

COST ESTIMATE

DATE PREPARED
9-16-86

SHEET OF

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

BLDG 2615
PROJECT TITLE

ESTIMATED BY

CATEGORY CODE NUMBER

HUFFMAN


STATUS OF DESIGN

JOB ORDER NUMBER

PED 30% 100% FINAL Other (Specify) _____

REPLACE STEAM, CONDENSATE, PLBG SYSTEM

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
REPLACE STEAM CONDENSATE PIPING AND HEATING SYSTEM: REMOVE ALL ASBESTOS INSULATION FROM PIPING. REPLACE ALL ACTIVE PIPING AND INSULATE WITH FIBER GLASS. REPLACE VALVES, TRAPS AND RELATED EQUIPMENT. REPLACE STEAM RADIATORS TRAPS AND VALVES.				13,000		47,000		60,000
POTABLE WATER, OLD FIRE HOSE PIPING, HOT WATER STORAGE TANK: REMOVE ALL ASBESTOS INSULATION, REMOVE ALL PIPING. REPLACE POTABLE WATER WITH COPPER AND INSULATE. REPLACE HOT WATER, WATER STORAGE TANK AND INSULATE. REPLACE ALL VALVES AND FAUCETS. BUILDING TO BE ASBESTOS FREE.				27,000		41,000		68,000
REPLACE ALL GALVINIZED AND OR STEEL WASTE				1,400		2,100		3,500

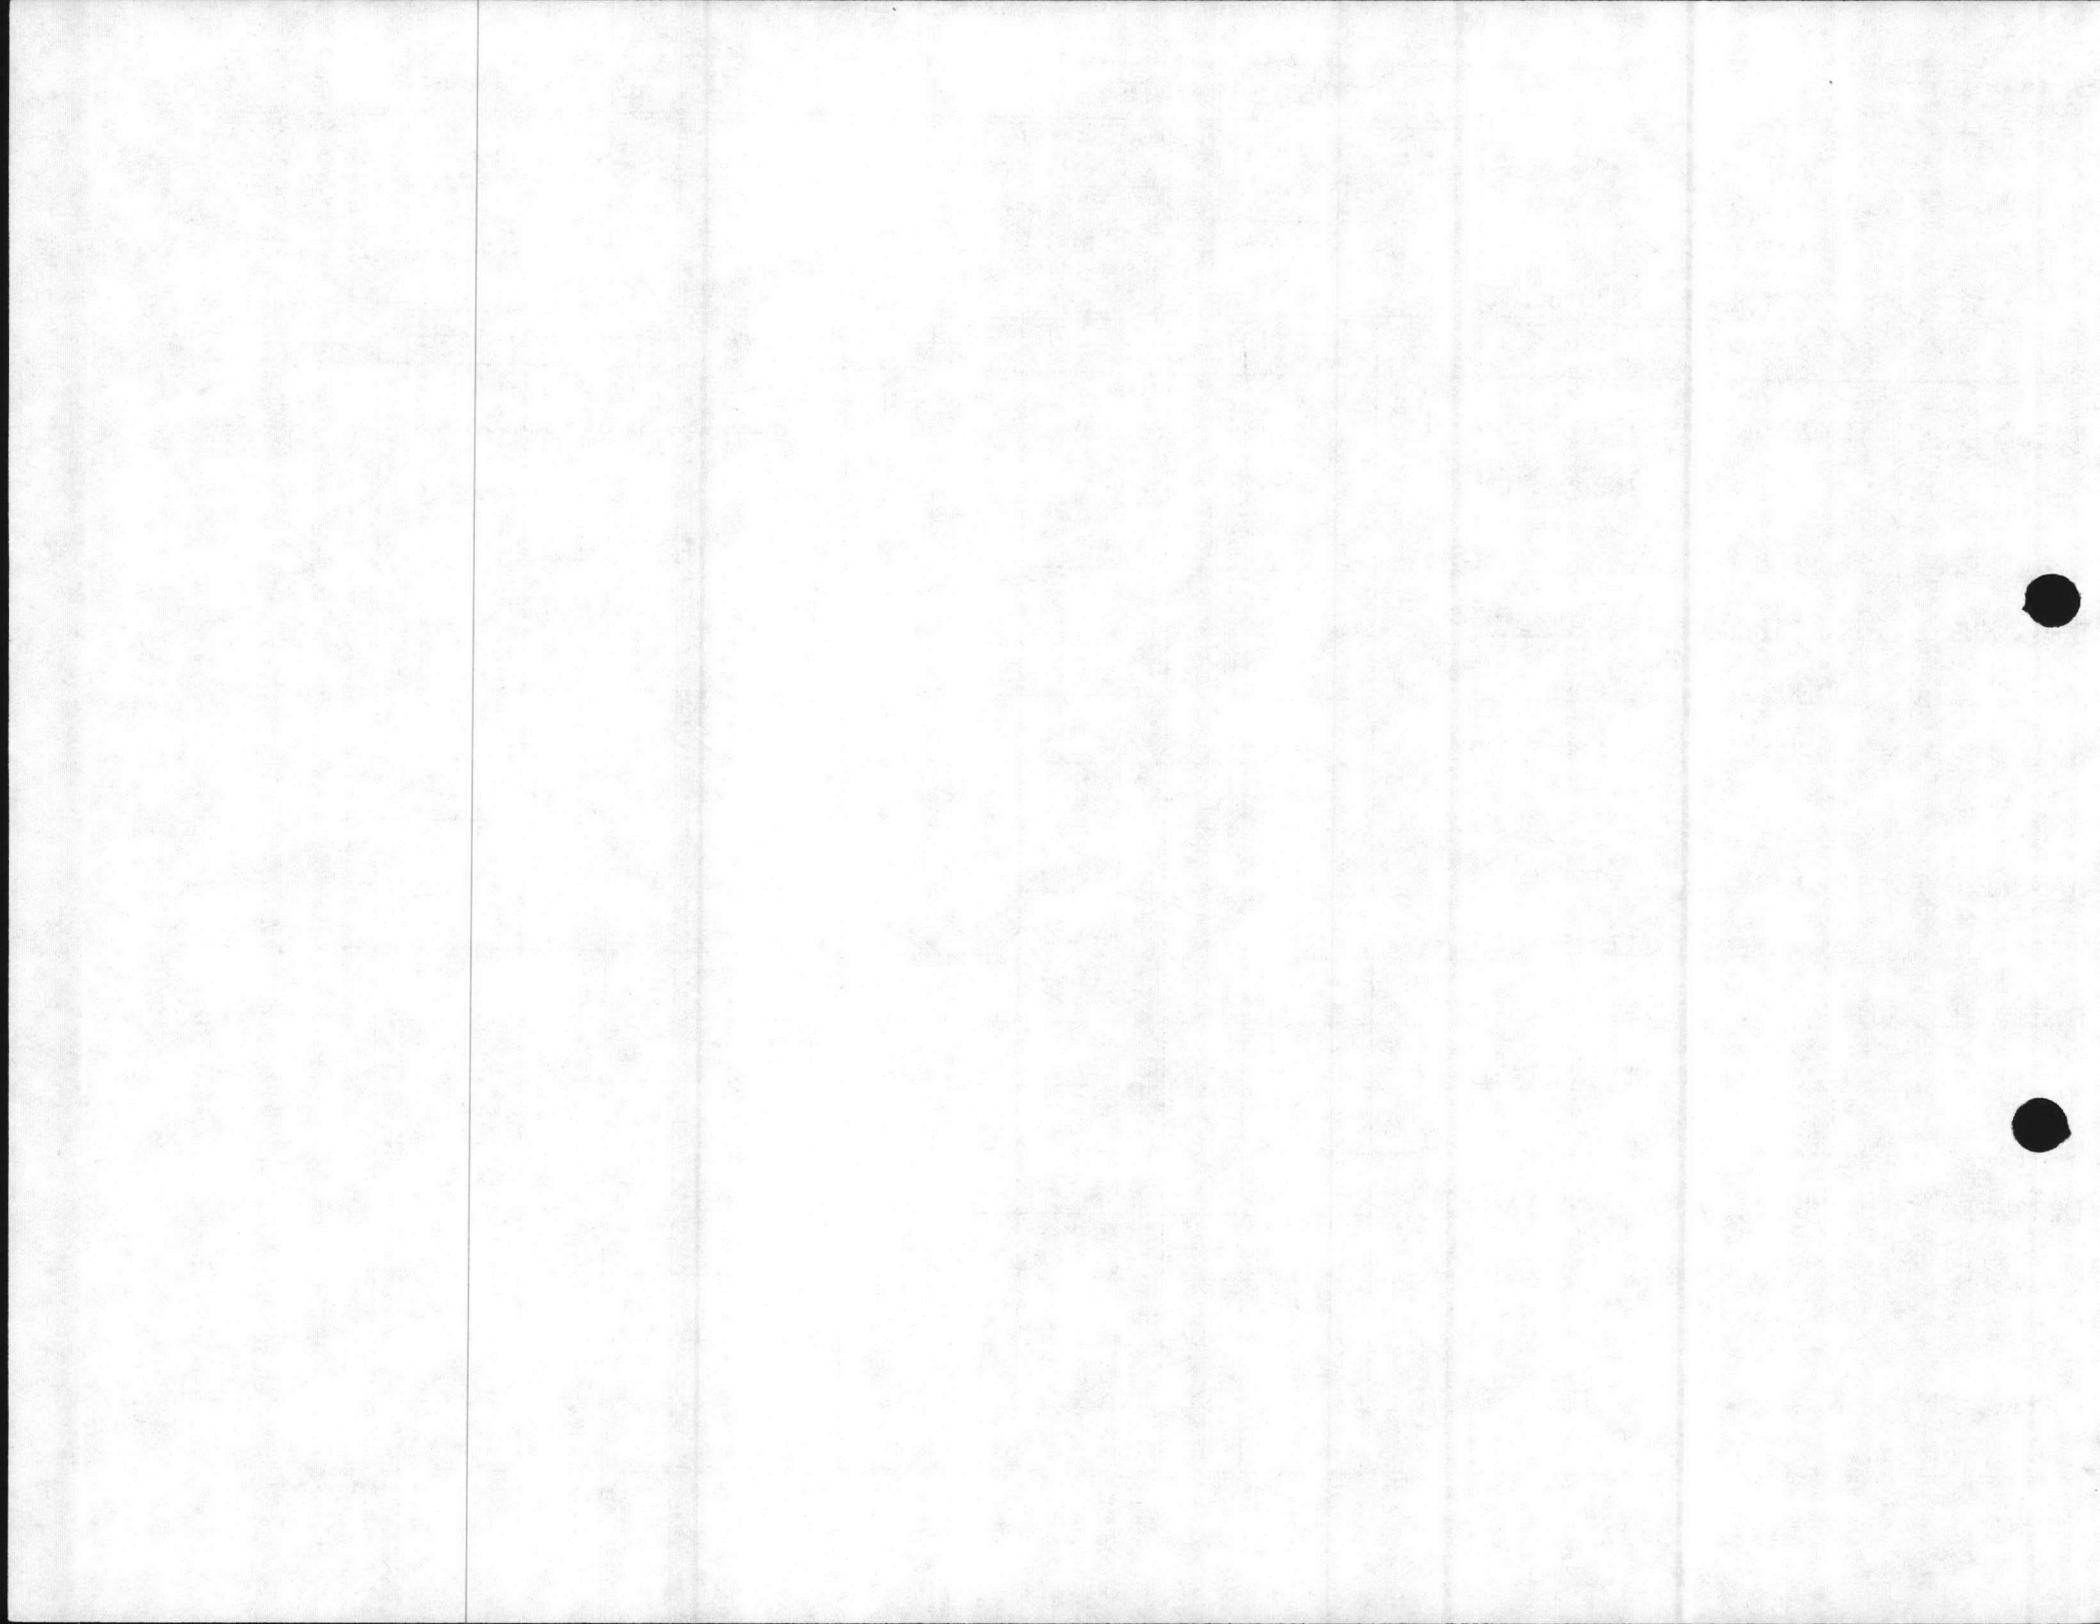

COST ESTIMATE

DATE PREPARED
9-16-86

SHEET OF

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

ESTIMATED BY

CATEGORY CODE NUMBER

PROJECT TITLE

HUFFMAN

JOB ORDER NUMBER

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify) _____

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
REPLACE ALL PLUMBING FIXTURES (HEADS) WITH STATE OF THE ART FIXTURES, VALVES, AND TRIM MEET CURRENT HEALTH AND NATIONAL PLUMBING CODES.				5,300		7,900		13,200
BOILER RENTAL AND CONNECTION, SECURE PIPING AND EQUIPING FOR ROOF REPLACEMENT.						30,000		30,000
REPLACE ALL BUILT IN REFRIGERANT UNITS (WALK IN REEFERS) WITH PREFABRICATED TYPE COVERED WITH ALUMINUM SKIN				45,600		10,000		55,600
TOTAL				92,300		138,000		230,300

