50D5A57

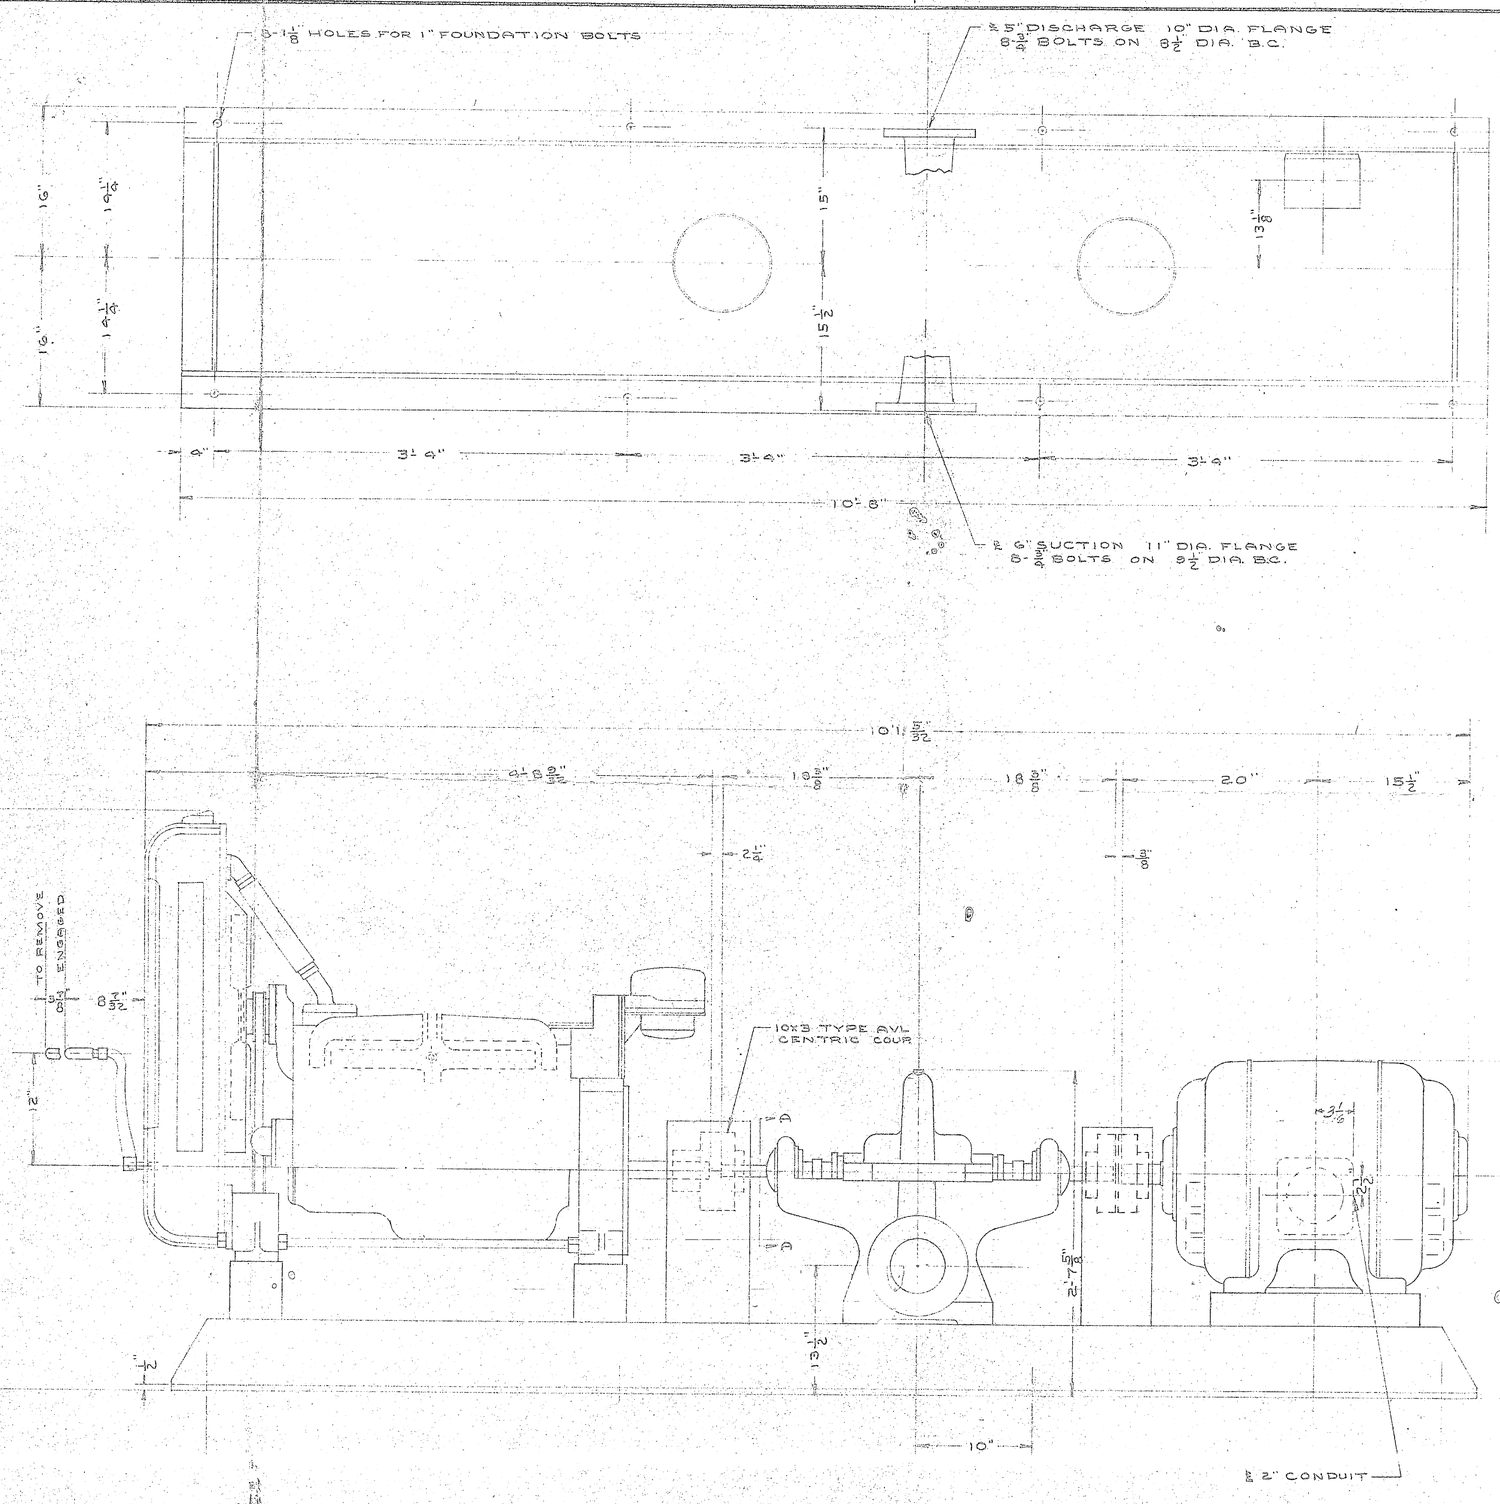



DISTRICT PUBLIC WORKS OFFICE
NAVAL BASE NORFOLK, VA.

APPROVED FOR DIMENSIONS ONLY

SUBJECT TO THE REQUIREMENTS OF NOY 95544

CONTRACT NBY _____ SPEC 49828

APPROVAL OF MATERIALS AND/OR EQUIPMENT INDICATES COMPLIANCE WITH SPECIFICATION REQUIREMENTS ONLY - THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING PROPER ARRANGEMENT DIMENSIONS & WEIGHTS, COORDINATION TRADES, ETC., AS REQUIRED.

W. SHULER

DATE 8-3-56 R.W. Nimmo, CEC, USN
Director Public Works Officer

THIS DRAWING CERTIFIED
For ____ Order No. 24621
FAIRBANKS, MORSE & CO.
Per ____ Date 7-9-57

FRACTIONAL MACHINING TOLERANCES 1/64
(Unless Otherwise Specified)

GENERAL NOTES

NOTE: PUMP SHOULD BE SET AT SUCH AN ELEVATION, THAT THE TOTAL SUCTION LIFT, INCLUDING PIPE FRICTION WHEN PUMP IS DELIVERING ITS FULL CAPACITY WILL NOT EXCEED 15 FEET.

WHEN UNIT IS SET ON CONCRETE FOUNDATION BOLTS SHOULD BE SET IN BOXES OR TUBES ABOUT TWICE THE SIZE OF THE BOLTS.

FLANGES ARE A.S.A. 125 POUND STD.

FLANGE HOLES EQUALLY SPACED ℄ STRADDLE ℄

BASE: D22A158
ENG. CONT. M363
MOTOR: RS 4455
ORDER NO: ATLANTA 14621

Pump #3

REV. NO.	EOC	SERIAL NUMBER	DATE	WAS
RELEASE NUMBER			DATE OF RELEASE	

FAIRBANKS, MORSE & CO.
KANSAS CITY WORKS
ENGINEERING DIVISION

DRAWN BY	R. W.	DATE	6-28-56
CHECKED BY	A.S.	DATE	
APPROVED BY		DATE	

SCALE

NAME SETTING PLAN

5"-5813 C.W. CENT. PUMP

MATERIAL SPECIFICATION

NO. 50D5A57

THE BRITISH LIBRARY