

NOTICE:

Bids to be opened at 2:00 P.M.
at the office of
Officer in Charge of Construction
Jacksonville, North Carolina Area
Building 1005, Marine Corps Base
Camp Lejeune, North Carolina 28540

NAVFAC
SPECIFICATION
NO. 05-79-4476

REPLACE WATER WELLS

at the

Marine Corps Air Station (Helicopter), New River
Jacksonville, North Carolina

and

Marine Corps Base, Camp Lejeune, North Carolina

HQMC LE004M and LE005M

Specification
Prepared by:

Vann Marshburn, Civil Engineer

Specification
Approved by:

J. H. Fitch, P.E.
Manager, Specifications Branch, Design Division
Public Works Department

T. R. Adkins, P.E.
Director, Design Division
Public Works Department

V. Podbielski, Commander, CEC, U. S. Navy
for Commander, Naval Facilities Engineering Command



CONTENTS

SECTION 00101. Bidding Information

DIVISION

1. GENERAL REQUIREMENTS

SECTION

- 01011. General Paragraphs
- 01012. Additional General Paragraphs
- 01401. Quality Control
- 01501. Environmental Protection

2. SITE WORK

SECTION

- 02110. Demolition
- 02201. Earthwork
- 02600. Asphaltic Concrete Surface and Patchwork
- 02608. Crushed Stone Pavement
- 02822. Establishing Vegetation

3. CONCRETE

SECTION

- 03300. Cast-in-Place Concrete

4 THROUGH 12 NOT USED

13. SPECIAL CONSTRUCTION

SECTION

- 13121. Pre-Engineered Metal Buildings (Rigid Frame)

14. NOT USED

15. MECHANICAL


SECTION

- 15011. General Requirements, Mechanical
- 15201. Wells
- 15221. Pumping Equipment
- 15272. Water Distribution
- 15840. Ductwork

16. ELECTRICAL

SECTION

- 16300. Electrical Distribution, Exterior
- 16402. Interior Electrical Systems

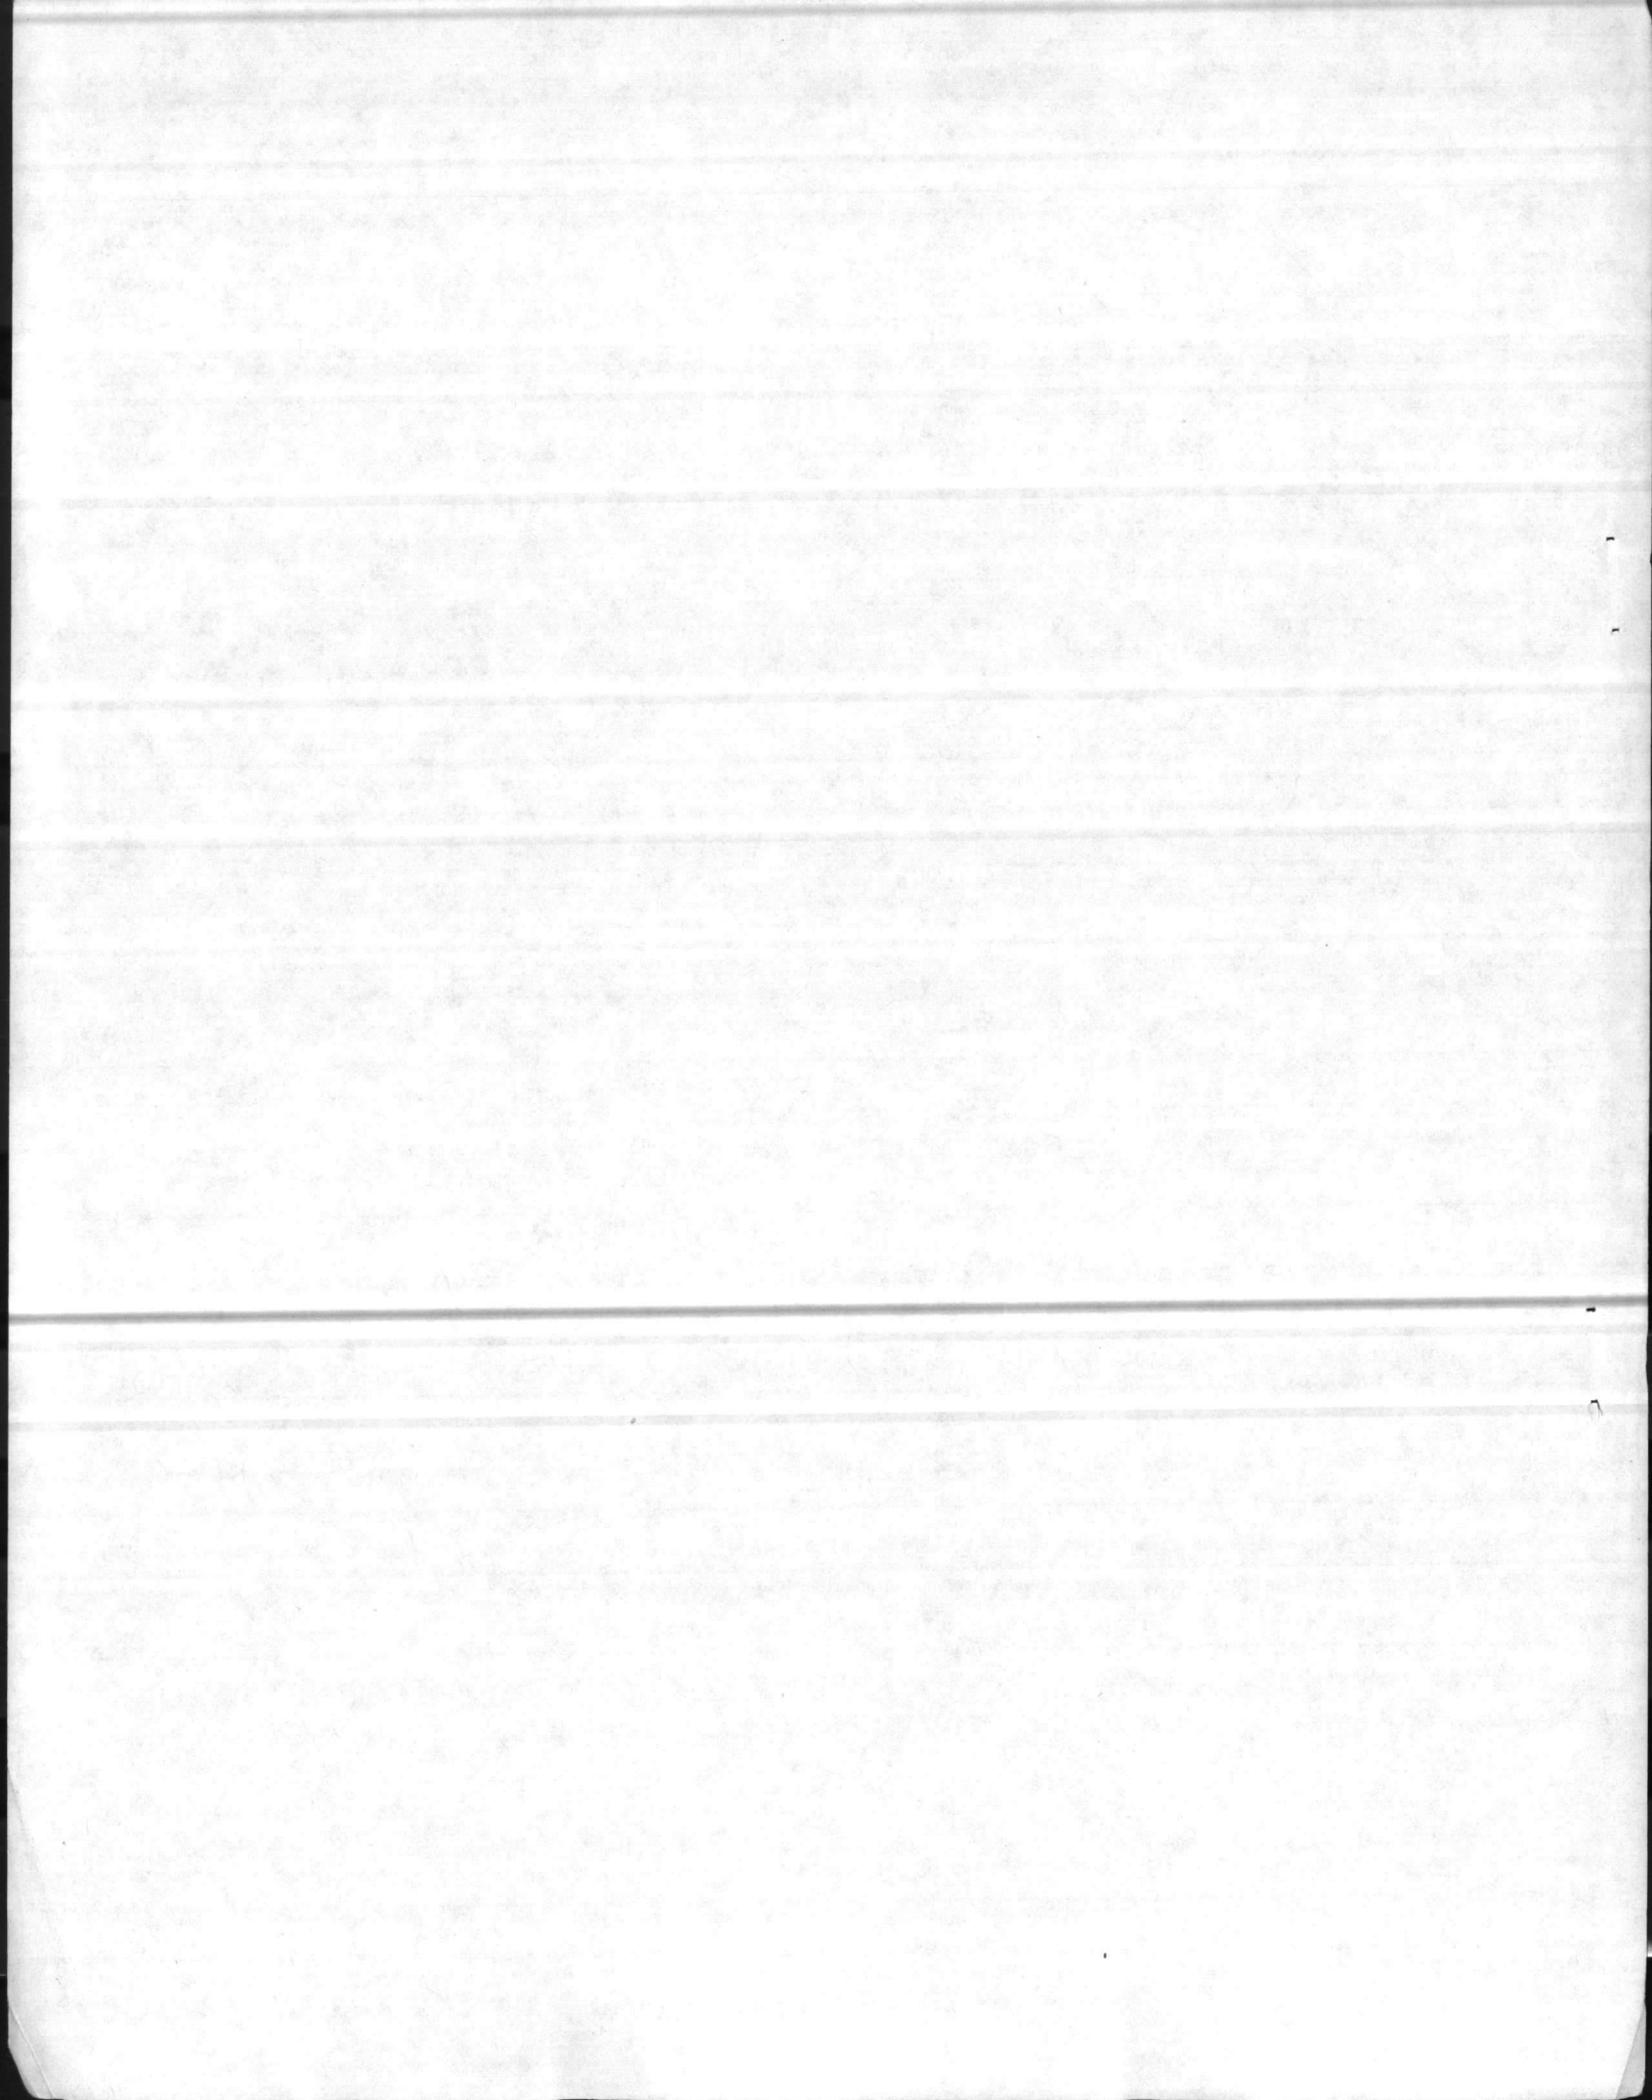

SECTION 00101. BIDDING INFORMATION

1. CONTENTS: This Invitation for Bids, IFB N62470-79-B-4476, consists of the following documents:


- a. Bid Instruction Documents
 - (1) Invitation for Bids (Standard Form 20, Jan 1961 Ed.)
 - (2) Bidding Information
 - (3) Instructions to Bidders, dated January 1975
 - (a) Change the date from "January 1975" to "April 1977"
 - (b) In the Table of Contents, Paragraph 7, and in Paragraph 7, change "(1974 SEP)" to "(1977 APR)"
 - (c) At the end of Paragraph 7, add the following:
"NOTE: The term "telegram" includes "mailgram"
 - (d) In the parenthetical expression at the beginning of Paragraphs 13 and 14, delete \$2000 and insert \$25,000
- b. Bid Submittal Documents
 - (1) Bid Form (Standard Form 21, Dec 1965 Ed.)
 - (2) Representations and Certifications (Standard Form 19B, Jun 1976 Ed.), including Appendix "A" dated 1 SEP 1978
 - (3) Bid Guaranty
- c. Contract Documents
 - (1) Construction Contract (Standard Form 23, Jan 1961 Ed.)
 - (2) Performance Bond (Standard Form 25, Jun 1967 Ed.)
 - (3) Payment Bond (Standard Form 25A, Jun 1964 Ed.)
 - (4) Labor Standards Provisions (Construction Contract), including Alterations Clause No. 13, dtd SEP 1978
 - (5) General Provisions (Construction Contract), including Clause 109 ALTERATIONS (3-79)
 - (6) NAVFAC Specification No. 05-79-4476
 - (7) Wage Determination Decision
 - (8) Drawings identified in Section 01011, Division 1, of the specification

2. BIDS:

2.1 INSTRUCTION TO BIDDERS: Instruction to Bidders, and Invitation for Bids, Standard Form 20, January 1961 edition, shall be observed in the preparation of bids. Bidders shall affix their names and return addresses in the upper left corner of bid envelope. Envelope containing bids must be sealed.

2.2 BID GUARANTY will be required as stipulated in the Instructions to Bidders.

2.3 ITEMS OF BIDS: Bids shall be submitted, in duplicate, on Standard Form 21, Bid Form; and shall be accompanied by Standard Form 19B, Representations and Certifications and Bid Guaranty in accordance with the Bid Instruction Documents listed in paragraph 1.a hereinbefore upon the following item(s):

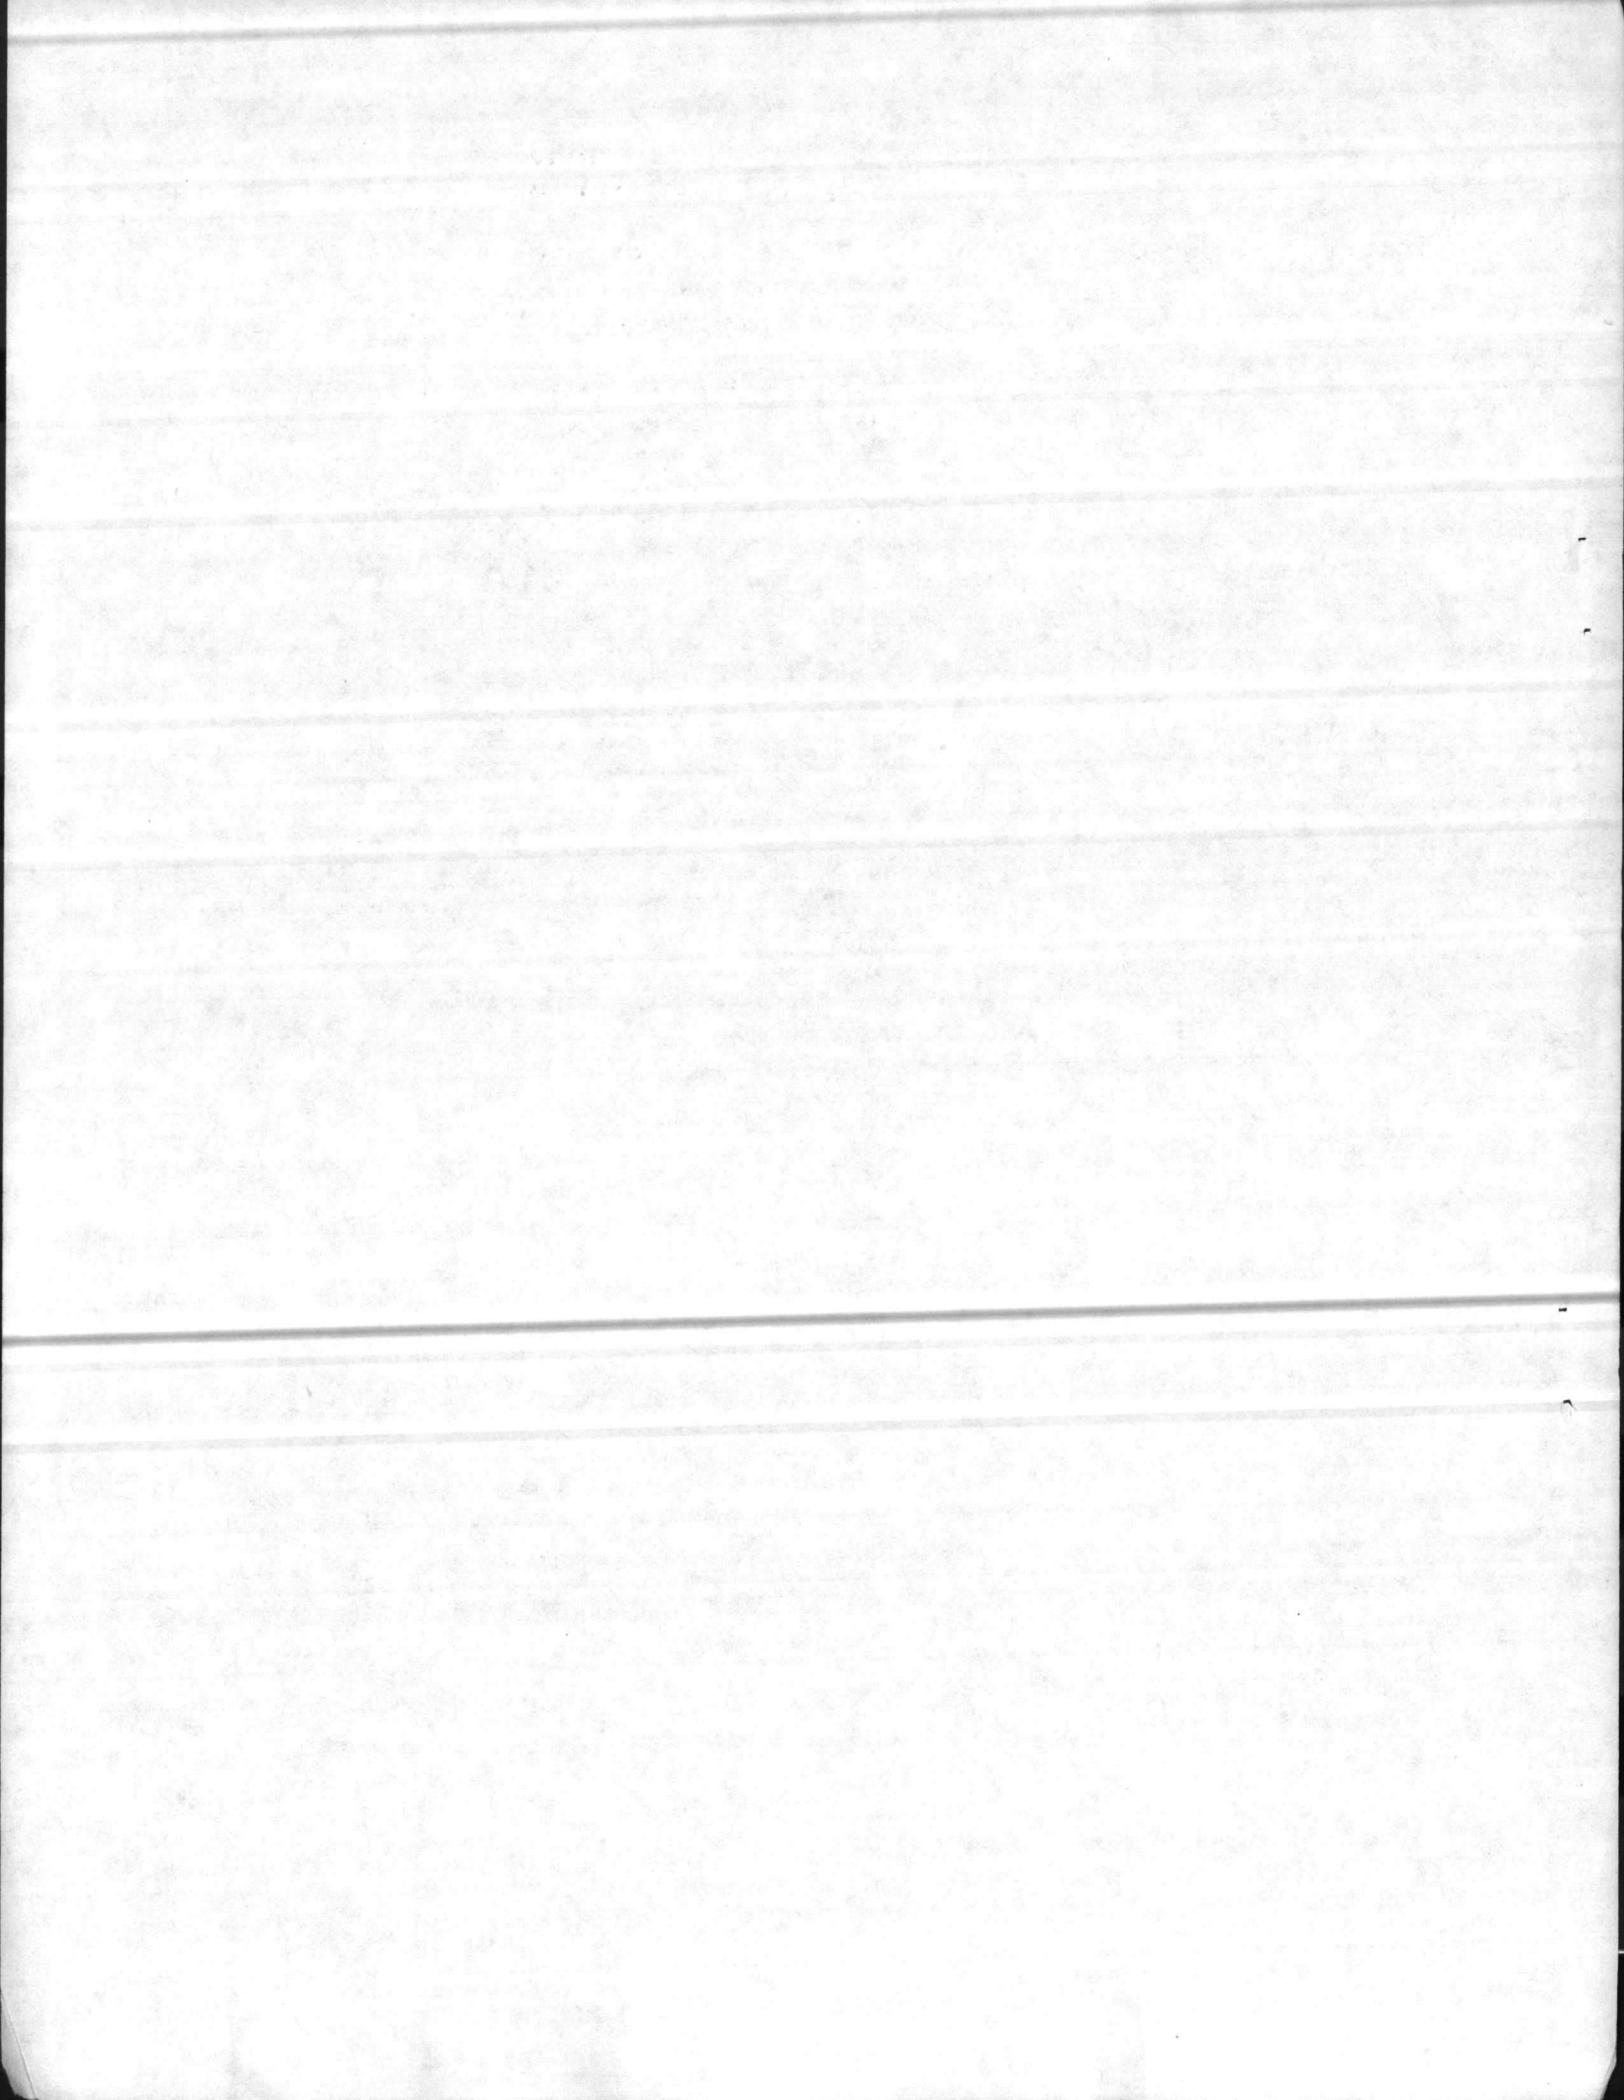

BASE BID: Price for the entire work, complete in accordance with the drawings and specifications.

2.4 TELEGRAPHIC MODIFICATIONS OF BIDS in accordance with the instructions to Bidders may be made. Two signed copies of the telegram in a sealed envelope marked "Copies of telegraphic modification of bid for REPLACE WATER WELLS Specification No. 05-79-4476 " should be forwarded immediately to the office to which the written bids were submitted.


2.5 TELEGRAPHIC MODIFICATIONS OR WITHDRAWAL OF BIDS will be considered as specified herein. TELEPHONIC RECEIPT OF TELEGRAPHIC MODIFICATIONS OR WITHDRAWAL OF BIDS WILL NOT QUALIFY THE TELEGRAM AS TIMELY. The telegram must be received at the place specified for receipt of bids prior to the exact time set for receipt of bids.

2.6 HAND DELIVERED BIDS: All hand delivered bids must be deposited with personnel in the office of the Officer in Charge of Construction, Jacksonville, North Carolina Area, Building 1005, Marine Corps Base, Camp Lejeune, North Carolina 28542, prior to the time and date set for bid opening. Any bids submitted by hand after the time set for receipt will not be accepted.

3. PRE-BID SITE VISITATION: To inspect the site of the work prior to bid opening, prior appointment must be made with the Officer in Charge of Construction, Jacksonville, North Carolina Area, telephone 919-451-2581. Bidders are urged and expected to inspect the site where services are to be performed and to satisfy themselves as to all general and local conditions that may affect the cost of performance of the contract to the extent such information is reasonably obtainable. In no event will a failure to inspect the site constitute grounds for withdrawal of a bid after opening or for a claim after award of the contract.

4. CONTROLLED MATERIALS DATA: The Contracting Officer will issue a DO-C2 priority rating for procurement of critical materials. See General Provision 48, "PRIORITIES, ALLOCATIONS AND ALLOTMENTS".

5. INQUIRIES: All questions concerning the bidding shall be presented to OICC-ROICC Contract Division, Building 1005, Marine Corps Base, Camp Lejeune, North Carolina, telephone 919-451-2581. Questions regarding any other phase of the plans and specifications occurring prior to bid opening shall be presented to the Design Division, Public Works Department, Building 1005, Marine Corps Base, Camp Lejeune, North Carolina 28542, telephone 919-451-5507. Questions requiring interpretation of drawings and specifications must be submitted at least 10 days before bid opening. Interpretations or modifications to specifications made as a result of questions will be made by amendment only, and unless so done, all bidders should base their bids on the plans and specifications as issued.

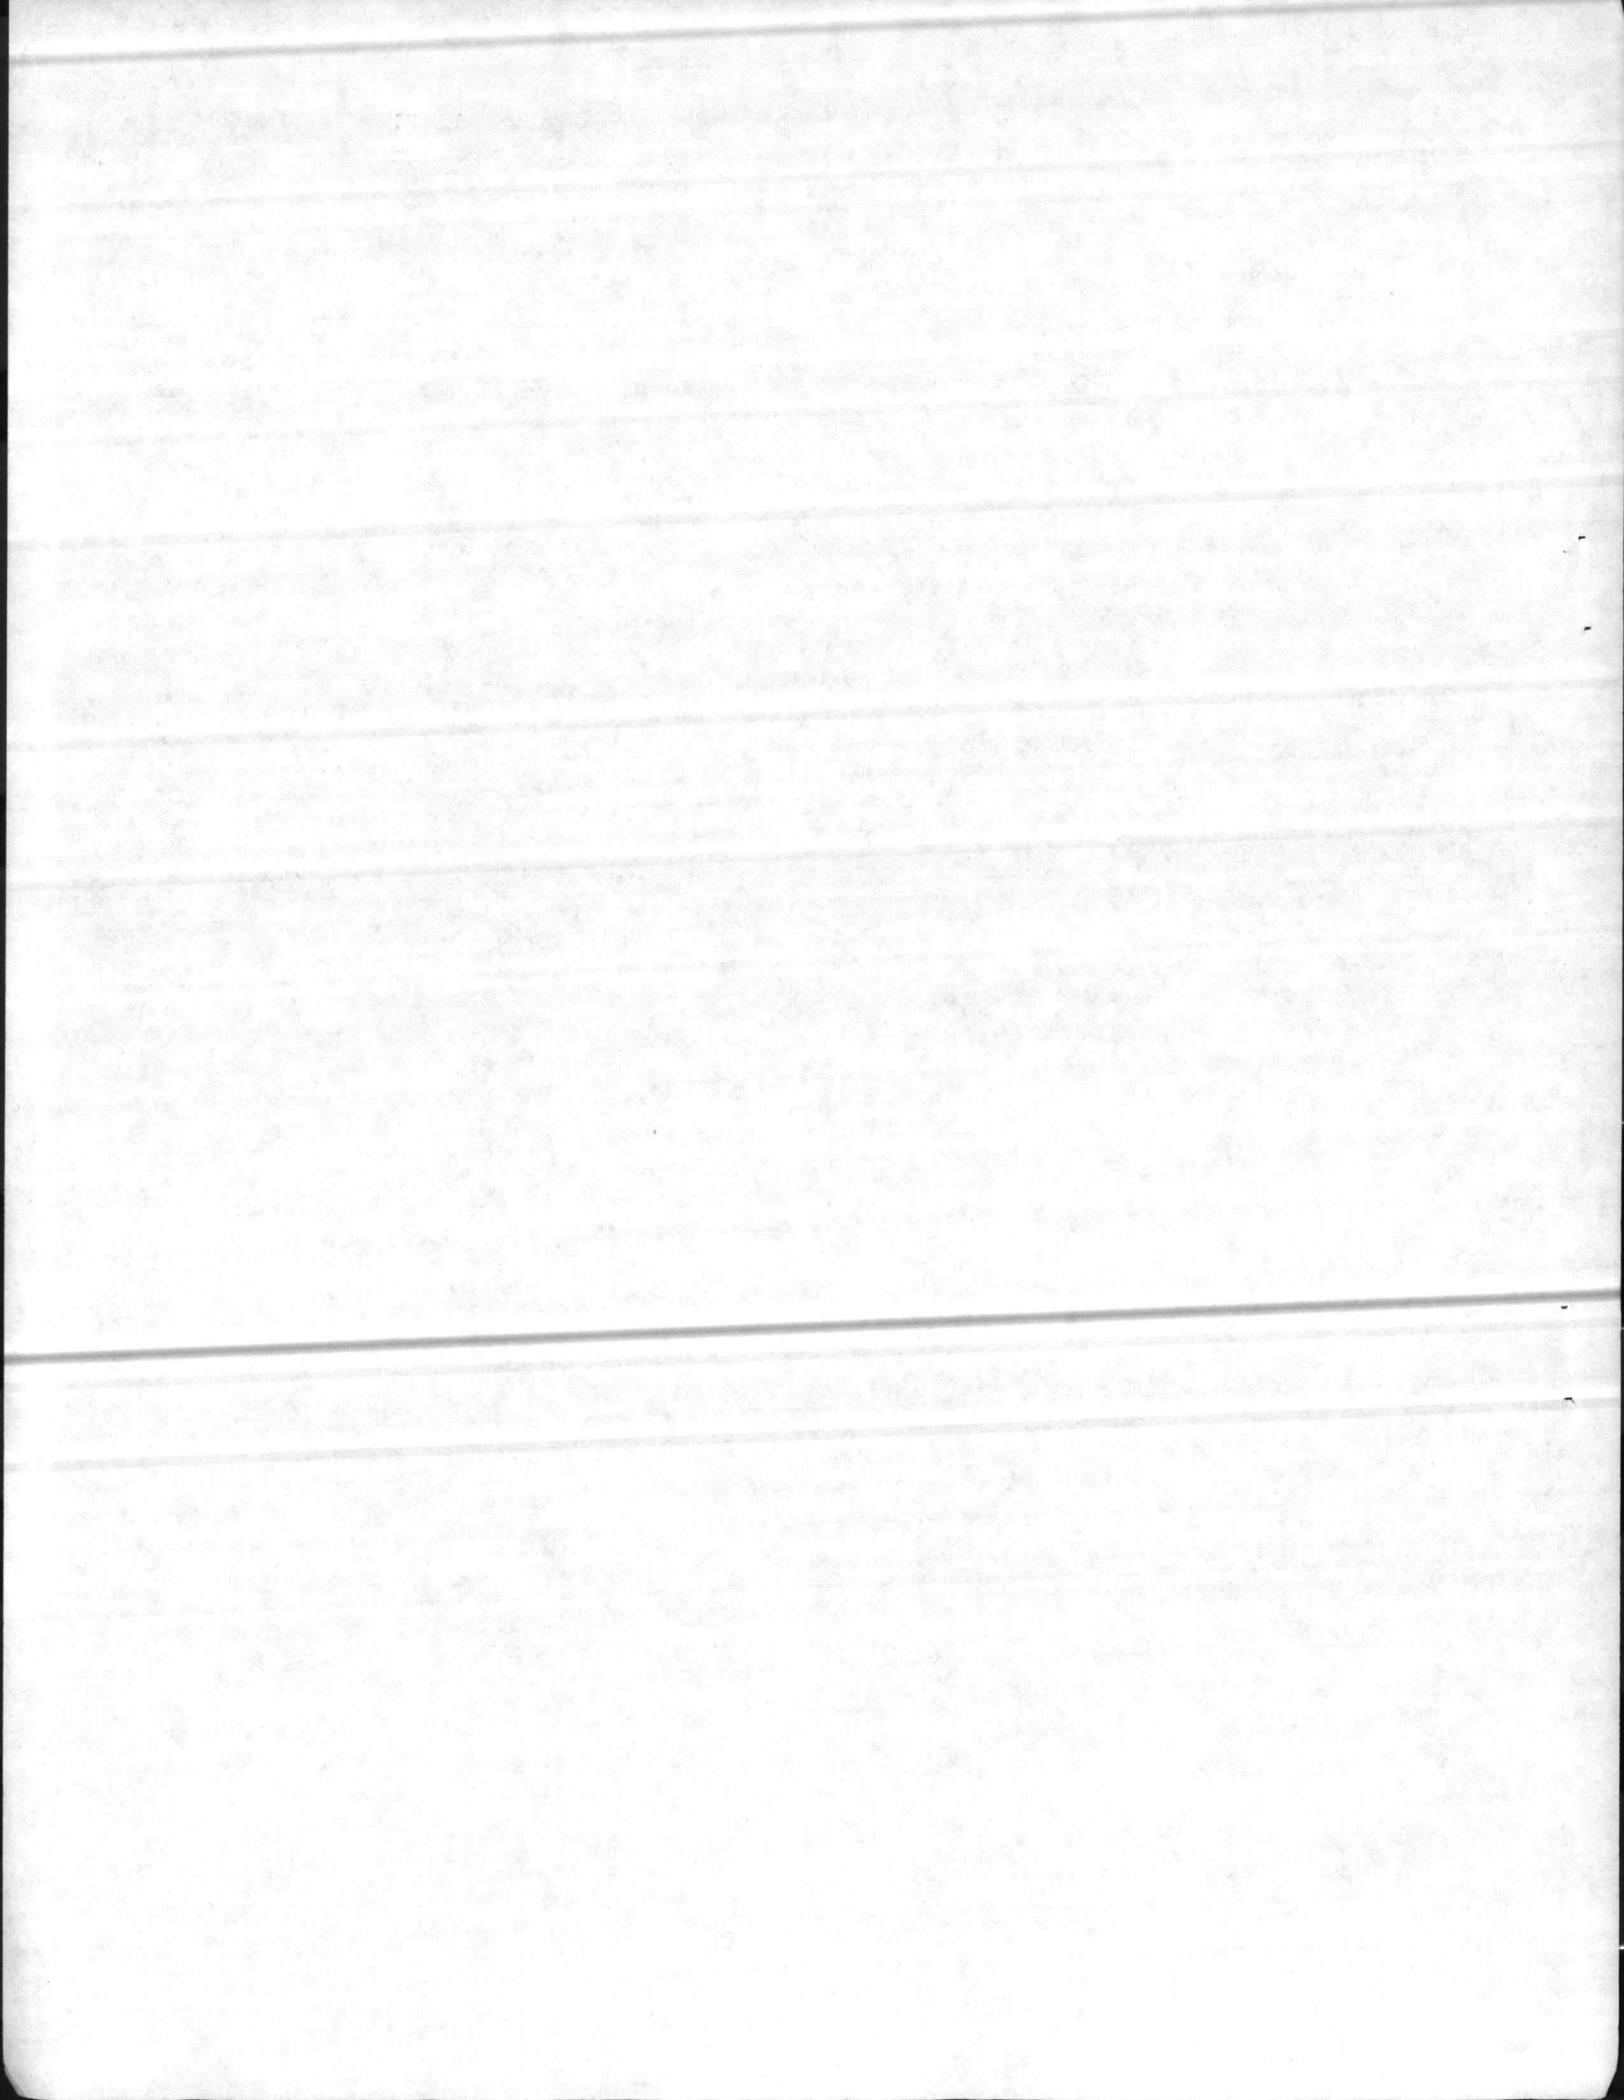

6. AVAILABILITY OF SPECIFICATIONS, STANDARDS AND DESCRIPTIONS (1977 JUN): Specifications, standards and descriptions cited in this solicitation are available as indicated below:

a. Unclassified Federal, Military and Other Specifications and Standards (Excluding Commercial), and Data Item Descriptions. Submit request on DD Form 1425 (Specifications and Standards Requisition) to:

Commanding Officer
U. S. Naval Publications and Forms Center
5801 Tabor Avenue, Philadelphia, Pennsylvania 19120


The Acquisition Management Systems and Data Requirements Control List. DOD Directive 5000.19L, Volume II, may be ordered on the DD Form 1425. The Department of Defense Index of Specifications and Standards (DODISS) may be purchased from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402. When requesting a specification or standard, the request shall indicate the title, number, date and any applicable amendment thereto by number and date. When requesting a data item description, the request shall cite the solicitation. When DD Form 1425 is not available, the request may be submitted in letter form, giving the same information as listed above, and the solicitation or contract number involved. Such request may also be made to the activity by TELEX No. 834295, Western Union No. 710-670-1685, or telephone 215-697-3321 in case of urgency.

b. Commercial Specifications, Standards and Description. These specifications, standards and descriptions are not available from Government sources. They may be obtained from the publishers.

c. Availability for Examination of Specifications, Standards, Plans, Drawings, and Other Pertinent Documents. The specifications, standards, plans, drawings, and other pertinent documents cited in this solicitation may be examined at the following location:

Public Works Department
Design Division
Building 1005, Marine Corps Base
Camp Lejeune, North Carolina

7. REFERENCE TO AMENDMENTS: Each bidder shall refer in his bid to all amendments to this specification; failure to do so may constitute an informality in the bid.

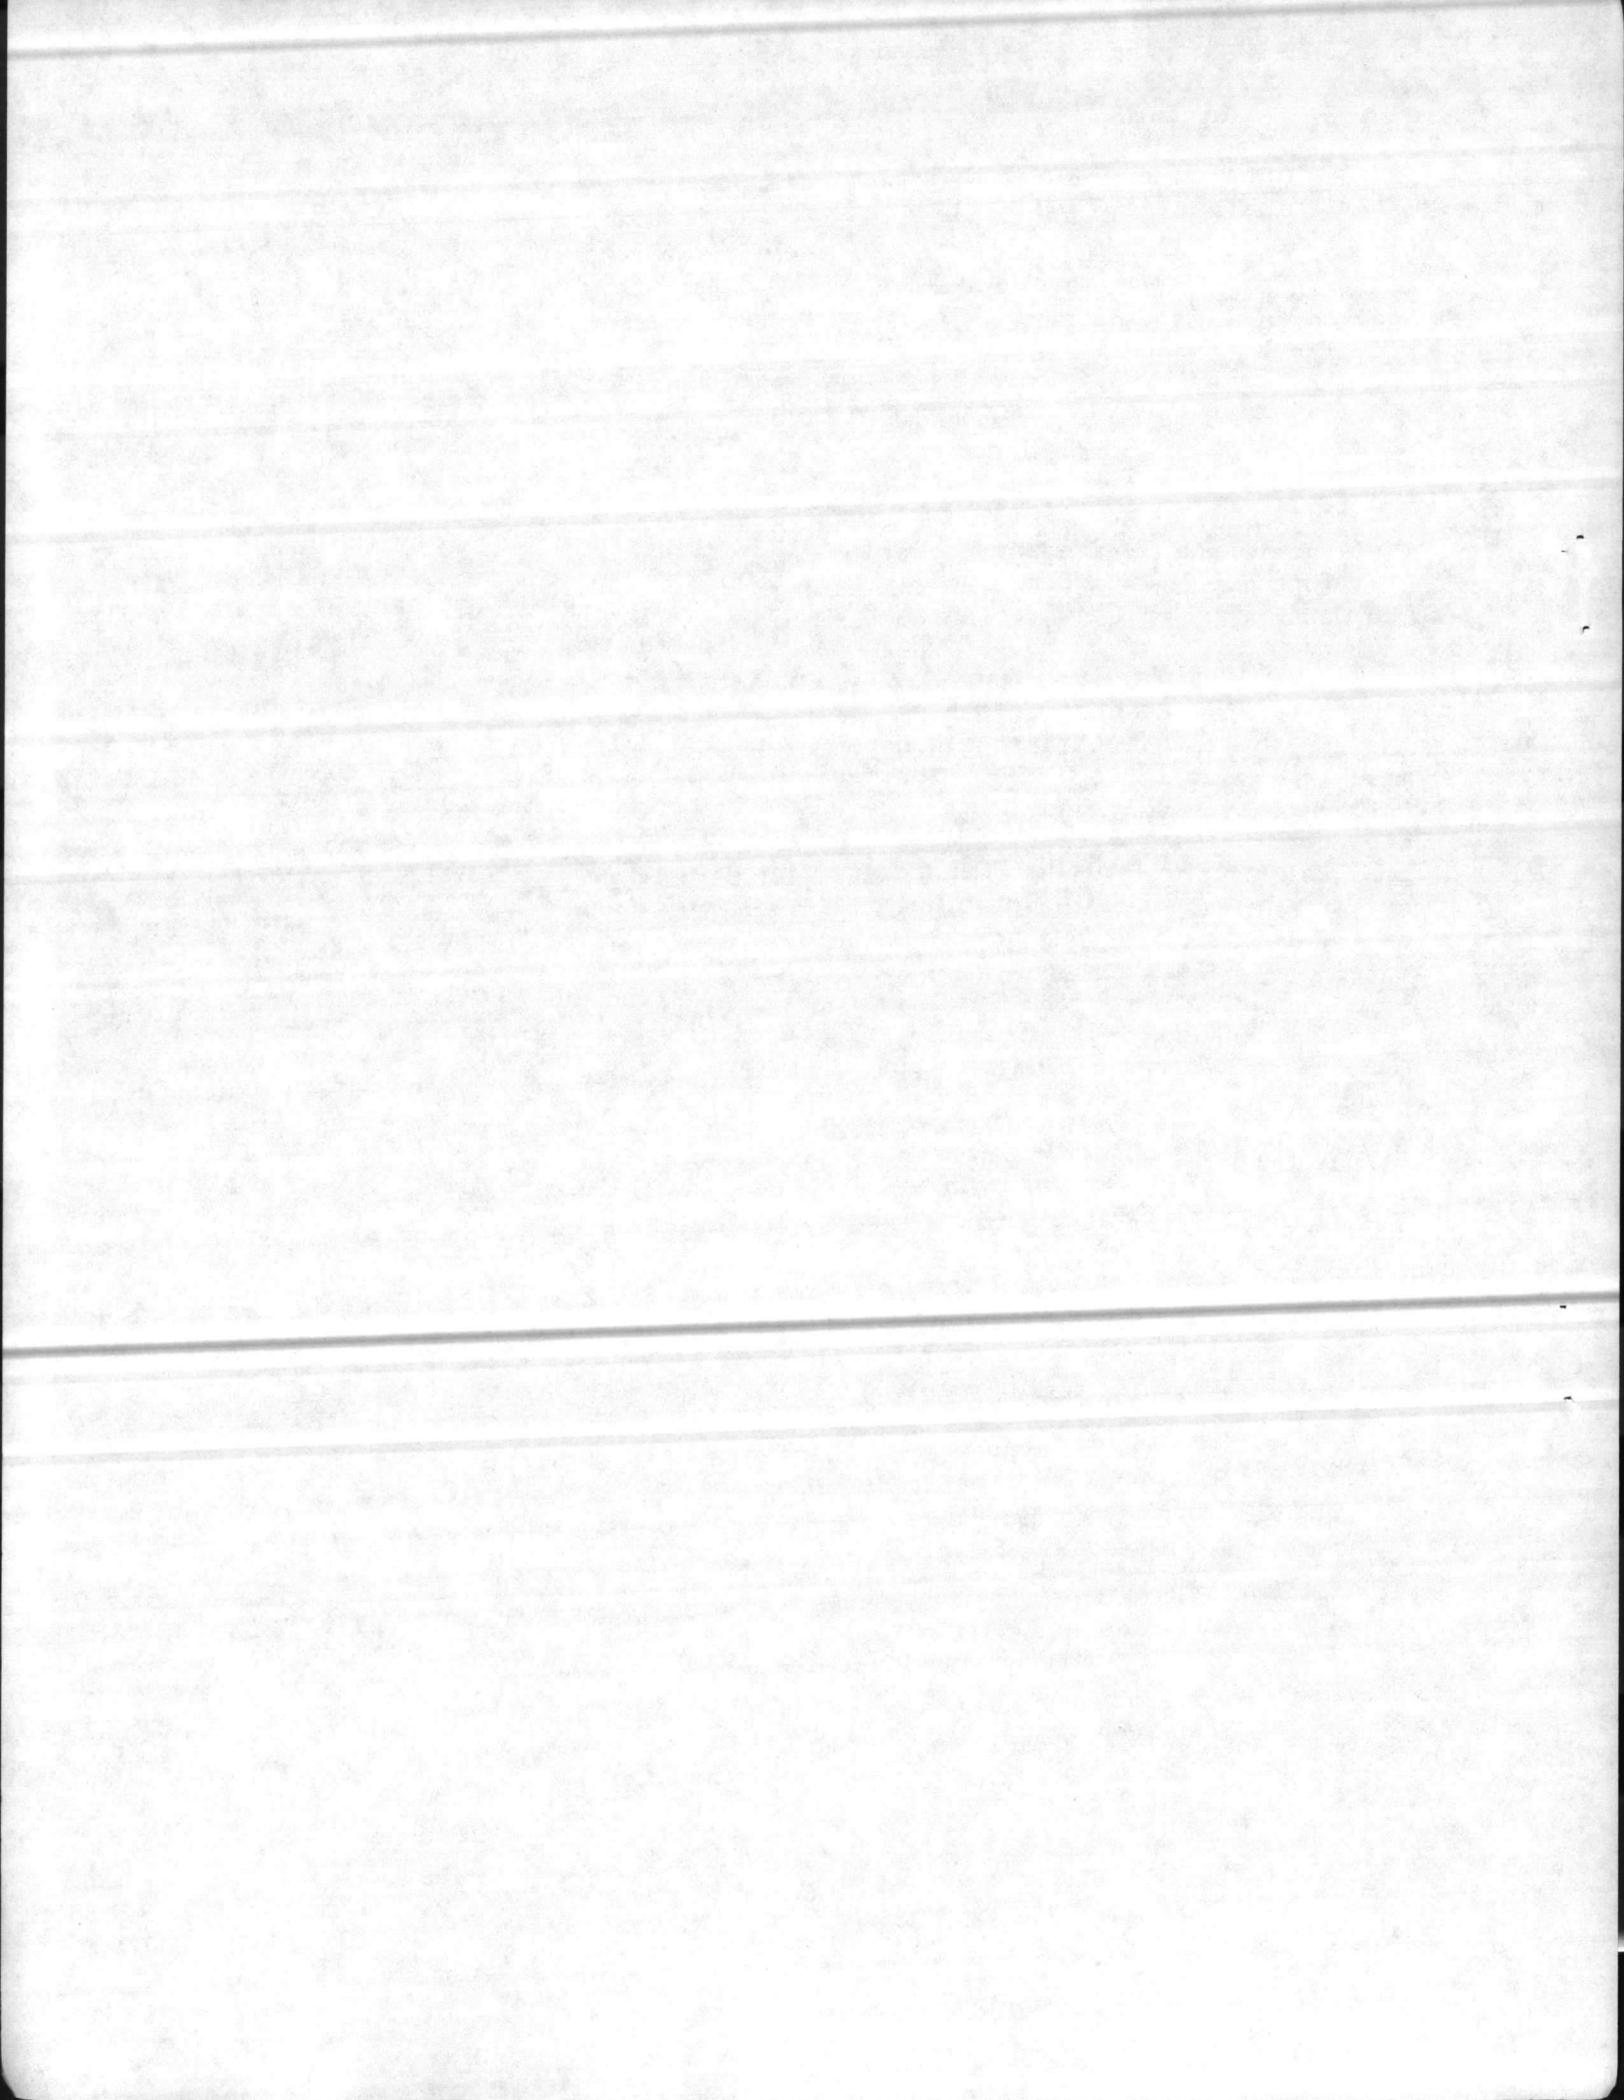

DIVISION 1. GENERAL REQUIREMENTS

SECTION 01011. General Paragraphs

1. GENERAL INTENTION: It is the declared and acknowledged intention and meaning to provide and secure replacement of water wells, complete and ready for use.

2. GENERAL DESCRIPTION: The work includes provision of new wells and well pumps, diesel engine drive for pumps, prefabricated metal well houses, water distribution piping, electrical work, concrete work, and incidental related work.

3. LOCATION: The work shall be located at the Marine Corps Air Station (Helicopter), New River and Marine Corps Base, Camp Lejeune, North Carolina, approximately as shown. The exact location will be indicated by the Contracting Officer. "Officer in Charge of Construction (OICC)" and "Contracting Officer" are used interchangeably in this specification and have the same meaning.

4. COMMENCEMENT, PROSECUTION AND COMPLETION OF WORK: The Contractor will be required to commence work under the contract 15 calendar days after the date of receipt of Notice of Award, to prosecute said work diligently, and to complete the entire work ready for use within 360 calendar days. The time stated for completion shall include final cleanup of the premises. The contract completion date will be computed starting 15 calendar days after date of the Notice of Award. This 15-day period is to allow for mailing of the Notice of Award and the Contractor's submission of required bonds.

5. LIQUIDATED DAMAGES: In case of failure on the part of the Contractor to complete the work within the time fixed in the contract or any extensions thereof, the Contractor shall pay to the Government as liquidated damages pursuant to Clause 5, "Termination for Default - Damages for Delay - Time Extensions", and Clause 80, "Damages for Delay - Defense Materials System and Priorities" of the General Provisions the sum of \$45 for each day of delay.

6. DRAWINGS ACCOMPANYING SPECIFICATION: The following drawings accompany this specification and are a part thereof. Drawings are the property of the Government and shall not be used for any purpose other than that contemplated by the specification.

NAVFAC

DWG. NO.

TITLE

4049522

Location Plan

4049523

Site Plan

4049524


Well and Well House

4049525

Electrical, Tent Camp

4049526

Electrical, Hadnot Point, Montford Point and Tarawa Terrace

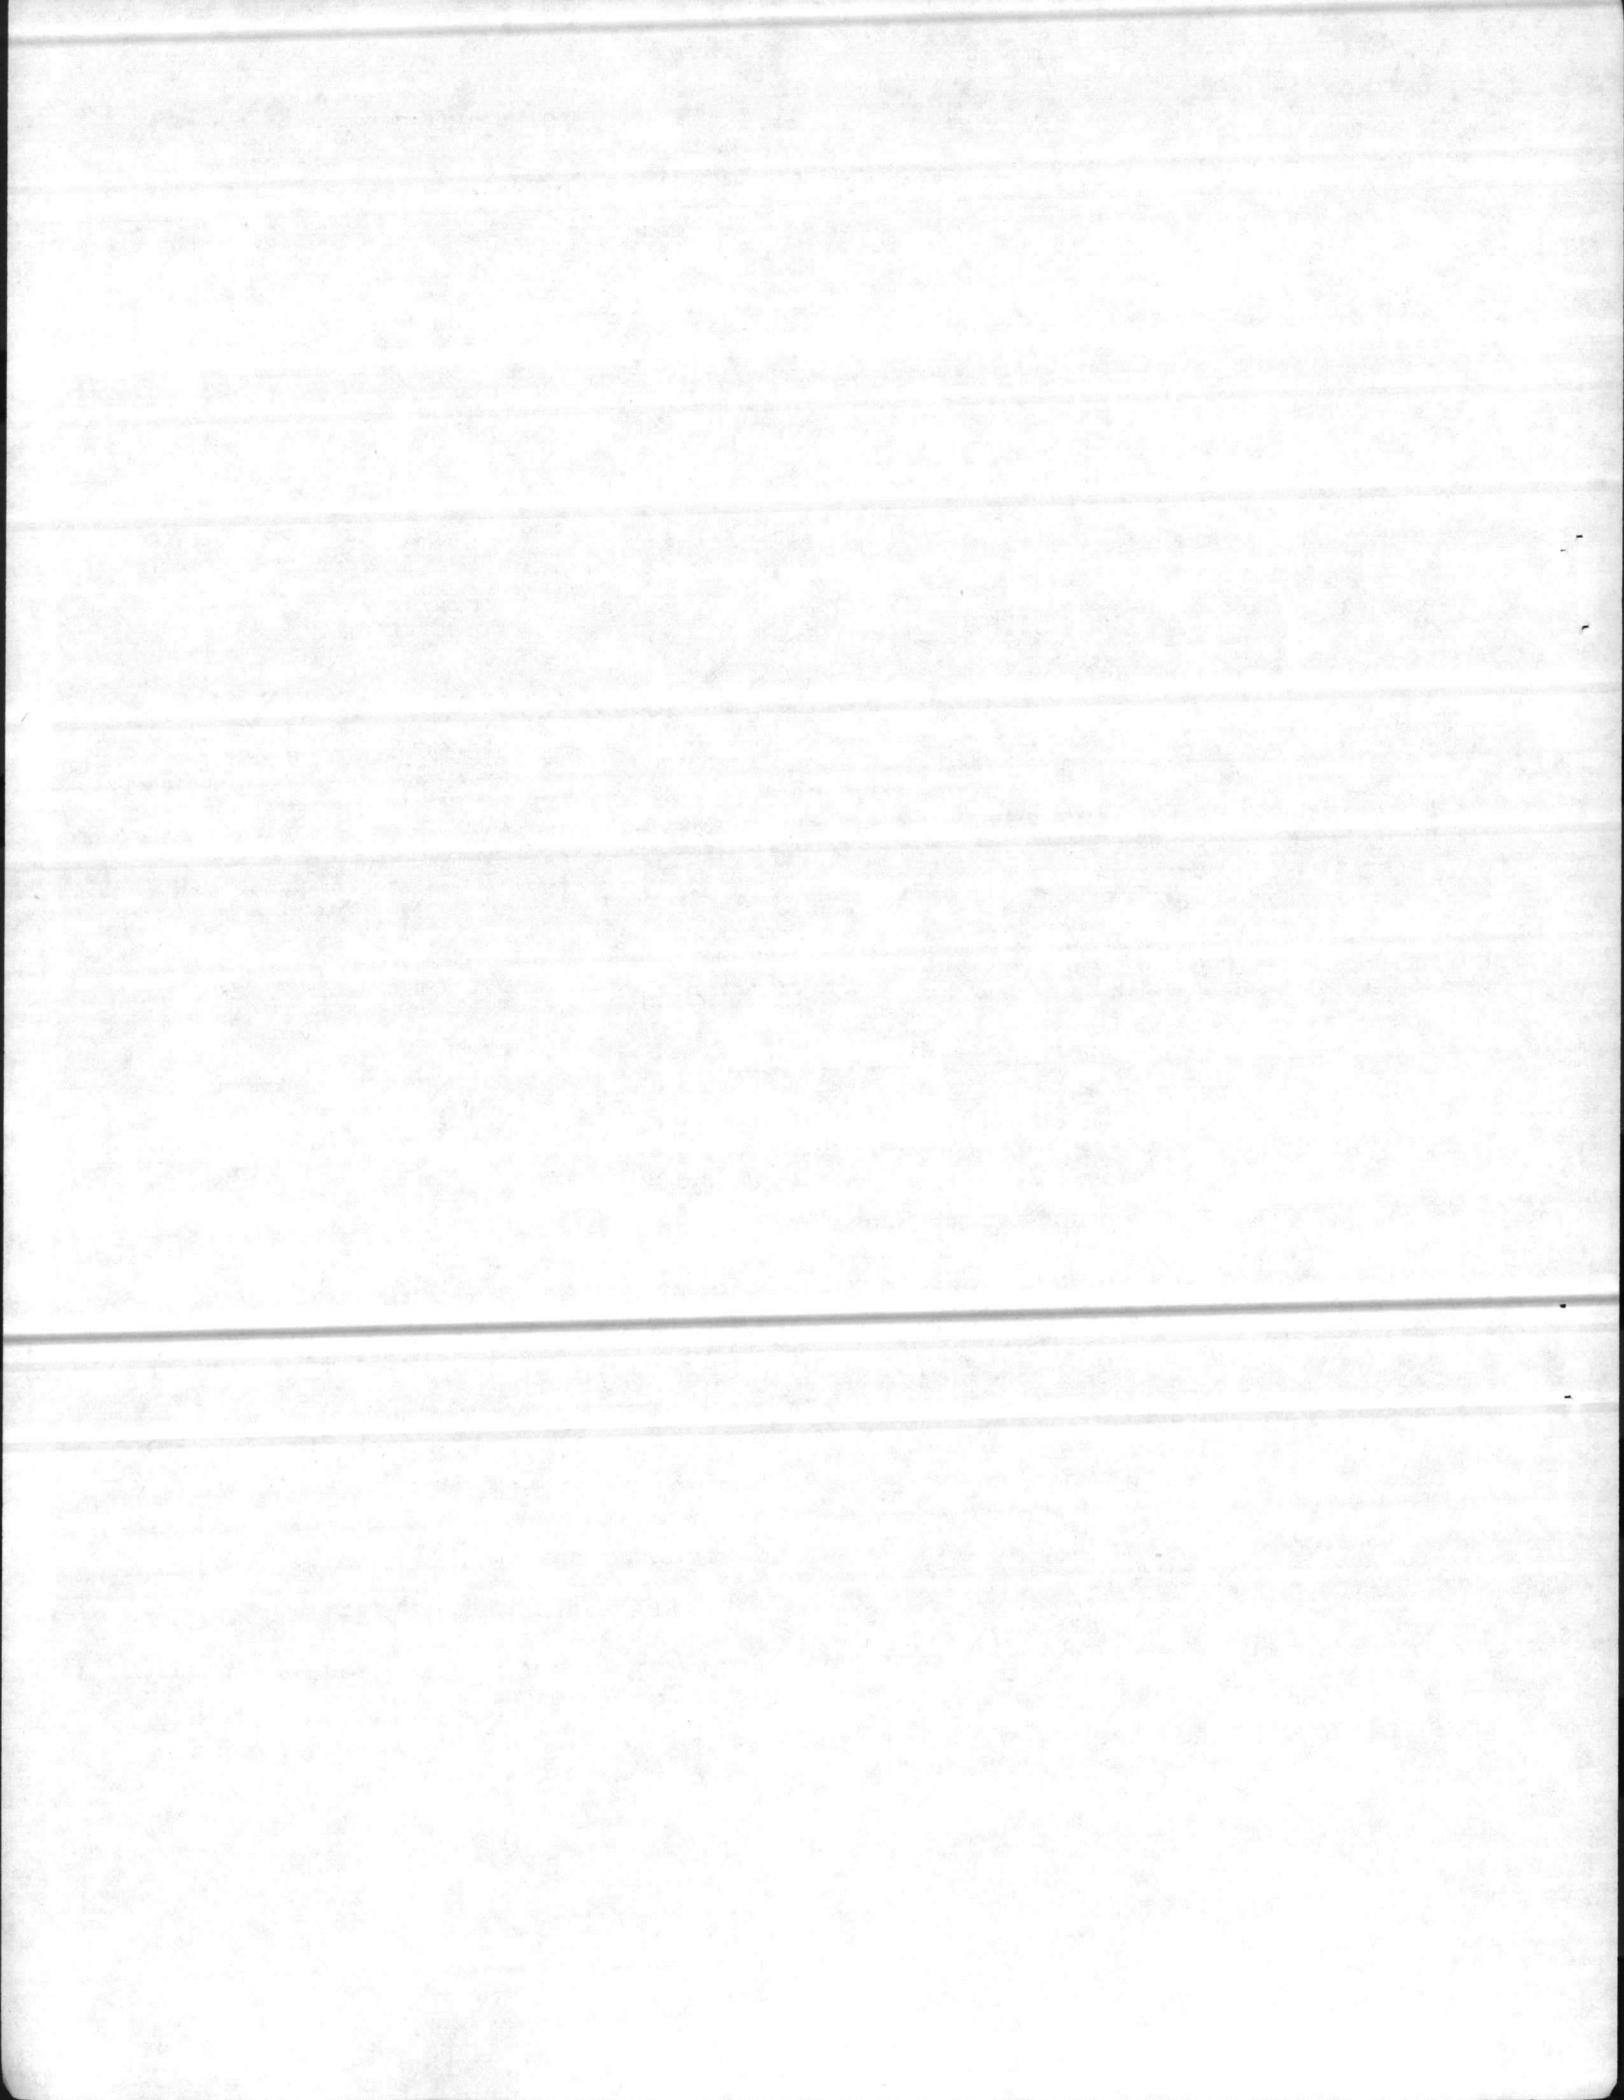

7. FACTORY INSPECTION: (See Clause 10 of the General Provisions)
Factory inspection of material and equipment for which tests at the place of manufacture are required in reference specifications will be waived if notarized copies of factory reports are furnished that show compliance with the specification requirement. Factory inspection will be required only where specified herein or in the technical sections of the specification. The Government reserves the right to charge to the Contractor any additional cost of Government inspection and tests when materials and equipment are not ready at the time inspection and tests are requested by the Contractor.

8. MINIMUM WAGE RATES AND OTHER LABOR STANDARDS: The Contractor shall pay mechanics and laborers employed or working directly upon the site of the work, wage rates not less than those contained in the attached wage determination decision of the Secretary of Labor. Rates for Water and Sewer Construction shall apply to all work in this contract. The wage rates are attached to the back of this specification.

9. SCHEDULING THE WORK: Notwithstanding the requirements of Clause 62 of the General Provisions, immediately after award, the Contractor shall meet with the Contracting Officer and present a schedule of work, prepared in accordance with Clause 62, for review by the Contracting Officer. The schedule will be reviewed at this meeting and will be retained by the Contracting Officer for final review and approval. The water systems will remain in operation during the entire construction period and the Contractor shall conduct his operations so as to cause the least possible interference with normal system operations. The normal hours of work for Contracting Officer personnel are from 8:00 A.M. to 4:30 P.M., Monday through Friday.


10. SAFETY PROGRAM: The Contractor shall implement a safety program conforming to the requirements of Federal, State and Local laws, rules and regulations. The program shall include, but is not limited to, the following:

a. "Occupational Safety and Health Standards", which can be examined at the office of the Contracting Officer or be ordered from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

b. Department of the Army, Corps of Engineers, "General Safety Requirements", which may be examined at the office where bids are being received or may be purchased from the Superintendent of Documents, U. S. Government Printing Office, Stock No. 008-022-00106-9.

c. General Provisions, Clause 45.

11. NORTH CAROLINA SALES AND USE TAX IS REQUIRED. (See also section entitled "Additional General Paragraphs")

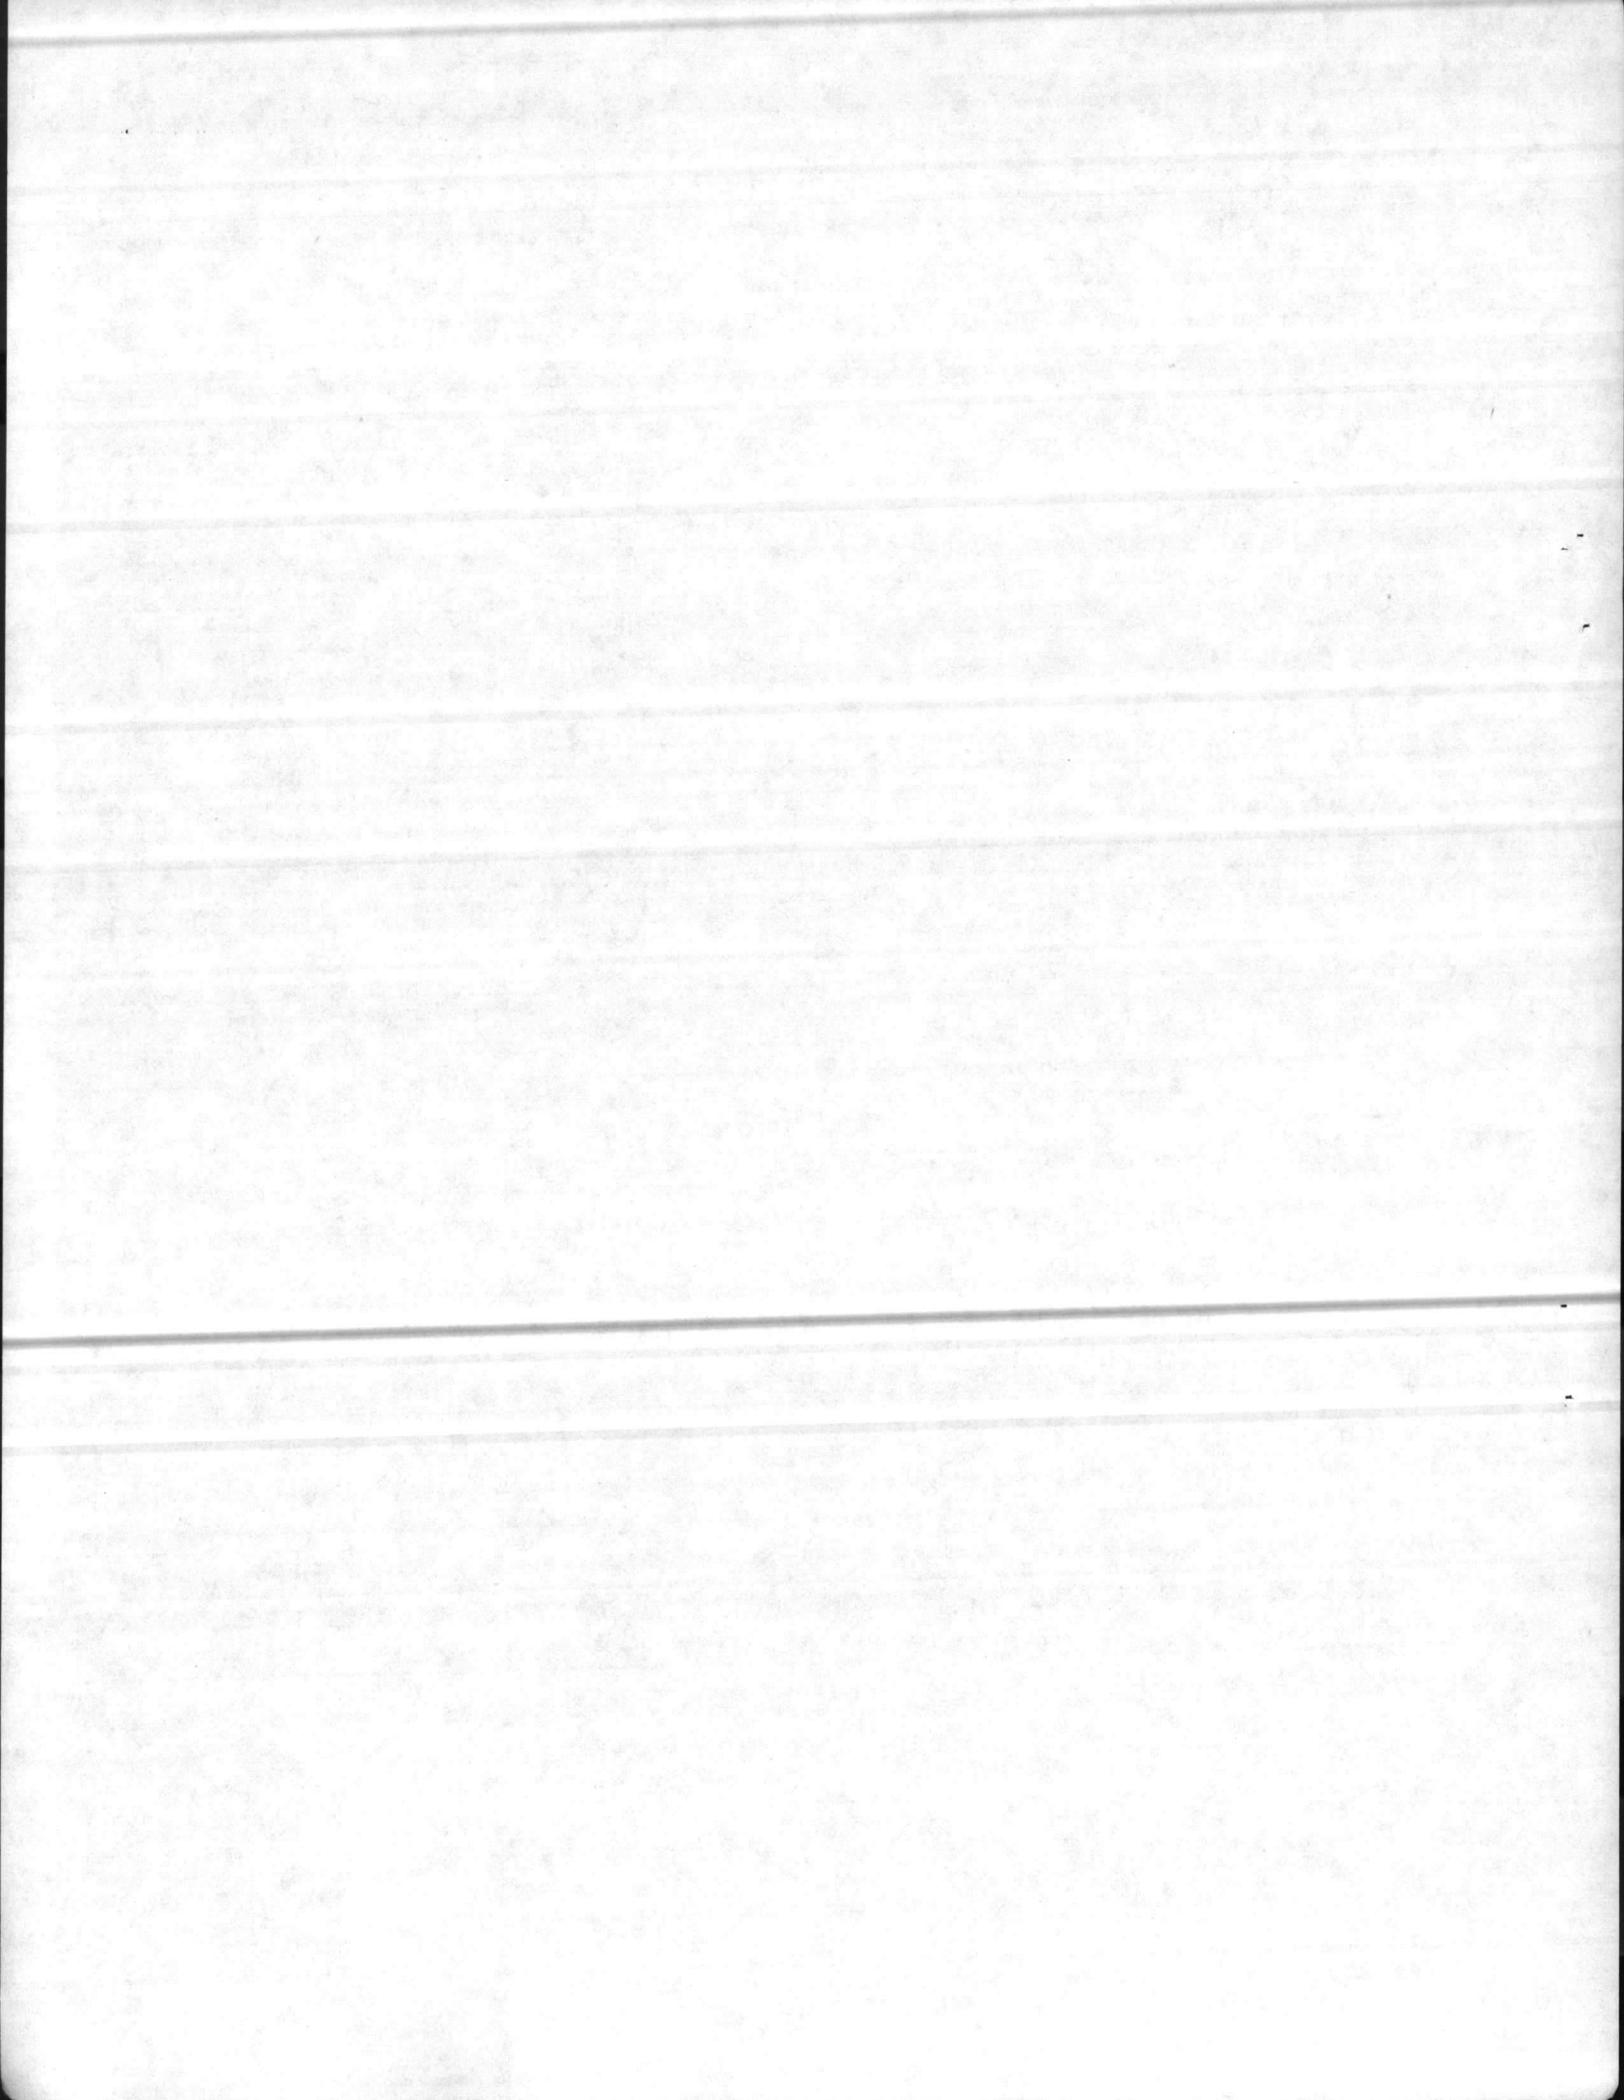

12. TECHNICAL PUBLICATIONS: The Contractor shall furnish to the Contracting Officer three copies each of installation, operation maintenance manuals and parts list for all Contractor-furnished mechanical and electrical equipment.

12.1 Maintenance and Operation Manual shall be furnished to the Contracting Officer for approval. The manual shall be mounted in flexible binders with oil-resistant covers and shall contain, but not be limited to, installation and operating instructions, maintenance procedures, illustrations, drawings, detailed descriptions, tests, adjustments, safety precautions, and parts list.

12.2 Parts list, giving part number and prices for the equipment furnished, shall be submitted to the Contracting Officer as soon as practicable after the award of the contract, but not later than 90 days after notice of award has been received.

13. TRAILER OR STORAGE BUILDINGS will be permitted on the job site, where space is available, subject to the approval of the Contracting Officer. The trailers or buildings shall be suitably painted and kept in a good state of repair. Failure of the Contractor to maintain his trailers or storage buildings in good condition will be considered sufficient reason to require their removal from the job site.

14. SCHEDULE OF PRICES: The original and seven copies of the Schedule of Prices shall be submitted to the Contracting Officer for approval in accordance with the General Provisions. Pursuant to Clause 7 of the General Provisions, payments will not be made until the Schedule of Prices has been submitted and approved.

15. CONTRACTOR'S INVOICE AND CONTRACT PERFORMANCE STATEMENT: Requests for payment in accordance with the terms of the contract shall consist of:

a. Contractor's Invoice on Form NAVFAC 10-7300/30 (4-68), which shall show, in summary form, the basis for arriving at the amount of the invoice

b. Contractor's Monthly Estimate for Voucher (5ND GEN 5265/1)

c. Affidavit to Accompany Invoice (5ND LANTDIV 4-4235/4)


(Rev 1/68)

Forms will be furnished by the Contracting Officer. Monthly invoices and supporting forms for work performed through the 15th of the month shall be submitted to the Officer in Charge of Construction by the 20th of the month in the following quantities:

a. Contractor's Invoice - Original and five copies

b. Contractor's Monthly Estimate for Voucher - Original and two copies

c. Affidavit - Original

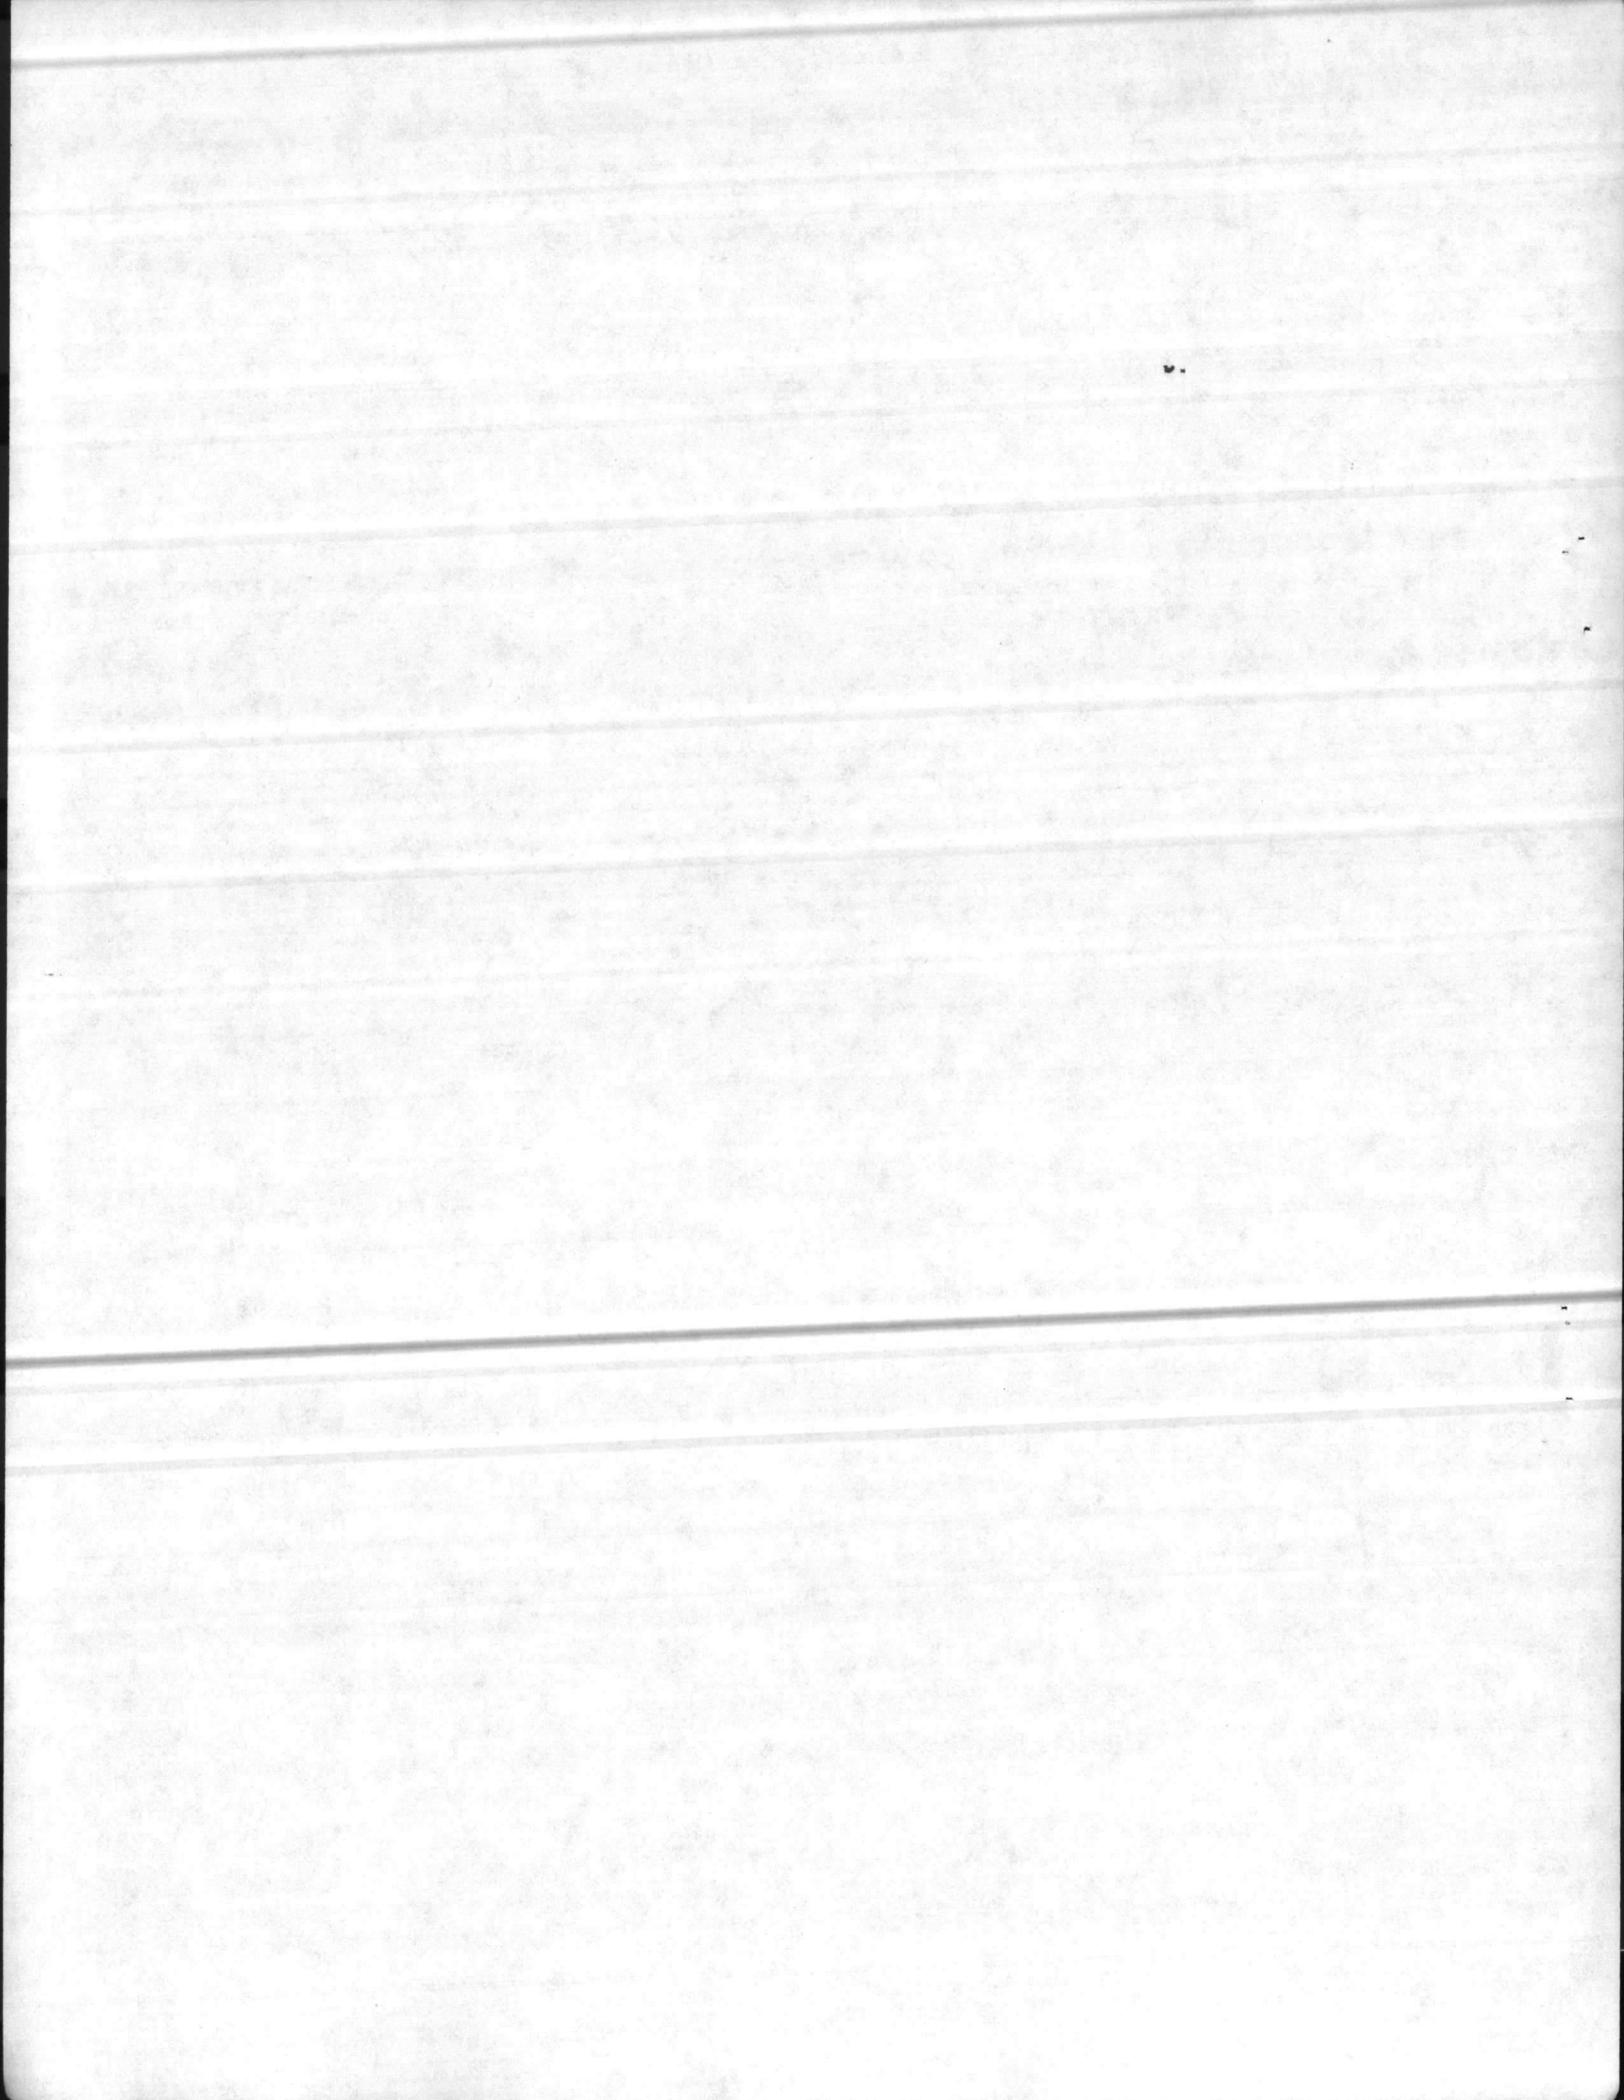

16. GOVERNMENT-FURNISHED UTILITIES: The Government will furnish water and electricity free of charge from the nearest existing outlets for pursuance of the work under this contract.

17. WRITTEN GUARANTEES AND GUARANTOR'S LOCAL REPRESENTATIVE: Prior to completion of the contract, the Contractor shall obtain and furnish to the Contracting Officer's designated representative, written guarantees for all equipment and/or appliances furnished under the contract. The Contractor shall furnish with each guarantee the name, address, and telephone number of the guarantor's representative nearest to the location where the equipment and/or appliances are installed, who, upon request of the using service's representative, will honor the guarantee during the guaranty period and will provide the services prescribed by the terms of the guarantee. At the time of installation, the Contractor shall tag each item of warranted equipment with a durable oil and water resistant tag approved by the Contracting Officer. Leave the date of acceptance and inspector's signature blank until the project is accepted for beneficial occupancy. The tag shall show the following information:

EQUIPMENT WARRANTY TAG

Type of Equipment _____


Accepted Date _____

Warranted Until _____

Under Contract No. _____

Inspector's Signature _____

STATION PERSONNEL TO PERFORM ONLY OPERATIONAL MAINTENANCE

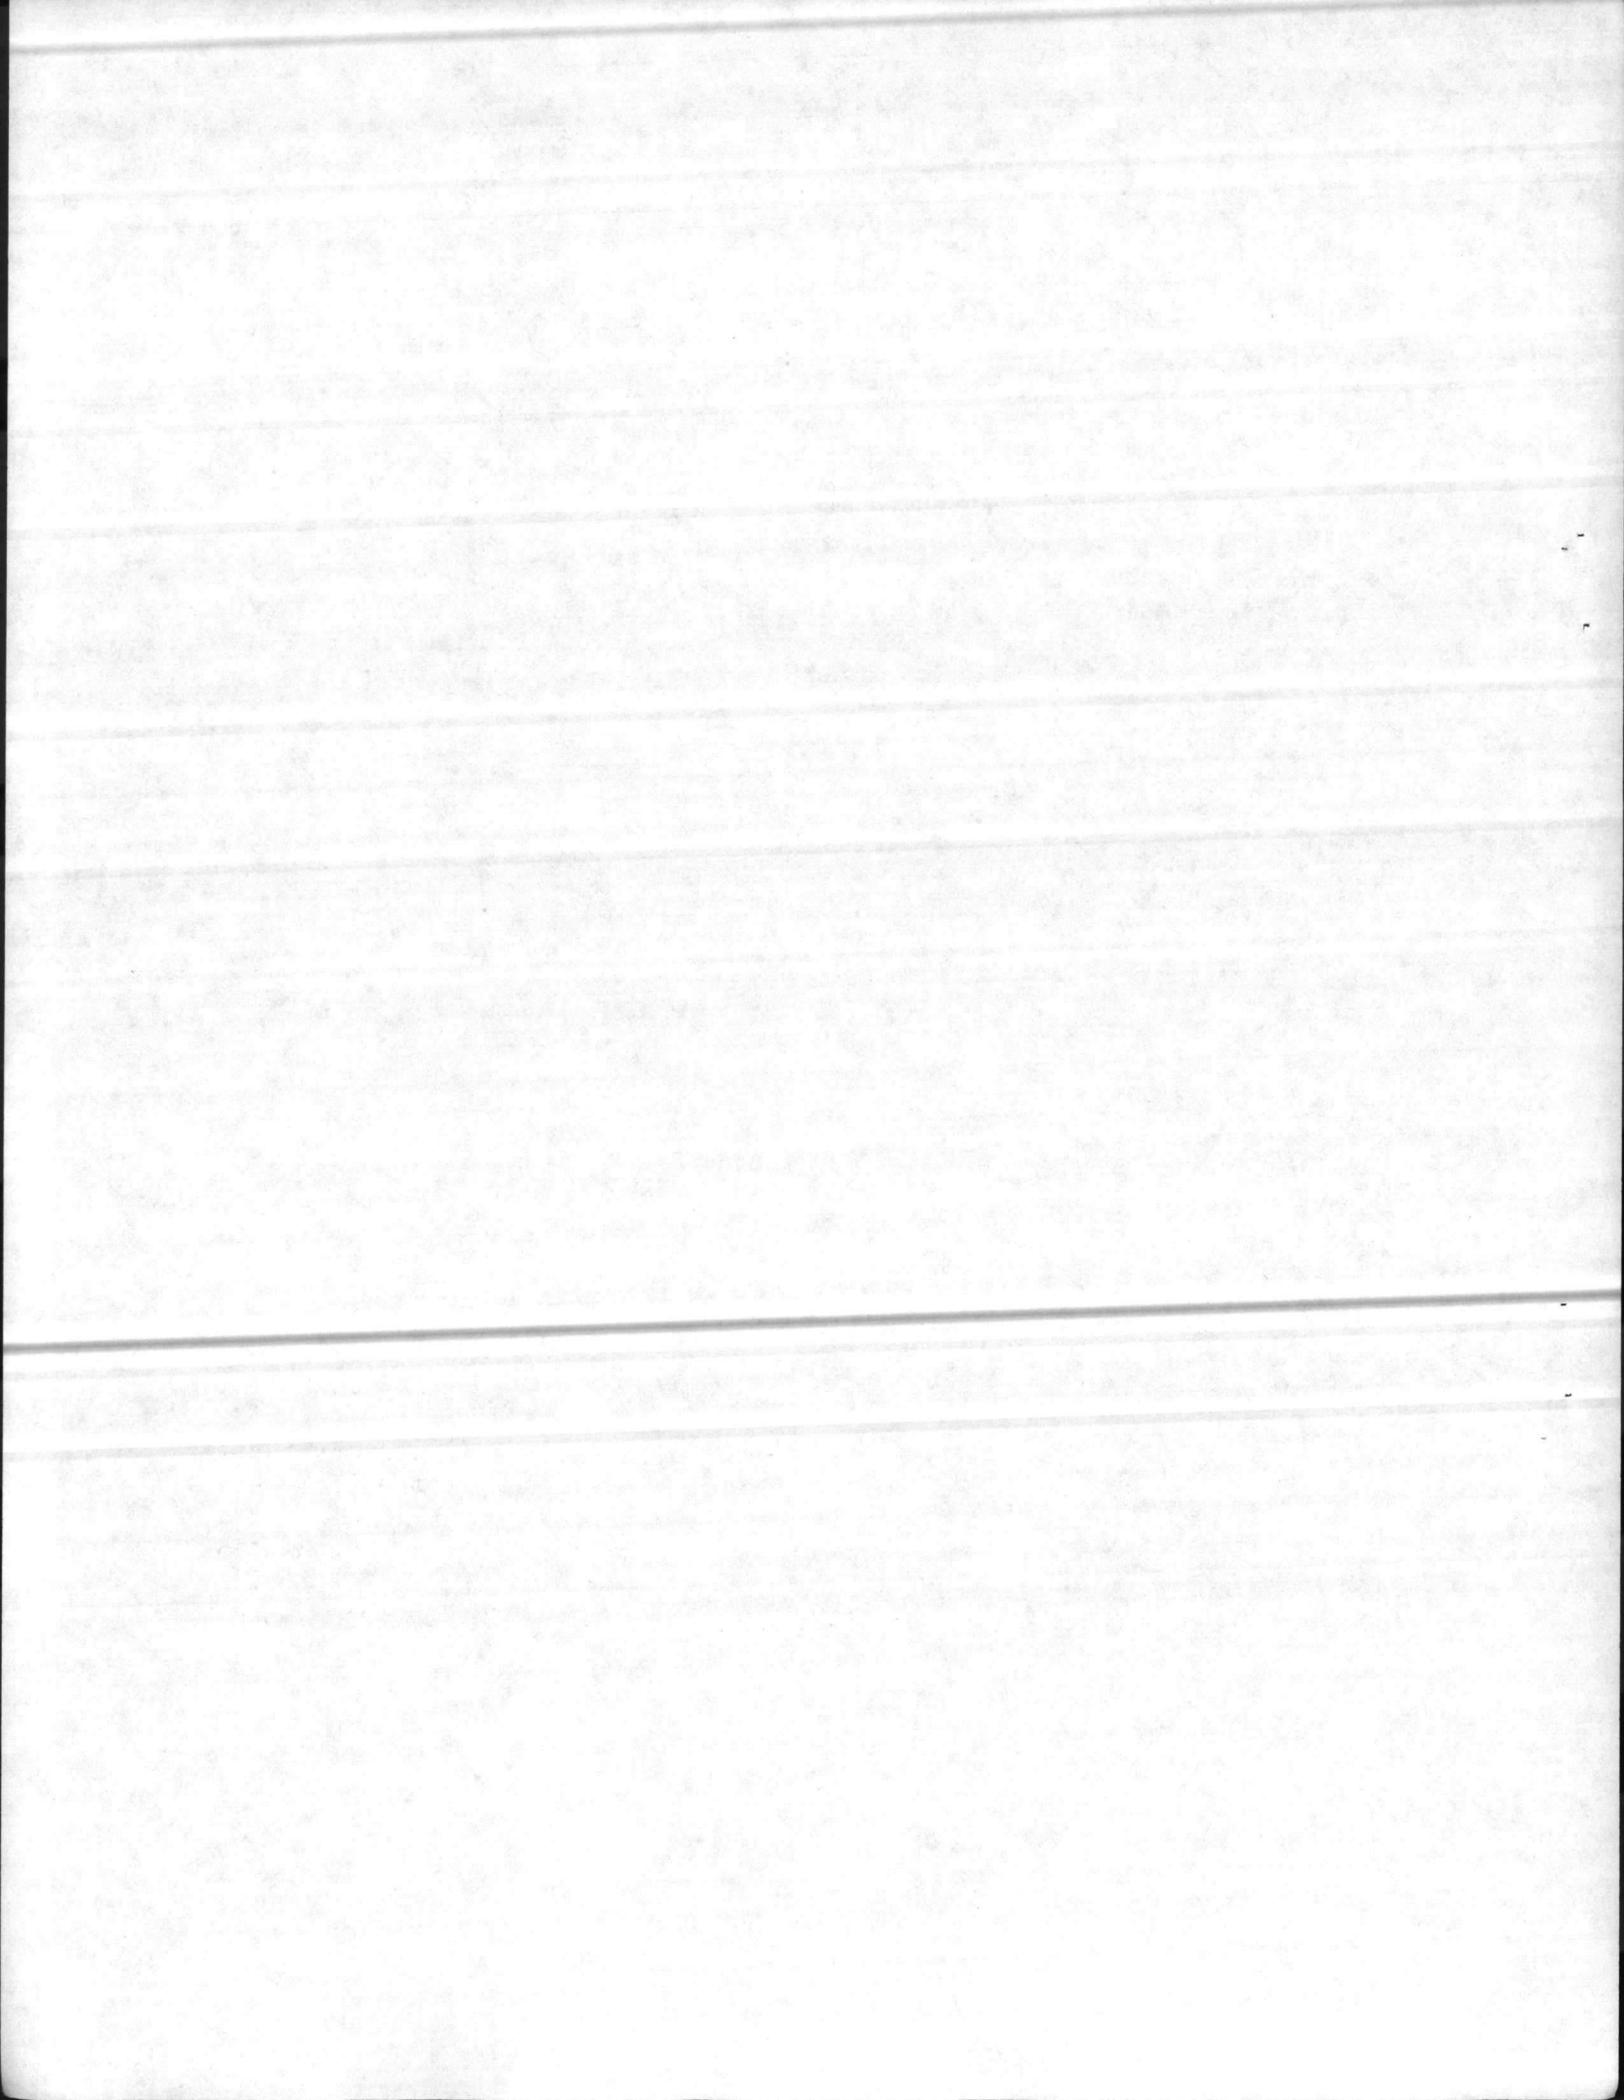


SECTION 01012. ADDITIONAL GENERAL PARAGRAPHS

1. APPROVAL OF SAMPLES, CUTS, AND DRAWINGS: Matter submitted for approval shall be accompanied by complete information concerning the material, articles, and/or design proposed for use in sufficient detail to show compliance with the specification, and shall be approved before incorporation into the work. Approval thereof will not be construed as relieving the Contractor of compliance with the specification, even if such approval is made in writing, unless the attention of the Contracting Officer is called to the noncomplying features by letter accompanying the submitted matter. Partial submittals or submittals of less than the whole of any system made up of interdependent components, will not be considered. Approval of drawings, cuts, and samples by the Contracting Officer shall not be construed as a complete check or approval of the detailed dimensions, weights, gauges and similar details of the proposed articles. The conformance of such details with the contract requirements, together with the necessary coordination of dimensions and details between the various elements of the work and between the various subcontractors and suppliers, shall be solely the responsibility of the Contractor, approval of submitted matter notwithstanding.

2. OPERATION OF STATION UTILITIES: The Contractor shall not operate nor disturb the setting of any control devices in the station utilities system, including water, sewer, electrical and steam services. The Government will operate the control devices as required for normal conduct of the work. The Contractor shall notify the Contracting Officer giving reasonable advance notice when such operation is required.

3. CHANGED CONDITIONS: Wherever changed conditions as defined in Clause 4 of the General Provisions are encountered, and wherever conditions exposed during the course of the work necessitate a change from quantities indicated or specified as either estimated quantities or as a basis for bids, whether or not provision for a change in price for such variation is specified, the Contracting Officer must be notified in writing and written directions to do so must be obtained before quantities stated in the contract documents are exceeded.

4. SUBCONTRACTORS AND PERSONNEL: Promptly after the award of the contract, the Contractor shall submit to the Contracting Officer in triplicate, a list of his subcontractors and the work each is to perform. On this form shall appear the names of the key personnel of the Contractor and subcontractors, together with their home addresses and telephone numbers, for use in event of any emergency. From time to time as changes occur and additional information becomes available, the Contractor shall amplify, correct, and change the information contained in previous lists.

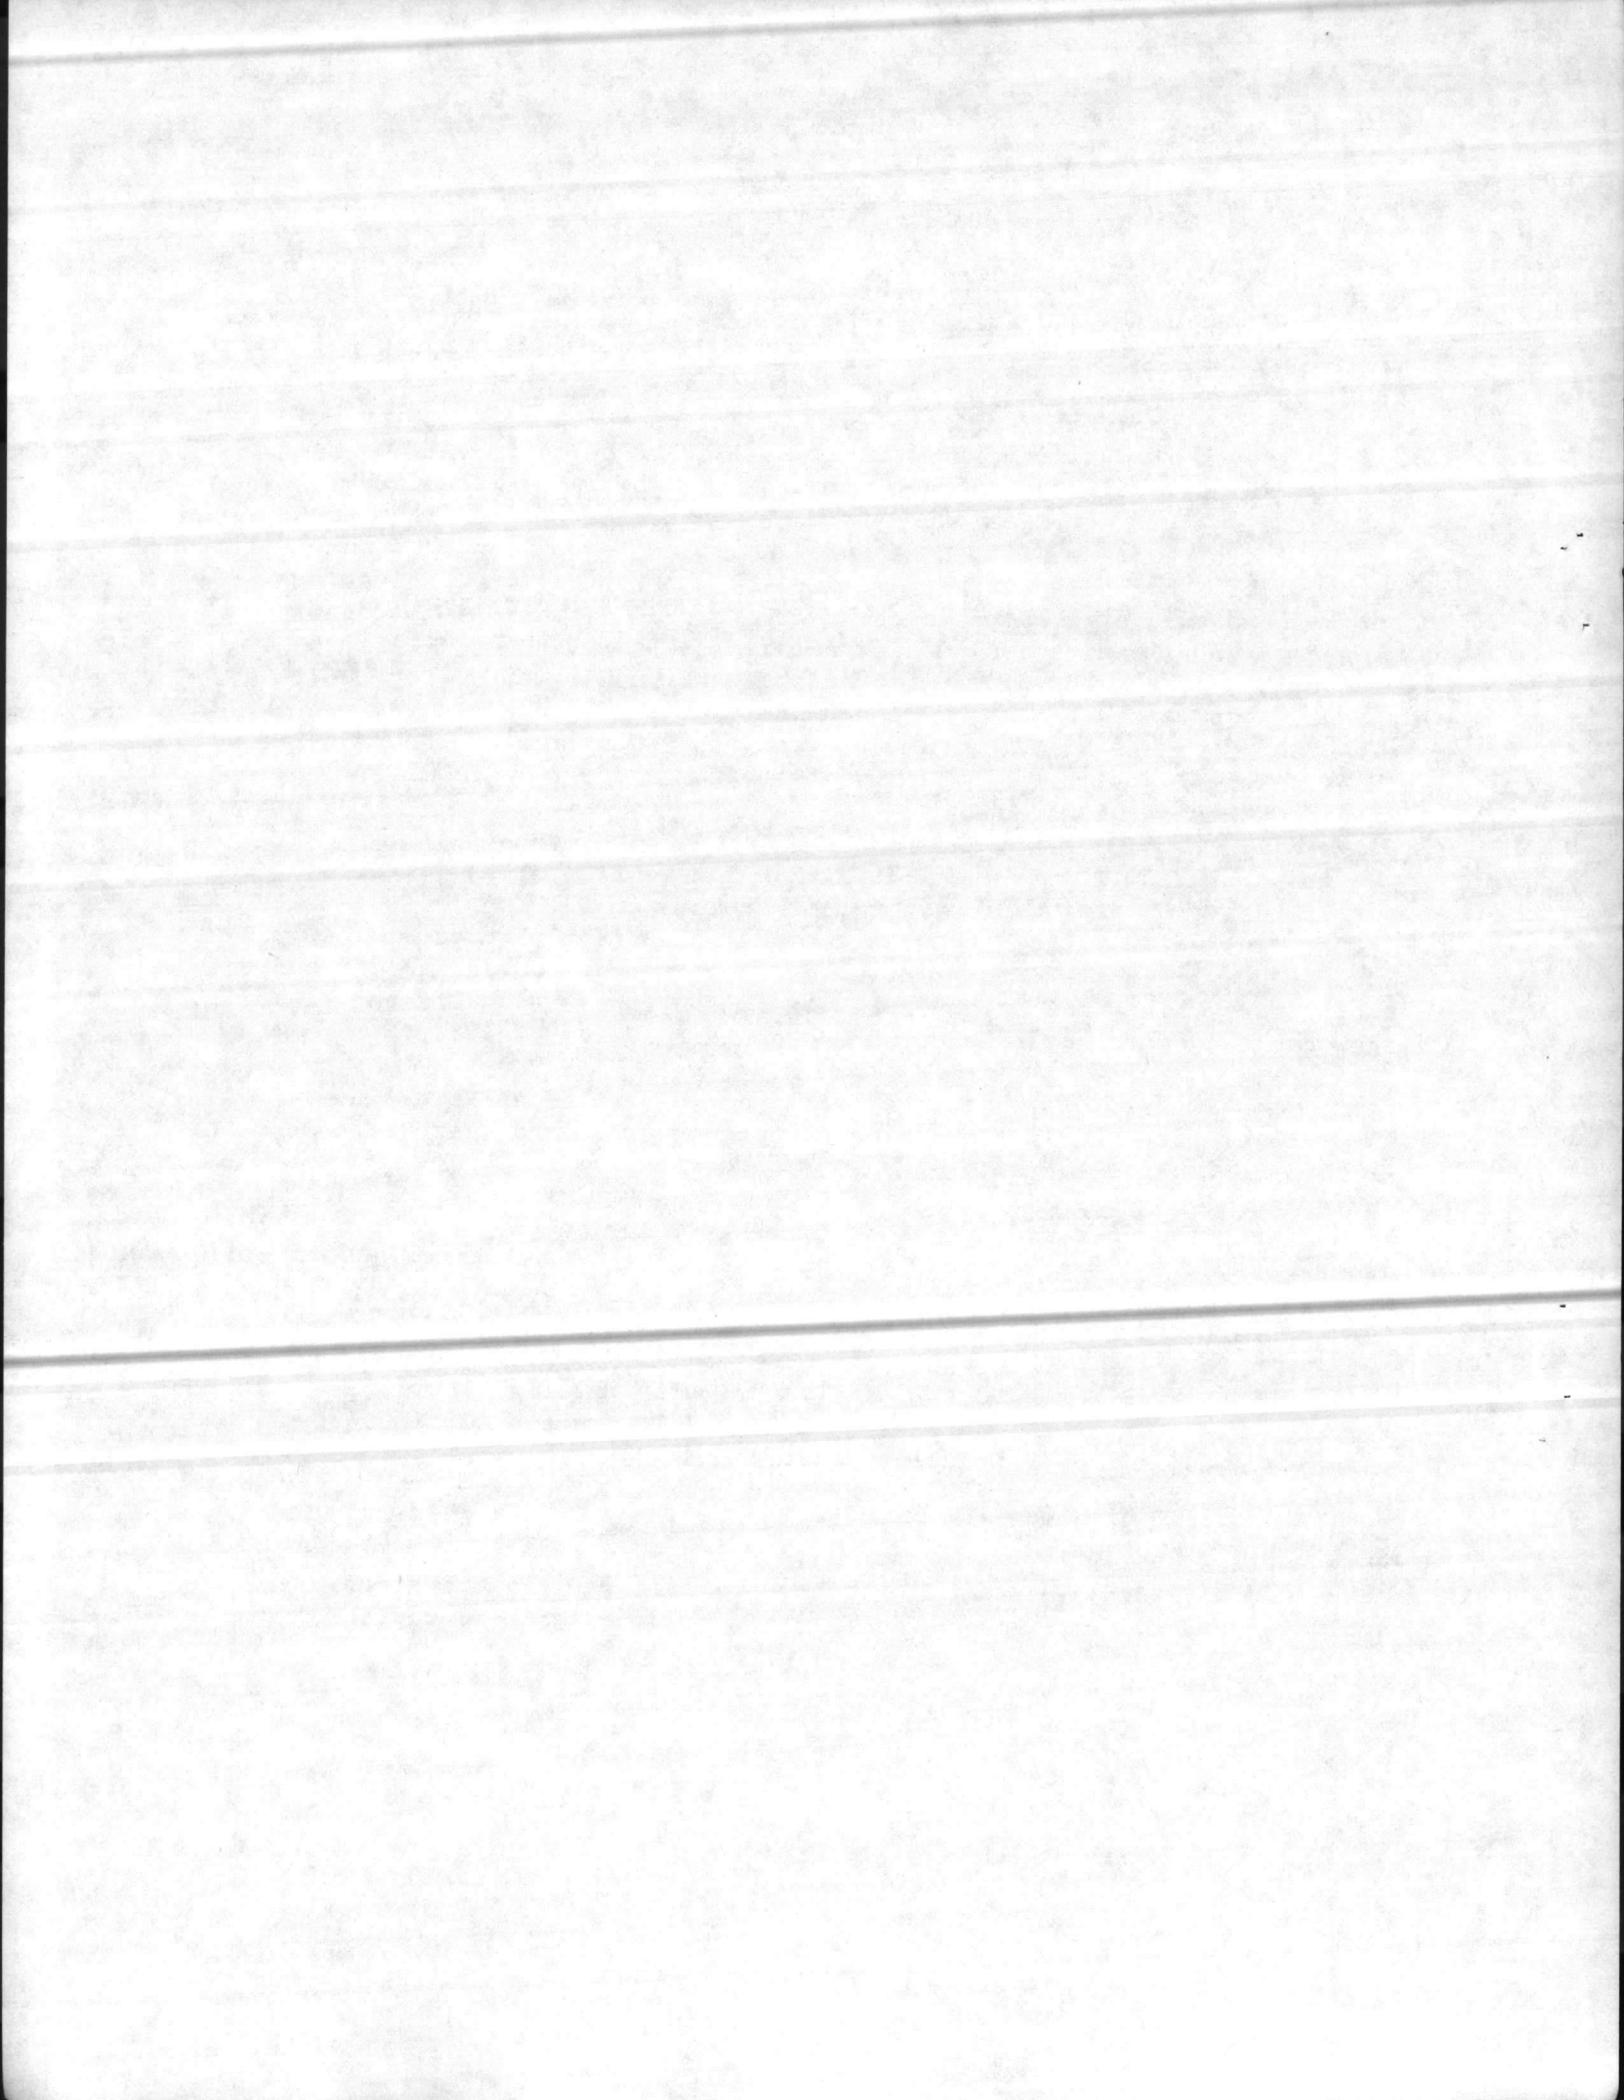


5. AS-BUILT DRAWINGS: On completion of the work, one full-size print of each of the drawings complying this specification shall be neatly and clearly marked indicating all variations between the construction actually provided or specified in the contract documents, and designated by the Contracting Officer. The Contractor shall also mark the exact location of any underground utility lines of the work. Where a choice of materials and/or reinforcement, and where variations in the scope or character of specified work are permitted either by award on bidding or by subsequent change to the contract, the drawings shall define the construction actually provided. The drawings shall include such supplementary notes, legends, and details as may be necessary for legibility and clear portrayal of the as-built construction; the marked prints shall be subject to approval of the Contracting Officer before acceptance.

THIS PARAGRAPH NOT USED

6. PRINTS FURNISHED TO CONTRACTOR: Six copies of the project specification, and six sets of the drawings accompanying the specification, will be furnished the Contractor. Additional sets of the specifications and drawings can be obtained, if required, by application to the Contracting Officer, providing that the need therefor is justified to the satisfaction of the Contracting Officer.

7. LOCATION OF UNDERGROUND UTILITIES: Where existing piping, utilities, and underground obstructions of any type are indicated in locations to be traversed by new piping, ducts, and other work provided hereunder, and are not indicated or specified to be removed, the elevations of the existing utilities and obstructions shall be determined before the new work is laid closer than the nearest manhole or other structure at which an adjustment in grade could be made. For any additional work required by reason of conflict between the new and existing work, an adjustment in contract price will be made in accordance with Clause 4 of the General Provisions. The Base Telephone Officer, phone 451-2531, will show the Contractor approximate locations of all buried telephone cables after receiving 10 days' notice. The locations of underground utilities shown is only approximate and the information is incomplete.

8. QUARANTINE FOR IMPORTED FIRE ANT (7/76). All of Onslow, Jones and Carteret Counties and portions of Duplin and Craven Counties have been declared a generally infested area by the United States Department of Agriculture for the imported fire ant. Compliance with the quarantine regulations established by this authority as set forth in USDA Quarantine No. 81 dated 9 October 1970, and USDA Publication 301.81-2A of 23 July 1976, is required for operations hereunder. Pertinent requirements of the quarantine for materials, originating on the Camp Lejeune reservation and the Marine Corps Air Station (Helicopter), New River, which are to be

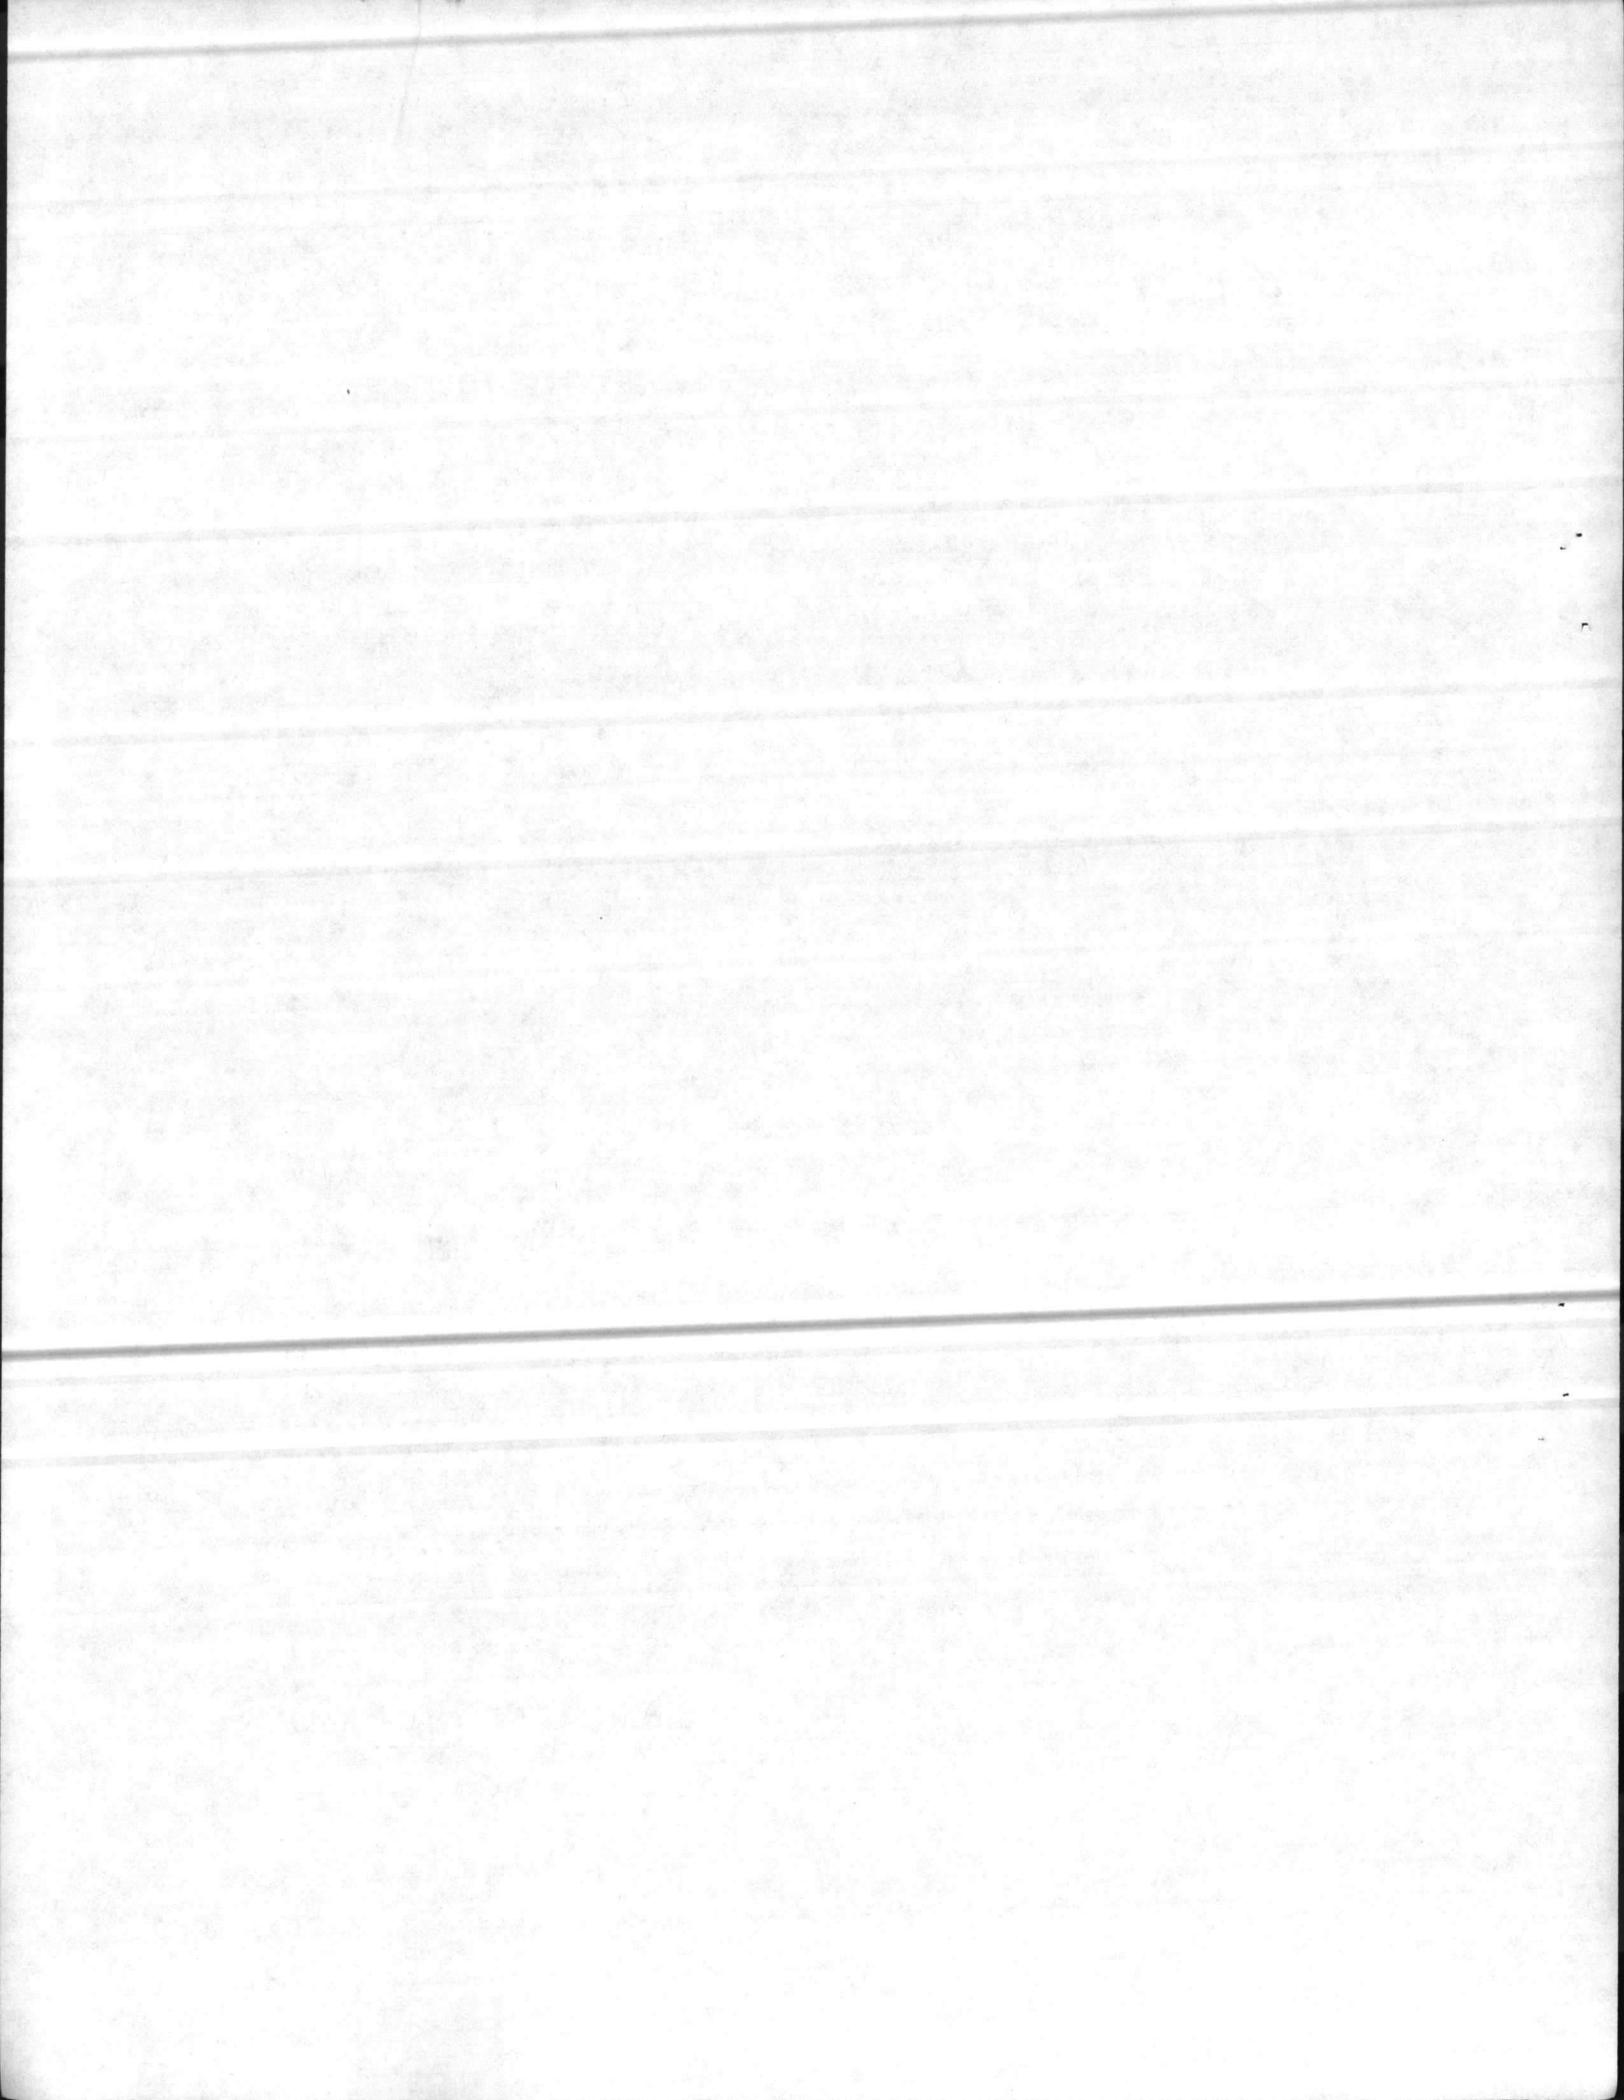

transported outside the Onslow County or adjacent suppression areas include the following:

(a) Certification is required for the following articles, and they shall not be moved from the reservation to any point outside the Onslow County and adjacent designated areas unless accompanied by a valid inspection certificate issued by an authorized imported fire ant inspector:

(1) Bulk soil,

(2) Used mechanized soil-moving equipment.

(3) Any other products, articles, or means of conveyance if it is determined by an inspector that they present a hazard of spread of the imported fire ant and the person in possession thereof has been so notified.

(b) Authorization for movement of equipment shall be obtained from the Officer in Charge of Construction (OICC), and requests for inspection shall be made sufficiently in advance of the date of movement to permit arrangements for the services of authorized inspectors. The equipment shall be prepared and assembled so that it may be readily inspected. All soil on or attached to equipment, supplies and materials shall be removed by washing with water and/or such other means as necessary to accomplish complete removal. Resulting spoil shall be wasted as directed.

9. EMERGENCY MEDICAL CARE. Only emergency medical care is available by Government facilities at Marine Corps Base, Camp Lejeune to Contractor employees who suffer on-the-job injury or disease. Emergency care will be rendered at the prevailing rates established in BUMEDINST 6320.4 series. Reimbursement will be made by the Contractor to the Naval Regional Medical Center Collection Agent upon receipt of a monthly statement.


10. NORTH CAROLINA SALES AND USE TAX.

(a) As used throughout this clause, the term "materials" means building materials, supplies, fixtures and equipment which become a part of or are annexed to any building or structure erected, altered, or repaired under this contract:

(b) If this is a fixed-price type contract as defined in the Armed Services Procurement Regulation, the contract price includes North Carolina sales and use taxes to be paid with respect to materials, notwithstanding any other provision of this contract. If this is a cost-reimbursement type contract as defined in such regulation, any North Carolina sales and use taxes paid by the Contractor with respect to materials shall constitute an allowable cost under this contract.

(c) At the time specified in paragraph (d) below:

(i) The Contractor shall furnish the Contracting Officer a certified statement setting forth the cost of the materials purchased from each vendor and the amount of North Carolina sales and use taxes

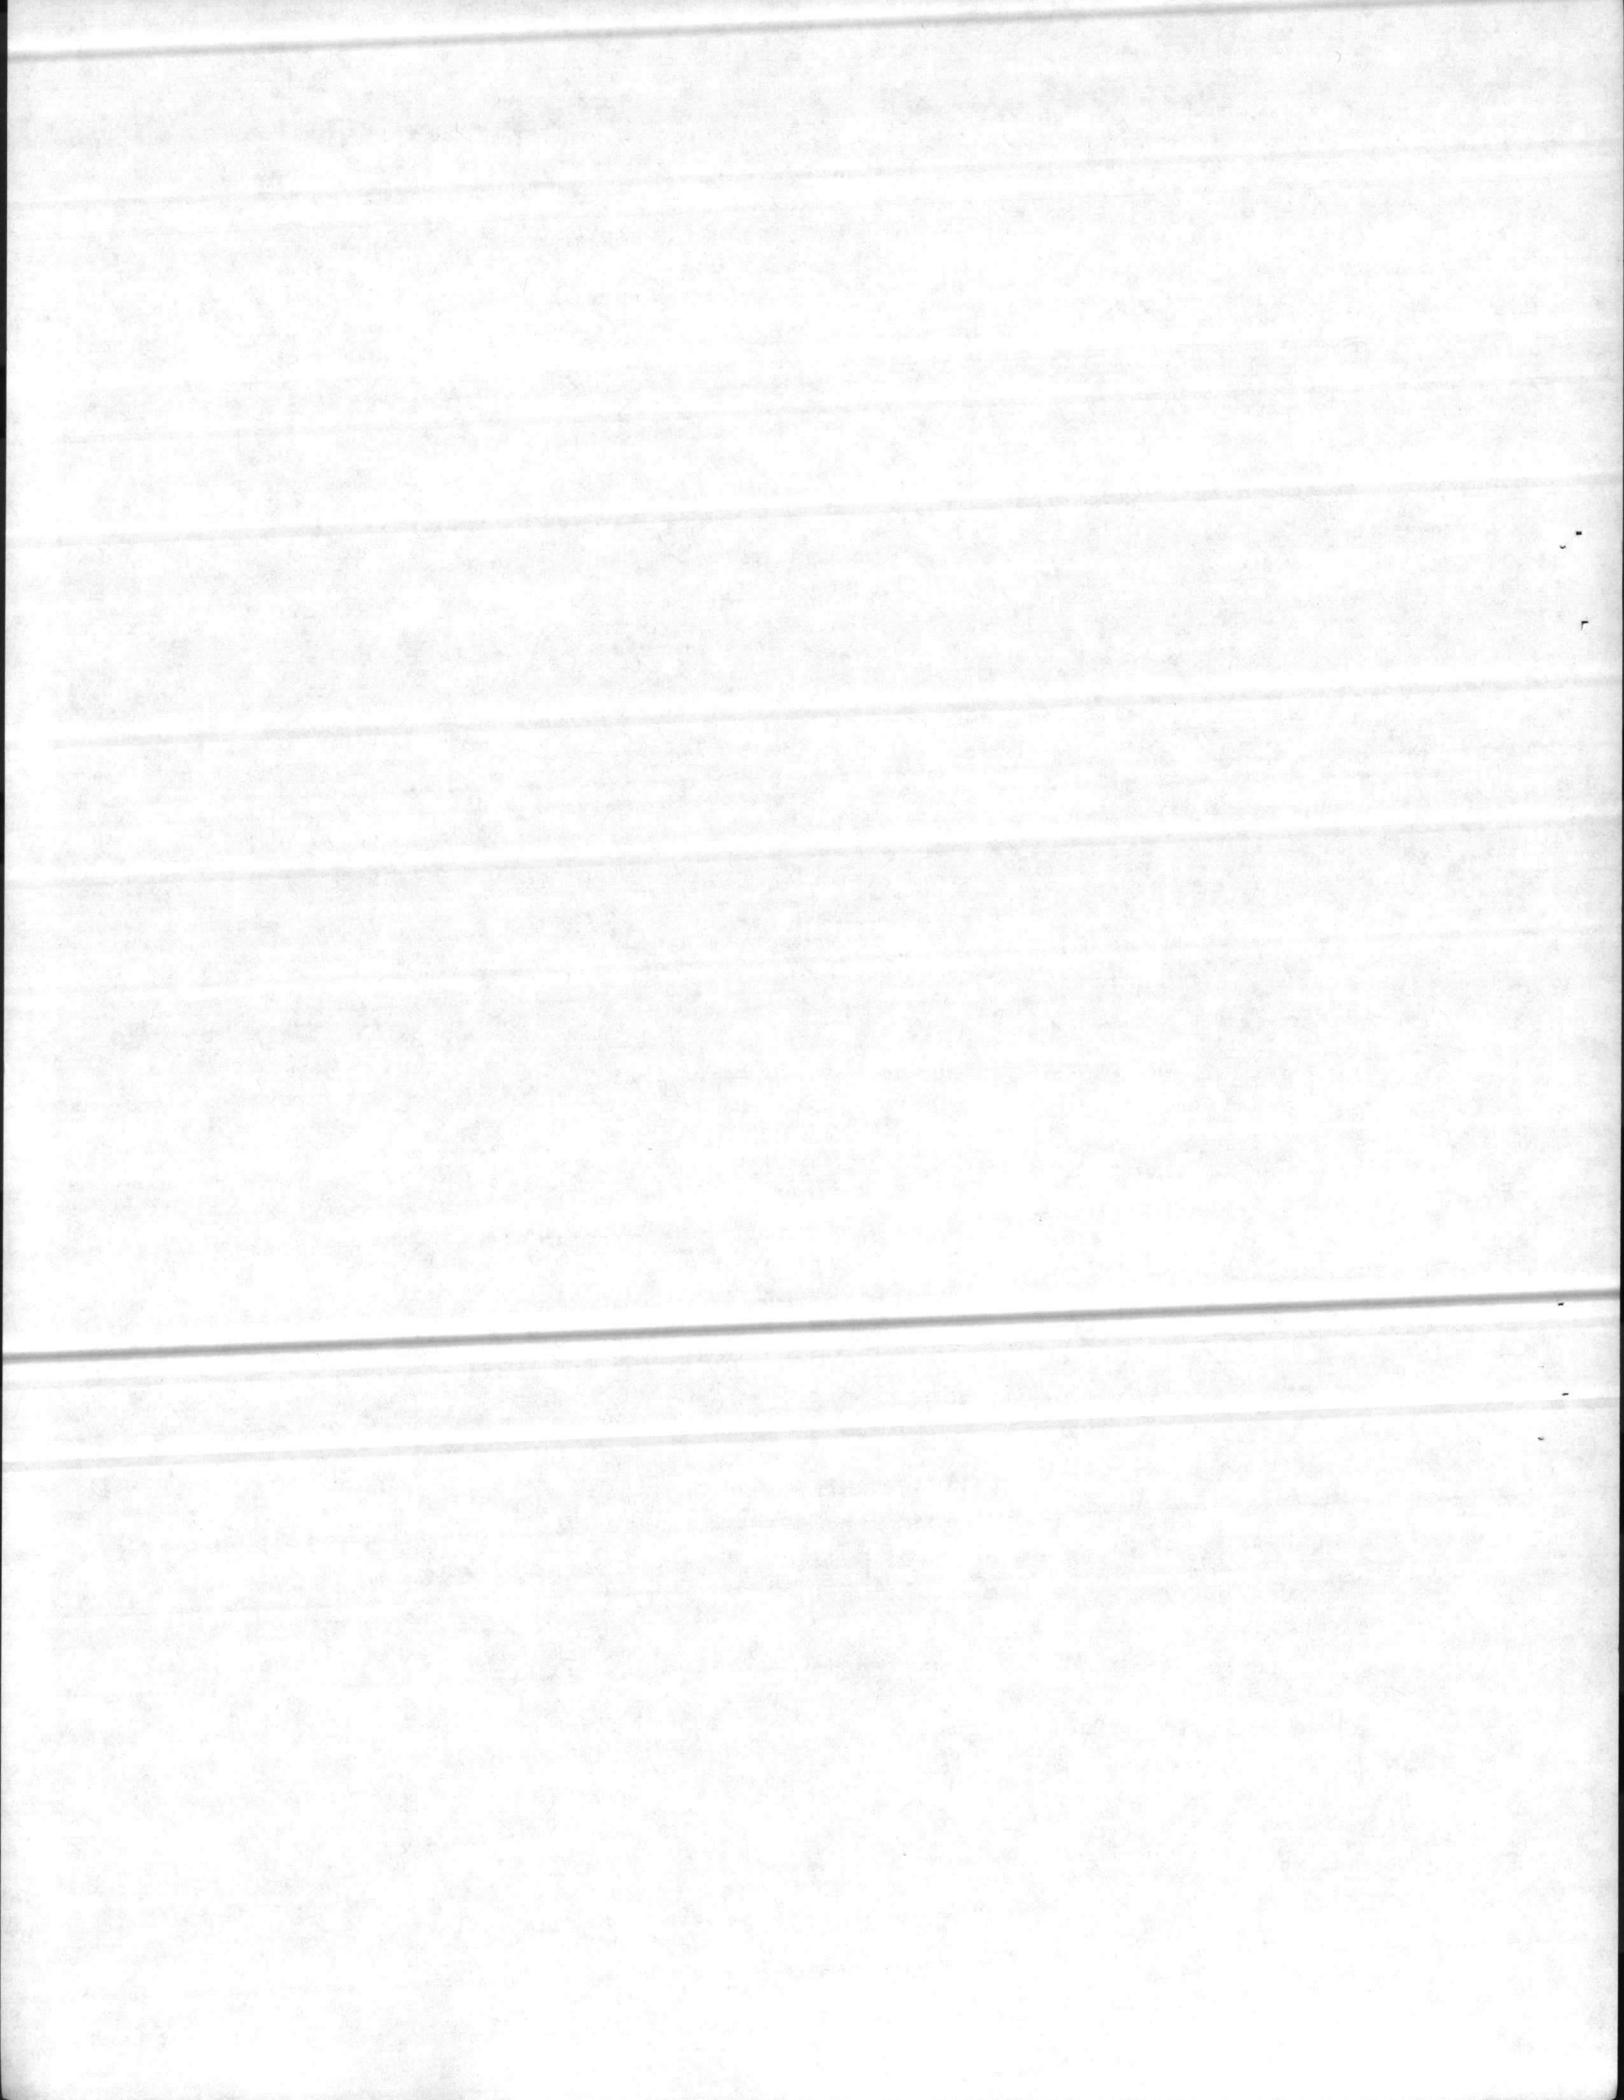


paid thereon. In the event the Contractor makes several purchases from the same vendor, such certified statement shall indicate the invoice numbers, the inclusive dates of the invoices, the total amount of the invoices, and the North Carolina sales and use taxes paid thereon. Such statement shall also include the cost of any tangible personal property withdrawn from the Contractor's warehouse stock and the amount of North Carolina sales or use tax paid thereon by the Contractor. The Contractor shall furnish such additional information as the Commissioner of Revenue of the State of North Carolina may require to substantiate a refund claim for sales or use taxes.

(ii) The Contractor shall obtain and furnish to the Contracting Officer similar certified statements by its subcontractors.

(d) If this contract is completed before the next October 1, the certified statements to be furnished pursuant to paragraph (c) above shall be submitted within 60 days after completion. If this contract is not completed before the next October 1, such certified statements shall be submitted on or before the 30th day of November of each year and shall cover taxes paid during the twelve-month period which ended the preceding September 30.

(e) The certified statement to be furnished pursuant to paragraph (c) above shall be in the following form:

I hereby certify that during the period _____ to _____, (name of Contractor or subcontractor) paid North Carolina sales and use taxes aggregating \$ _____ with respect to building materials, supplies, fixtures and equipment which have become a part of or annexed to a building or structure erected, altered or repaired by (name of Contractor) for the United States of America, and that the vendors from whom the property was purchased, the dates and numbers of invoices covering the purchases, the total amount of the invoices of each vendor, the North Carolina sales and use taxes paid thereon, and the cost of property withdrawn from warehouse stock and North Carolina sales or use taxes paid thereon are as set forth in the attachments hereto.

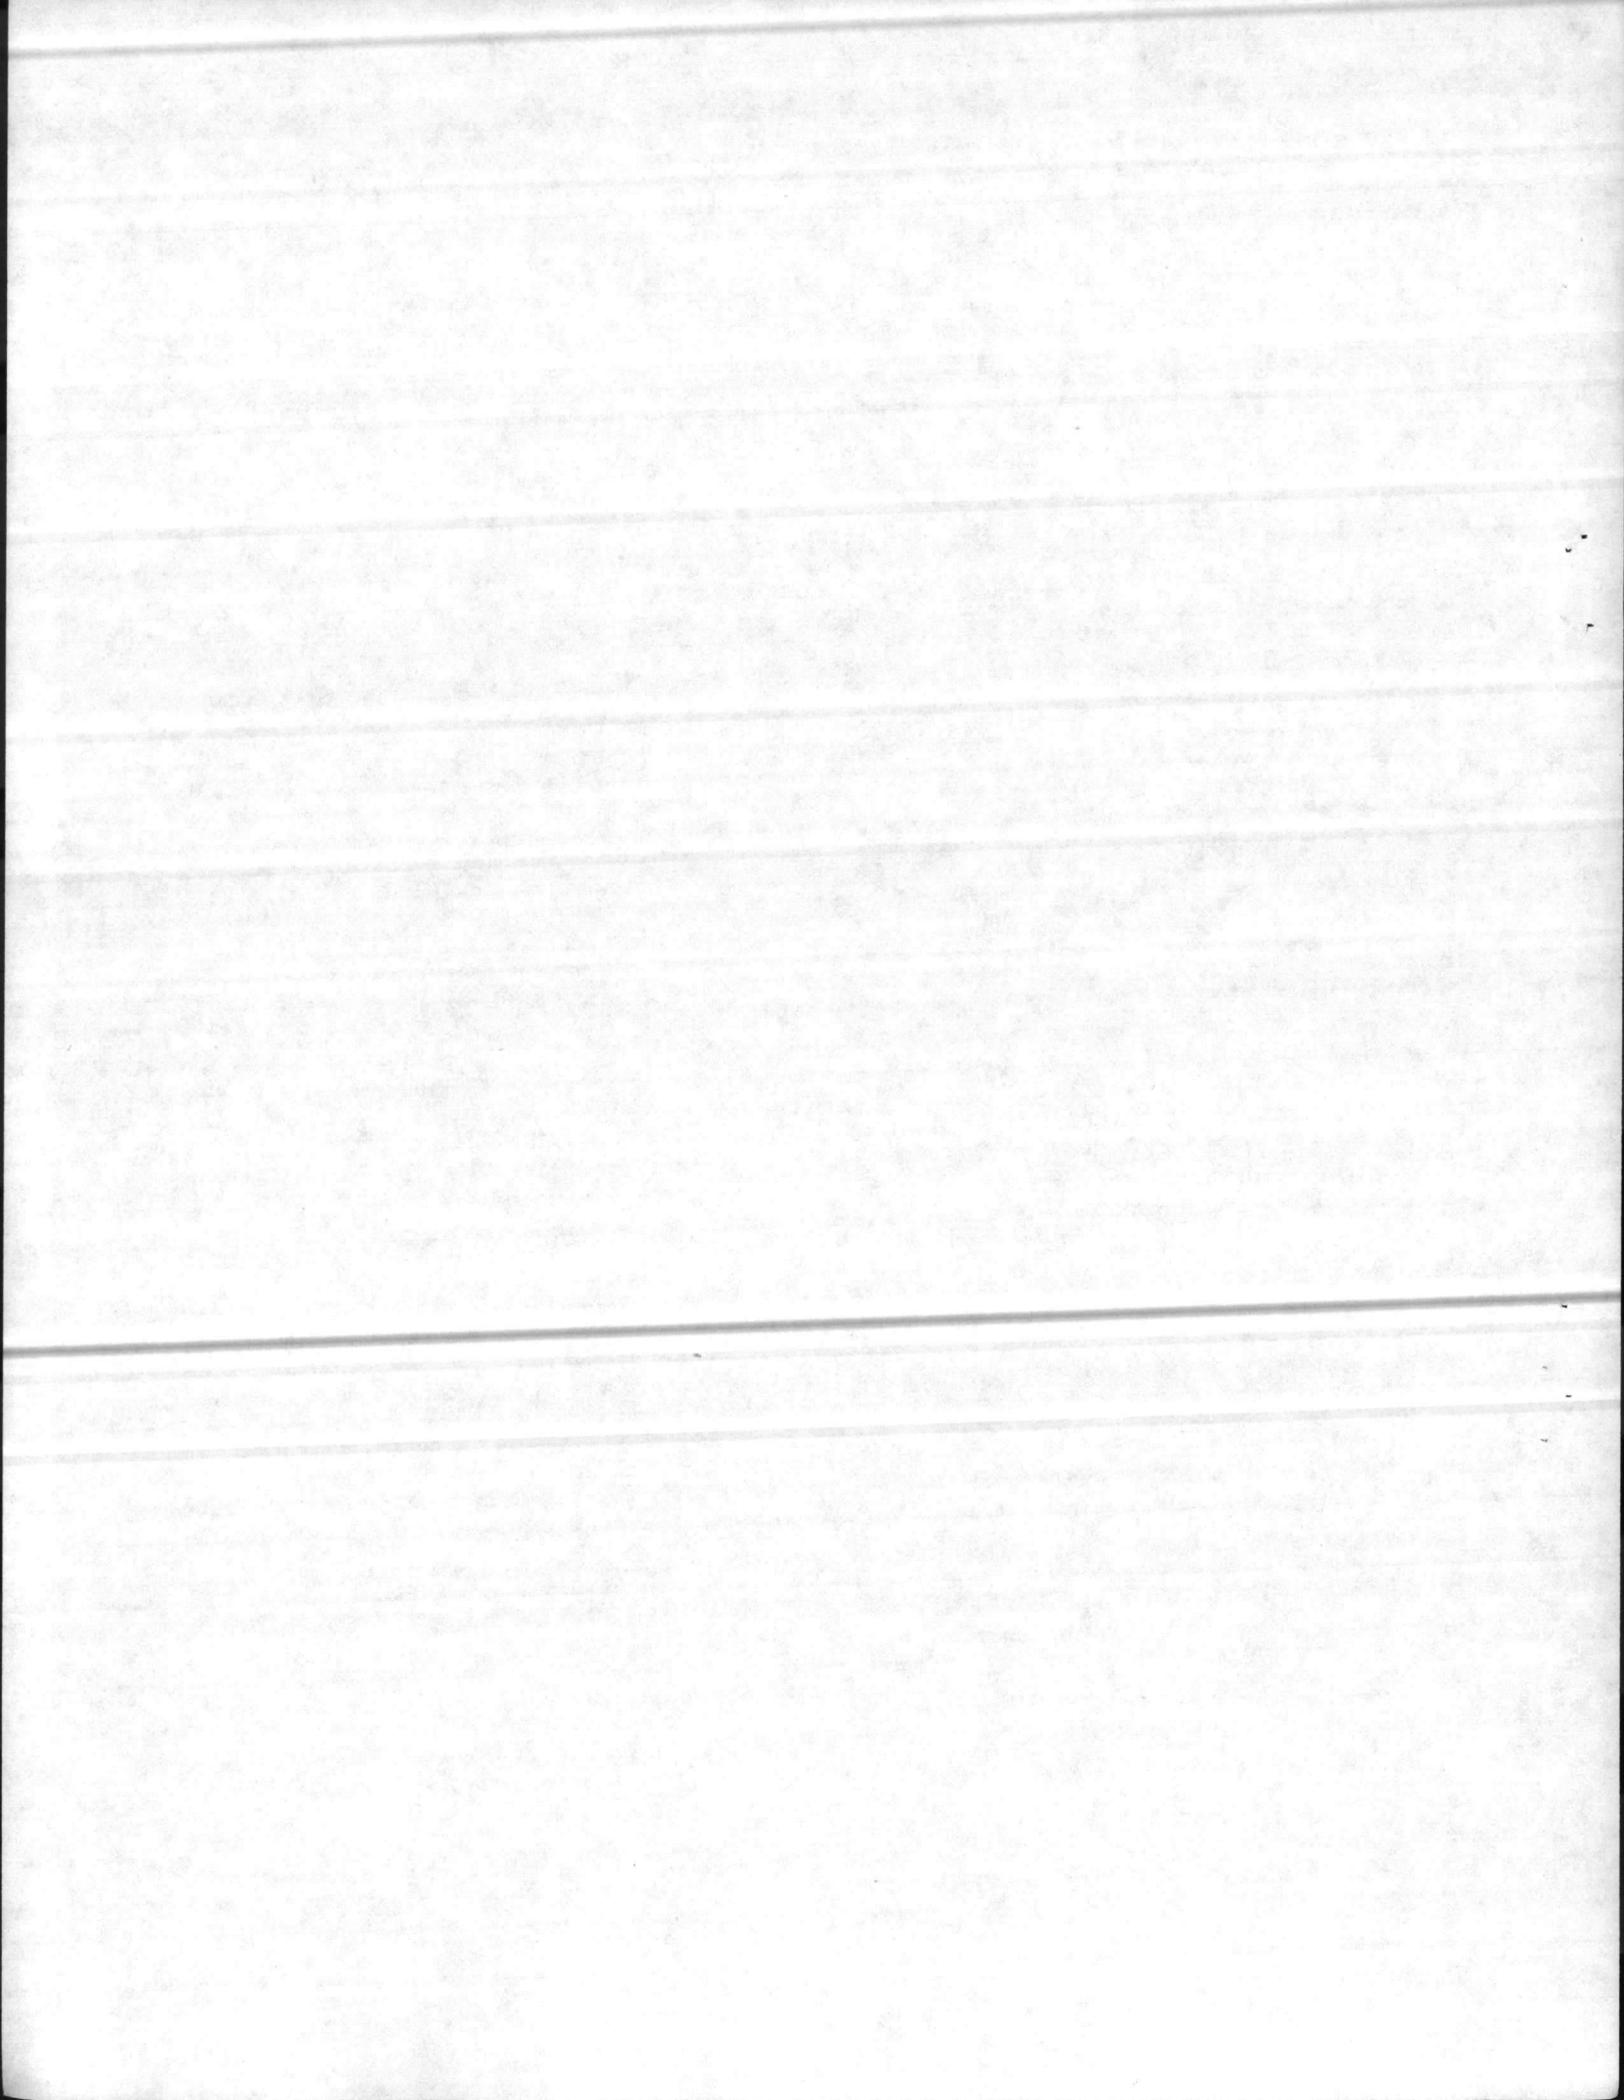

SECTION 01401. QUALITY CONTROL

1. APPLICABLE PUBLICATION: The following publication of the issue listed below, but referred to thereafter by basic designation only, forms a part of this specification to the extent indicated by the references thereto:

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E329-72 Inspection and Testing Agencies for Concrete, Steel, and Bituminous Materials as Used in Construction

2. QUALITY CONTROL of this contract will be administered under the General Provisions Clause entitled "Contractor Inspection System".

3. DEFINITIONS:

3.1 Factory Tests: Tests made on various products and component parts prior to shipment to the job site, including but not limited to such items as transformers, boilers, air conditioning equipment, electrical equipment, and precast concrete.

3.2 Field Tests: Tests or analyses made at, or in the vicinity of, the job site in connection with the actual construction.


3.3 Product: The term "product" includes the plural thereof and means a type or a category of manufactured goods, construction, installations and natural and processed materials or those associated services whose characterization, classification or functional performance determination is specified by standards.

3.4 Person: The term "person" means associations, companies, corporations, educational institutions, firms, government agencies at the Federal, State and Local level, partnerships, and societies, as well as divisions thereof, and individuals.

3.5 Testing Laboratory: The term "testing laboratory" means any "person", as defined above, whose functions include testing, analyzing, or inspecting "products", as defined above, and/or evaluating the designs or specifications of such "products" according to the requirements of applicable standards.

3.6 Certified Test Reports: Reports of tests signed by a qualified professional attesting that the test results reported are accurate and that items tested either meet or fail to meet the stated minimum requirements. These test reports include those performed by Factory Mutual, Underwriters' Laboratories, Inc., and others.

3.7 Certified Inspection Reports: Reports signed by approved inspectors attesting that the items inspected meet the specification requirements other than any exceptions included in the report.

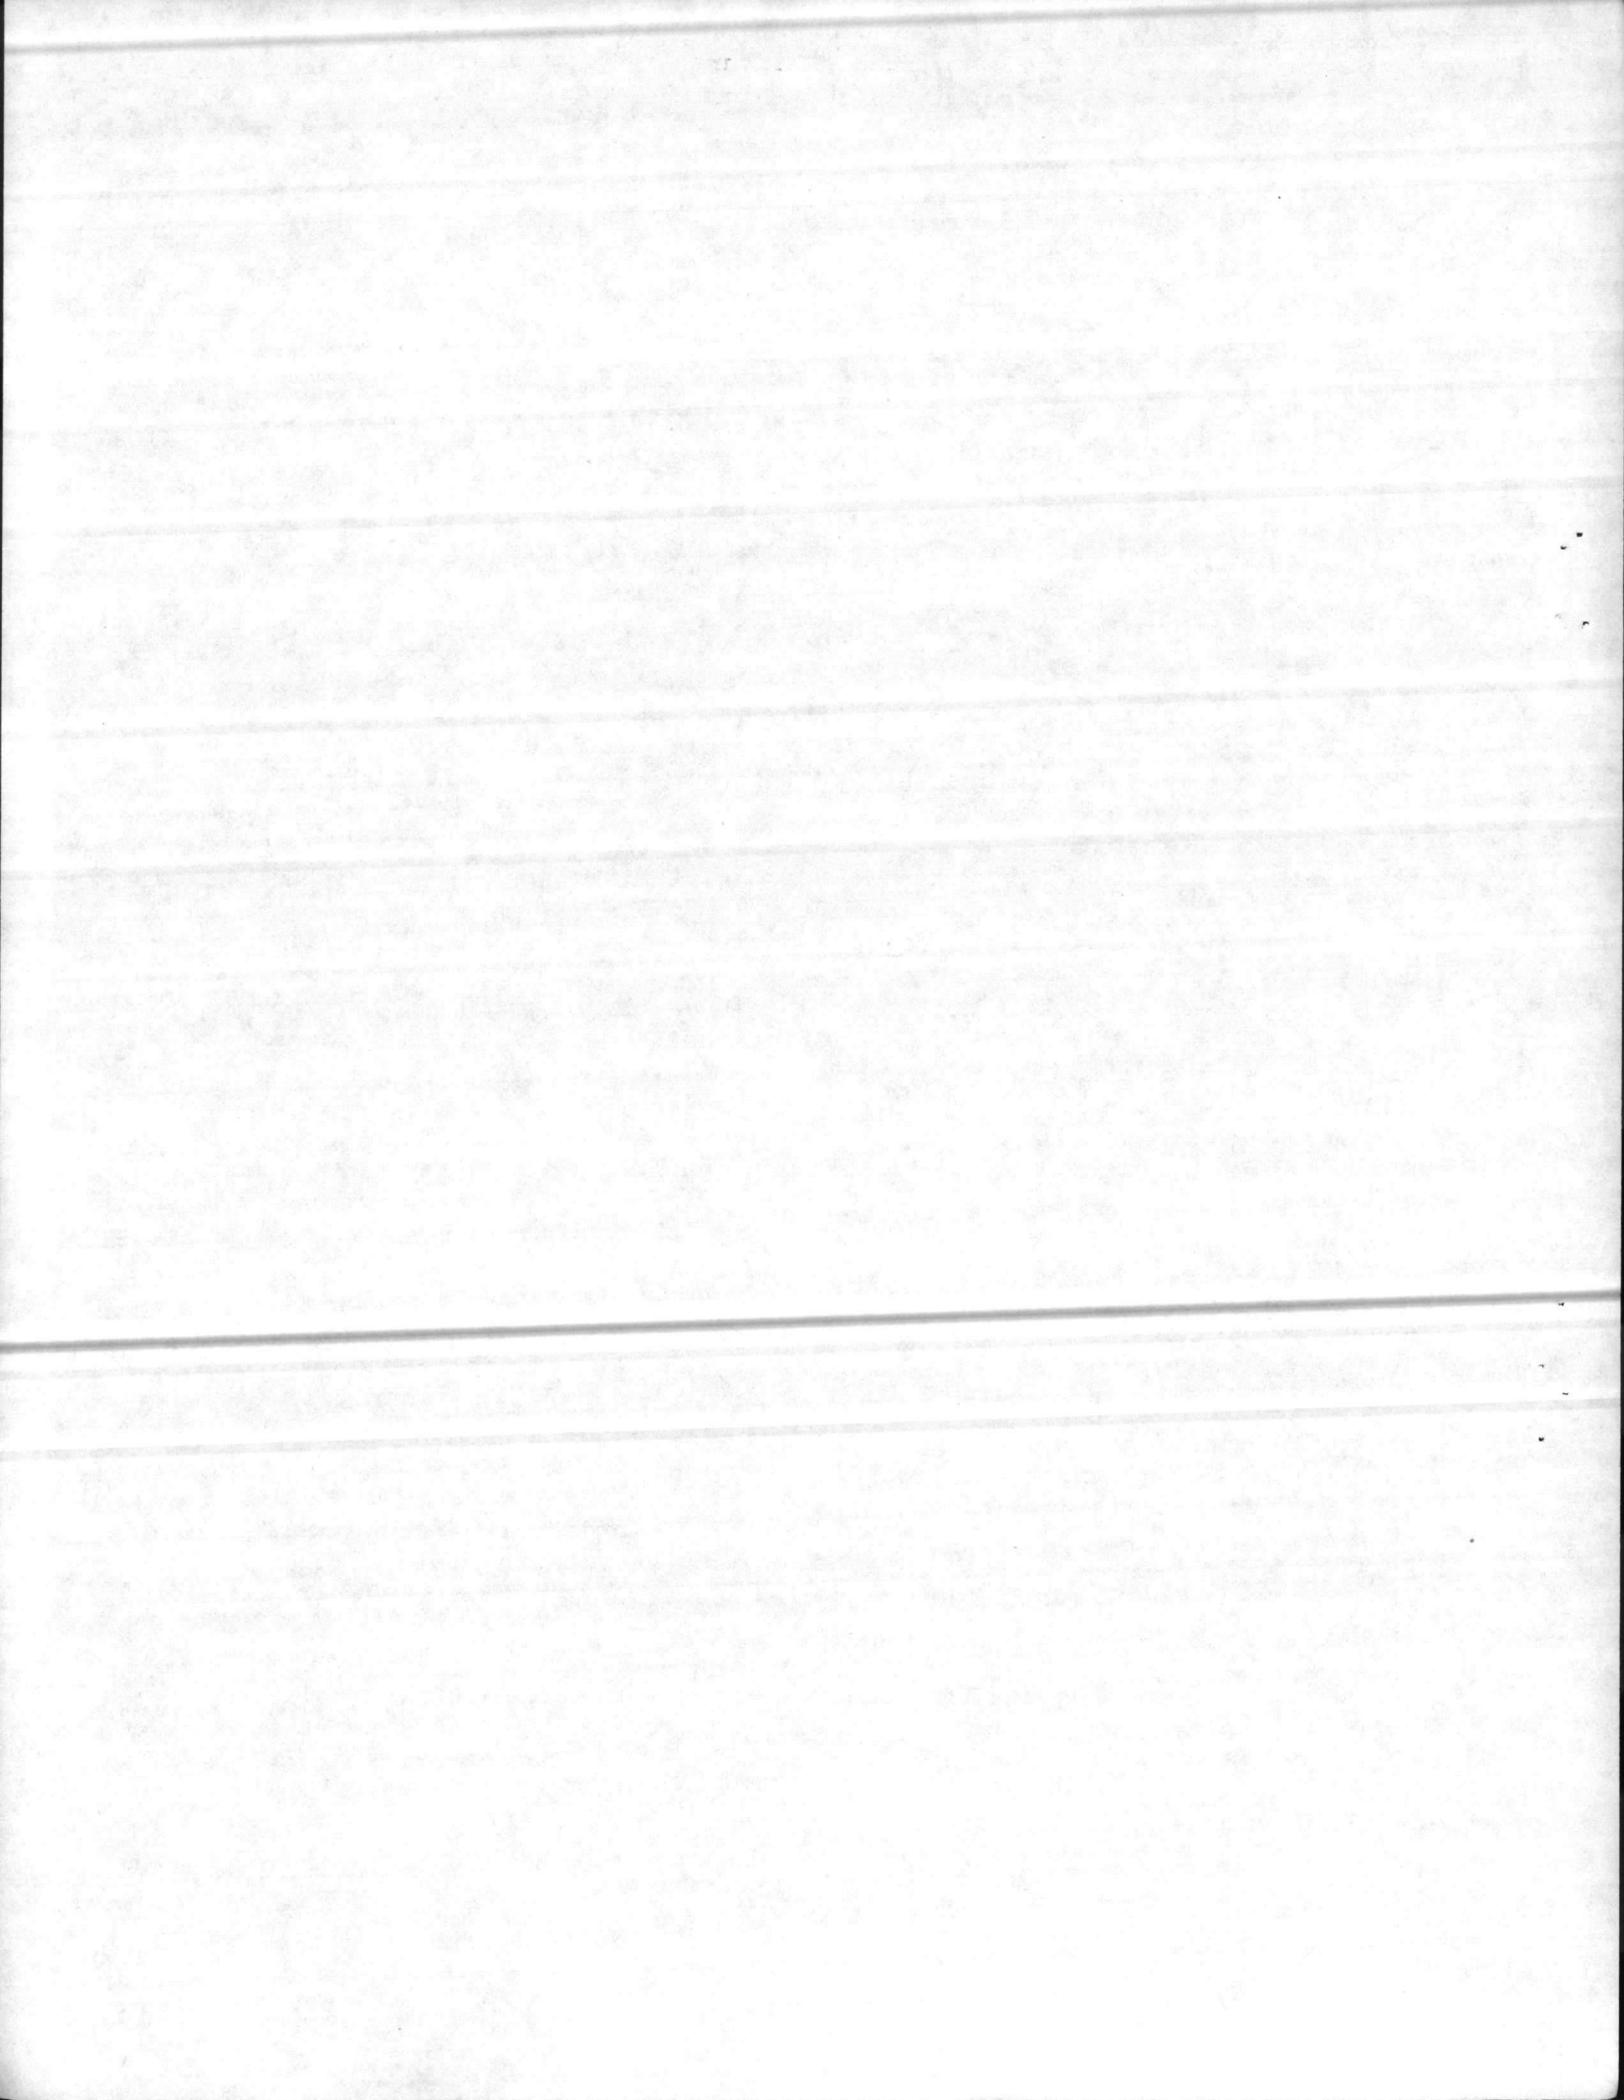

3.8 Manufacturer's Certificate of Conformance or Compliance: A certificate signed by an authorized manufacturer's official attesting that the material or equipment delivered meets the specification requirements.

4. SUBMITTALS shall be prepared in accordance with this specification and the General Provisions and submitted to the Contracting Officer for approval. Each submittal shall be accompanied with a cover letter signed by the Contractor. Each item proposed to be incorporated into the contract shall be clearly marked and identified in the submittals, and shall be cross-referenced to the contract drawings and specifications so as to identify clearly the use for which it is intended. Each sheet of submittal shall be stamped with the Contractor's certification stamp. Data submitted in a bound volume or on one sheet printed on two sides, may be stamped on the front of the first sheet only. The Contractor's certification stamp shall be worded as follows:


"It is hereby certified that the (equipment)(materials) shown and marked in this submittal is that proposed to be incorporated into Contract Number _____, is in compliance with the contract drawings and specifications, can be installed in the allocated spaces, and is submitted for Government approval. Certified by _____
Date _____"

The person signing the certification shall be one designated in writing by the Contractor as having that authority. The signature shall be in original ink. Stamped signatures are not acceptable.

4.1 Submittal Status Logs: The Contractor shall maintain at the job site an up-to-date submittal status log showing the status of all submittals required by the contract. A sample format of an acceptable log is attached at the end of this section. While the use of this sample format is not required, any other format must contain the same information as shown on the sample.

4.2 Samples, shop drawings, manufacturer's data, certifications and data required of the Contractor: Specification MIL-D-1000 shall be used as a guide and its use is encouraged, for all drawings and data submitted by the Contractor. Conformance to the provisions of Specification MIL-D-1000 is not mandatory for maps, sketches, presentation drawings, perspectives, renderings, and all other drawings not requiring Naval Facilities Engineering Command drawing numbers. Before starting the fabrication or installation of any of this work, the Contractor shall submit to the Contracting Officer for, and receive approval of, in accordance with the General Provisions, such drawings as may be required, including all items specified in the applicable paragraphs of the technical sections of this specification. Seven copies of all submittals to be approved by the Contracting Officer shall be forwarded.

4.3 Identification: All catalog cuts, shop drawings, samples and other data submitted for approval shall specifically identify the specification paragraph or contract drawing by number where each item submitted is required to be provided. All submittals shall be clearly marked in

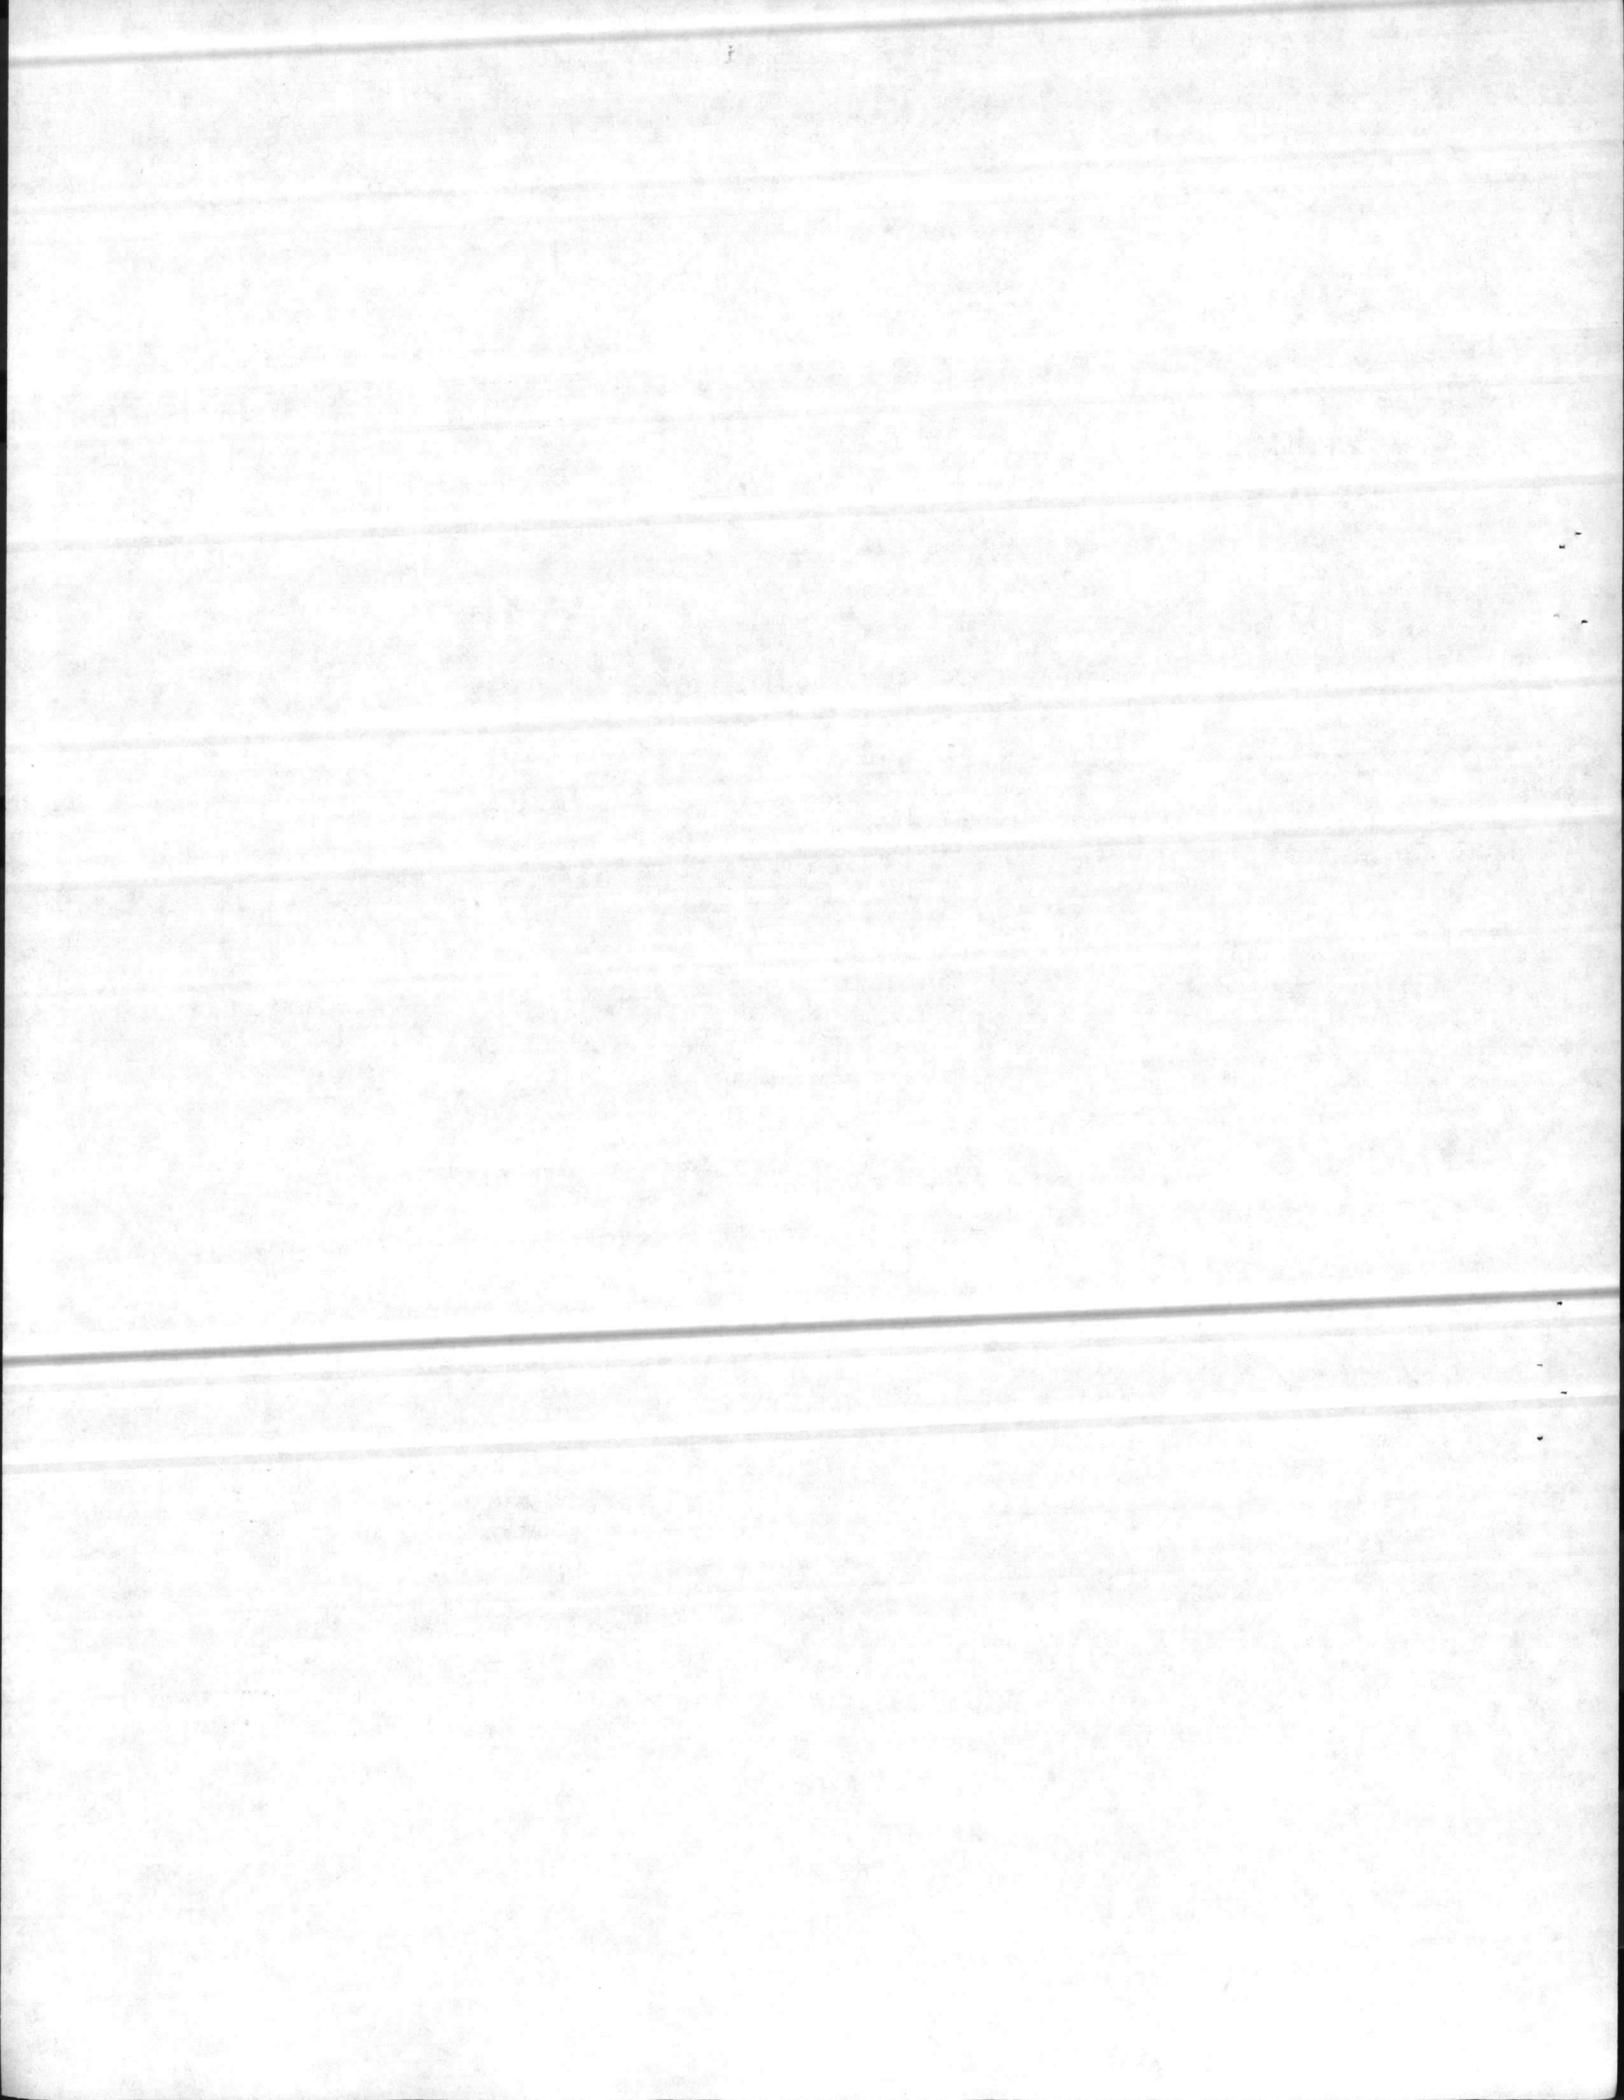

ink to indicate the specific item(s) submitted for approval. Samples shall be clearly labeled with strong tags, firmly affixed, or indelible markings to identify the contract number, contractor, manufacturer, and item name.


4.4 Certified Test Reports: Before delivery of materials and equipment, four certified copies of the reports of all tests listed in the technical sections and referenced publications shall be submitted and approved. The testing shall have been performed in a laboratory meeting the requirements specified herein. The tests shall have been performed within three years of submittal of the reports for approval. Test reports shall be accompanied by certificates from the manufacturer certifying that the material and equipment proposed to be supplied is of the same type, quality, manufacture, and make as that tested.

4.5 Manufacturer's Certificates of Conformance or Compliance: Manufacturer's certification furnished by the Contractor on items of materials and equipment incorporated into the work will be accepted only when this method will assure full compliance with the provisions of the contract, as determined by the Contracting Officer. Preprinted certifications will not be acceptable. All certifications shall be in the original. The original of all manufacturer's certifications shall name the appropriate item of equipment or material, specification, standard, or other document specified as controlling the quality of that item and shall have attached thereto certified copies of test reports upon which the certifications are based. All certificates shall be signed by the manufacturer's official authorized to sign certificates of conformance or compliance.

4.6 Laboratory Reports shall cite the contract requirements, the test or analysis procedures used, the actual test results, and include a statement that the item tested or analyzed conforms or fails to conform to the specification requirements. Each report shall be conspicuously stamped on the cover sheet in large red letters "CONFORMS" or "DOES NOT CONFORM" to the specification requirements as the case may be. All test reports shall be signed by the representative of the testing laboratory authorized to sign certified test reports. The Contractor shall arrange for immediate and direct delivery of the signed original of all reports, certifications, and other documentation to the Contracting Officer.

4.7 Tabulation of Tests: In addition to the General Provisions requirements for CQC test reports, prior to final payment the Contractor shall obtain from each laboratory a tabulation of all tests it has performed in connection with the construction contract, including conforming or nonconforming, and repeated test results. The tabulation(s) shall be certified as complete, and signed by the authorized representative of the laboratory, and shall be delivered to the Contracting Officer.

5. QUALITY CONTROL REQUIREMENTS: In accordance with the General Provisions Clause entitled "Contractor Inspection System", the Contractor shall inspect and test all work under the contract and maintain records of the inspections and tests. Approvals, except those required for field

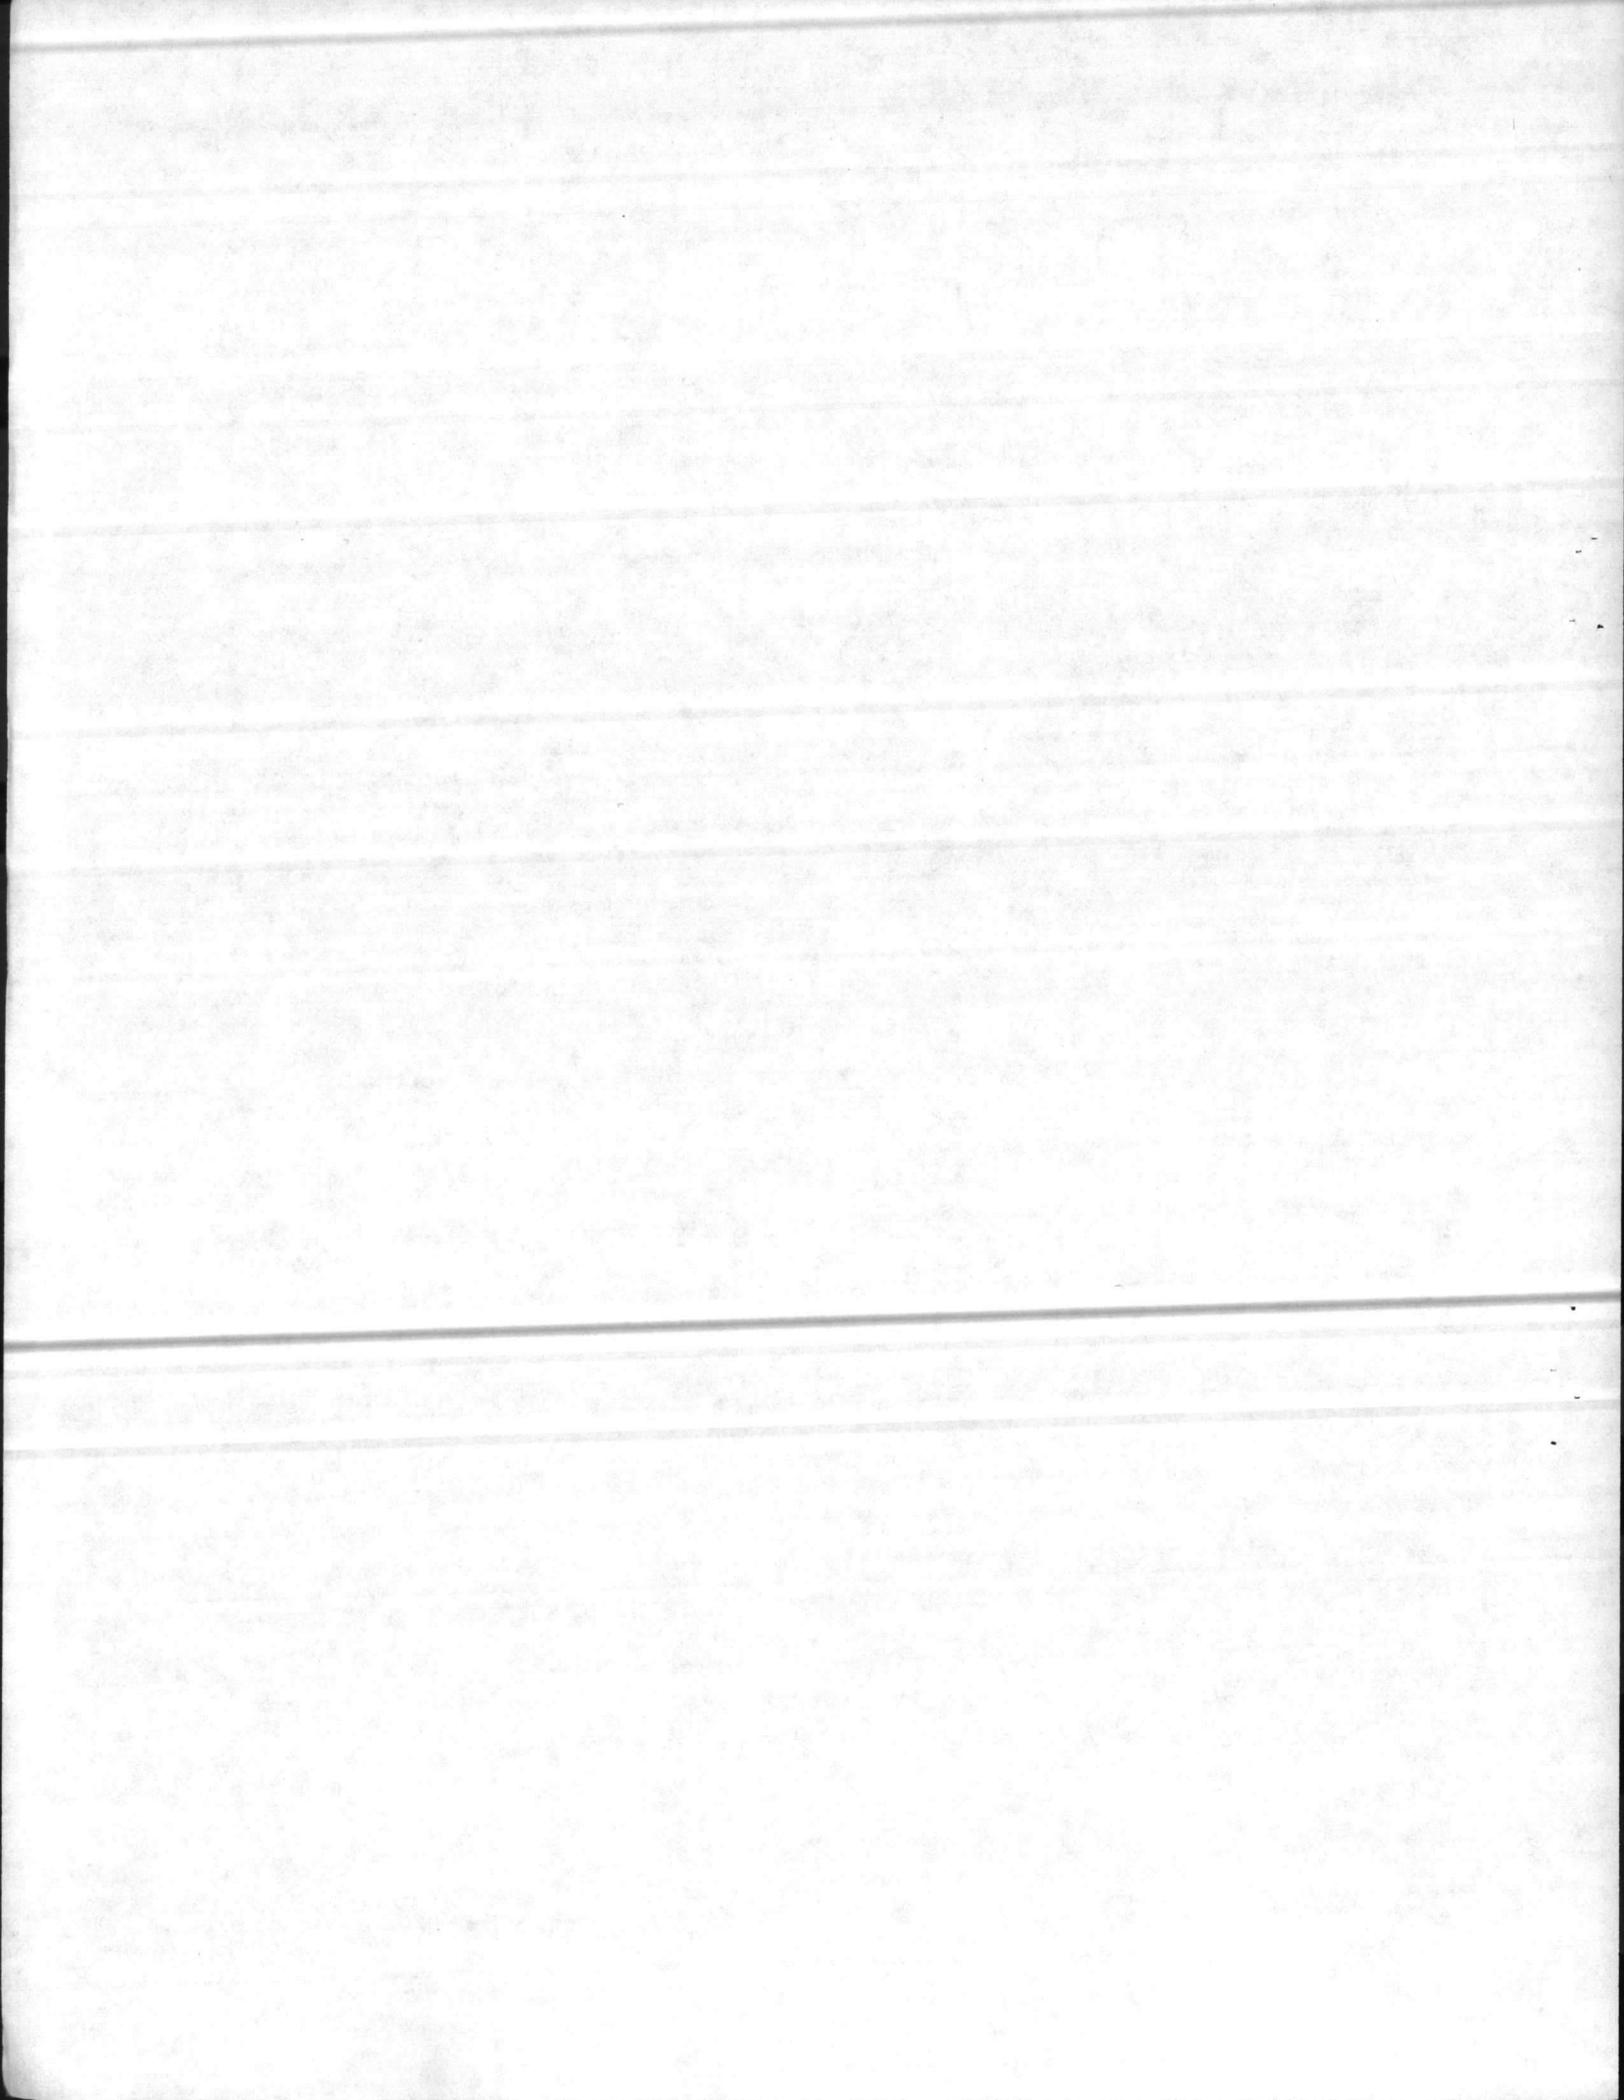

installations, field applications, and field tests, shall be obtained before delivery of materials and equipment to the project site. Surveillance of the inspection system will be performed by the Contracting Officer.

5.1 Factory Tests: Unless otherwise specified, the Contractor will arrange for factory tests when they are required under the contract.

5.2 Factory Inspection: Unless otherwise specified, the Contractor will arrange for factory inspection when required under the contract.

5.3 Field Inspections and Tests by the Contractor: The Contractor shall furnish all equipment, instruments, qualified personnel, and facilities necessary to inspect all work and perform all tests required by the contract. All inspections and tests performed and test results received each day shall be included in the Daily Report to Inspector.

5.5 Approval of Testing Laboratories: All laboratory work under this contract shall be performed by a laboratory approved by the Government, whether the laboratory is employed by the Contractor, or is owned and operated by the Contractor. The basis of approval includes the following:

a. Testing laboratories performing work in connection with concrete, steel, and bituminous materials shall comply with ASTM E329, except that the Contracting Officer will perform the function of paragraphs 3.4 and 3.5 therein in the absence of other Government approval.


b. Testing laboratories performing work not in connection with concrete, steel, or bituminous materials shall comply with sections 3 and 4 of ASTM E329, except that the Contracting Officer will perform the functions of paragraphs 3.4 and 3.5 therein in the absence of other Government approval.


5.6 Repeated Tests and Inspections: The Contractor shall repeat tests and inspections after each correction made to nonconforming materials and workmanship until tests and inspections indicate the materials, equipment, and workmanship conform to the contract requirements. The retesting and reinspections shall be performed at no additional cost to the Government.

5.7 Daily Report to Inspector: The Daily Report to the Inspector Form NAVFAC 4330/34 shall be submitted to the Contracting Officer by 10:00 A.M. on the working day following the day the work was performed.

04-79-4476

01401 - 4

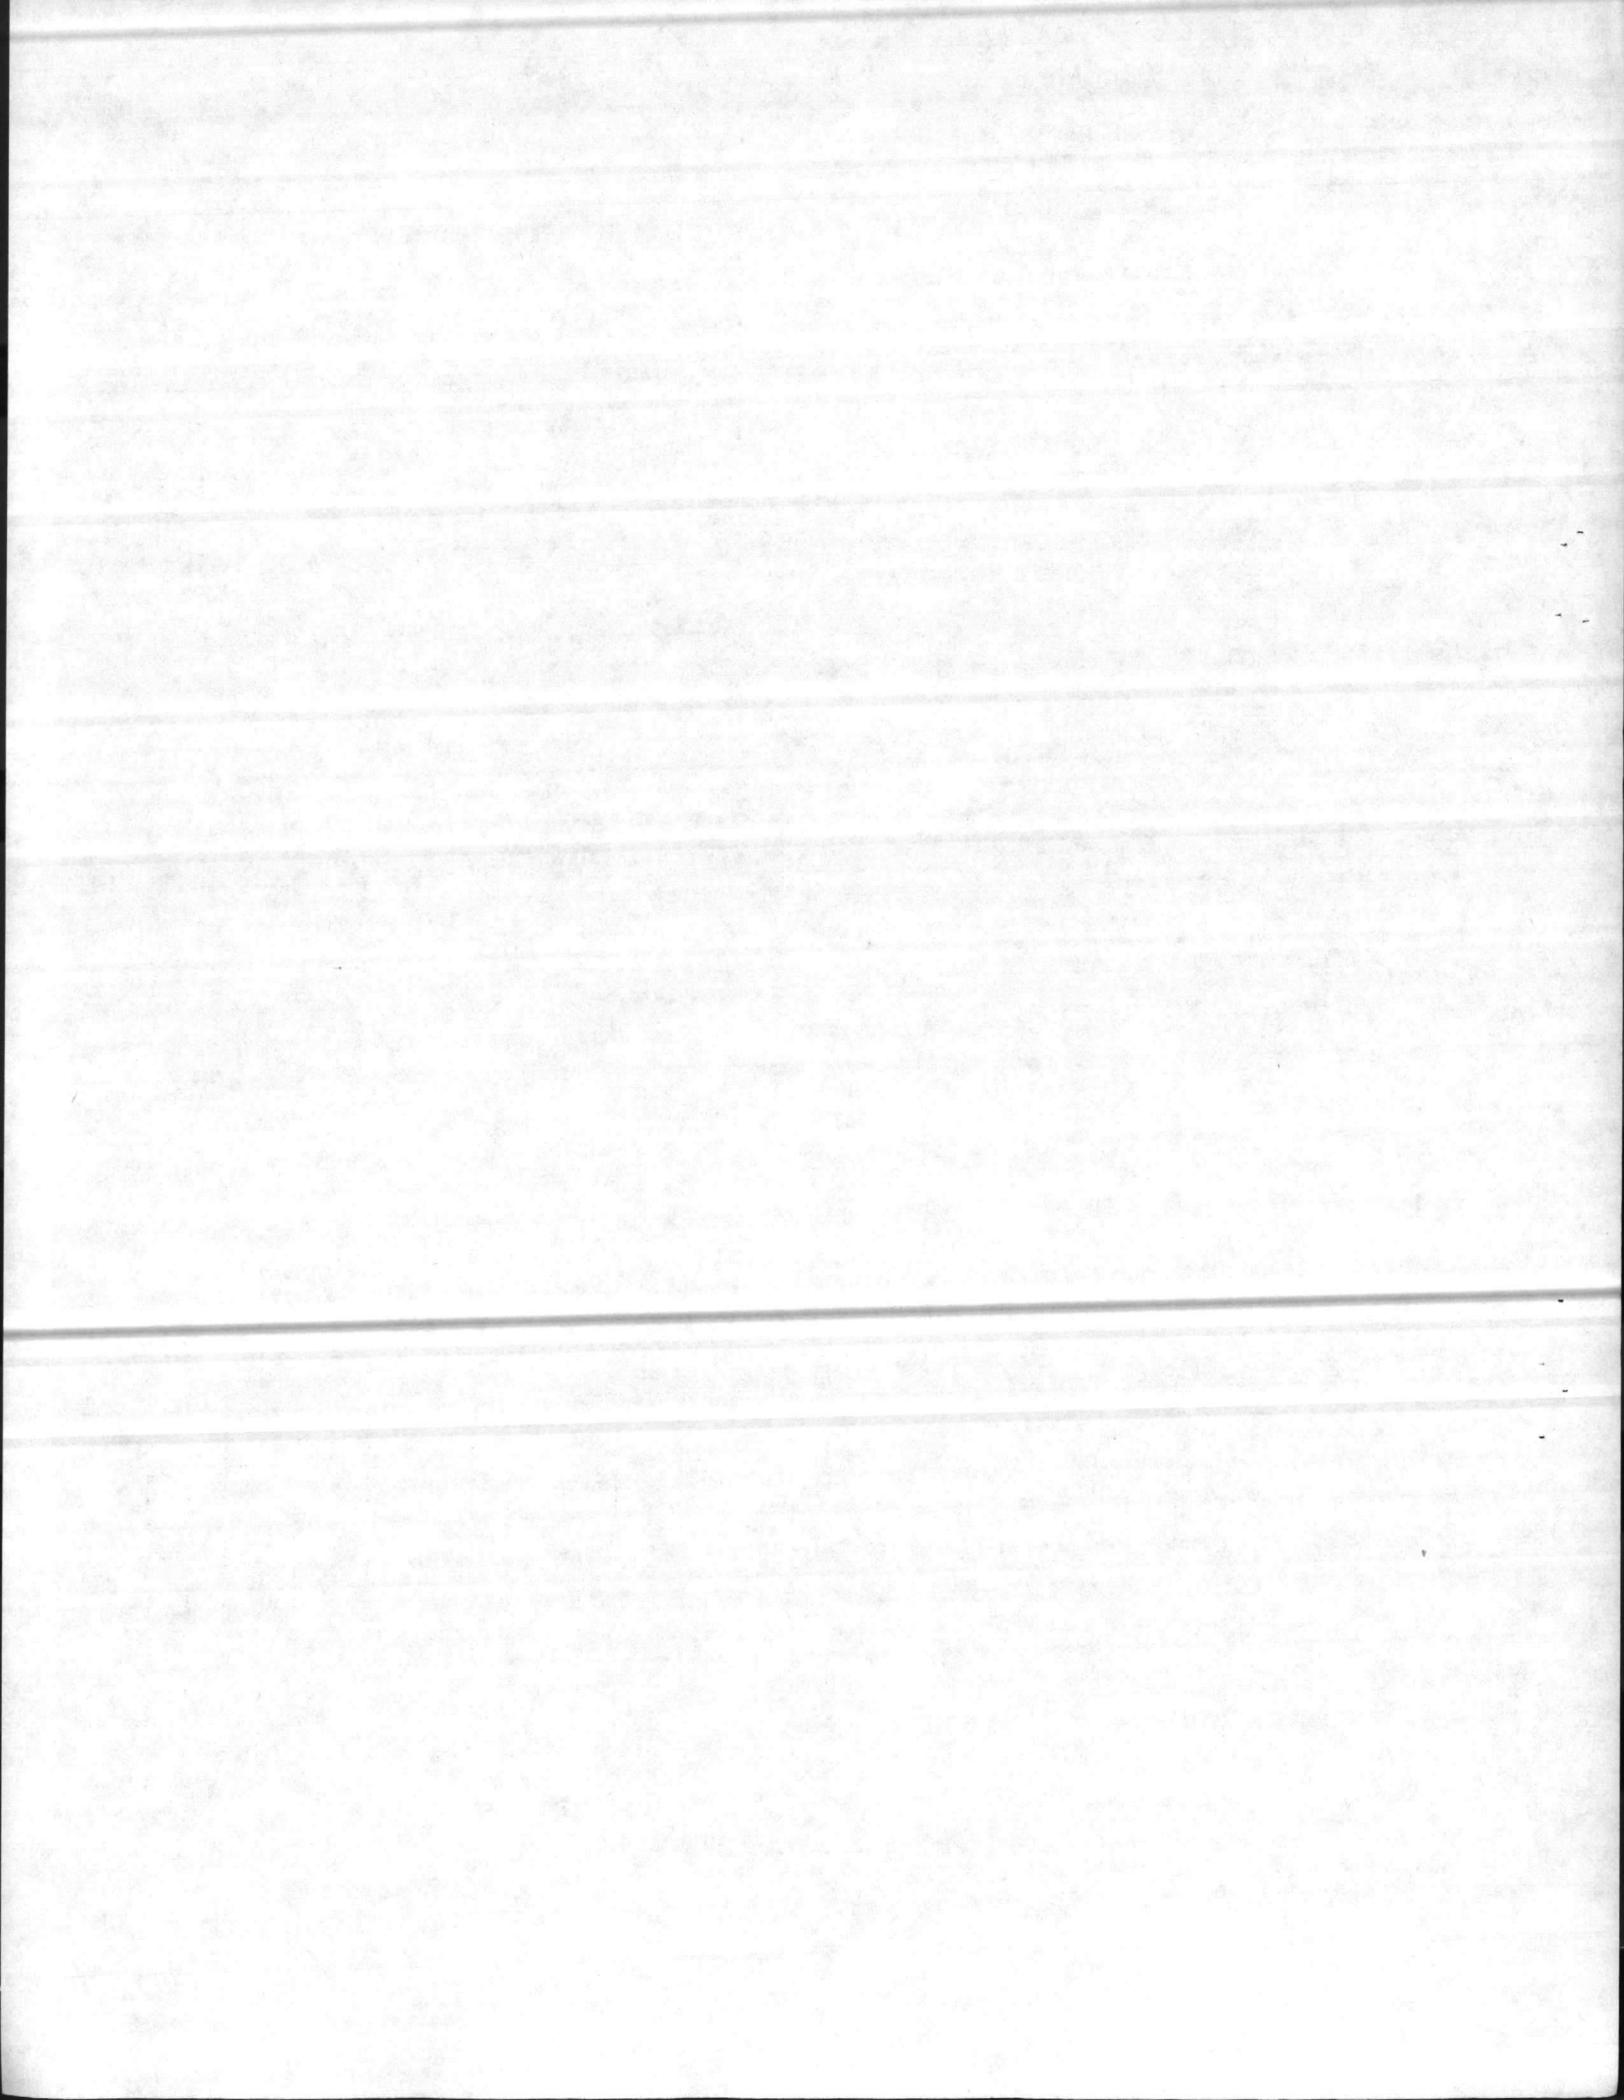

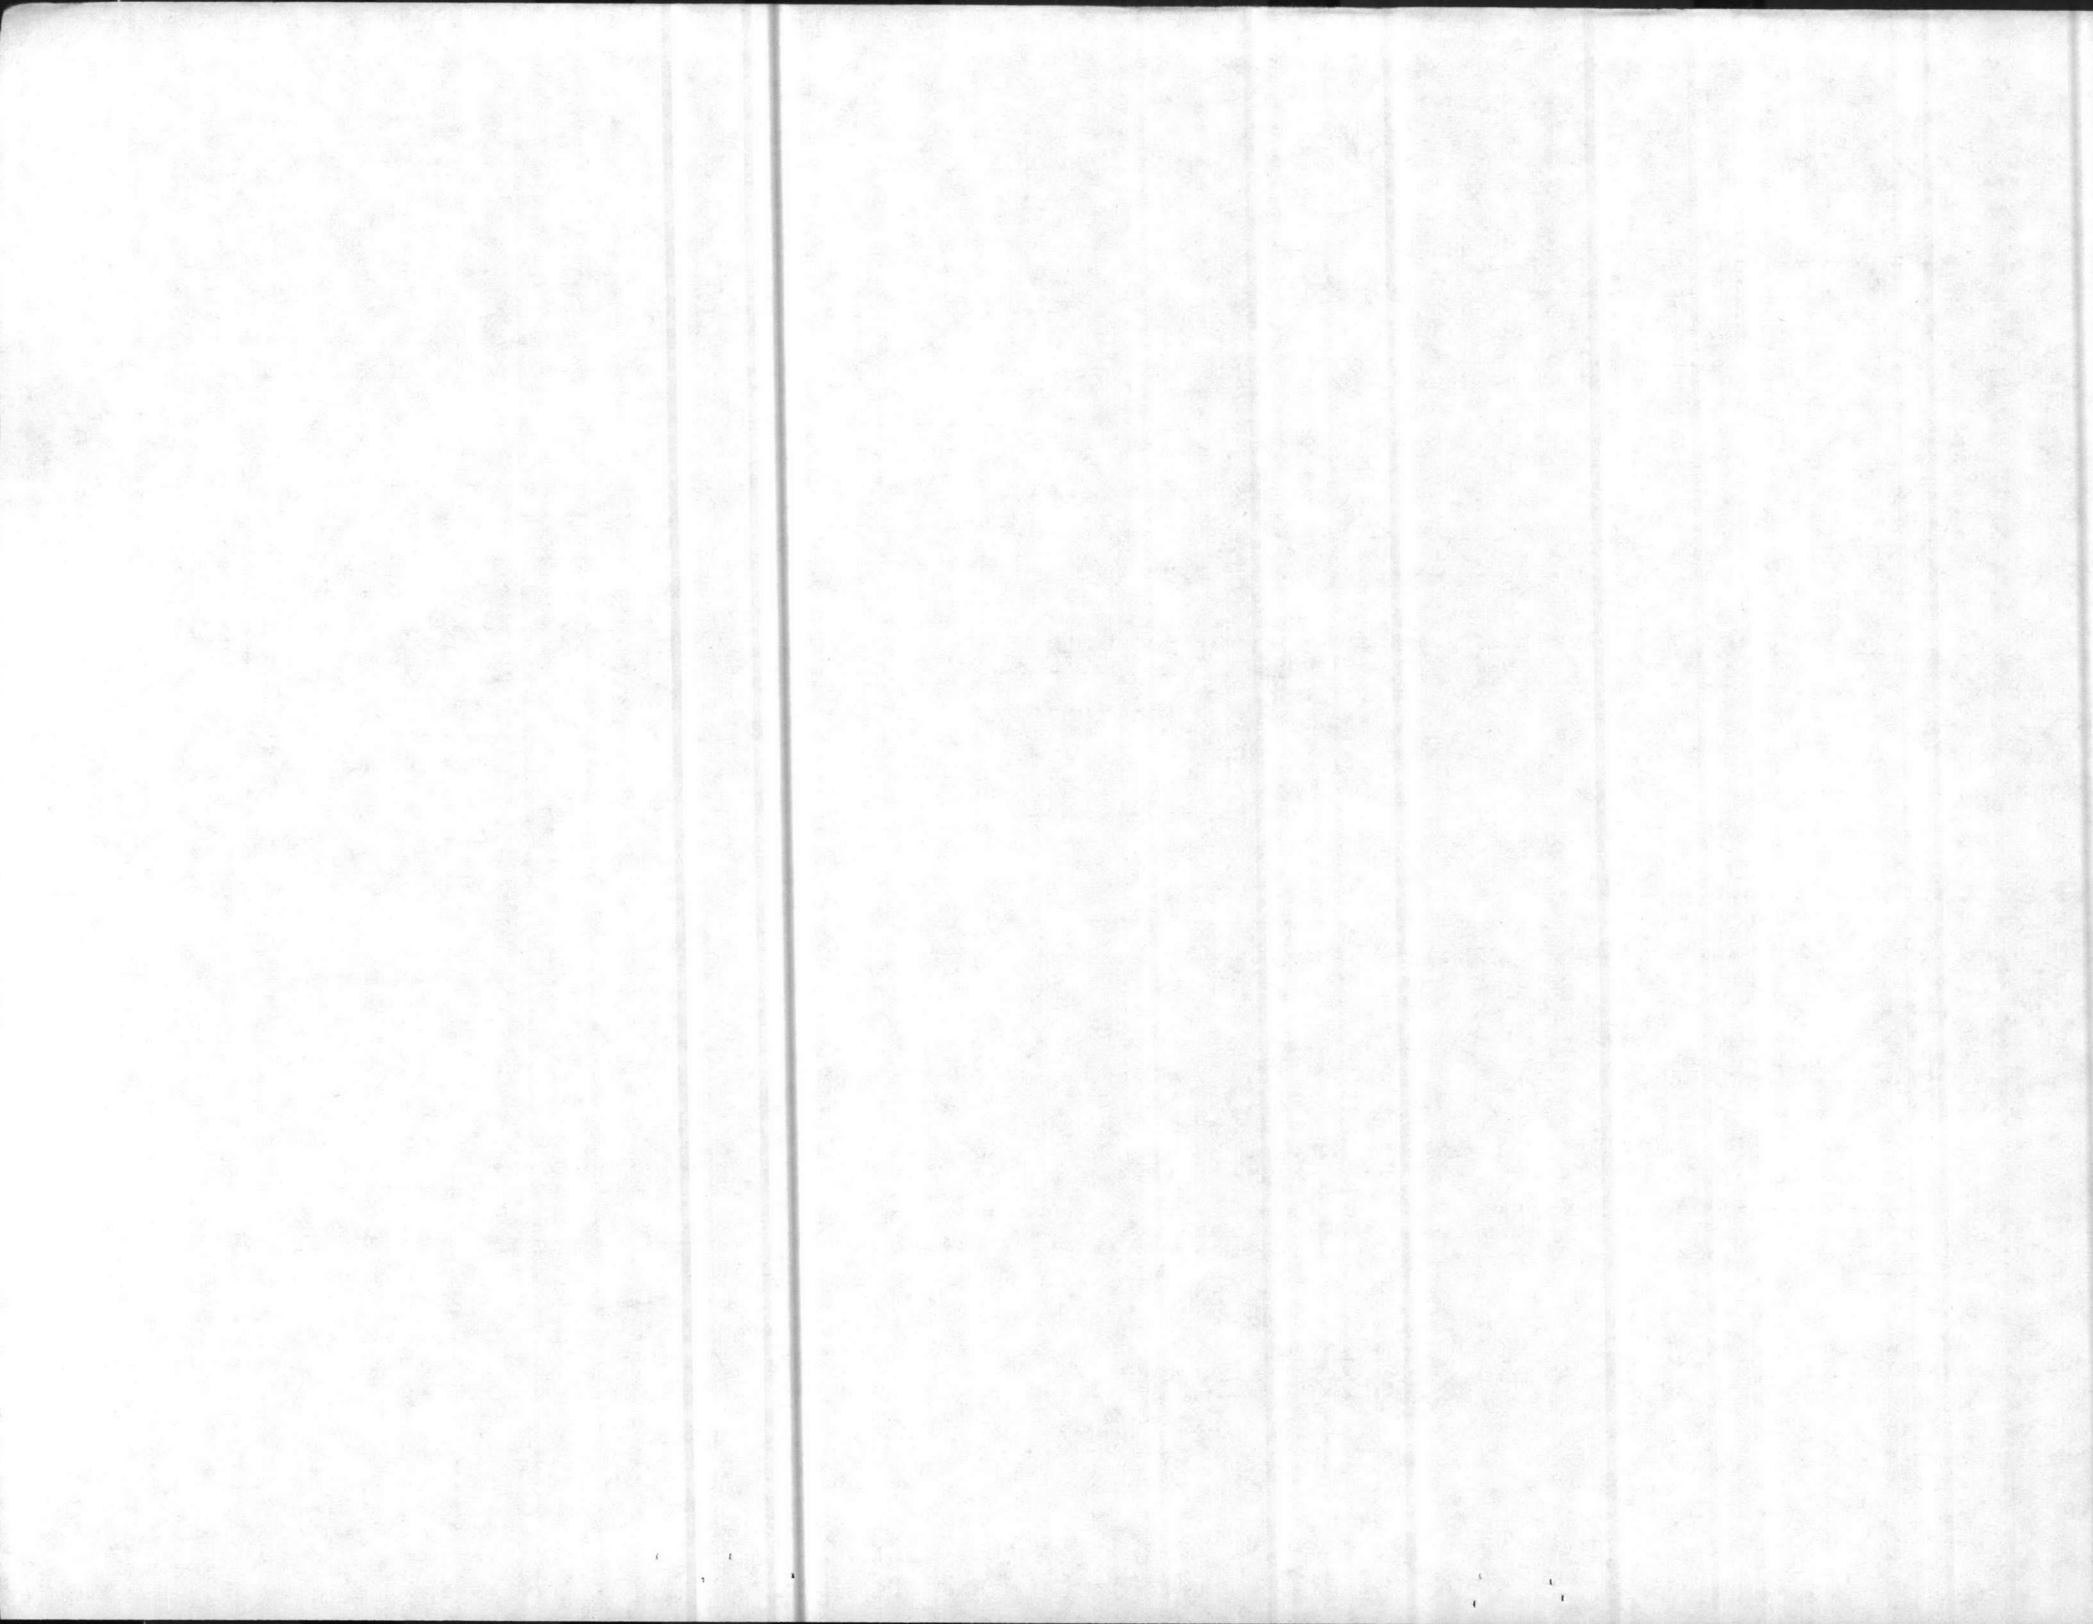


INSTRUCTIONS

1. This form may be used by the contractor for listing all material submittals that require action by either the contractor or the government.
2. Columns (a) through (e) should be completed by the contractor and must include all submissions that are required by the specifications.
3. As submittals are received and processed, the remaining columns are to be completed by the contractor.
4. In those instances where the contractor has approved the submittal under his contract responsibility, there may be a dual Action Code under column (f); e.g., "A/E", indicating approved as submitted and forwarded to the ROICC for record purposes.
5. In column (f) for those items requiring ROICC action (Action Code "D"), the reason for forwarding to the ROICC should be entered in the column (l), the Remarks column; e.g., gov't approval required; waiver requested because of variance, substitution, etc.
6. Where no government action is required, (for contractor review/approval items), there need be no entry in columns (h) and (i).
7. Column (j) is completed when material or equipment is delivered to the project. Column (k) is completed only after verification that the delivered item is that represented by the approved submittal.

ACTION CODE: To be used when completing columns (f) and (h)

- A - Approved as submitted
- B - Approved as noted
- C - Disapproved
- D - Forwarded to ROICC for action
- E - Forwarded to ROICC for record purposes

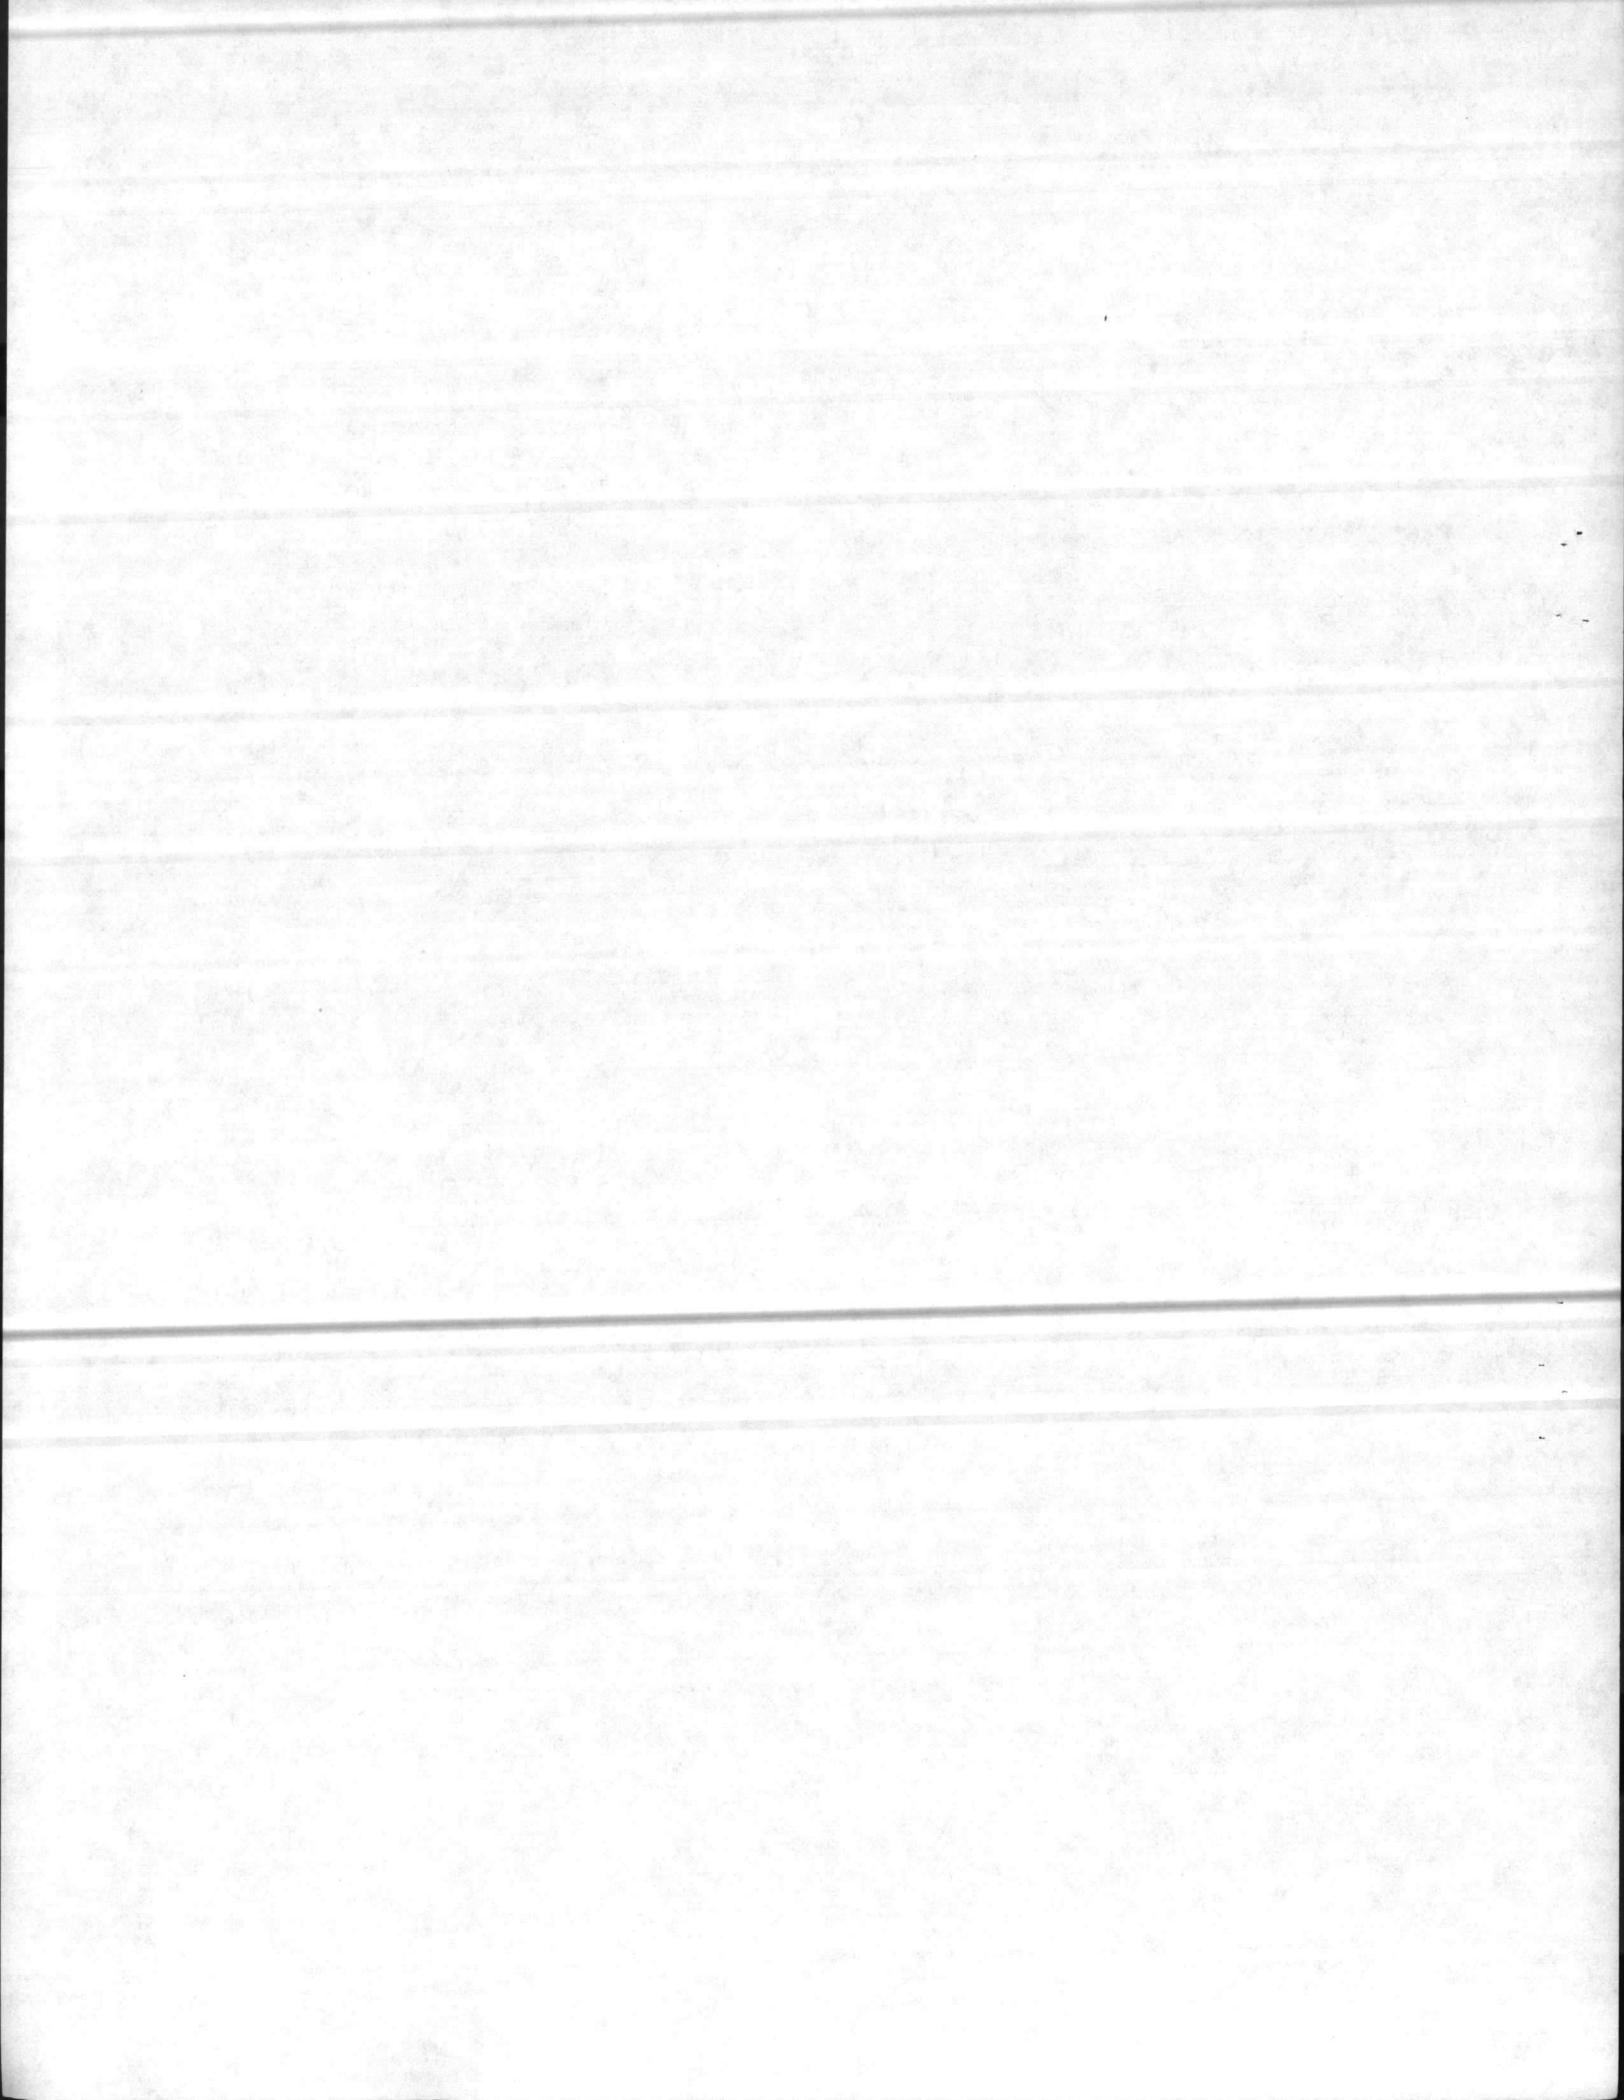

SECTION 01501. ENVIRONMENTAL PROTECTION.

1. ENVIRONMENTAL PROTECTION PLAN: The Contractor may be responsible for the preparation and submission of an Environmental Protection Plan. Prior to the commencement of the work, the Contractor may be required to meet with the Contracting Officer, or his representative, and discuss the proposed Environmental Protection Plan. The meeting shall develop mutual understanding relative to details of environmental protection, including required reports and measures to be taken should the Contractor fail to provide adequate protection in an adequate and timely manner. Not more than 14 days after the meeting, the Contractor shall submit for approval his proposed Environmental Protection Plan, if so required.

2. GENERAL REQUIREMENTS: The Contractor shall provide and maintain environmental protection during the life of the contract, as defined herein. The Contractor's operations shall comply with all Federal, State and Local regulations pertaining to water, air, solid waste, and noise pollution.

3. PROTECTION OF NATURAL RESOURCES:


3.1 General: It is intended that the natural resources within the project boundaries and outside the limits of permanent work performed under this contract be preserved in their existing condition or be restored to an equivalent or improved condition upon completion of the work. The Contractor shall confine his construction activities to areas defined by the work schedule, plans, and specifications.

3.2 Land Resources: The Contractor shall not remove, cut, deface, injure, or destroy trees or shrubs without written permission from the OICC. No ropes, cables, or guys shall be fastened to or attached to any existing nearby trees for anchorages unless specifically authorized. Where such special emergency use is permitted, the Contractor shall be responsible for repairing or replacing any damage resulting from such use.


3.2.1 Protection Plan: Where trees may possibly be defaced, bruised, injured or otherwise damaged by the Contractor's activity, equipment or by his dumping or other operations, the Contractor shall submit a plan for protecting such trees. Monuments, markers and works of art shall be protected before beginning operations.

3.2.2 Repair or Restoration: Any trees or other landscape features scarred or damaged by the Contractor's equipment or operations shall be repaired and/or restored to their original condition at the Contractor's expense. The Contracting Officer shall approve the repair and/or restoration planned prior to its initiation.

3.2.3 Oily Substances: At all times, special measures shall be taken to prevent oily or other hazardous substances from entering the ground, drainage areas, or local bodies of water in such quantities as to affect normal use, aesthetics, or produce a measurable ecological impact on the area.

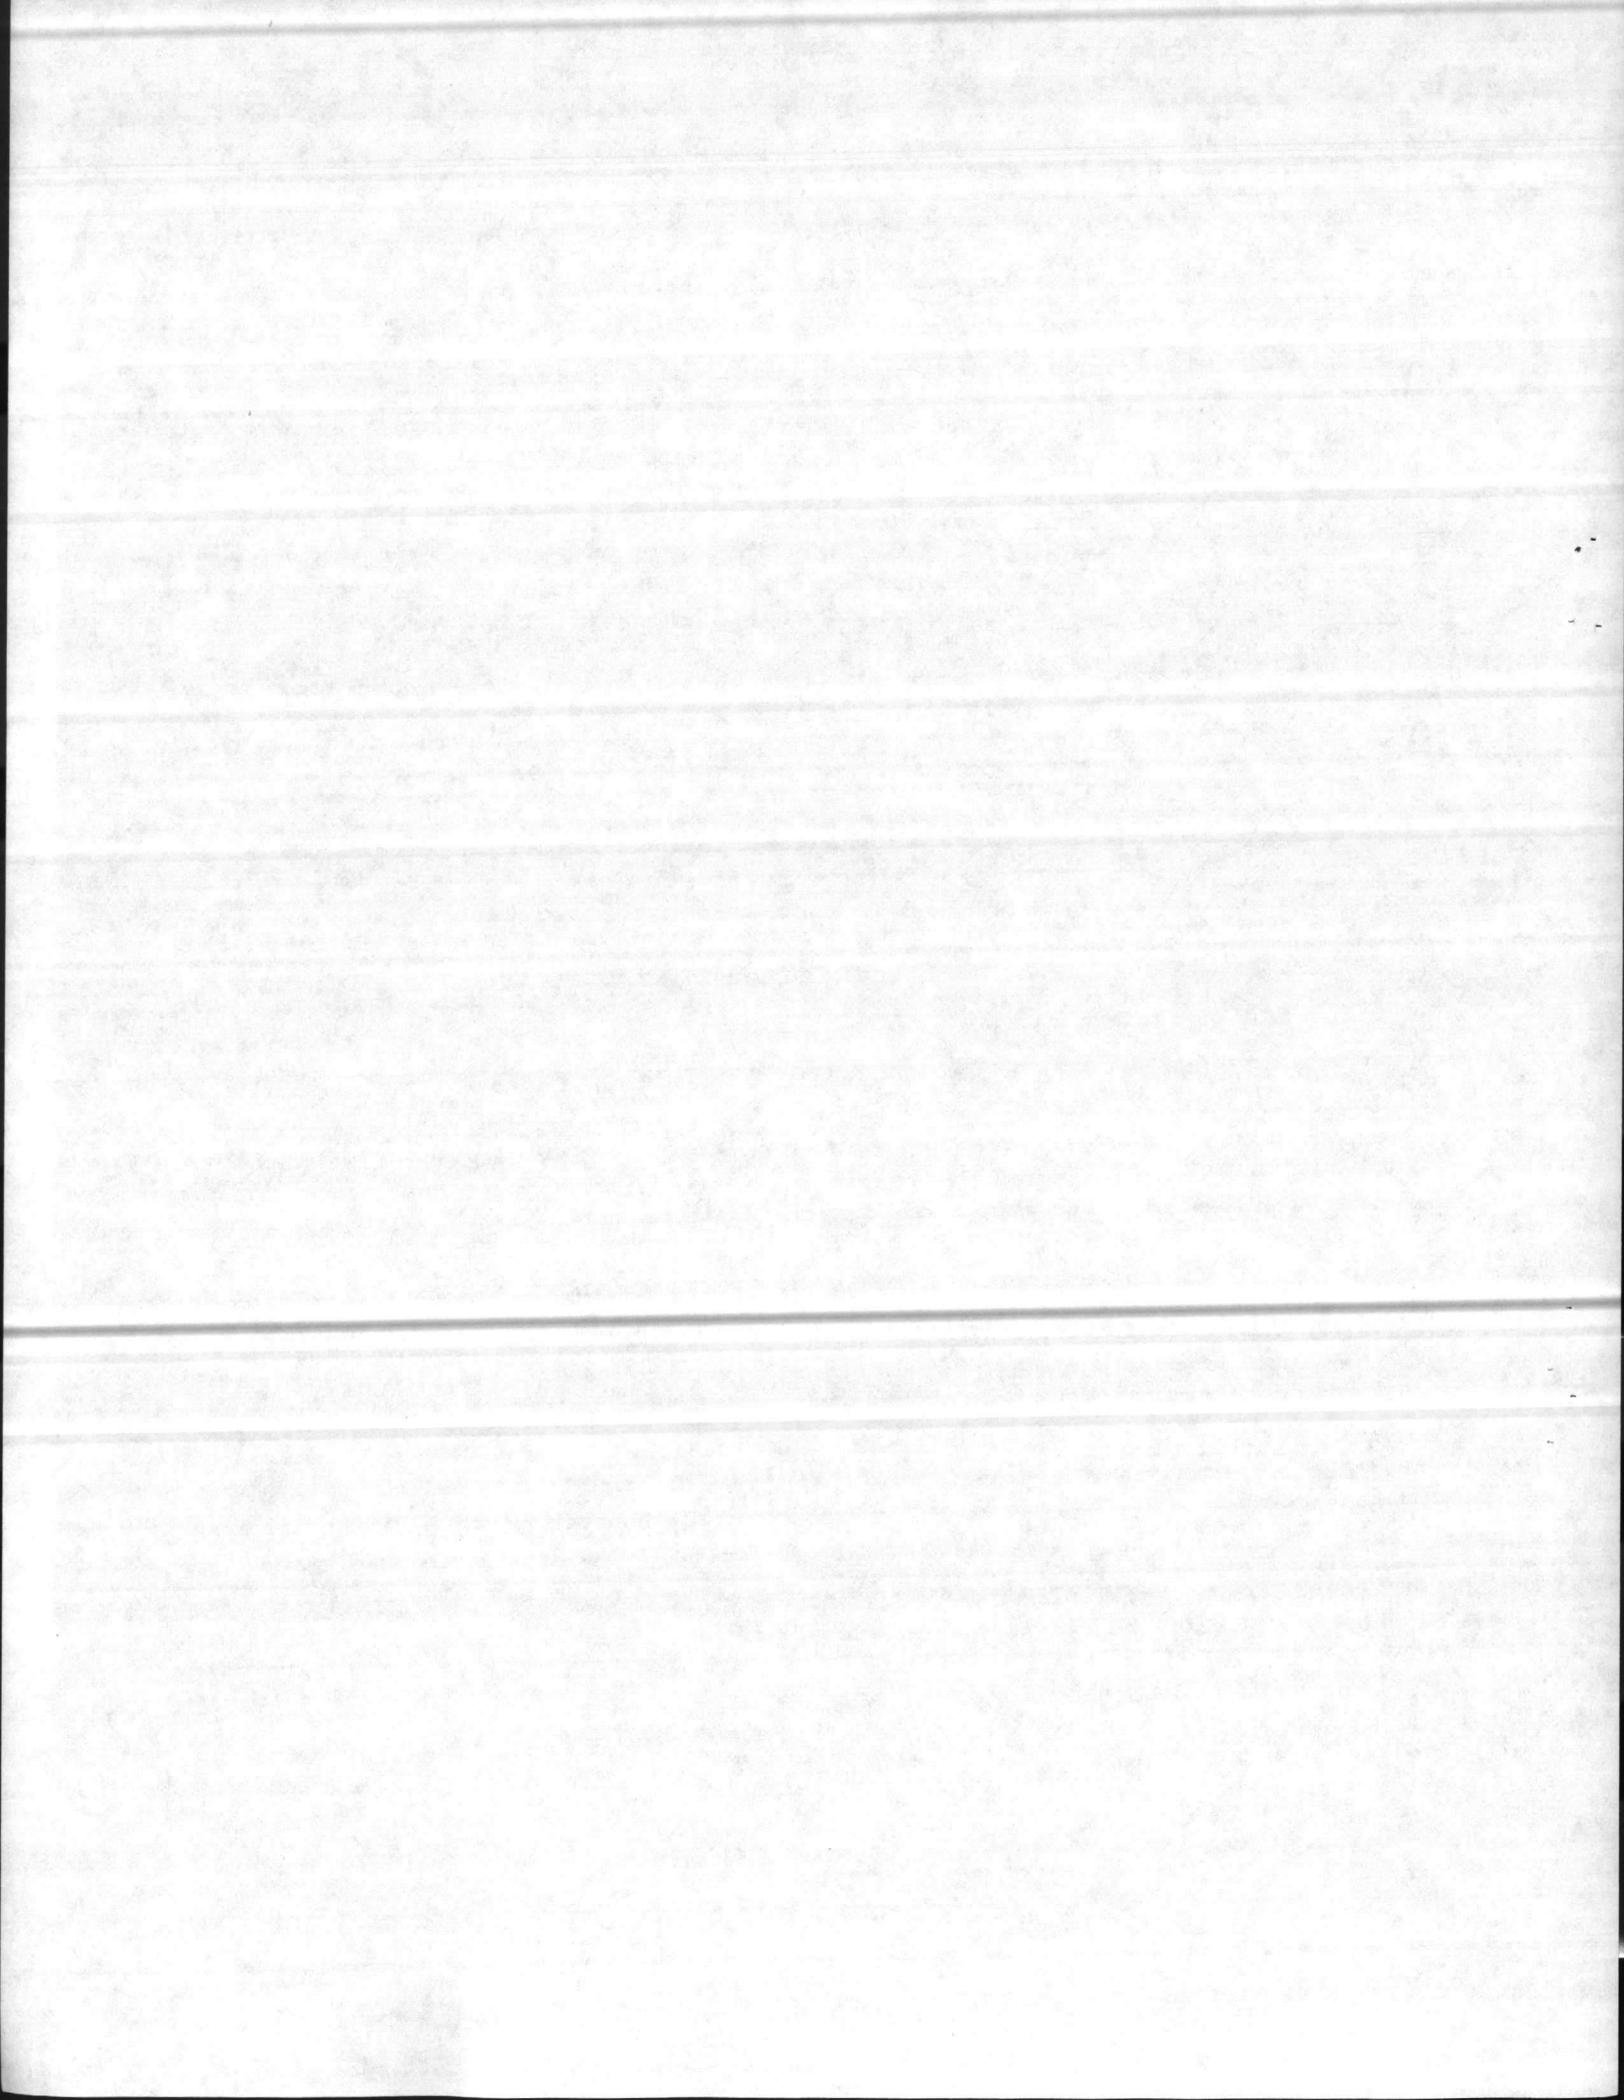

4. Liquid Wastes shall be stored in corrosion-resistant containers, removed from the project site, and disposed of not less frequently than monthly, unless directed otherwise. Disposal of liquid waste shall be in accordance with Federal, State and Local regulations. Fueling and lubricating of equipment and motor vehicles shall be conducted in a manner that affords the maximum protection against spills and evaporation. For oil and hazardous material spills which may be large enough to violate Federal, State and Local regulations, the Contracting Officer shall be notified immediately.

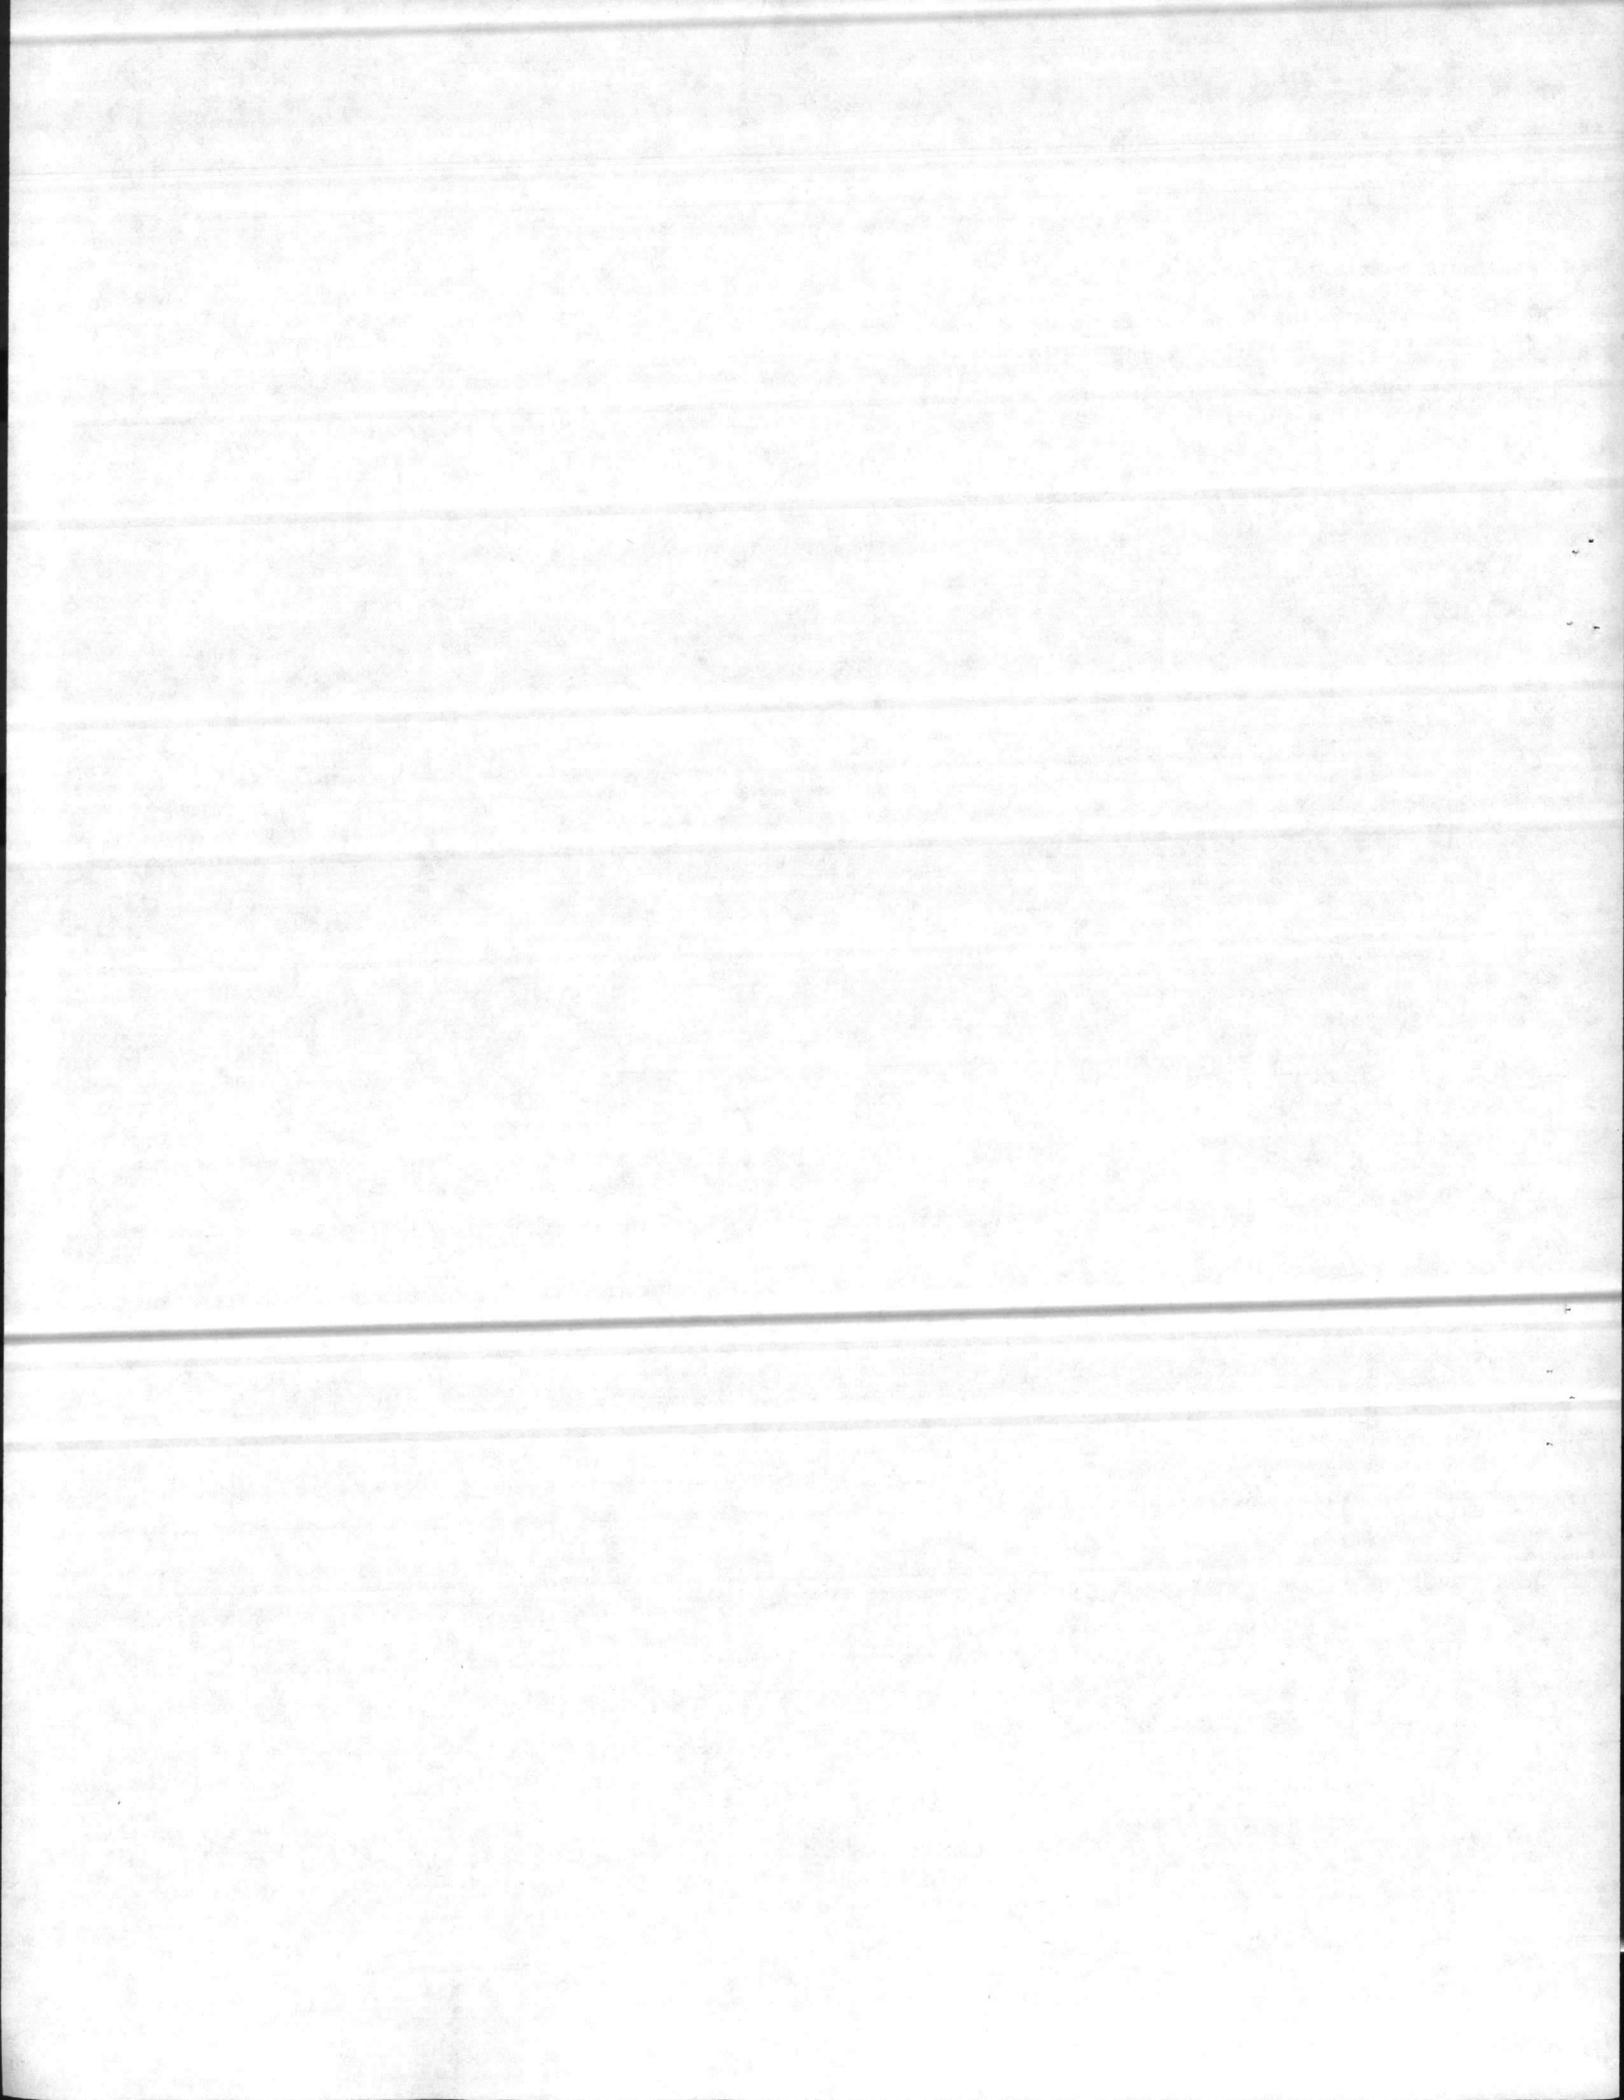

SECTION 02110. DEMOLITION

1. SUBMITTALS:


1.1 Procedures: The procedures proposed for the accomplishment of demolition work shall be submitted to and approved by the Contracting Officer before work is started. The procedures shall provide for safe conduct of the work, protection of property which is to remain undisturbed, coordination with other work in progress, and timely disconnection of utility services. The procedures shall include a detailed description of the methods and equipment to be used for each operation, and the sequence of operations.

2. REQUIREMENTS: The work includes the demolition and removal of all construction indicated, specified, or necessary to accomplish the work under this contract. The work indicated or specified in this section or other sections of the specifications is included, but is not intended that all items of demolition work be specifically indicated, specified, or listed. After carefully reviewing the drawings and specifications to determine intent, the Contractor shall visit the site and determine the extent of demolition work required to properly complete the work under this contract.

2.1 Demolition and removal shall be conducted in a manner that will eliminate hazards to persons and property in the area and shall prevent the release of dust and rubbish into the air. All debris resulting from demolition or removal work shall be removed from the station daily or as directed by the Contracting Officer. Trash and rubbish shall not be allowed to accumulate. Demolished materials and debris which in the opinion of the Contracting Officer cannot practicably be removed from the site the same day as removed, may be temporarily stacked or stored in a designated location on the site as directed by the Contracting Officer. All materials resulting from demolition work, except as indicated or specified otherwise, shall become the property of the Contractor and shall be removed from the limits of the station.

2.2 Dust Control: The amount of dust resulting from demolition shall be controlled to avoid creation of a nuisance in the surrounding area. Use of water will not be permitted when it will result in, or create, hazardous or objectionable conditions such as ice, flooding and pollution.

2.3 Protection of Existing Work: Before beginning any cutting or demolition work, the Contractor shall carefully survey the existing work and examine the drawings and specifications to determine the extent of the work. The Contractor shall take all necessary precautions to insure against damage to existing work to remain in place, to be reused, or to remain the property of the Government and any damage to such work shall be repaired or replaced, as approved by the Contracting Officer, at no additional cost to the Government. The Contractor shall carefully coordinate the work of this section with all other work and construct and maintain shoring, bracing and supports, as required.

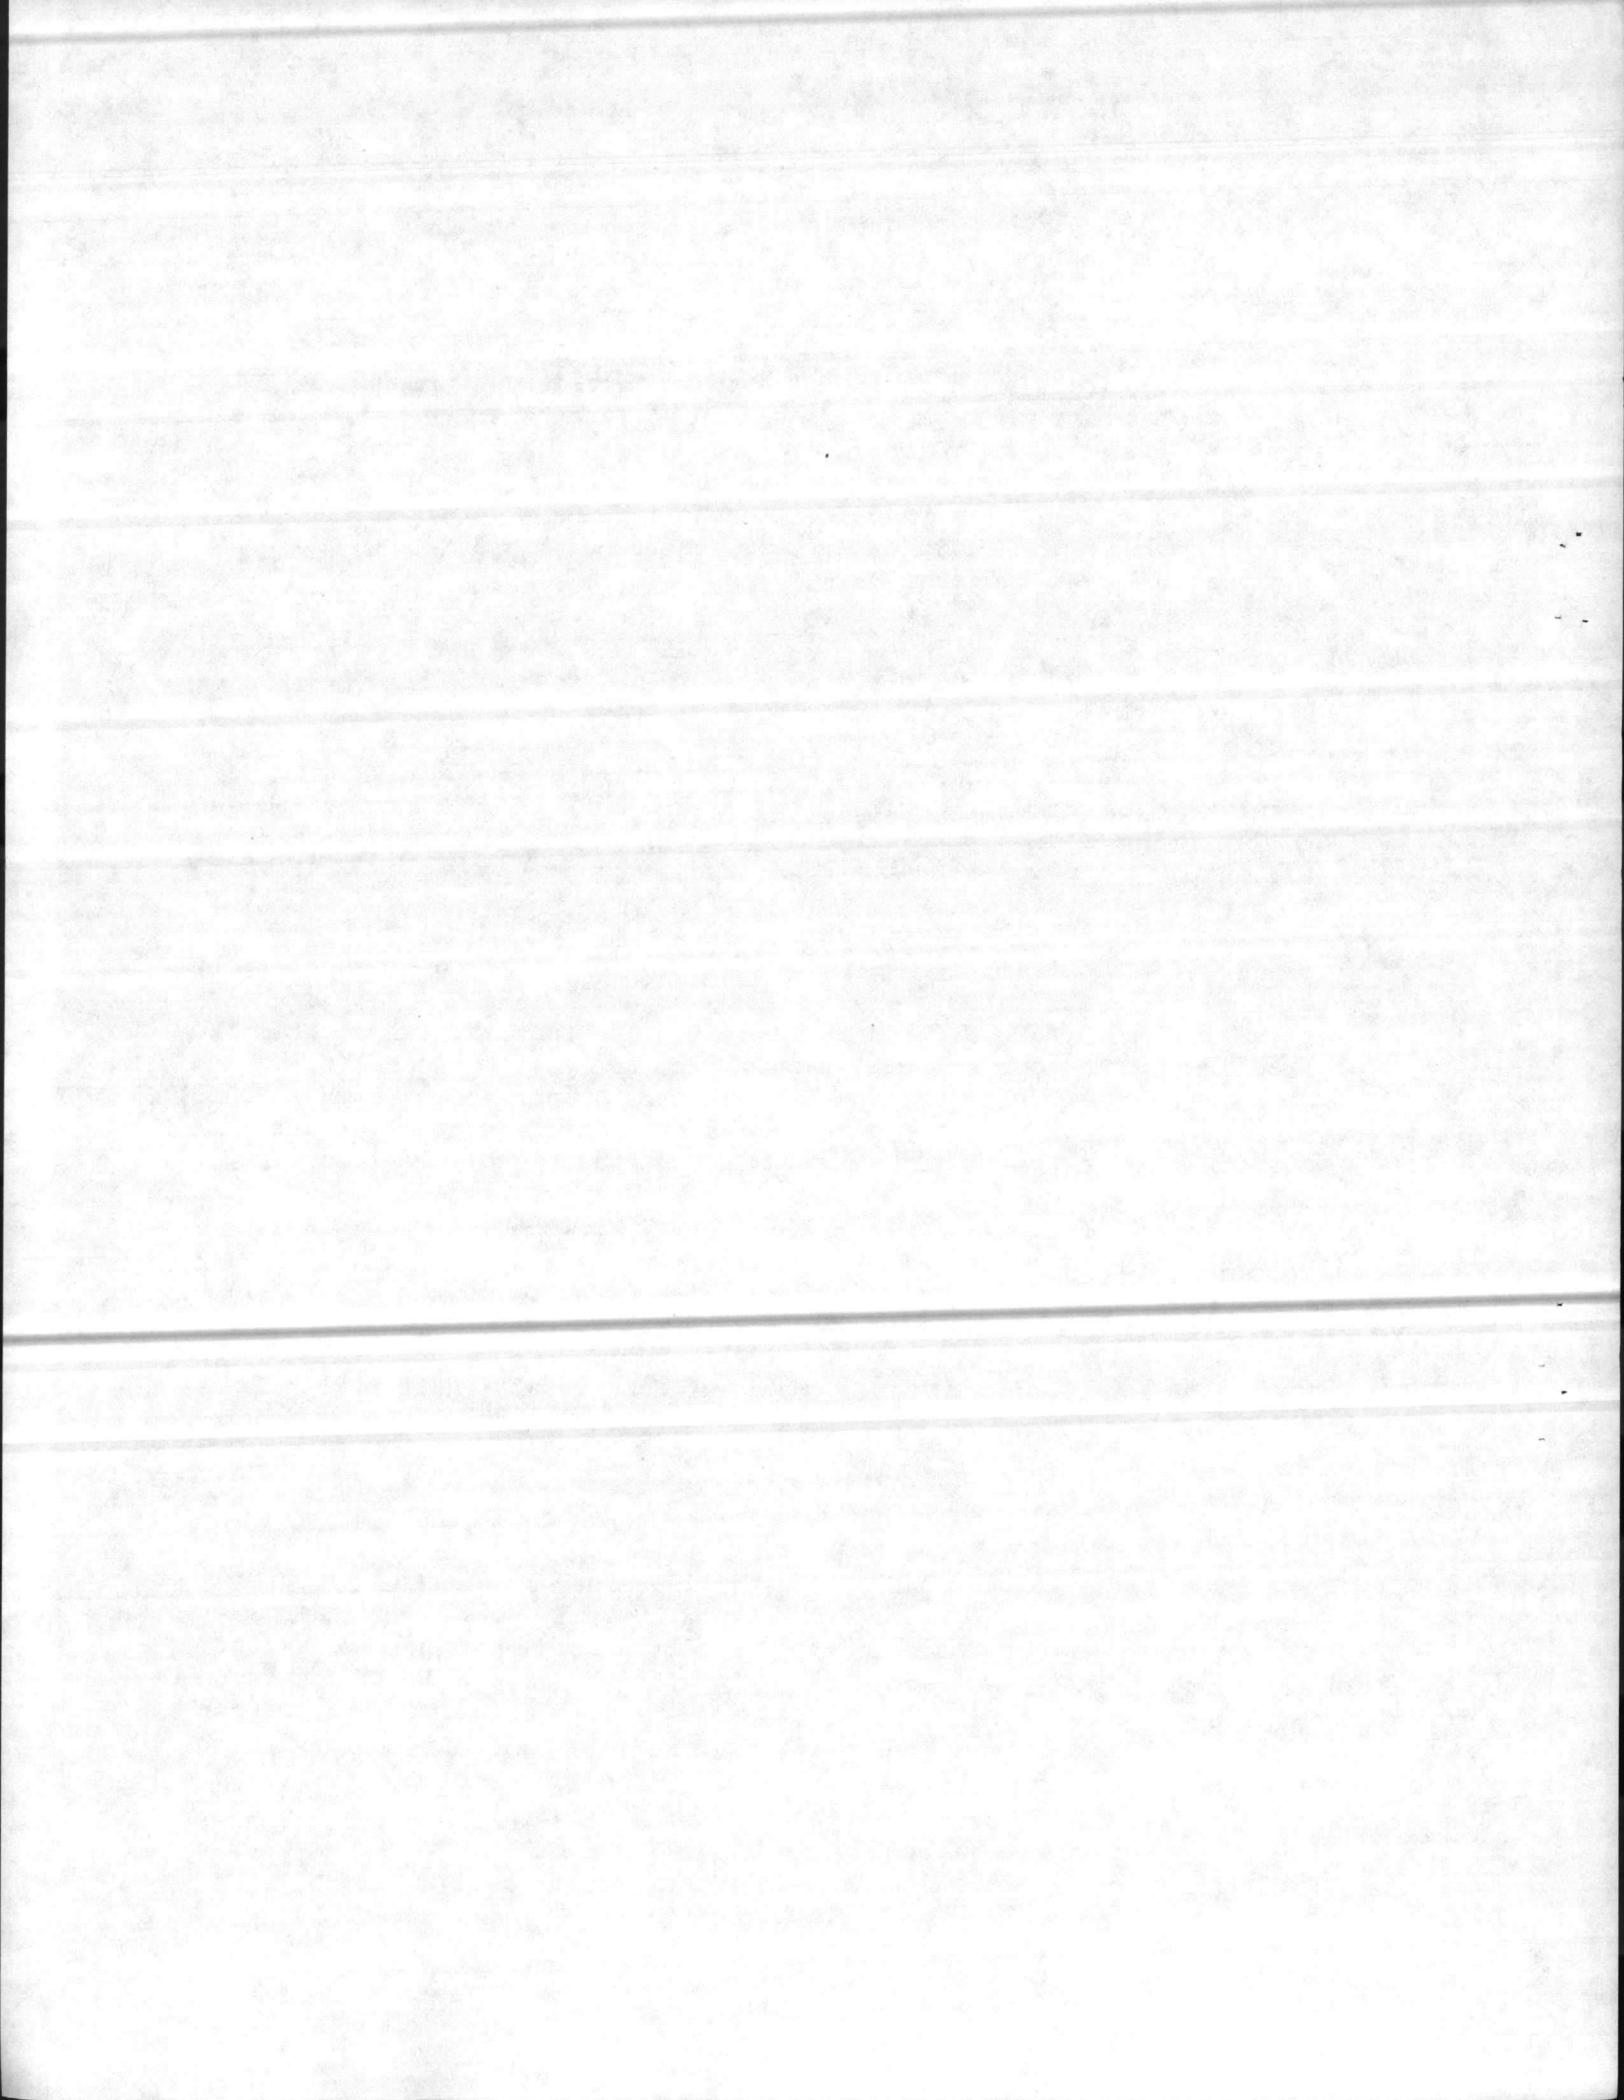

2.4 Use of Explosive: Use of explosives will not be permitted.

2.5 Filling: Holes resulting from demolition and removal work shall be filled as specified in Section entitled "Earthwork" and vegetated as specified in Section entitled "Establishing Vegetation".


2.6 Structures: Existing structures indicated shall be removed in their entirety down to and including removal of building floor slabs and footings and engine foundations.

2.7 Utilities: Remove all existing utilities as indicated, and terminate in a manner and at a time satisfactory to the Government. Water lines shall be terminated where shown, using appropriate cast iron blind flanges. Capping of wells is specified in section entitled "Wells". When utility lines are encountered that are not indicated on the drawings, they shall be disposed of as directed by the Contracting Officer and disposal shall be covered by "Differing Site Conditions" in accordance with the General Provisions.

3. DISPOSITION OF MATERIAL:

3.1 Title to all materials and equipment to be demolished, except as specified otherwise, is vested in the Contractor upon receipt of notice to proceed. The Government will not be responsible for the condition, loss or damage to such property after notice to proceed.

3.2 Equipment to be Removed by the Government: The water pump in Building TT-30 will be removed by the Government and will remain the property of the Government. The Contractor will install and have in operation Well TT-25 prior to the Government's removal of the water pump from Well TT-30. The Contractor shall notify the Contracting Officer, in writing, at least 14 days in advance of the time he proposes to begin demolition of Well TT-30.

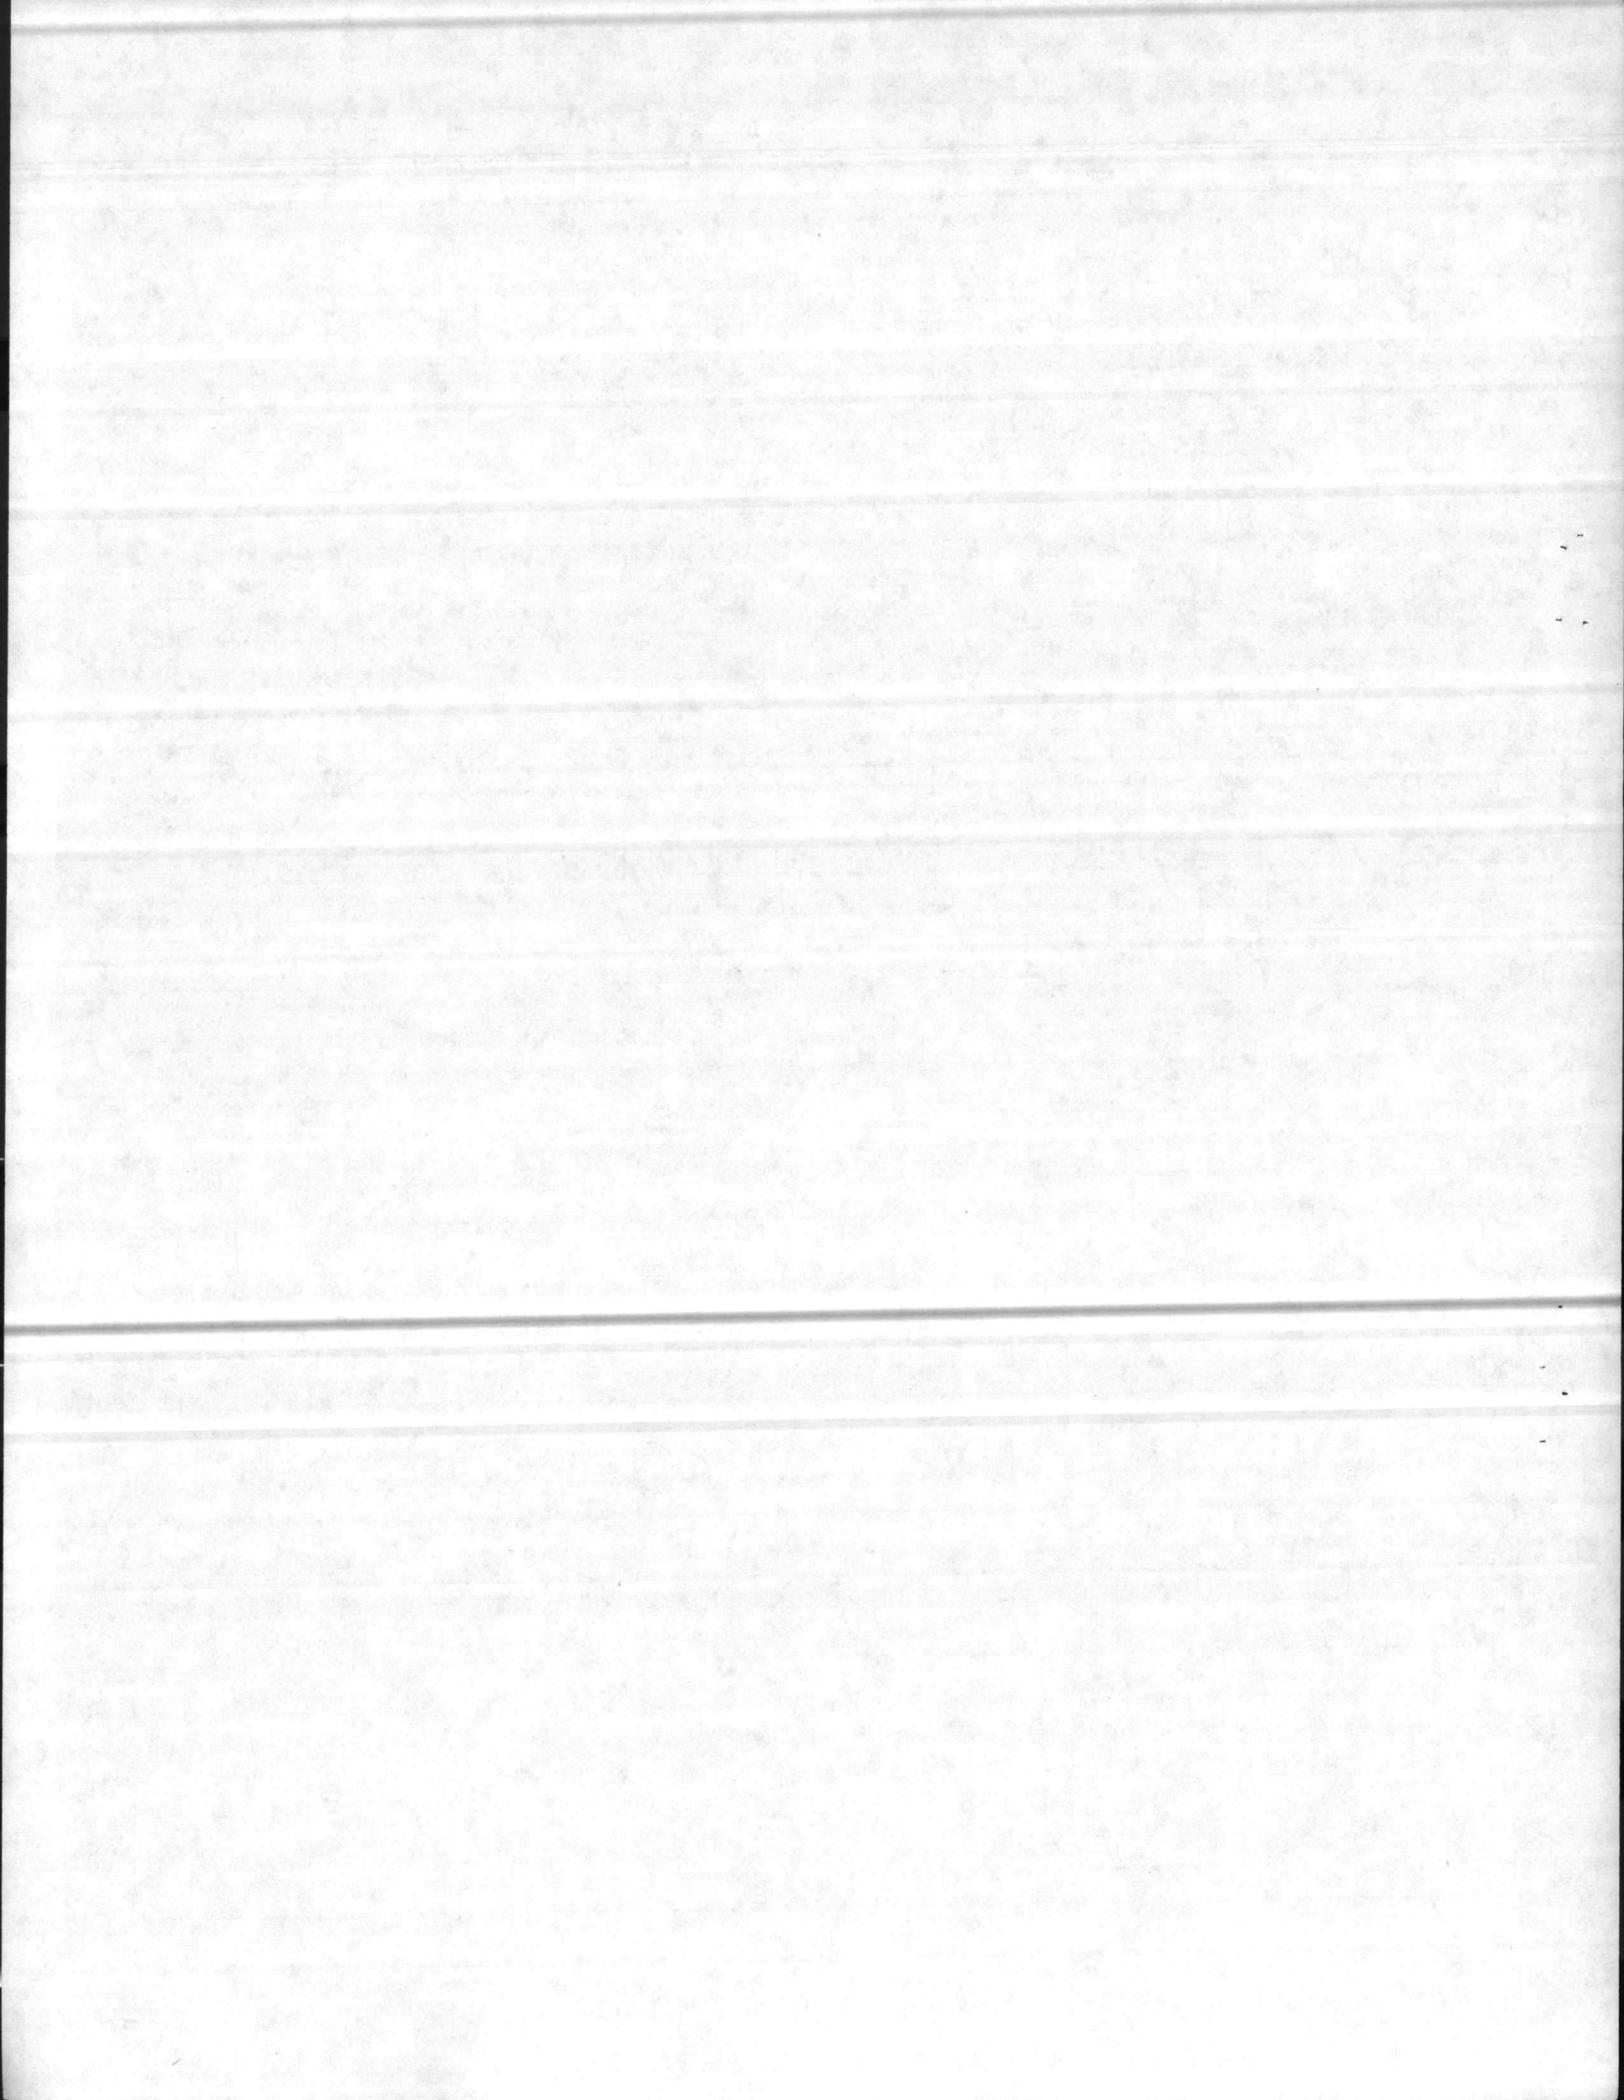

SECTION 02201
EARTHWORK

1. **APPLICABLE PUBLICATIONS:** The following publications of the issues listed below, but referred to elsewhere by basic designation only, form a part of this specification to the extent indicated by the references thereto (where a number is suffixed to the specification number, it denotes the effective amendment to the specification):

1.1 American Association of State Highway Officials (AASHO):

T99-70 Moisture-density relations of soils. 5.5 lb. rammer.

2. **QUALITY CONTROL:** See Paragraph entitled "Tests" hereinafter.

3. **REQUIREMENTS:** The work includes the clearing and the excavation, filling, backfilling, and grading indicated and necessary for proper completion of the project.

3.1 **General:** Bids shall be based on the following:

(a) that the surface elevations are as indicated;


(b) that no pipes or other artificial obstructions, except those indicated, will be encountered; and

(c) that hard material will not be encountered.

In case the actual conditions differ substantially from those stated or shown, or both, the provisions of the contract respecting an adjustment for changed conditions shall apply, subject to the requirement of notification thereunder being given. Hard material shall be defined as solid ledge rock, firmly cemented unstratified masses or conglomerate deposits possessing the characteristics of solid rock not ordinarily removed without systematic drilling and blasting, and any boulder, masonry, or concrete except pavement, exceeding 1/2 cubic yard in volume.

3.2 **Clearing:** All trees, logs, shrubs, and brush within the indicated clearing limits shall be removed, except as indicated otherwise. Trees and shrubs which are not to be cut shall be properly protected from damage. Bushes, roots and matted roots shall be grubbed out at least 18 inches below the existing surface. Brush, refuse, stumps, roots, and timber shall be removed from the limits of the station.

3.3 **Topsoil:** Existing topsoil shall be stripped to a depth of 4 inches, stockpiled separately from other excavated materials, and shall be reused for finished surface grading. Topsoil shall be free of stones, wood matter, cuttings, excessive quantities of vegetation, and debris of every kind. Piles of topsoil shall be located so that the material can be used readily for finished surface grading; topsoil shall be protected and maintained until needed. The top 4-inch thickness of all newly graded earth surfaced areas shall consist of topsoil. Any surplus of topsoil from excavations and grading shall be stockpiled on the station at a location within 5000 feet of the site of the work, as directed by the Contracting Officer. If there is insufficient topsoil available to

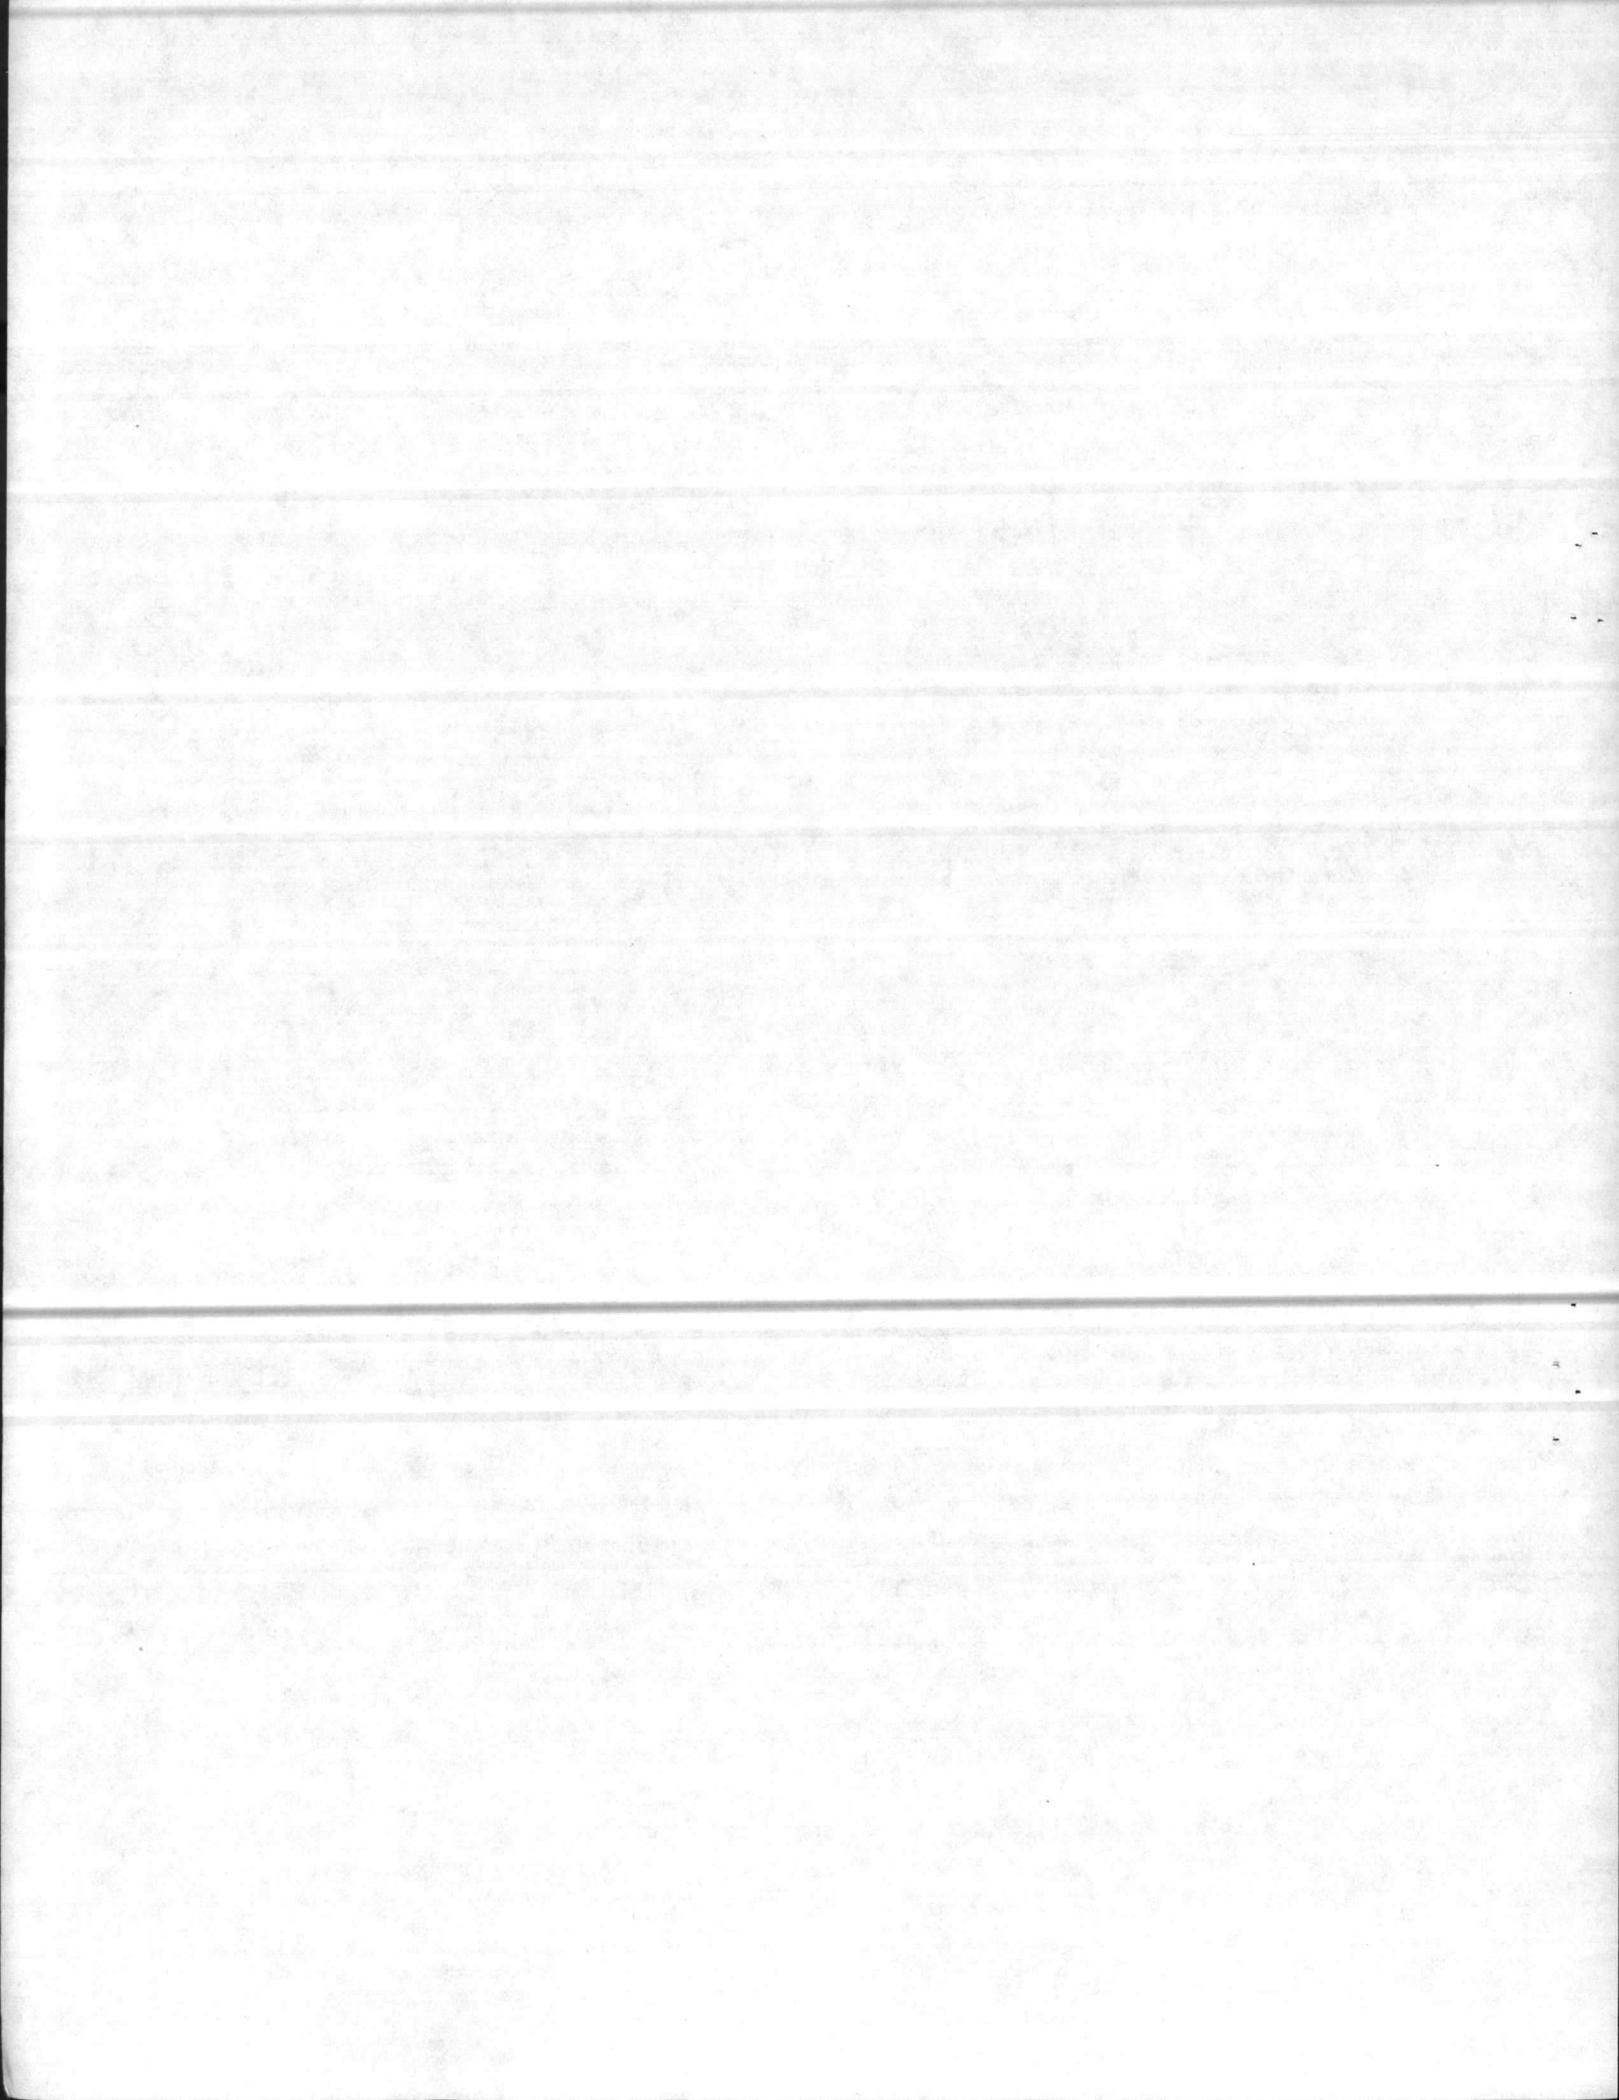

form the 4-inch thickness, that available shall be utilized as directed. The Contractor will not be required to haul in additional topsoil if all requirements specified are complied with. Placing of topsoil is specified in the section entitled "Establishing Vegetation".


3.4 Excavations shall be carried to the depths, contours and dimensions indicated or necessary. Excavations shall be kept free from water while construction therein is in progress.

3.4.1 Excavations for structures and trenches: Excavations carried below the depths indicated, without specific directions of the Contracting Officer, shall be refilled to the proper grade with suitable material and compacted thoroughly, except that in excavations for footings the concrete shall be extended to the bottom of the excavations; all additional work of this nature shall be at the Contractor's expense. Trenches for pipe lines shall be excavated along straight lines and, unless indicated otherwise, shall provide a minimum of 6 inches between the outside of the pipe bell and the sides of the trench or bracing. Standard pipe trench excavation and bedding shall be in accordance with the Standard Pipe Trench Bedding details given at the end of this section. Pipe, except cast iron or steel shall have its bottom quadrant for the full length of the barrel embedded in undisturbed earth. Mechanical excavation shall be held at least 2 inches above final invert grade. The remainder of the excavation shall be shaped manually and graded to provide uniform bearing on compacted soil, immediately before the pipe is laid.

3.4.2 Excavation under new pavements and concrete slabs: The entire area of the original ground under new pavements and concrete slabs shall be excavated to remove all vegetable matter, topsoil, sod, muck, rubbish, and other unsuitable material to a minimum depth of 6 inches. In the event that the Contractor is directed by the Contracting Officer to remove unsuitable material to a greater depth than specified, an adjustment in the contract price or time for completion, or both, will be made in accordance with the contract.

3.4.3 Shoring and sheeting: Excavations shall be shored and sheeted with members of sizes and arrangement sufficient to prevent injury to persons, damage to structures, injurious caving, or erosion. Shoring, sheeting, and bracing shall be removed as the excavations are backfilled; care shall be exercised to prevent injurious caving during the removal of the shoring and sheeting.

3.5 Borrow materials, if required, shall be obtained from the station borrow pit or from sources outside the station, at the Contractor's option. The station borrow pit is located within a haul distance of 5 miles from the site of the work. If the station borrow pit is used, the Contractor, at his expense, shall perform any clearing, grubbing, and stripping required for providing access to suitable borrow material and shall dispose of materials from clearing and grubbing operations off the

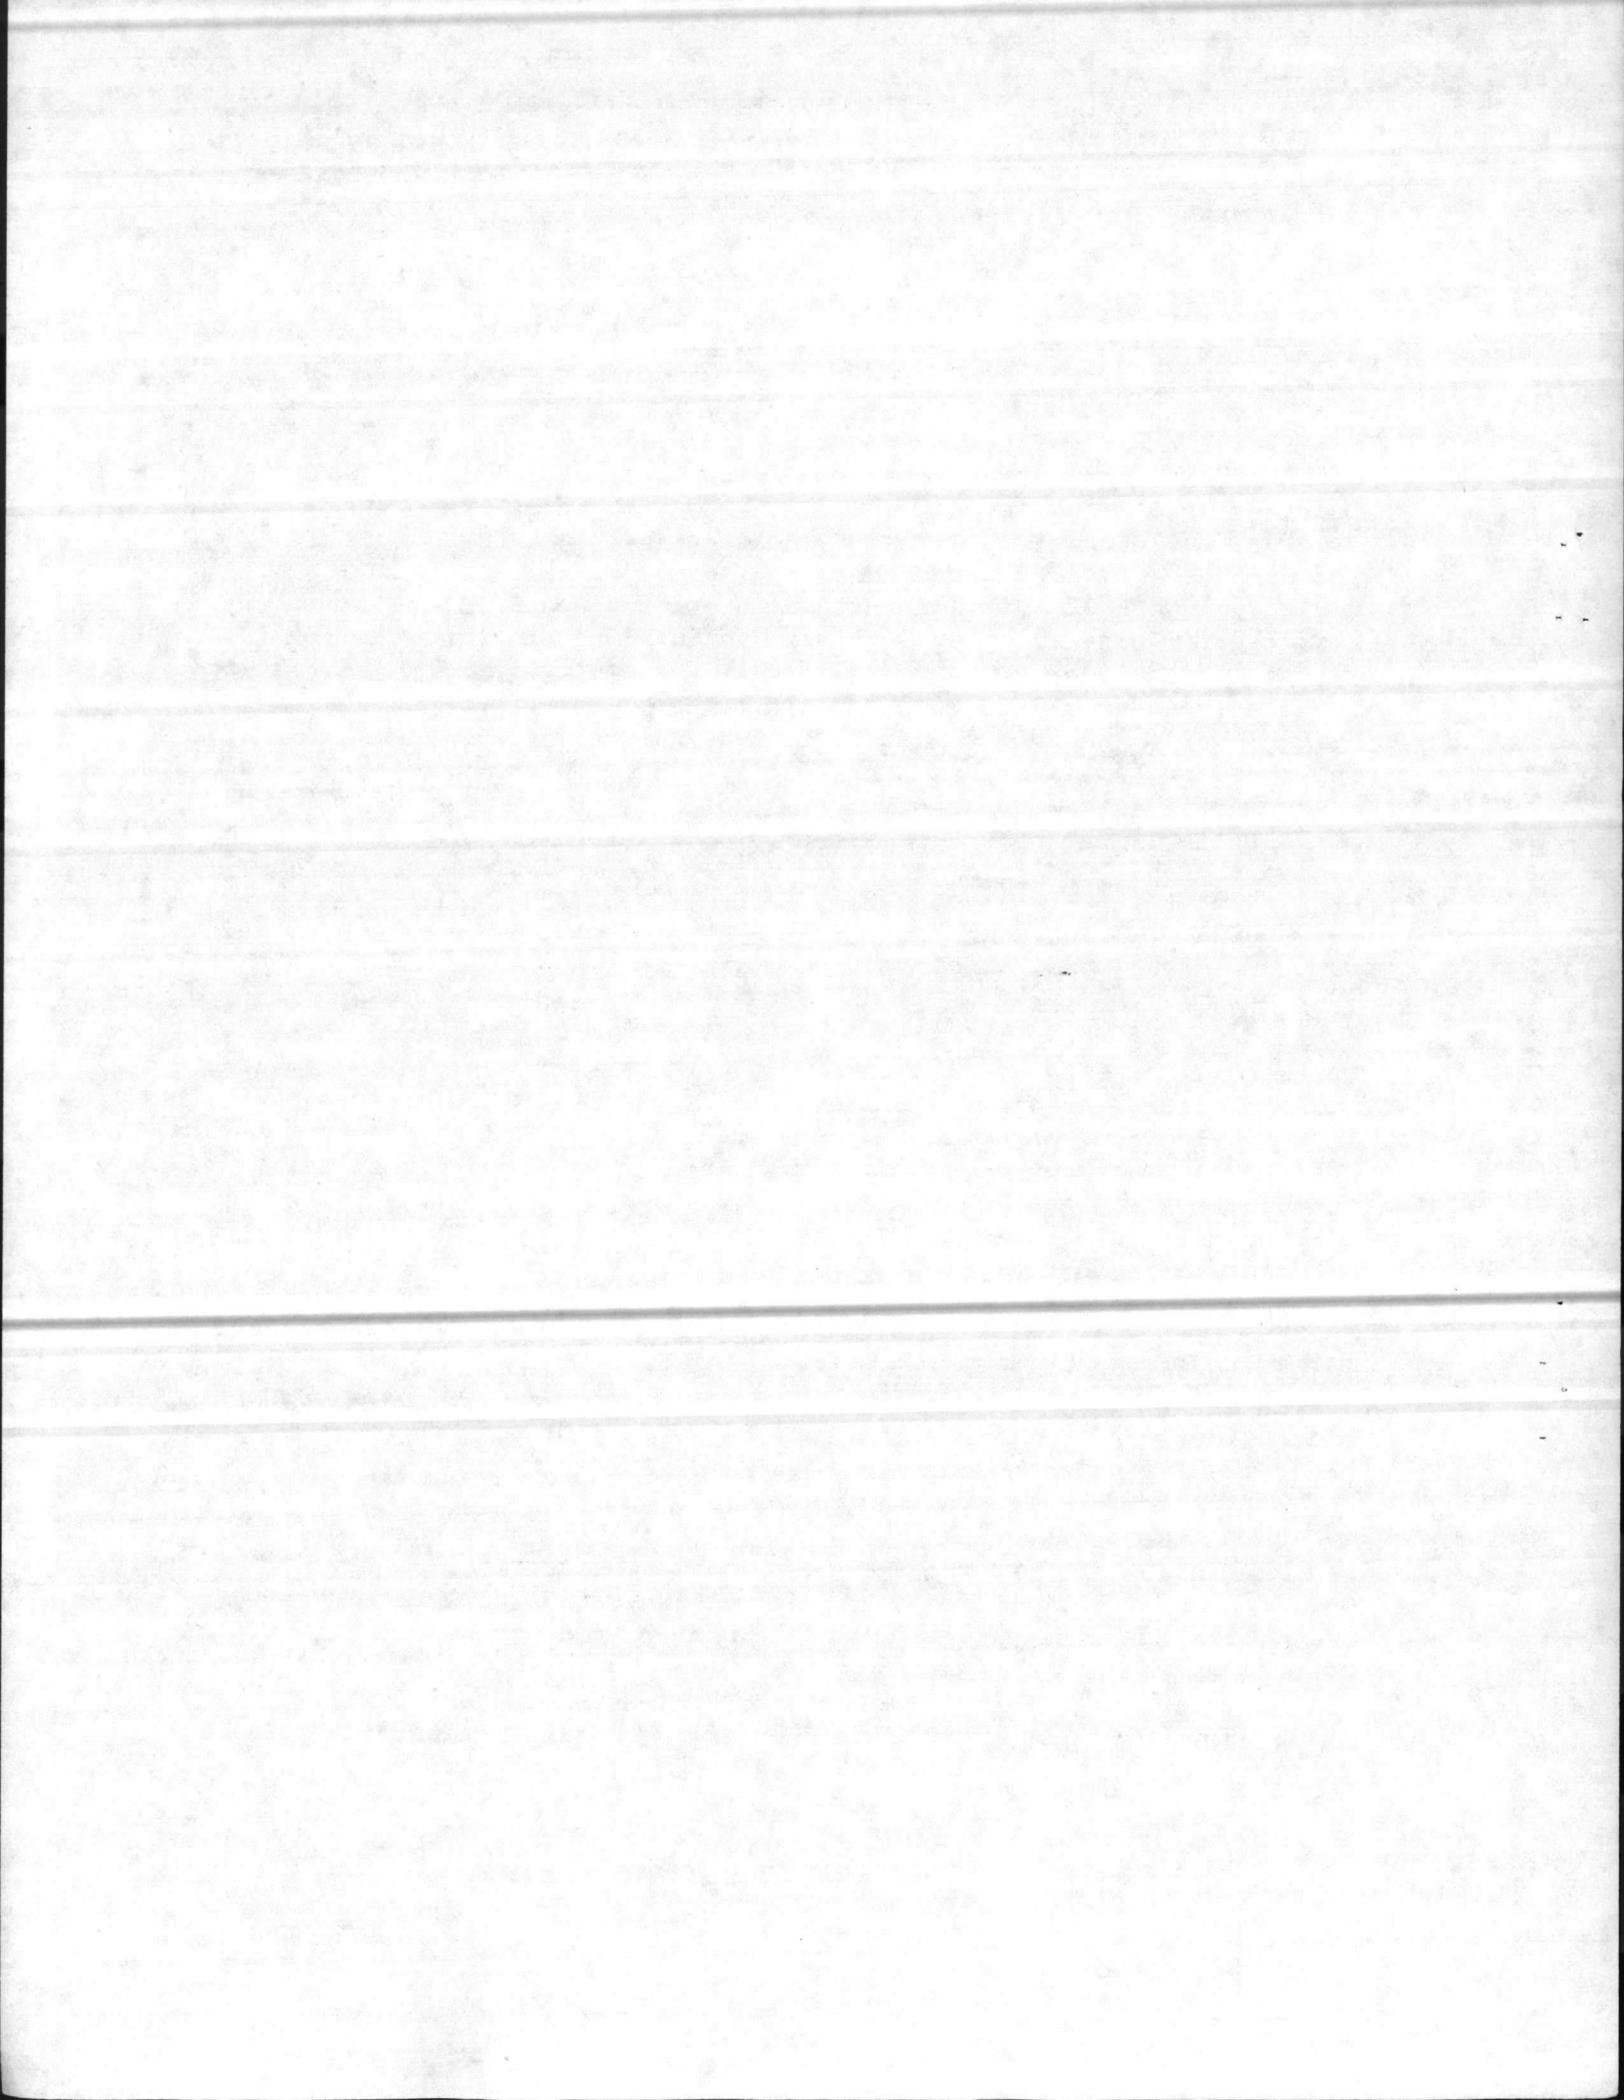


station. The Contractor, at his expense, shall also remove and stockpile the top 12 inches of soil material in the area in which he is to get the borrow. After the borrow material has been removed, the borrow pit shall be trimmed neatly and graded to drain properly and the stockpiled soil material replaced and leveled over the borrow area. If the borrow materials are provided from sources outside the station, they shall be at the Contractor's expense.

3.6 Drainage of construction sites: It shall be the Contractor's responsibility to adequately and completely drain construction sites as required to keep subgrades and subsoils sufficiently dry to permit all construction operations to successfully progress during all periods in which work is in progress. In addition to permanent drainage features required, the Contractor shall provide all necessary additional temporary ditches, swales, and other drainage features and equipment required to maintain the soils dry during construction. Where the Contractor's operations or failure to comply with the above requirements results in the development of unsuitable working platforms for equipment operation and unsuitable soil support for subsequent construction features, the Contractor shall, at his expense, remove the unsuitable material to whatever depth is required to restore suitable working platforms and soil support and replace it with suitable material from sources outside the station.

3.7 Filling and backfilling:

3.7.1 Filling and backfilling for structures and trenches: All fill and backfill shall be free from roots, wood or other scrap material, and other vegetable matter and refuse. Fill and backfill shall be placed in layers not more than 6 inches thick, except as specified otherwise herein, and each layer shall be compacted thoroughly and evenly. Backfill about structures shall be placed, as far as practicable, as the work of construction progresses. Backfilling of trenches shall progress as rapidly as the construction and testing of the work permits. In backfilling pipe trenches, approved fill shall be compacted in 6-inch layers to a depth of one foot over the top of the pipe; the remainder of the trench shall be backfilled in well-compacted one-foot layers, except that for trenches in pavements the backfill shall be compacted in 6 inch layers to the top of the trench.

3.8 Compaction: The subgrade of soils in cut shall have a density of 95 percent of the maximum density to a depth of 12 inches below the subgrade surface. If the density of the existing material is less than 95 percent, it shall be compacted to a depth of 12 inches to the minimum 95 percent density. Fill and backfill under concrete floor slabs and the upper 12 inches under pavements shall be compacted to not less than 100 percent of the maximum density for cohesionless materials and 95 percent of the maximum density for other materials; under grassed areas to 85 percent; and other backfill adjacent to structures to 90 percent. The moisture content of the specified densities shall be within 2 percent more or less than the optimum.

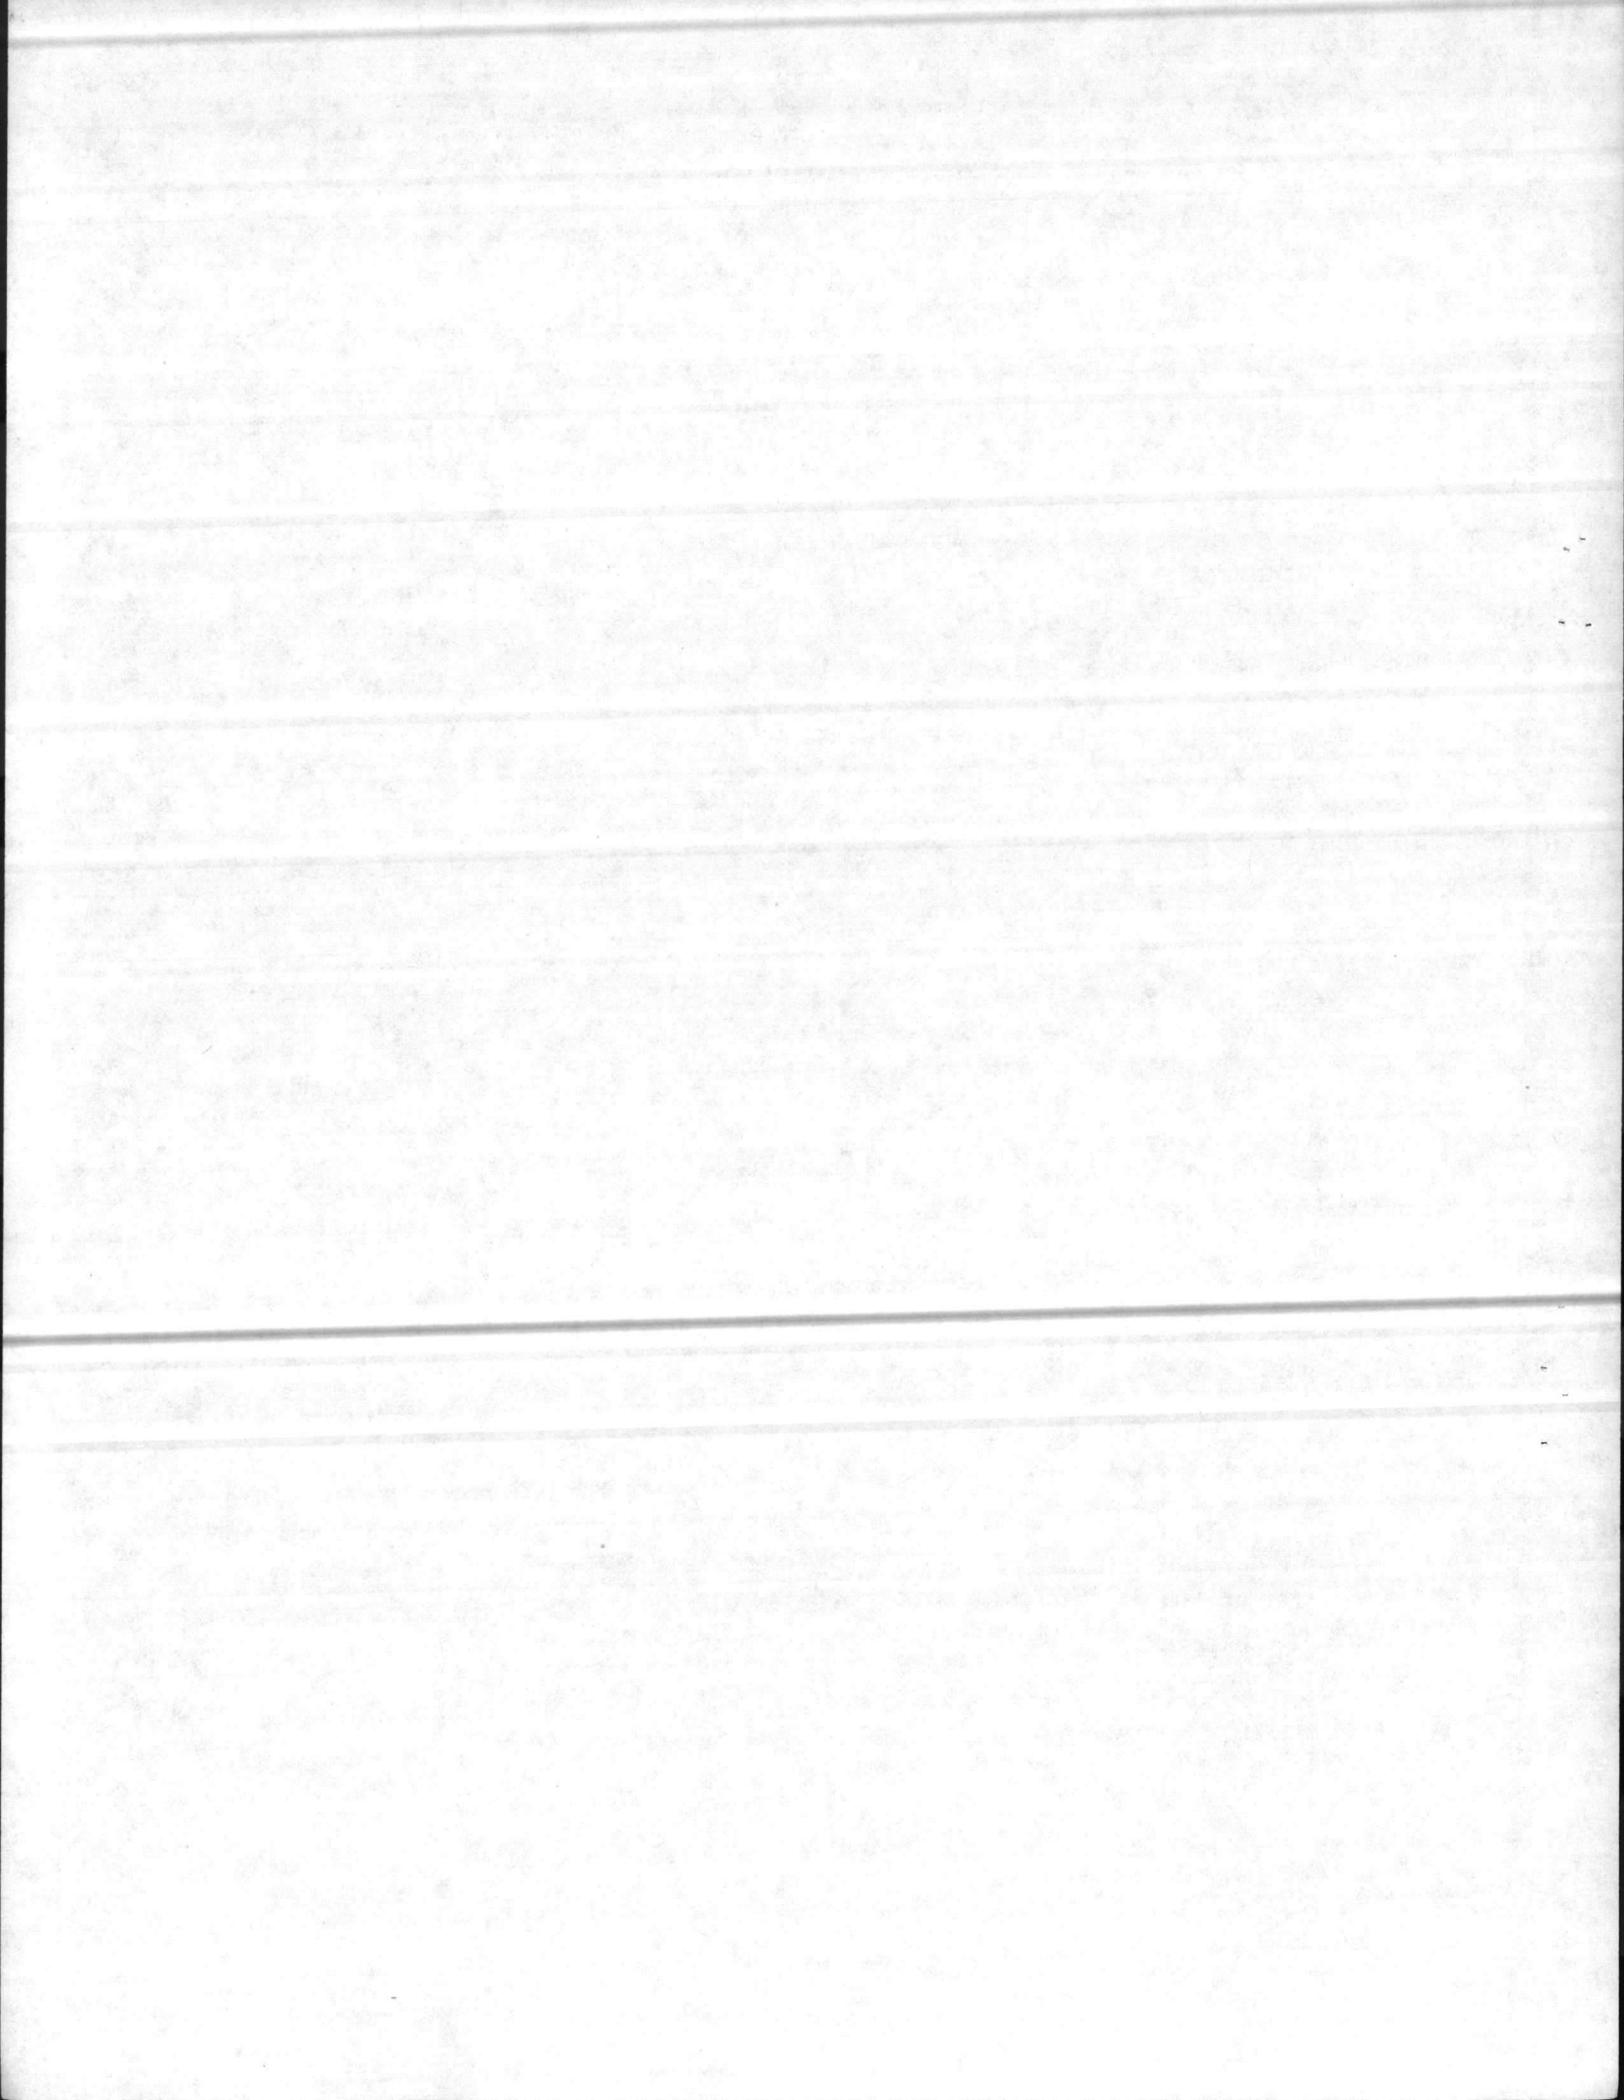

3.9 Grading: The Contractor shall perform all grading in the areas so indicated or specified. Surfaces which are to receive topsoil shall be depressed as required to receive the topsoil. Fill shall be brought to finished grades indicated within a tolerance of one-tenth of a foot and shall be graded to drain away from structures. Existing grades which are to remain and which are disturbed by the Contractor's operations shall be graded to provide surfaces suitable for the proper use of mowing machines.


3.10 Granular fill (indicated as material) under concrete floor slabs shall be provided by the Contractor from sources outside the station, and shall consist of clean crushed rock, crushed or uncrushed gravel, uniformly graded and of a size that will pass a 1-1/2 inch sieve and will be retained on a no. 4 sieve. The porous material layer shall be not less than 4 inches in compacted thickness, and shall be compacted with a minimum of two passes of a hand-operated plate-type vibratory compactor.


3.11 Disposition of surplus material: Surplus soil material not required for filling, backfilling, or grading shall be wasted by deposition on Government property within 2 miles of the site of the work, where directed by the Contracting Officer. Wasted material shall be spread and leveled as directed by the Contracting Officer.

4. TESTS: All tests will be performed by the Government. Maximum density at optimum moisture content will be determined by AASHTO method T99, Method D, with the following modifications: (1) all material passing a 2-inch sieve and retained on a 3/4-inch sieve shall be removed and replaced with an equal portion of material between the no. 4 and 3/4-inch sieves, and (2) a separate batch of material shall be used for each compaction test specimen. No material shall be reused for compaction tests.

---o0o---

3.8 Compaction
of 95 percent
subgrade soil
95 percent
95 percent
the upper
100 percent
percent of the
to 95 percent
The material
more or less

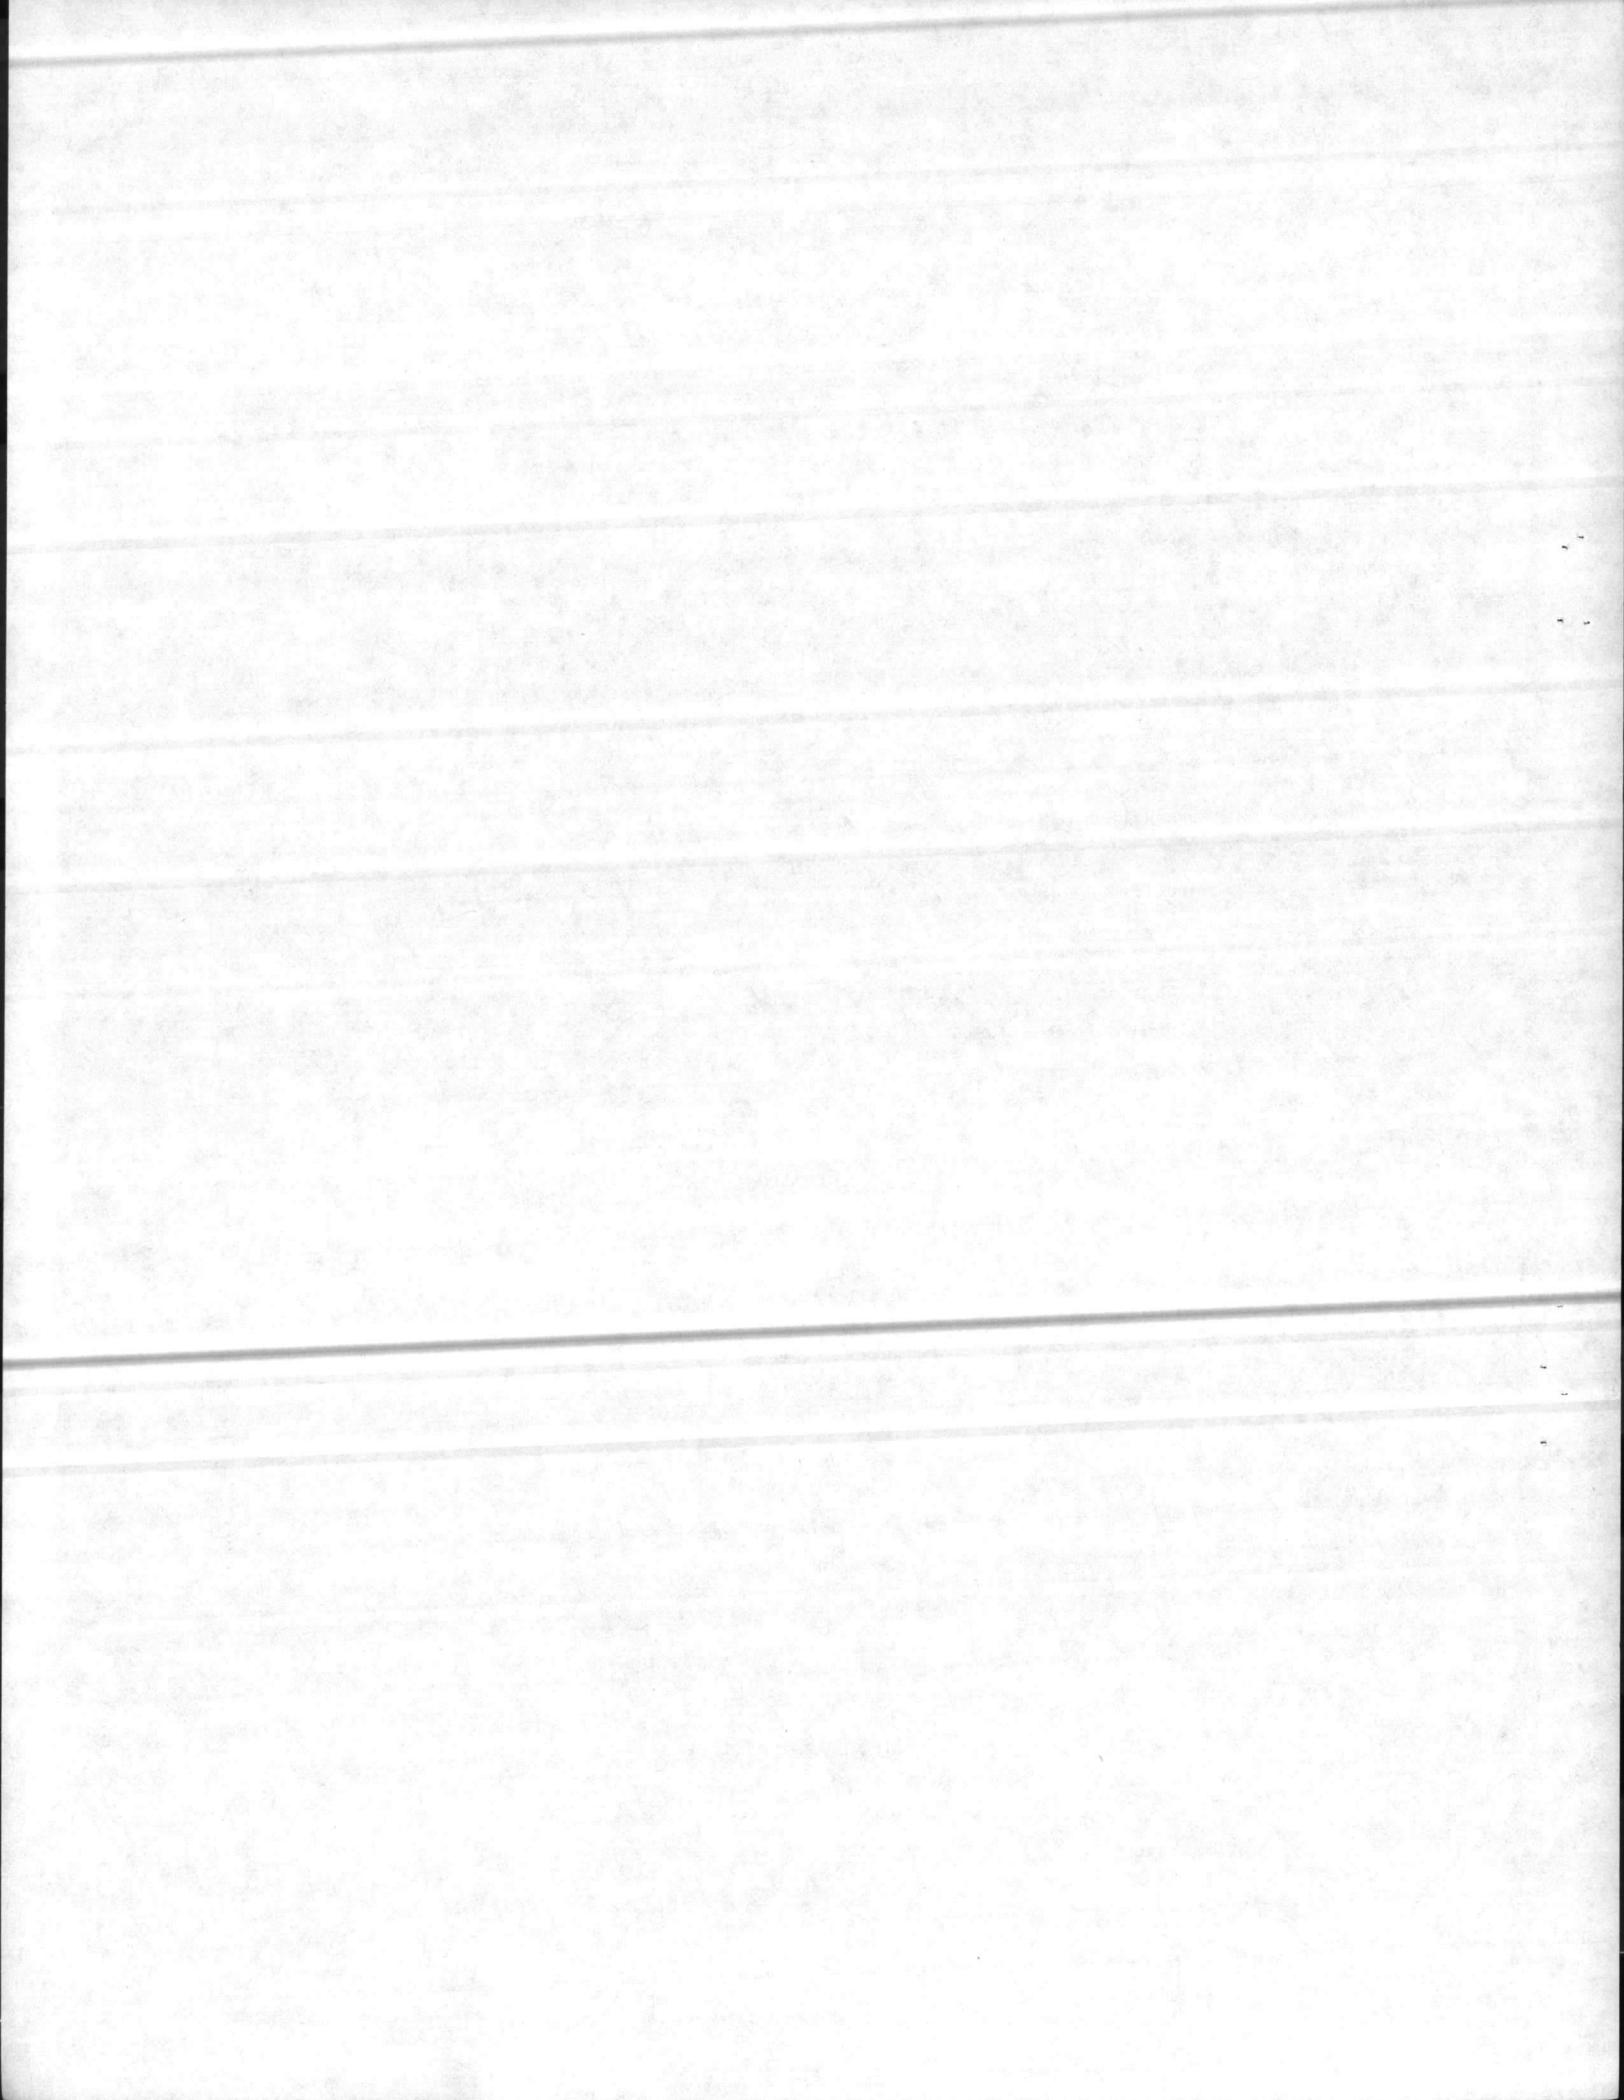

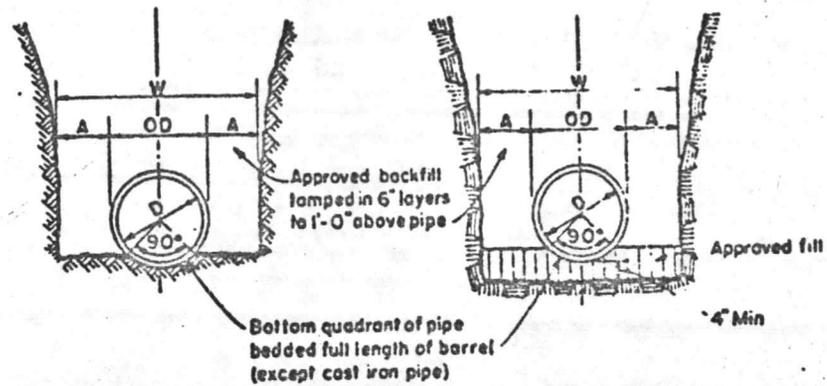

TRENCH IN EARTH


TRENCH IN ROCK

PIPE DIA "D"	MAXIMUM "A"
6" to 15"	8"
18" to 21"	10"
24" to 30"	12"
33" to 42"	15"
48" & Larger	18"

Maximum trench width "W"
taken at top of pipe.

STANDARD PIPE TRENCH BEDDING

LANTDIV PLATE

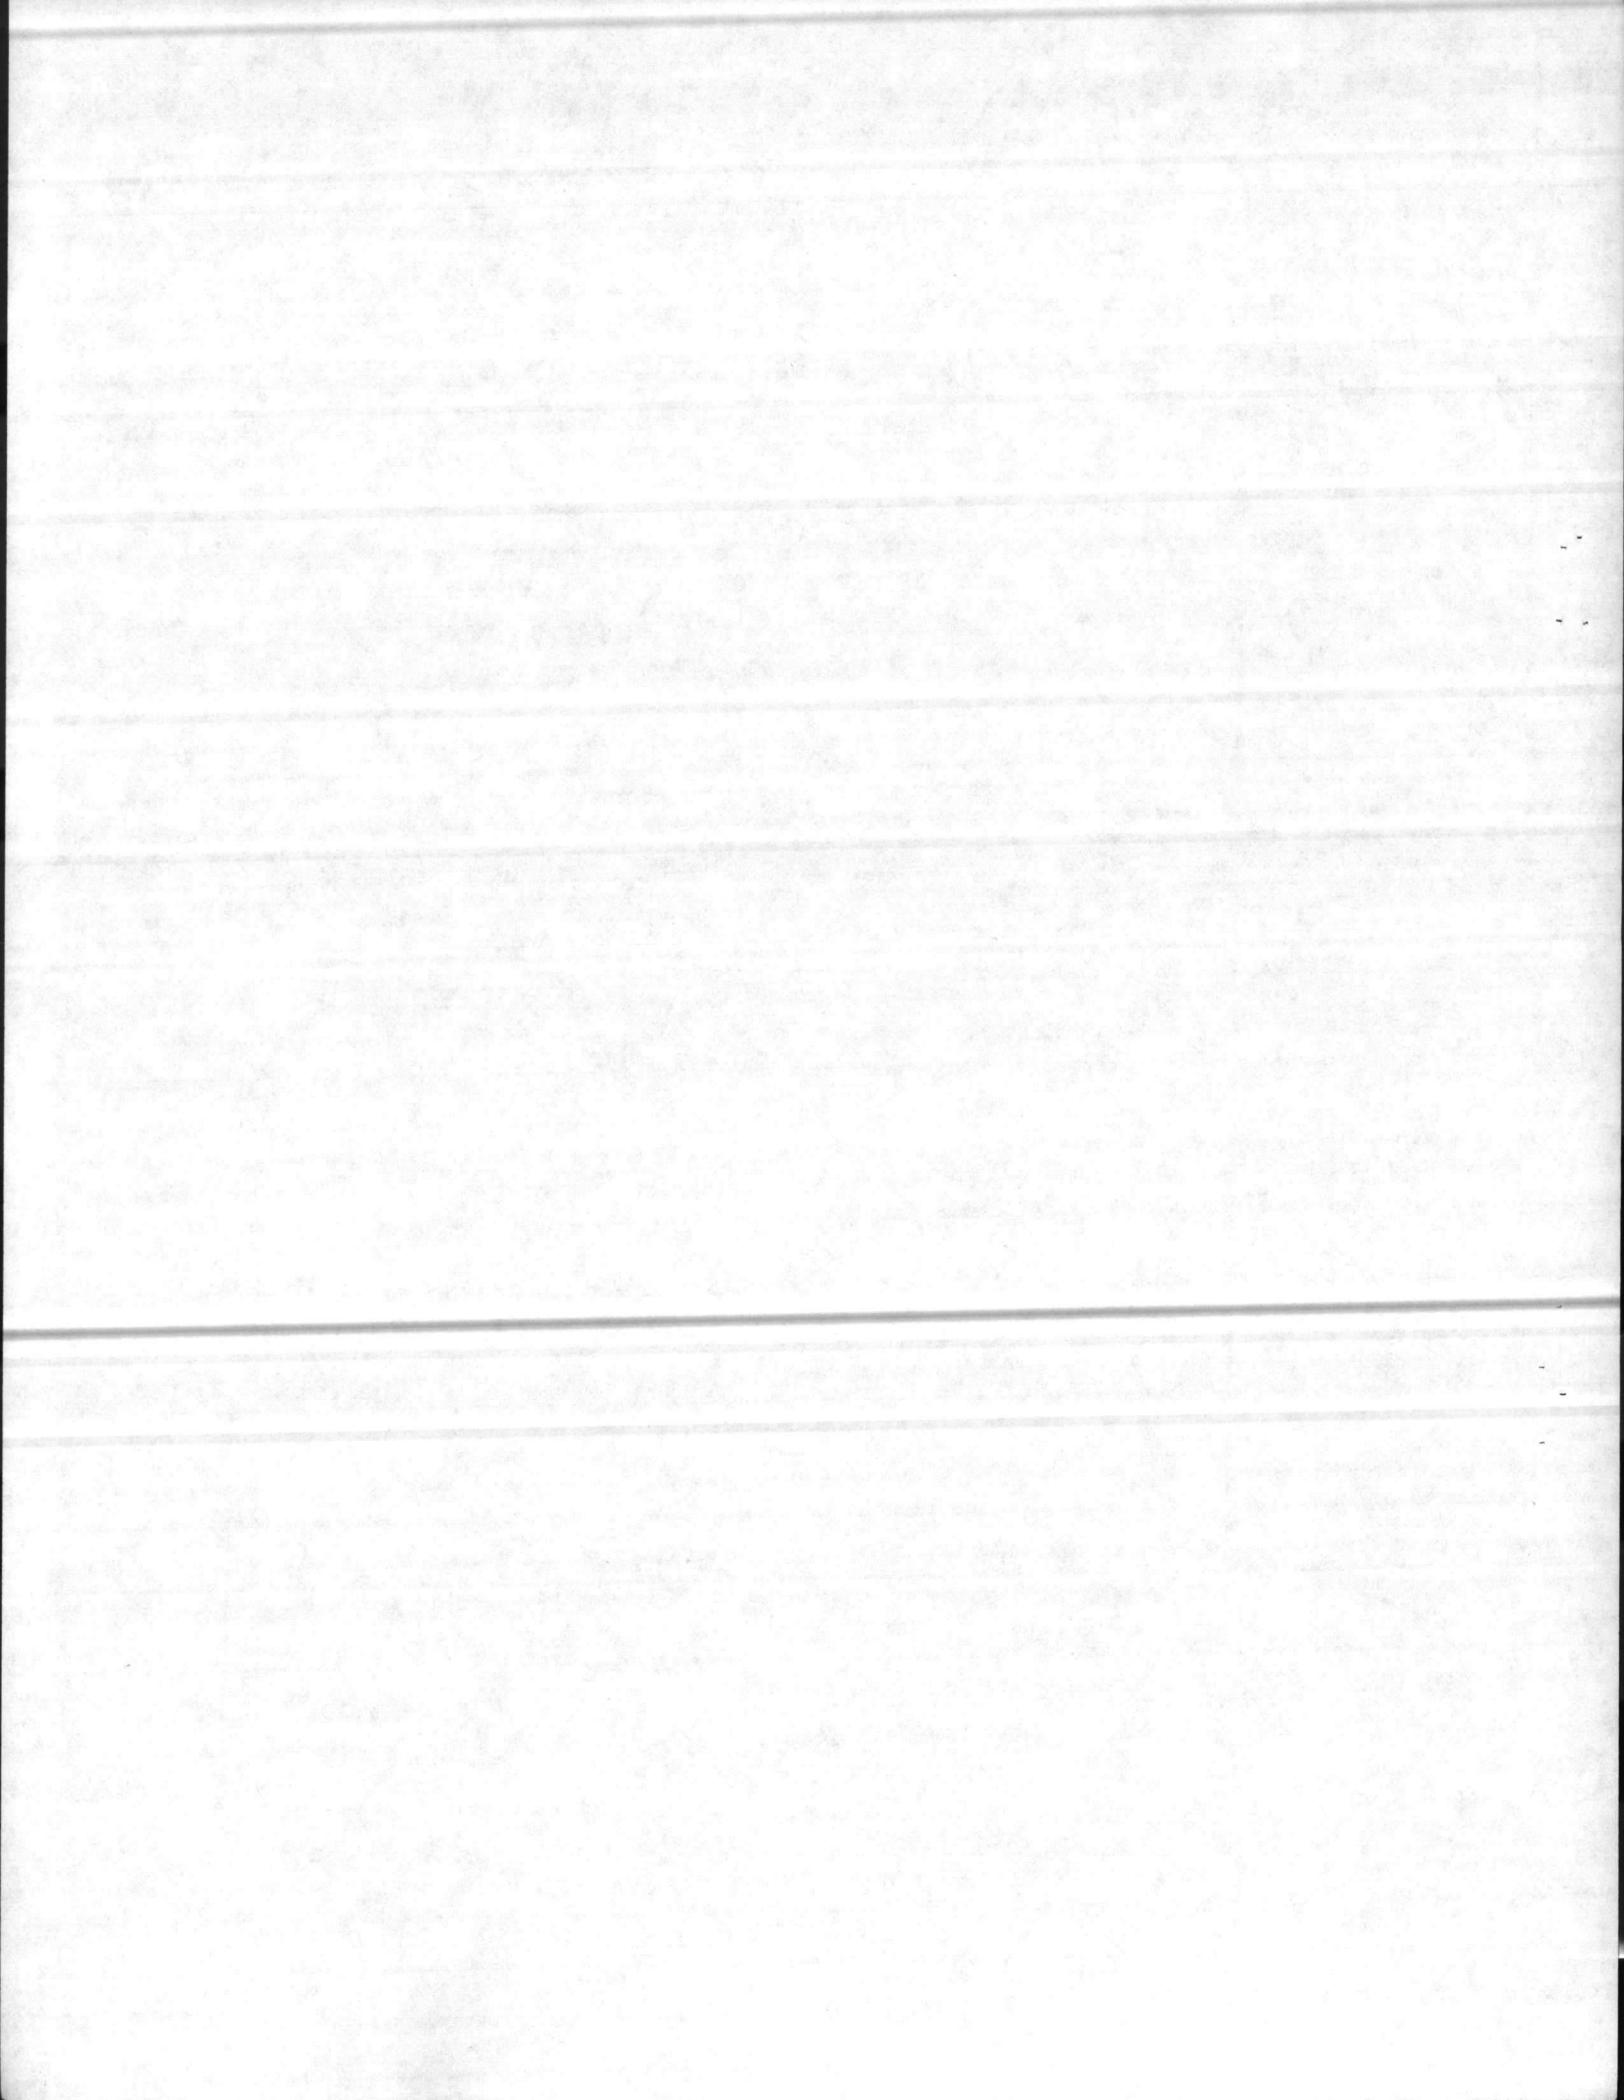

SECTION 02600. ASPHALTIC CONCRETE SURFACE AND PATCHWORK

1. APPLICABLE PUBLICATIONS: The following publications of the issues listed below, but referred to thereafter by basic designation only, form a part of this specification to the extent indicated by the references thereto.

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION (NCDOT):

Standard Specifications for Roads and Structures, July 1978.

2. GENERAL REQUIREMENTS: All "Section" references refer to NCDOT "Standard Specifications for Roads and Structures". In all references:

- a. The articles entitled "Method of Measurement", "Basis of Payment" and "Acceptance of Bituminous Materials" will not apply.
- b. All references to "Engineer" shall mean "Contracting Officer".

3. PRIME COAT: Work and materials shall be Grade MC-30 or RC-30 conforming to Section 600.

4. TACK COAT: Work and materials shall conform to Section 605 for Type F-I or Section 645 for I-2.

5. ASPHALTIC CONCRETE SURFACE COURSE also specified as "Bituminous Concrete" shall be Type F-I or I-2. Work and materials shall conform to Section 635.

6. CRUSHED STONE: Work and materials shall conform to Section 520.

7. CONSTRUCTION EQUIPMENT:

7.1 Mixing Plant shall conform to the requirements of Section 610-5.


7.2 The Spreading and Finishing Equipment shall be the electronic-screed type and shall be capable of spreading the bituminous mixtures to a uniform density, striking a smooth surface true to cross section and producing a finish surface of the specified evenness. Electronic-screed type equipment will not be required on stone base course overlaying.

7.3 Compacting Equipment shall include a tandem roller.

8. CONSTRUCTION METHODS: Work shall conform to the sections referenced hereinbefore and to the following:

8.1 Before commencing the operations on any portion of the work, the surface of the existing pavement and new base course shall be thoroughly cleaned of all foreign matter, including grass, by mechanical means, if feasible.

8.2 Patchwork: All asphalt surfacing and loose stone base course shall be removed. Stone base course materials removed shall be replaced with a new stone base course and asphaltic concrete mixture. The patchwork shall be accomplished in advance of placing the surface course, and the surface course placed continuously over the entire area.

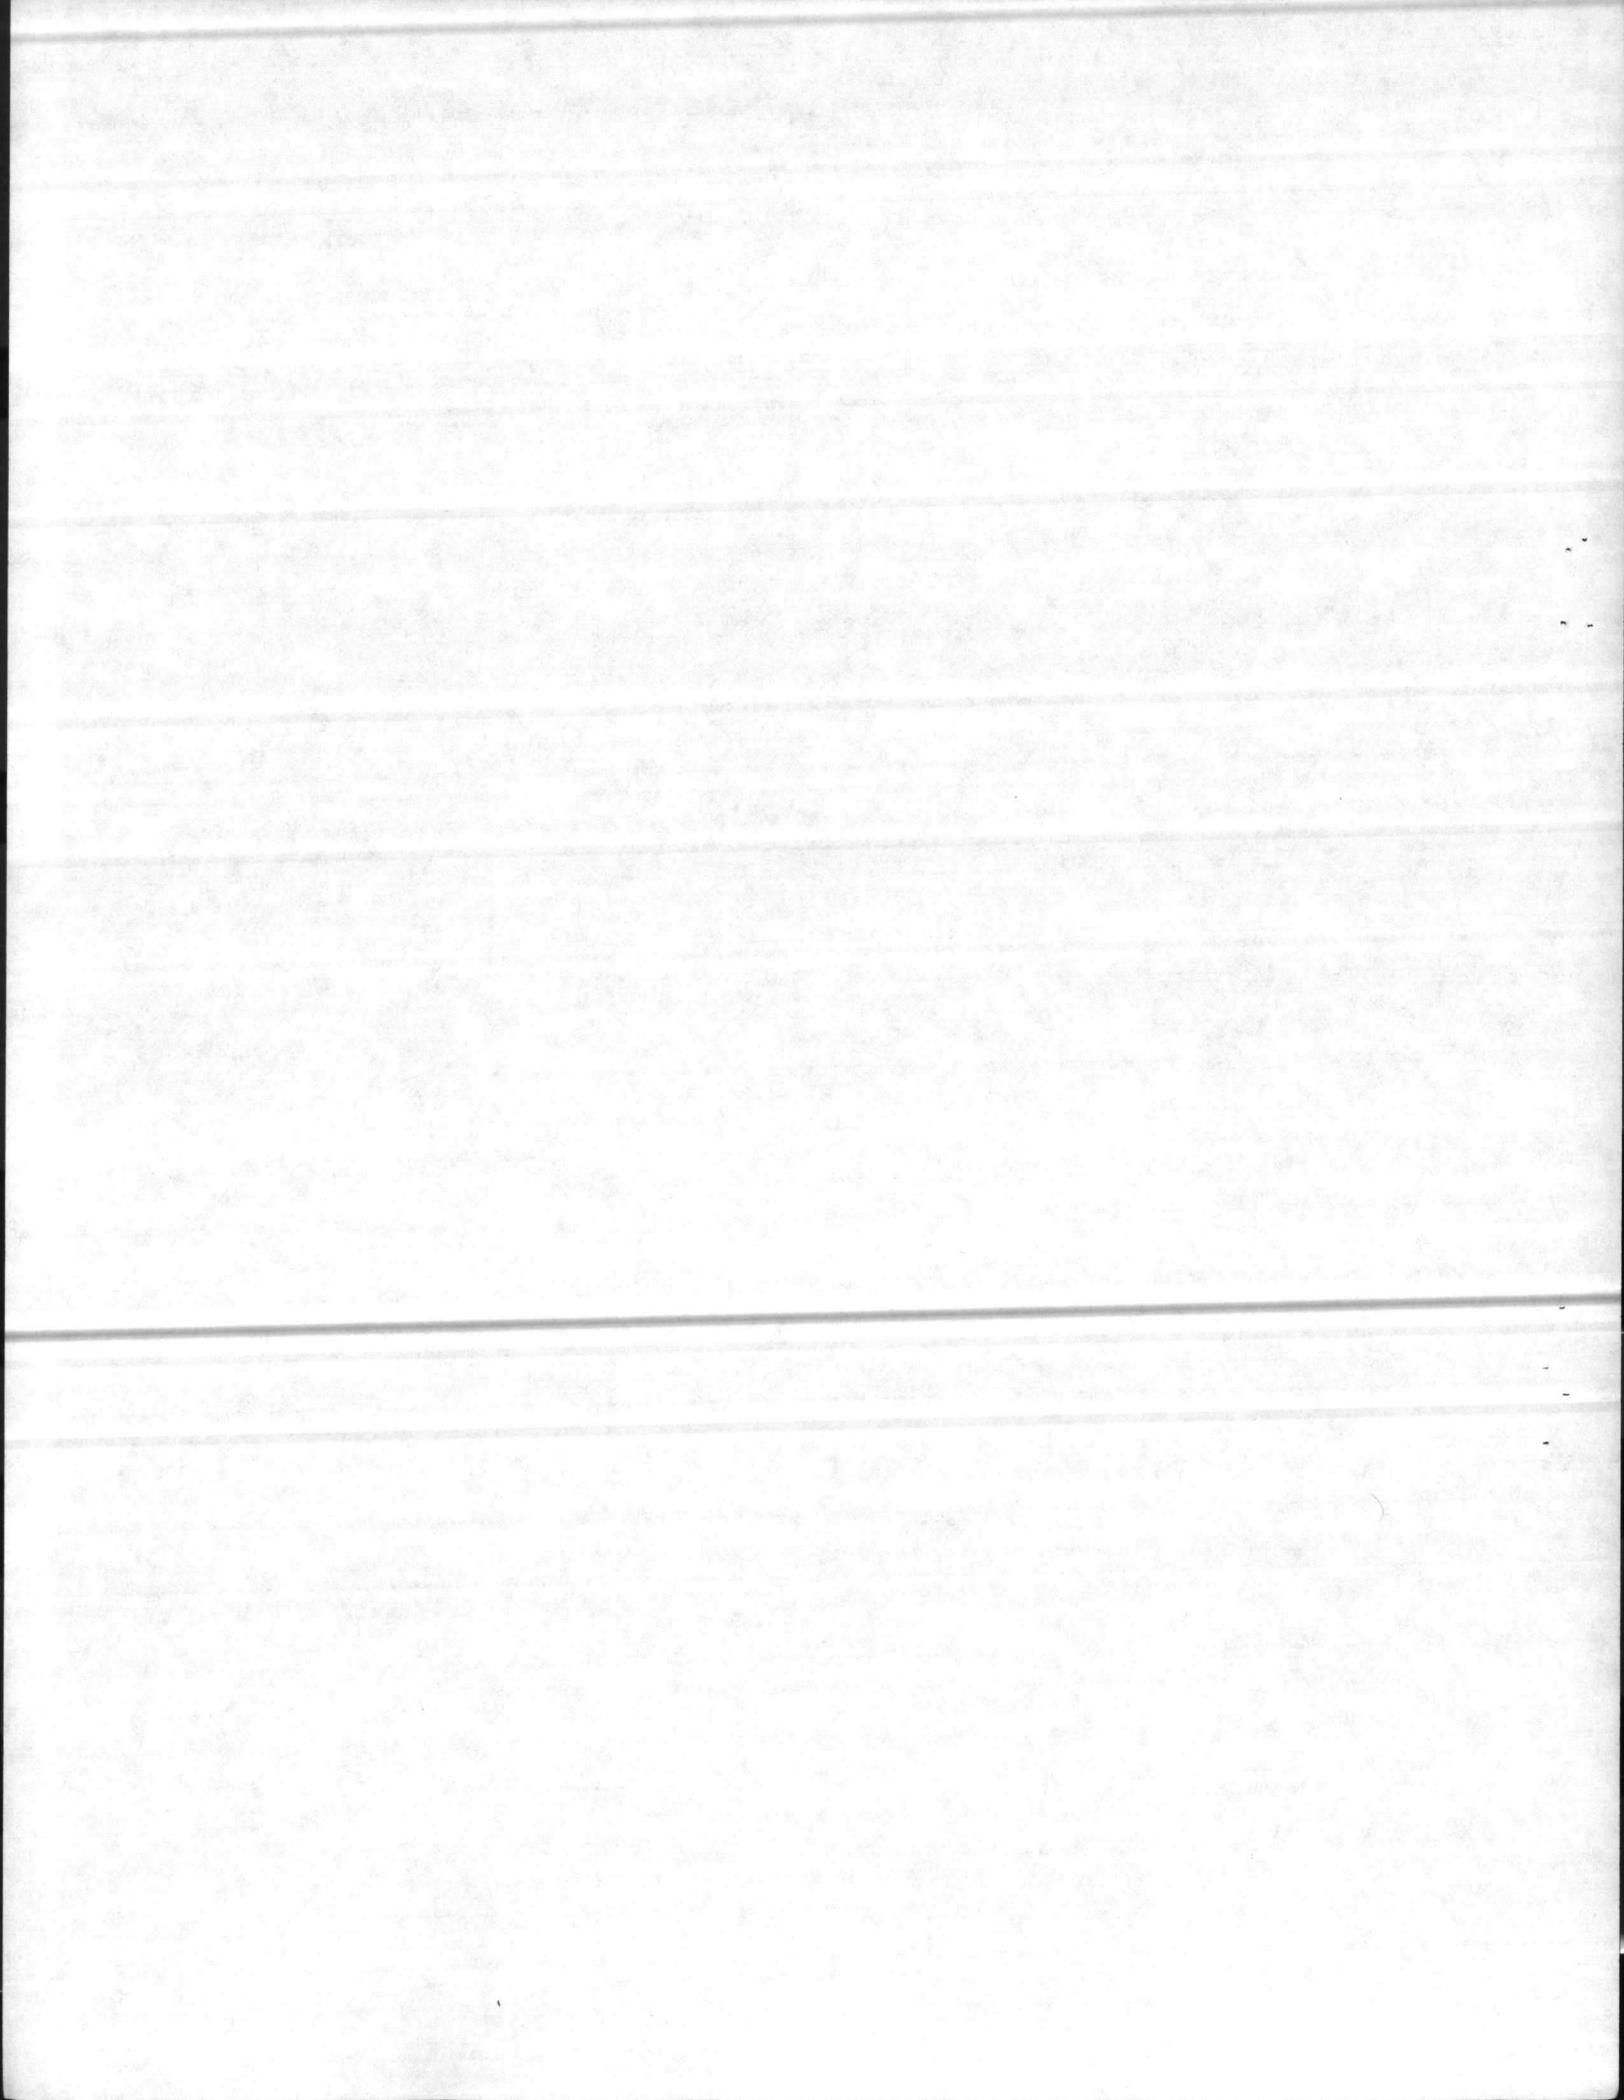


8.3 Placing of the Asphaltic Concrete shall be as nearly continuous as possible. The rollers shall pass over the unprotected end of the mixture only when laying is discontinued for sufficient time to permit the mixture to cool, in which case, a joint shall be made by cutting back the surface course to expose a granular surface for its full depth to bond with the fresh mixture. When laying is resumed, the exposed edge shall be coated with hot asphaltic cement and the fresh mixture raked against the joint, thoroughly tamped with hot tamps and rolled.

8.4 Finished Surfaces shall be uniform in texture and appearance and free from cracks and creases. The finished surface shall vary not more than 1/8-inch when the test for smoothness is performed with a 10-foot straightedge. The finished thickness shall be not less than the specified thickness minus 1/8-inch. Where the irregularities of the surface or the deficiency in depth is more than the specified tolerances, the defective work shall be removed and replaced with new material, as directed, without additional cost to the Government.

8.5 Bituminous Materials and/or Mixture shall not be produced or placed when weather is rainy or foggy, or when the air temperature is less than 40 degrees Fahrenheit in the shade away from the artificial heat.

8.6 Protection of Pavement: After final rolling, no vehicular traffic of any kind shall be permitted on the pavement until it has cooled and hardened and, in no case, in less than eight hours.

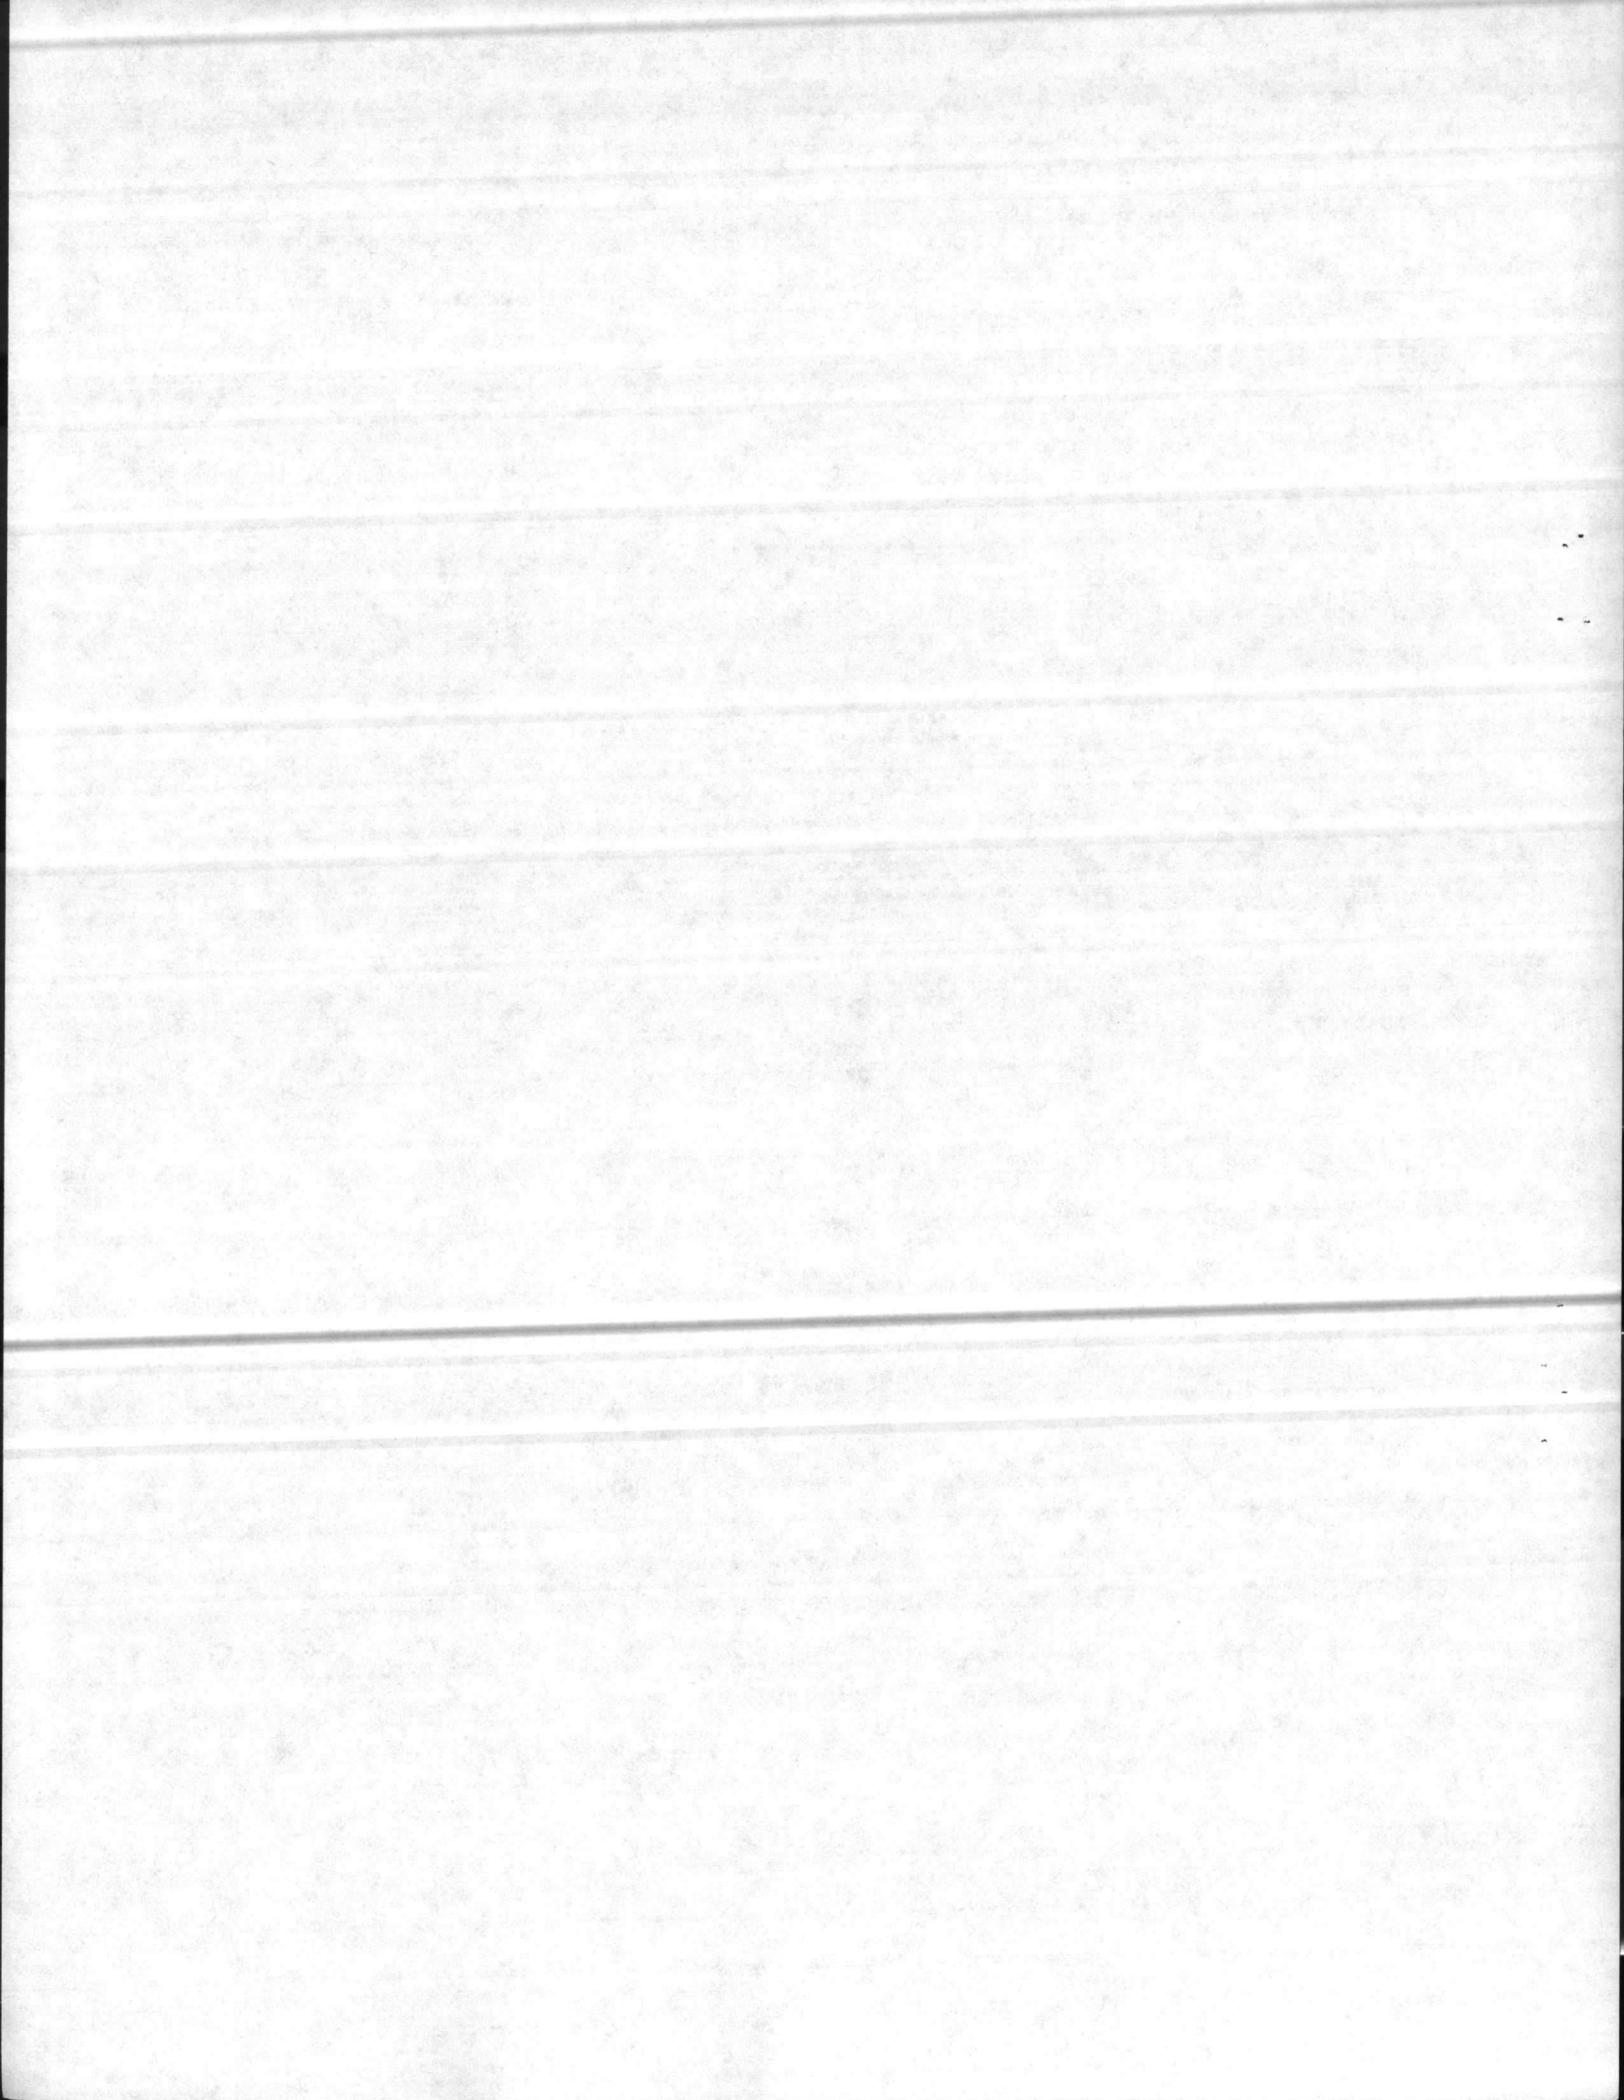

CRUSHED STONE PAVEMENT

1. APPLICABLE PUBLICATIONS: The following publications of the issues listed below, but referred to elsewhere by basic designation only, form a part of this specification to the extent indicated by the references thereto (where a number is suffixed to the specification number, it denotes the effective amendment to the specification):

1.1 American Association of State Highway and Transportation Officials (AASHTO):

T96-72I Resistance to abrasion of small size coarse aggregate by use of the Los Angeles Machine.

1.2 North Carolina Department of Transportation and Highway Safety (NCDOT):

Standard specifications for roads and structures, dated July 1, 1972.

2. QUALITY CONTROL: All field tests to determine conformance with the specified requirements shall be performed in the presence of the Contracting Officer.

3. SUBMITTALS:


3.1 Certificates: Submit notarized certificates from the manufacturer attesting that the following products conform to all requirements of this specification and of reference documents:

a. Aggregates for surface course.

3.1.1 Sample Certificate: The notarized certificate shall not contain statements that could be interpreted to imply that the product does not meet all requirements specified, such as "as good as"; "achieve the same end use and results as materials formulated in accordance with the referenced specification"; "equal or exceed the service and performance of the specified material". The certificate should simply state that the product conforms to all requirements specified.

SAMPLE CERTIFICATE

The manufacturer hereby certifies that the following products being furnished for this project conform to all requirements of the project specifications and of the reference specifications listed:

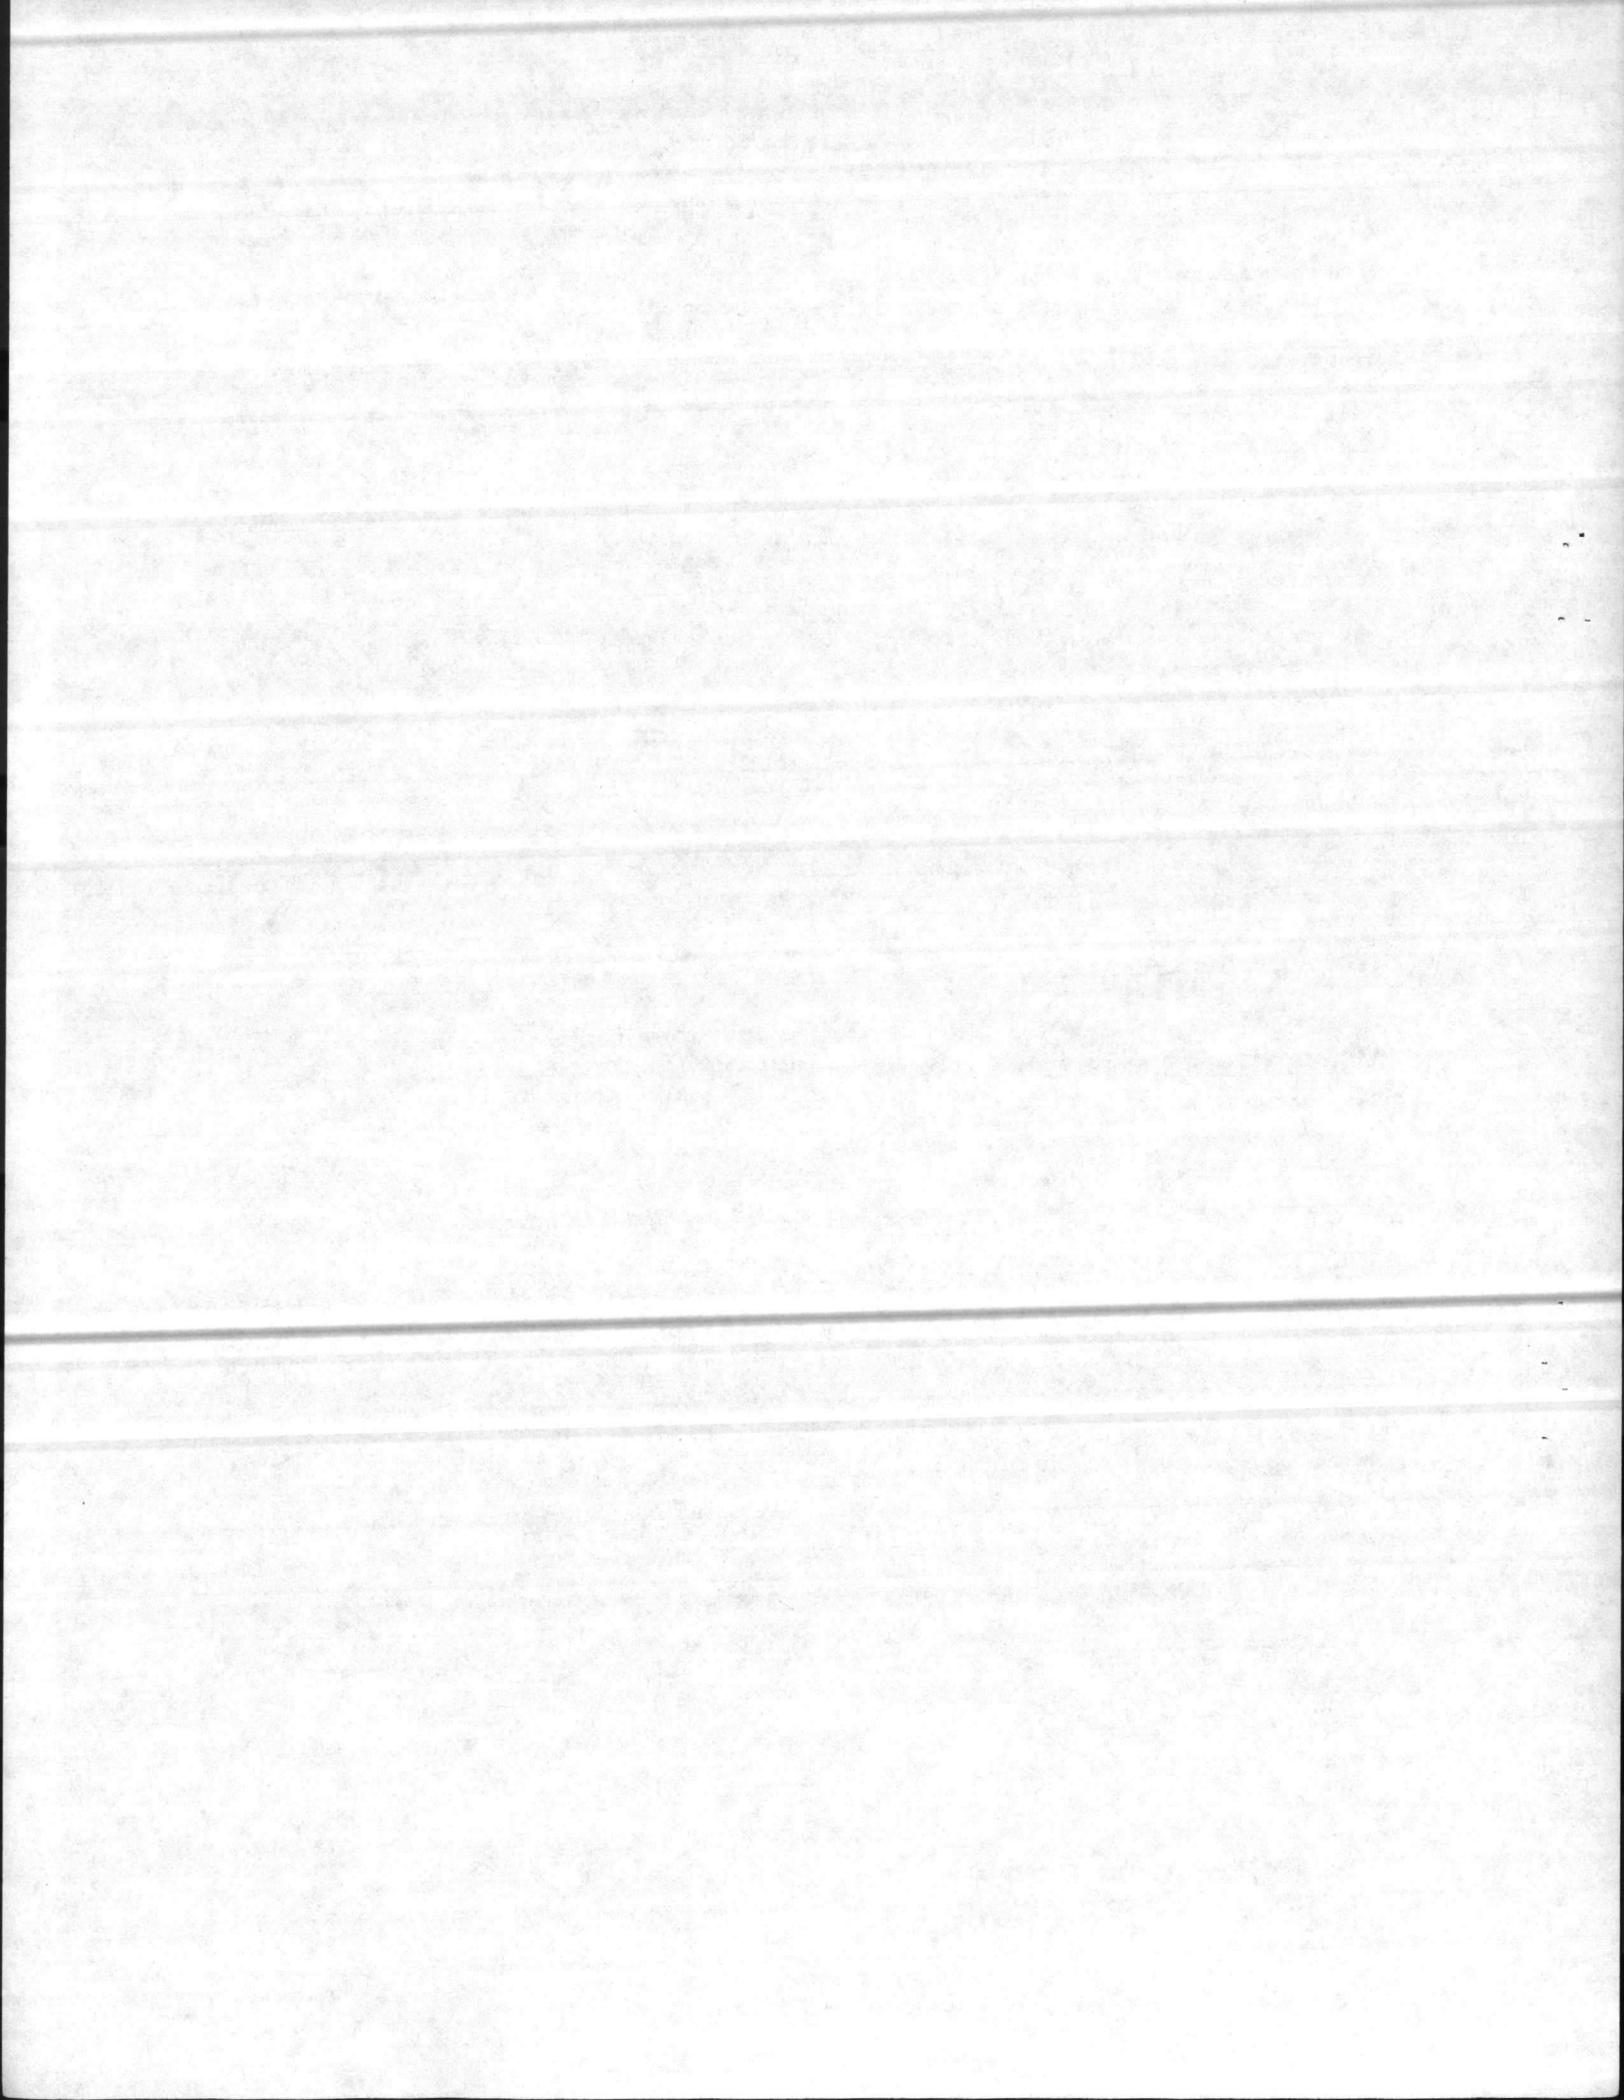

MANUFACTURER AND PRODUCT

John Doe Company
Portland Cement, Type I

REFERENCE SPECIFICATION

ASTM C150-74, Type I.

SIGNATURE AND TITLE

NOTARY STATEMENT AND SEAL

4. MATERIALS:

4.1 Stone Surface Course: Materials shall be in accordance with the NCDOT "Standard Specifications for Roads and Structures, Sections 905 and 910 for Aggregate Base Course, Standard Size No. 7. When tested in accordance with AASHTO T96, Test Grading A, aggregate shall show a loss not greater than 55 percent.


5. REQUIREMENTS: The work includes construction of a crushed stone surface course for pavements. Preparation of the subgrade shall be as specified under the section of this specification entitled "Earthwork". Except as specified herein or indicated on the drawings, all work and materials shall be in accordance with the NCDOT "Standard Specifications for Roads and Structures". The provisions therein for method of measurement and payment do not apply.

6. CONSTRUCTION:

6.1 Soil Treatment: Soil sterilization shall be accomplished before the stone surface course is placed. Bromacil, the herbicide to be used, shall be applied at the rate of 15 pounds of the active ingredient per acre. Bromacil shall be applied to the soil as a water suspension with a minimum of 50 gallons of water per acre. The treated soil shall not be disturbed between herbicide application and placement of stone materials.

6.2 Crushed Stone Surface Course: Spreading of the stone material shall begin at the point nearest the source of supply. Hauling shall be done and traffic permitted over the course to assist in compaction. Any ruts formed by the traffic shall be carefully filled and re-rolled. After the surface course is in place, machining and rolling shall continue until the surface is smooth, hard, well bonded, and true to the designed cross section. Compaction of 100 percent of maximum density, as determined by the method specified in the section entitled "Earthwork", shall be obtained in the surface course. The surface shall be machined as often as necessary to maintain it smooth and true to grade and cross section until acceptance of the work.

---o0o---

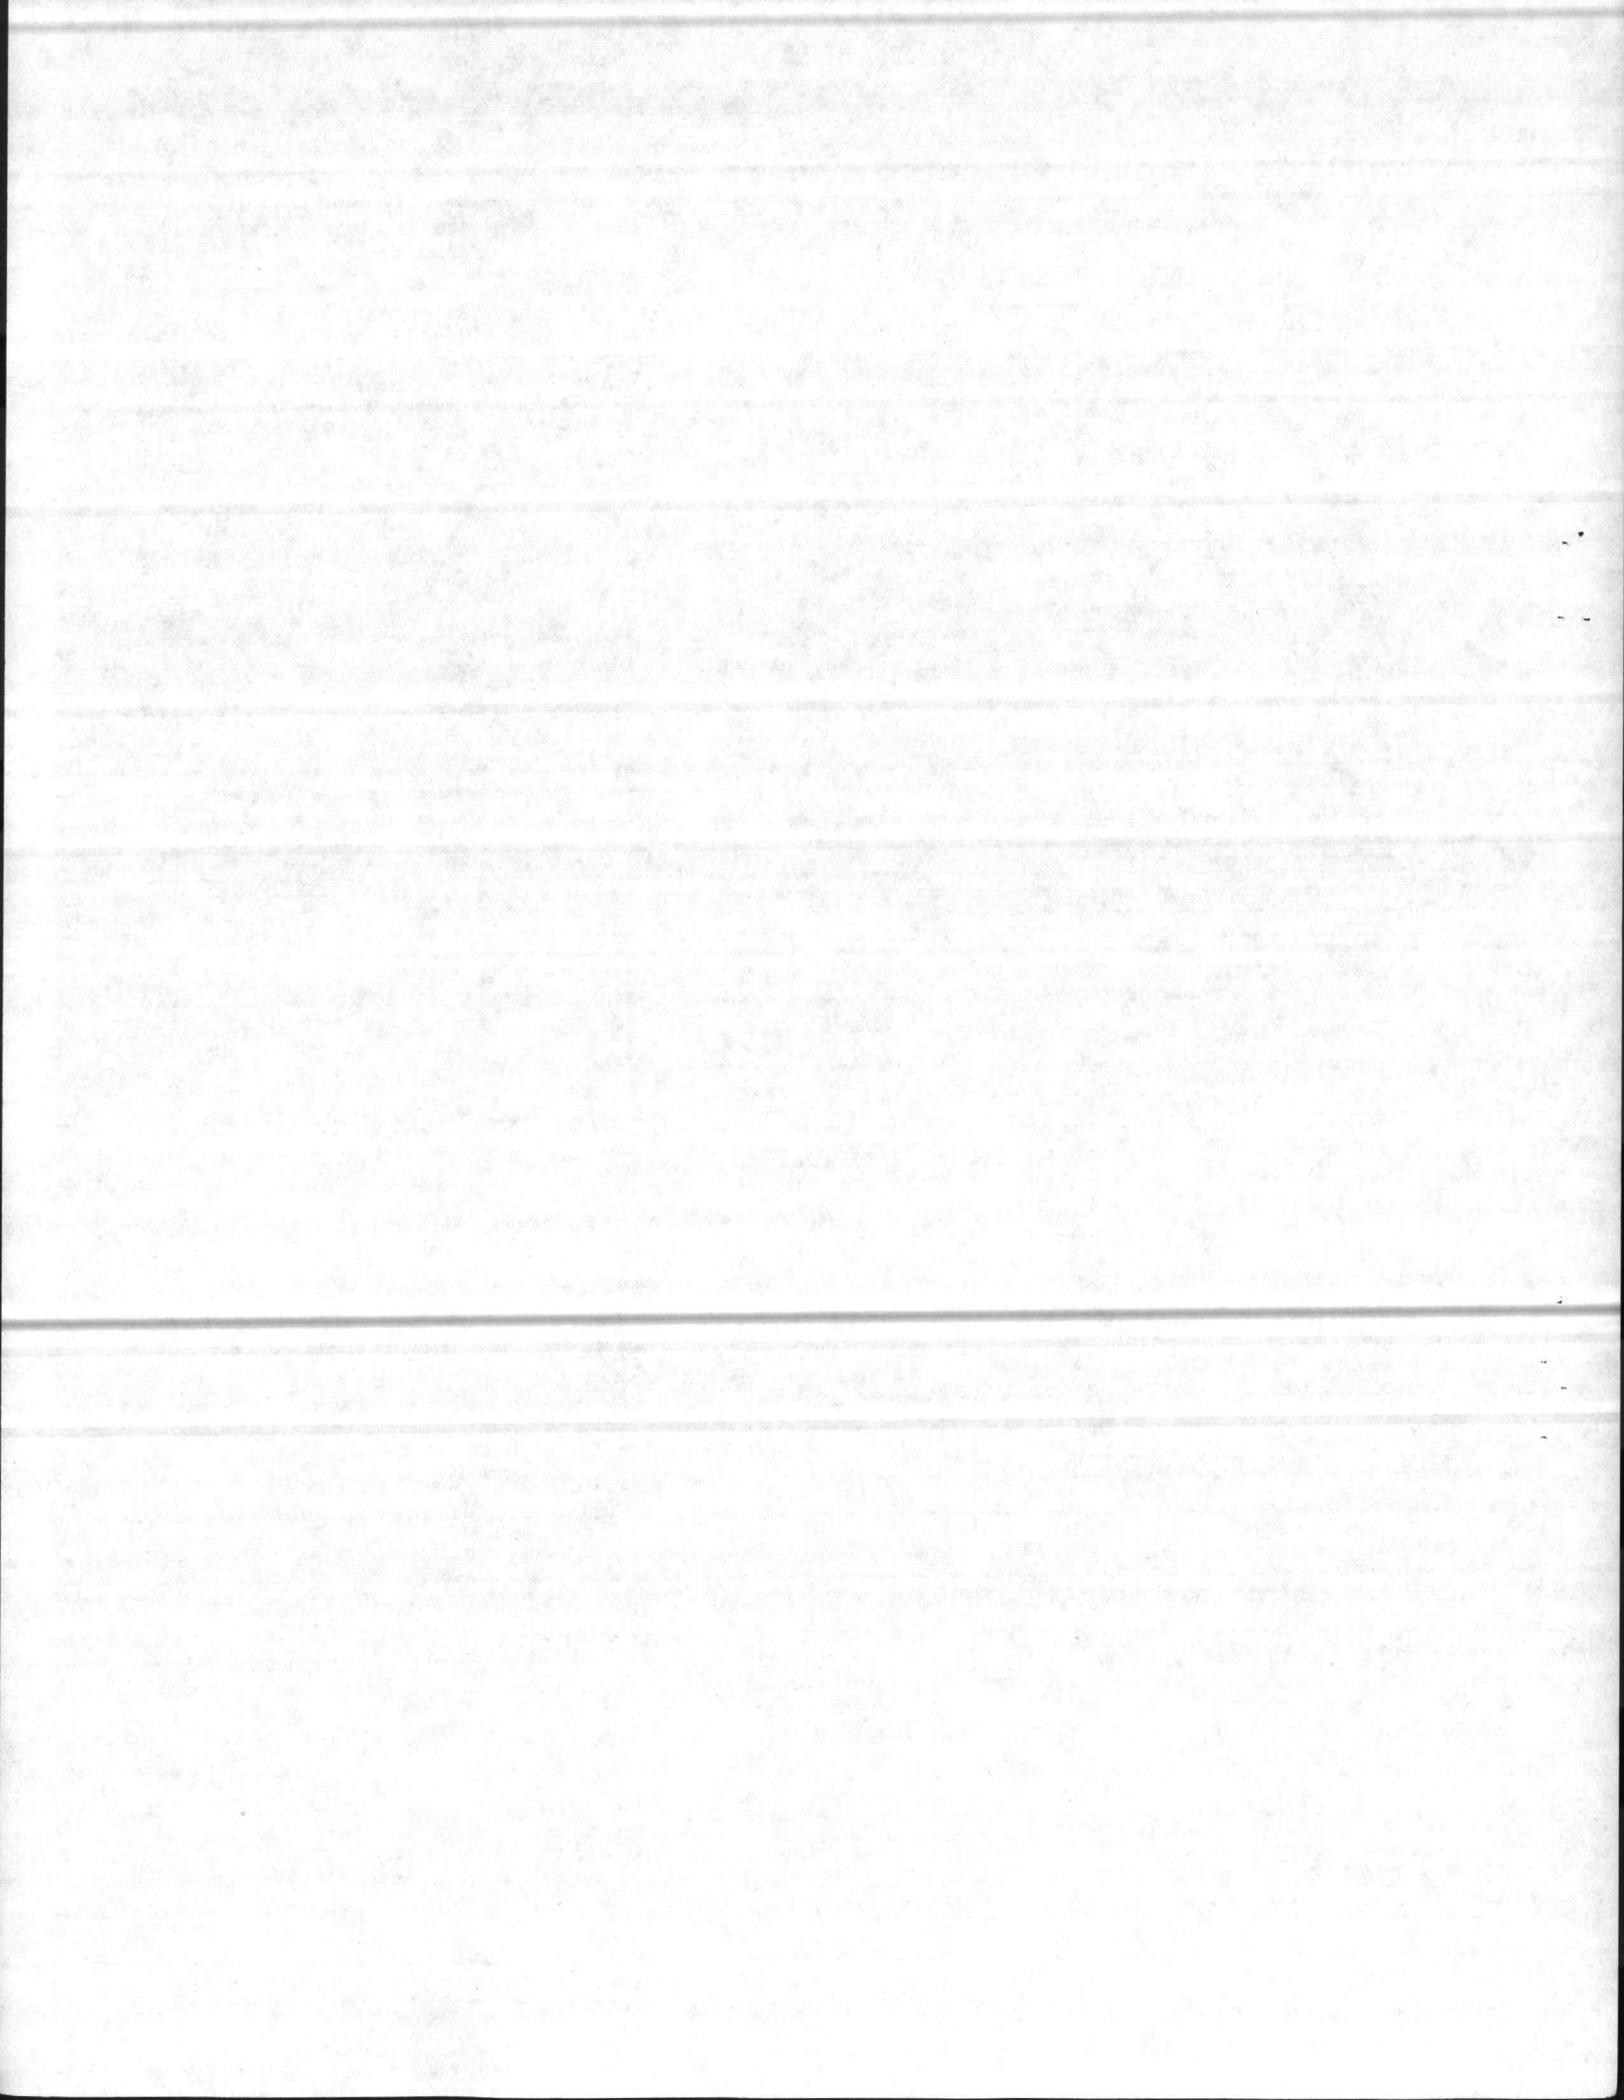

SECTION 02822. ESTABLISHING VEGETATION

1. GENERAL REQUIREMENTS: The work includes seedbed preparation, liming, fertilizing and seeding of all areas where natural soil conditions have been disturbed by this contract.

2. MATERIALS:

(a) Fill shall be obtained from a Base provided borrow pit located within five miles of the construction site. Fill shall be free from roots, wood, or other scrap material, and other vegetable matter and refuse. Fill shall be friable sandy loam with pH 6.0 to 7.0, soluble salts less than 550 ppm, high organic matter content, which is capable of producing satisfactory agricultural crops.

(b) Lime shall be ground dolomitic agricultural limestone containing 10 percent Magnesium Oxide.

(c) Fertilizer shall be standard commercial product of 10-10-10 analysis.


(d) Seed shall be 66 percent Ky-31 Fescue, 34 percent Bermuda (unhulled) and shall be certified seed or equivalent based on North Carolina Seed Improvement Association requirements for certification.

3. SEEDBED PREPARATION: The areas to be vegetated shall be prepared by thoroughly loosening the soil to a depth of 4 inches. After loosening the soil, all surface irregularities where surface water could collect and pond shall be smoothed out. Topsoil removed shall be reinstalled and leveled.

4. LIMING: Limestone shall be uniformly applied at the rate of 40 pounds per 1,000 square feet to all areas to be vegetated. Limestone shall be applied after seedbed preparation, but before seeding, lime shall be incorporated into the entire depth of prepared seedbed, thoroughly.

5. FERTILIZING: Fertilizer shall be uniformly applied at the rate of 25 pounds per 1,000 square feet. The fertilizer shall be incorporated into the upper three or four inches of prepared seedbed.

6. SEEDING: Seed shall be sown by hand or an approved seeder and distributed uniformly at the rate of two pounds per 1,000 square feet. The seed shall be planted no deeper than 1/4-inch. After seeding, the seeded areas shall be compacted lightly with a hand roller. All seeding and compacting shall be done when weather conditions are favorable and not when seedbed is wet.

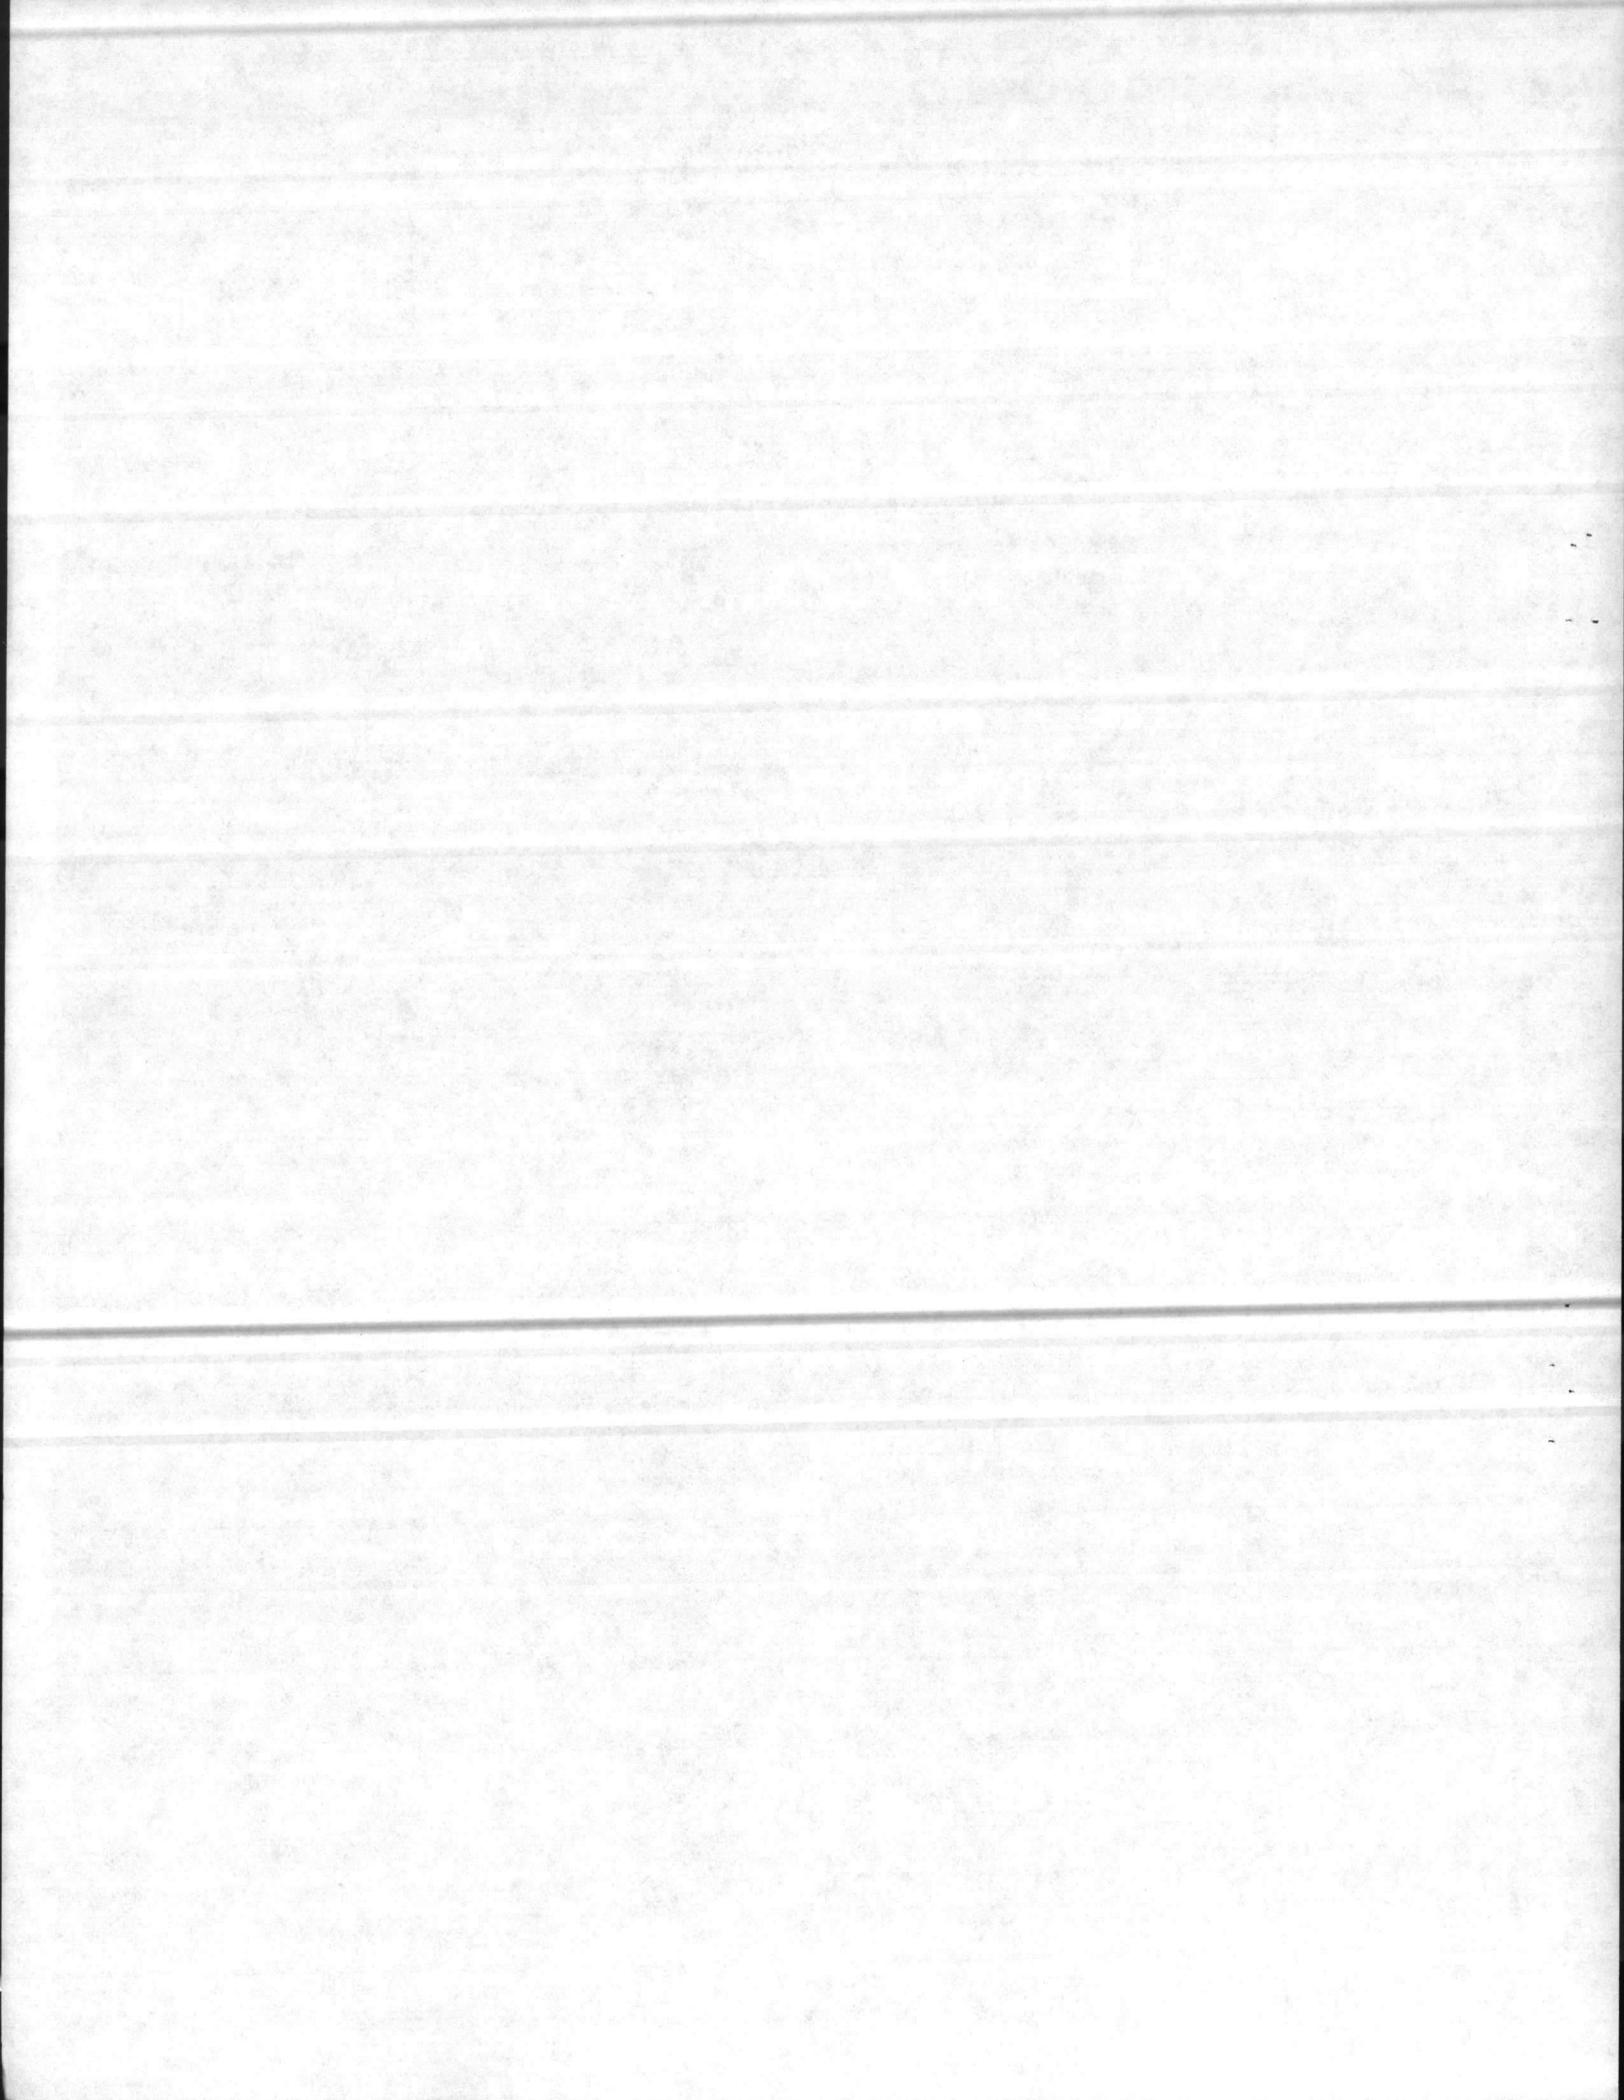

DIVISION 3. CONCRETE

SECTION 03300. CAST-IN-PLACE CONCRETE

1. APPLICABLE PUBLICATIONS: The following publications of the issues listed below, but referred to thereafter by basic designation only, form a part of this specification to the extent indicated by the references thereto.

AMERICAN CONCRETE INSTITUTE (ACI)

- ACI 211.1-74 Recommended Practice for Selecting Proportions for Normal Weight Concrete.
- ACI 308-1 Curing Concrete.
- ACI 315-65 Manual of Standard Practice for Detailing Reinforced Concrete Structures.
- ACI 318-71 Building Code Requirements for Reinforced Concrete.
& 71C Supplement
- ACI 347-68 Recommended Practice for Concrete Formwork.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

- C150-78 Portland Cement.

2. MATERIALS shall conform to the requirements and reference documents listed.

2.1 Concrete shall be ready-mixed concrete meeting design requirement of ACI 211, made with cement conforming to ASTM C150.

2.2 Reinforcement shall be in accordance with ACI 315.


2.3 Formwork shall conform to ACI 347.

2.4 Curing concrete shall be in accordance with ACI 308.

2.5 Compress Strength at 28 days shall not be less than 3000 pounds per square inch.

3. WORKMANSHIP: All work shall meet requirements of ACI 318. The surface immediately under concrete installed on grade shall be wetted as directed immediately before the concrete is placed. Reinforcing shall be placed prior to beginning concrete pour. Where concrete abuts, adjoins, or overlays existing concrete, approved expansion joints, bonding agents, or surface preparations shall be used.

4. CONCRETE FINISHES: All interior concrete slabs shall receive a steel trowel finish level within 1/8-inch in 10 feet. Sidewalks and exterior slabs shall be trowelled and given a broomed finish unless indicated otherwise. Brooming shall be in a direction transverse to that of traffic or at right angles to the slope of the slab. Floated finishes may be used on foundations, footings, and related concrete when approved by the Contracting Officer.

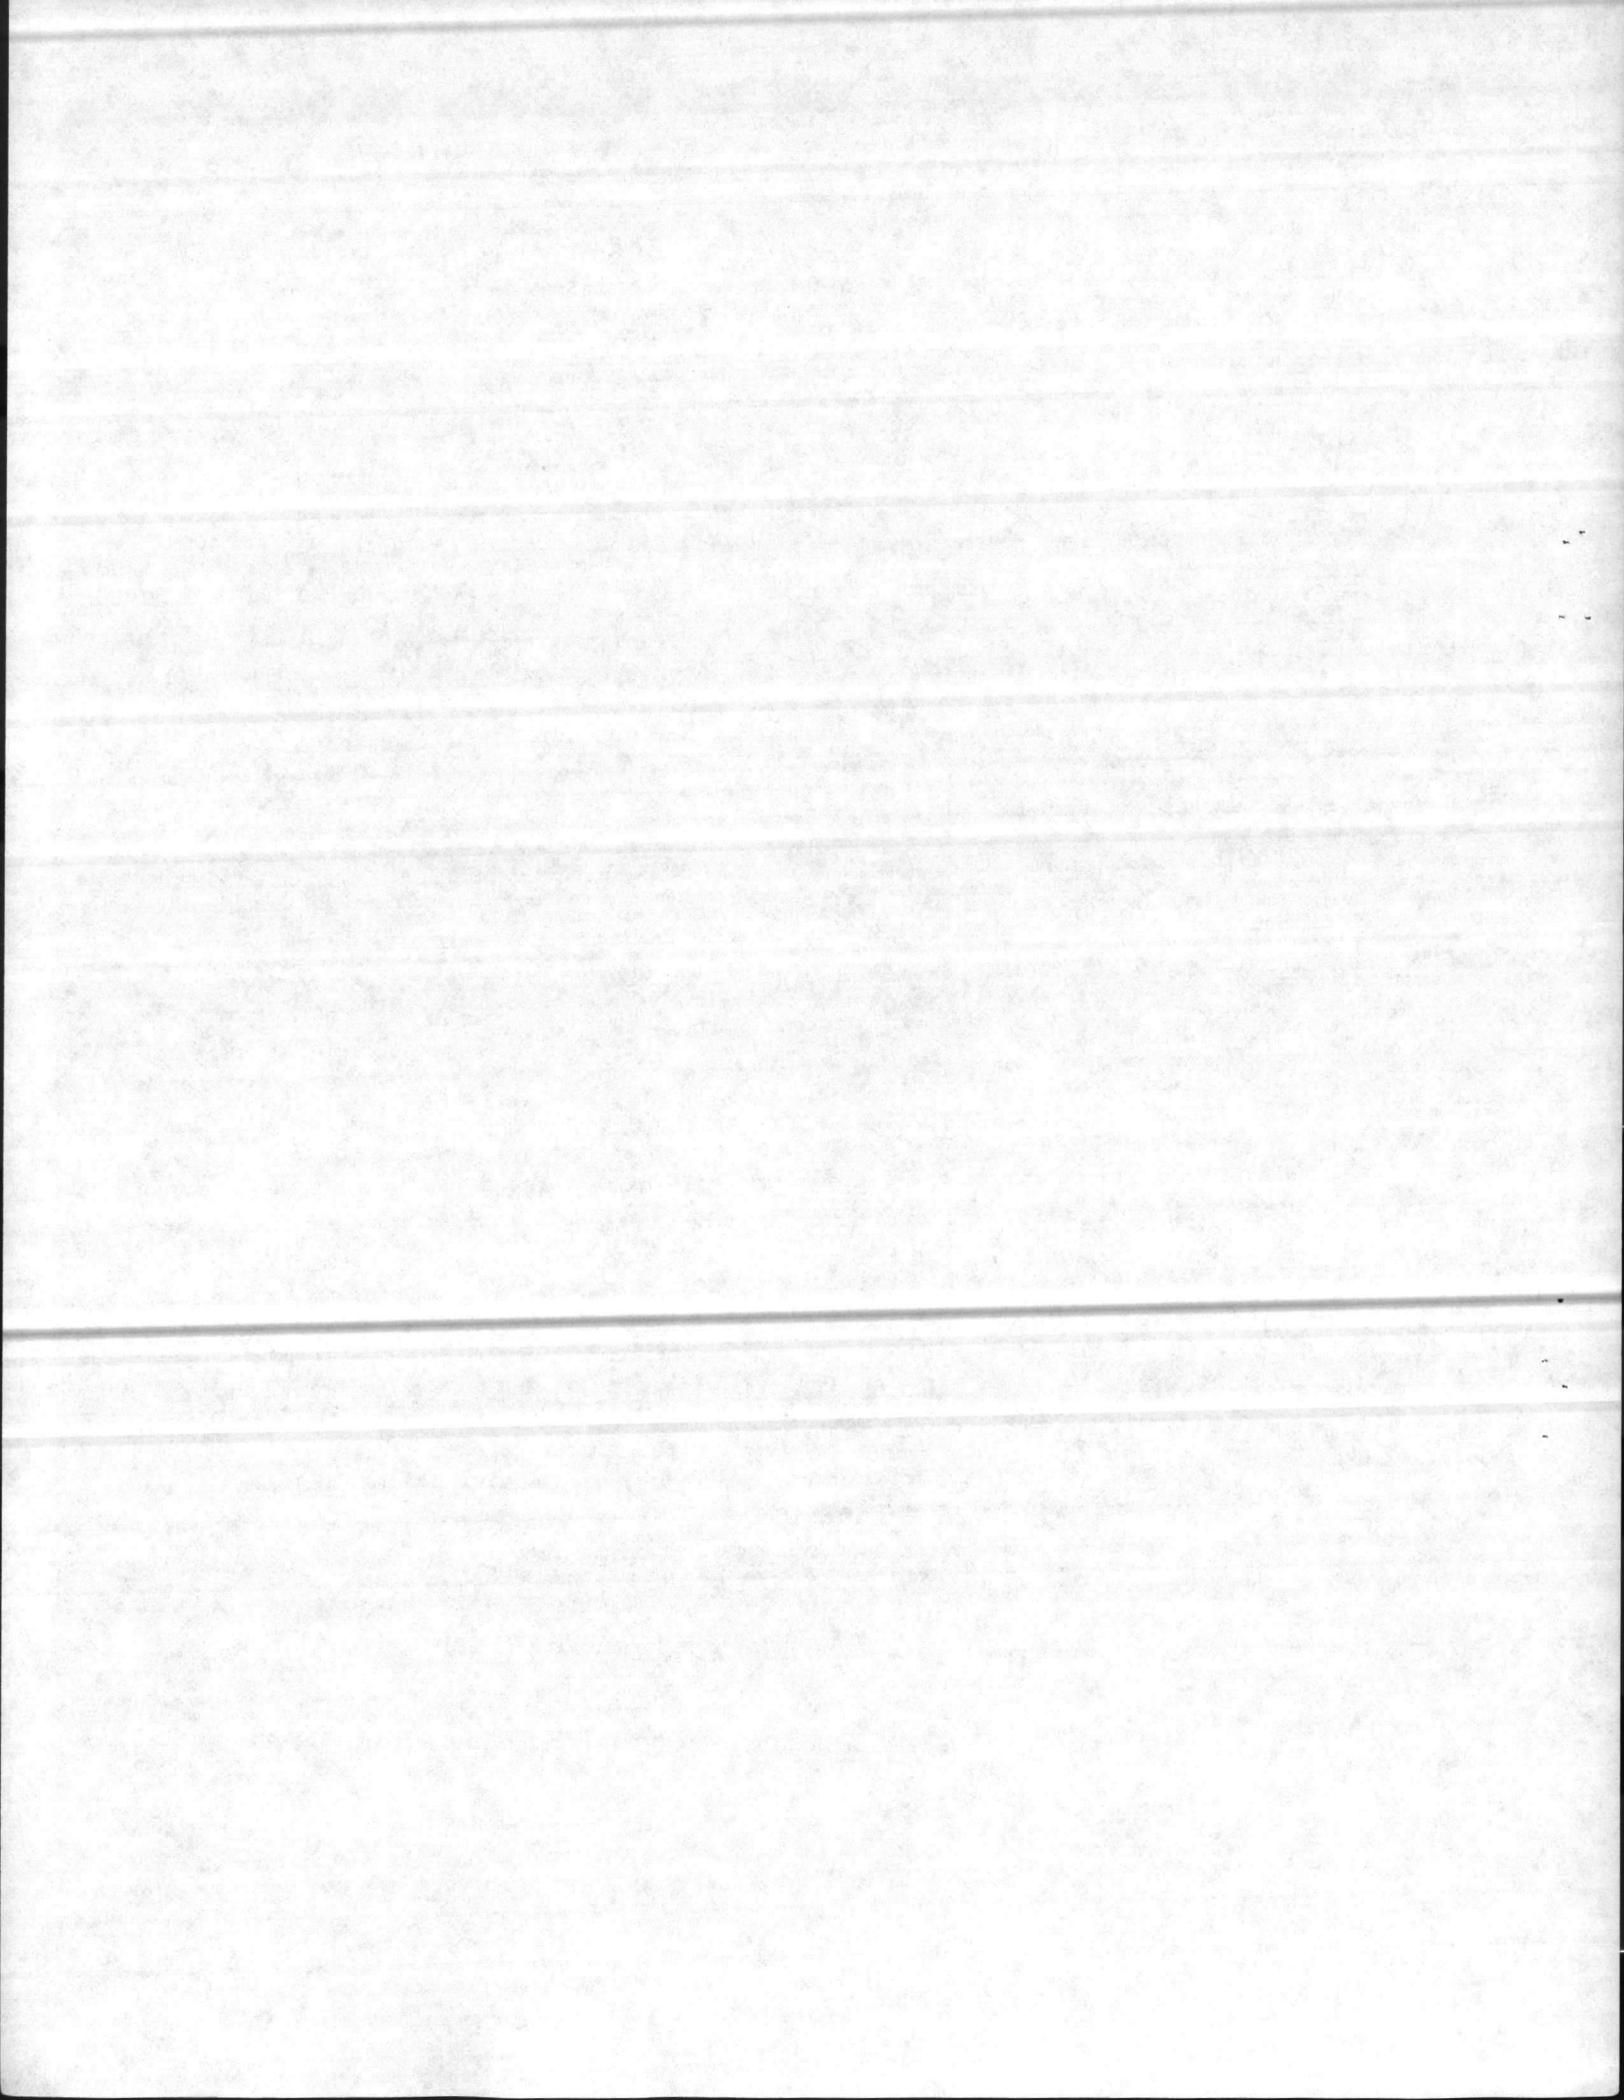

SECTION 13121

PRE-ENGINEERED METAL BUILDINGS (RIGID FRAME)

1. APPLICABLE PUBLICATIONS: The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

1.1 Federal Specifications (Fed. Spec.):


L-P-505C	Plastic Panels, Corrugated, Translucent, Glazing
L-P-1040B	Plastic Sheets and Strips (Polyvinyl Flouride)
FF-H-106C/GEN	Hardware, Builders'; Locks and Door Trim: General Specification for
FF-H-111C	Hardware, Builders'; Shelf and Miscellaneous
RR-D-575B	Door, Metal, Sliding and Swinging: Door Frame, Metal (Flush and Semiflush)
TT-C-520B	Coating Compound, Bituminous, Solvent Type, Underbody, (For Motor Vehicles)
TT-C-1796A	Calking Compounds, Metal Seam and Wood Seam
TT-P-645	Primer, Paint, Zinc-Chromate, Alkyd Type

1.2 Military Specifications (Mil. Spec.):

MIL-S-4174B	Steel Sheet and Strip, Flat, Aluminum Coated, Low Carbon
DOD-P-15328D	Primer (Wash), Pretreatment (Formula No. 117 for Metals) (Metric)

1.3 American Institute of Steel Construction (AISC) Publication:

Steel Construction Manual (Seventh Edition)

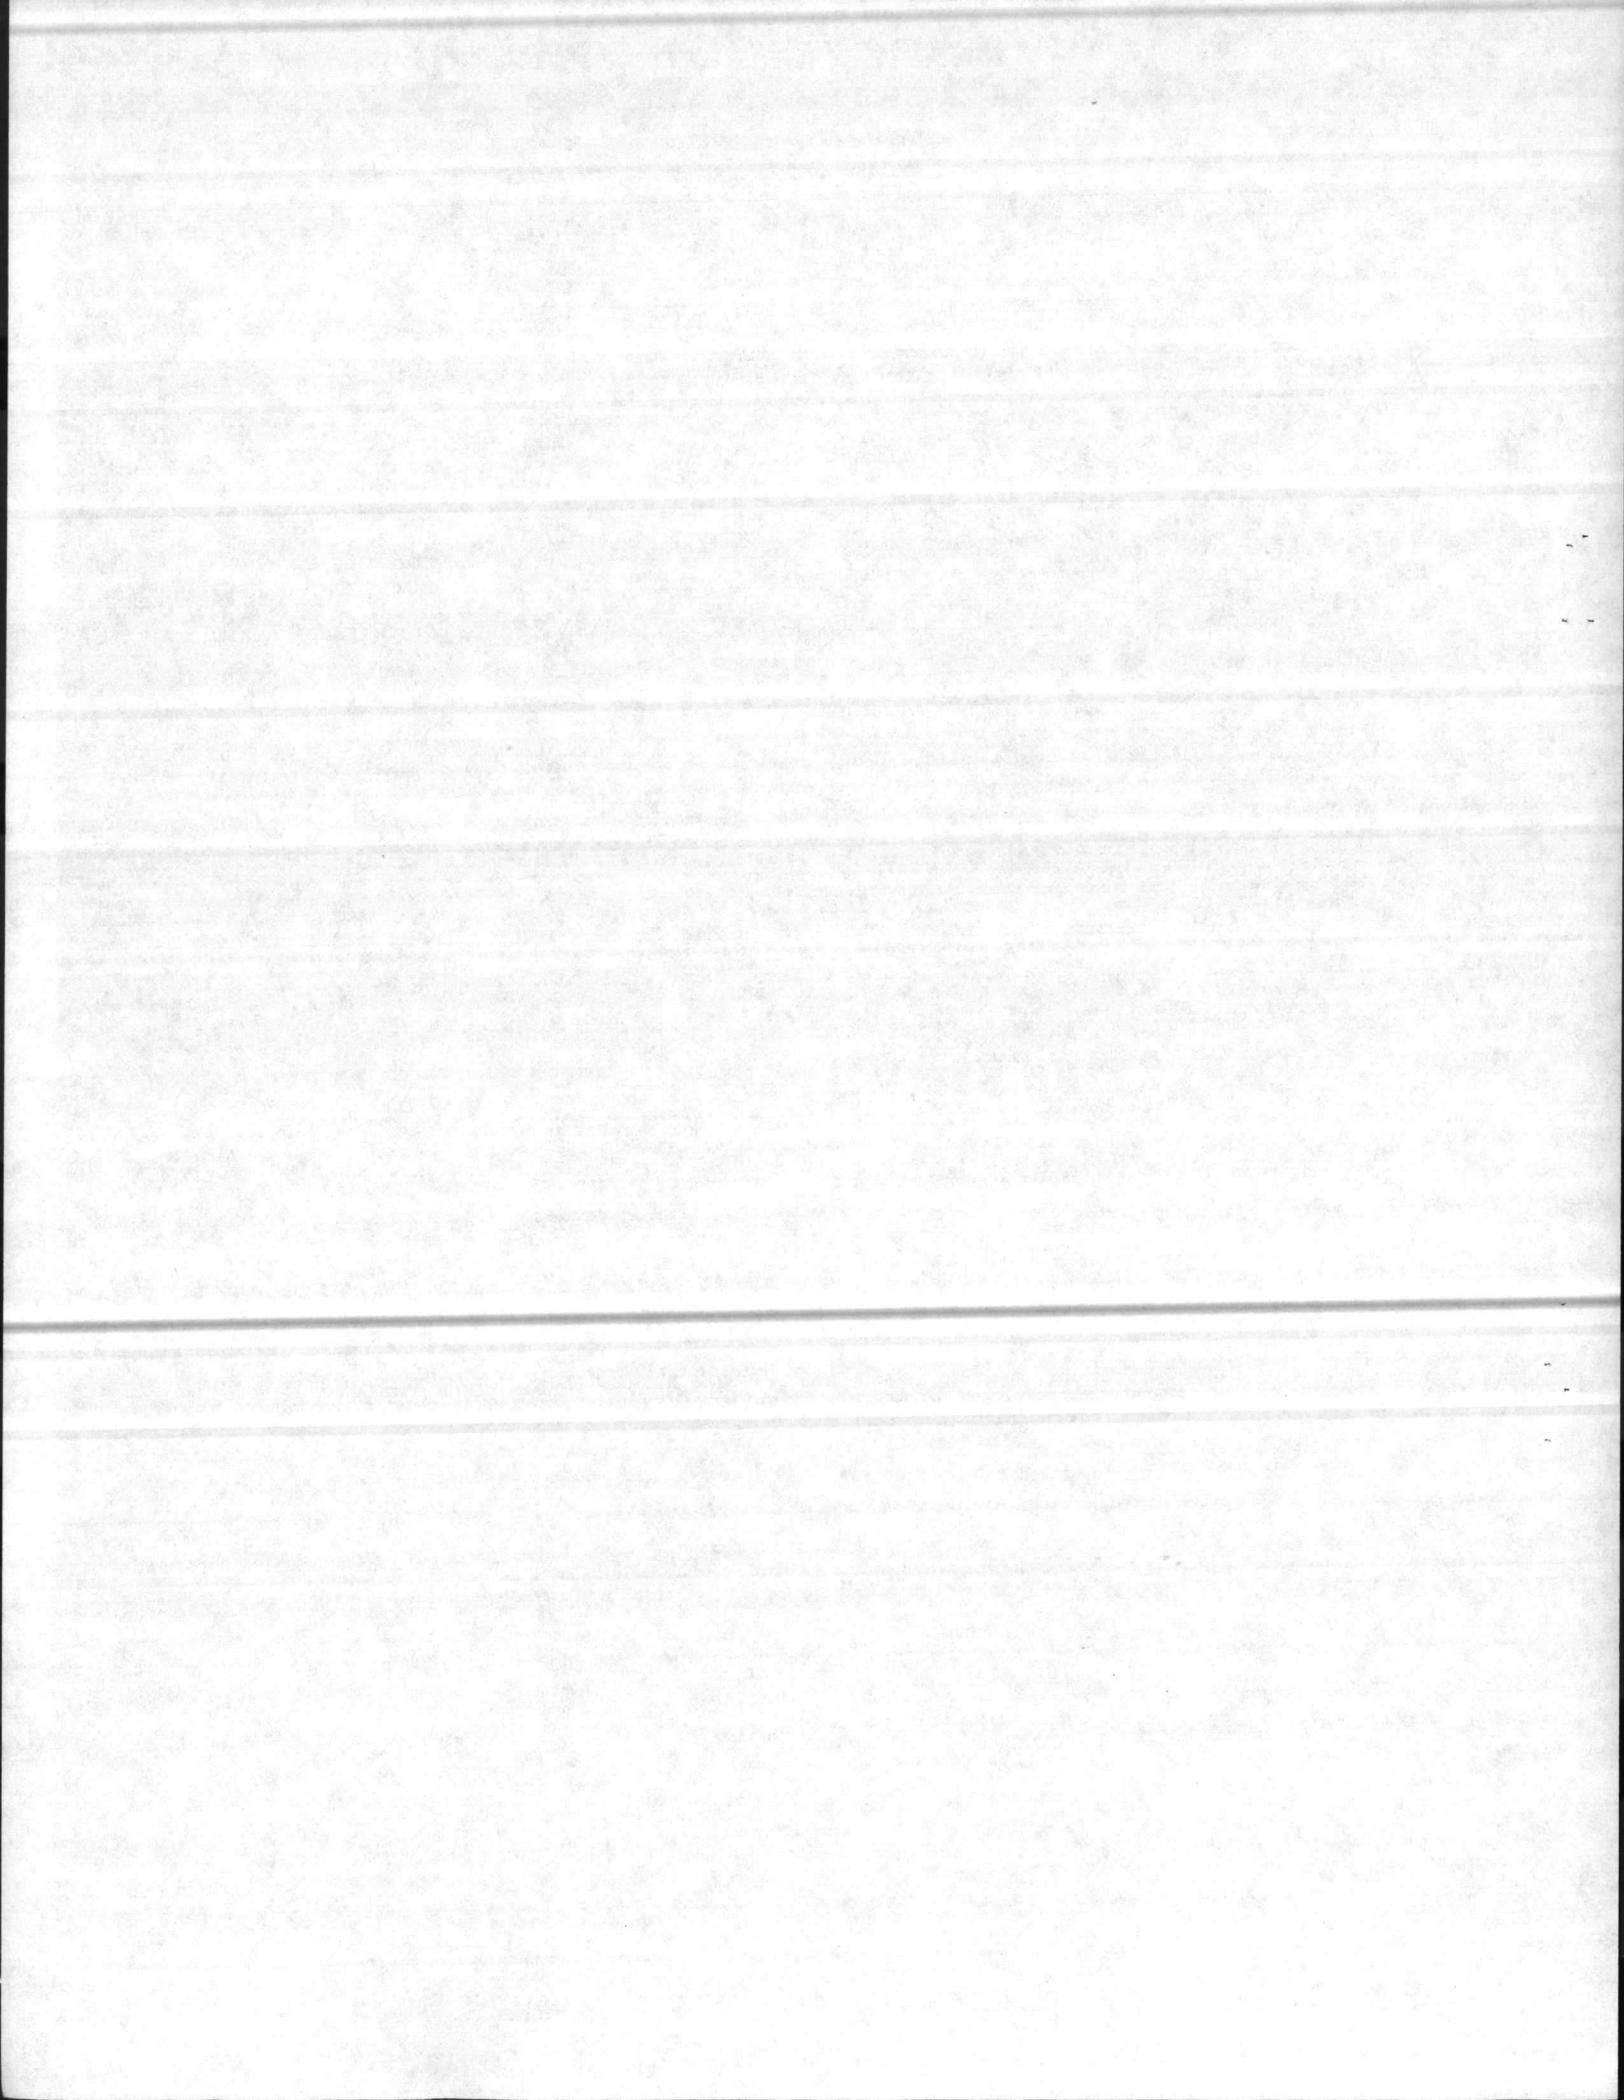

1.4 American Iron and Steel Institute (AISI) Publication:

Cold-Formed Steel Design Manual, (1968 Edition, and Including Addendum No. 1)

1.5 American Society for Testing and Materials (ASTM) Publications:

A446-76	Steel Sheet, Zinc-coated (Galvanized) by the Hot Dip Process, Structural (Physical Quality)
B117-73	Salt Spray (Fog) Testing
D822-60 (R-1973)	Operating Light-and Water-exposure Apparatus for Testing Paint, Varnish, Lacquer and Related Products
E84-77	Test for Surface Burning Characteristics of Building Materials
E96-66 (R-1972)	Water Vapor Transmission of Materials in Sheet Form
E330-70	Tests for Structural Performance of Exterior Window Curtain Walls, and Doors Under the Influence of Wind Loads

1.6 Metal Building Manufacturers Association (MBMA) Publication:

Recommended Design Practices Manual, (1974 Edition)

1.7 Steel Window Institute (SWI) Publication:


Recommended Specifications for Steel Windows (1975 Edition)

1.8 Aluminum Association (AA) Publication:

Designation System for Aluminum Finishes, Sixth Edition, March 1973

1.9 American National Standards Institute (ANSI) Publications:

A134.1-1972	Specifications for Aluminum Prime Windows (AAMA 302.8)
A156.1-1976	Butts and Hinges (BHMA 101)
A156.2-1976	Locks and Lock Trim (BHMA 601)
A156.3-1972	Exit Devices (BHMA 701)
A156.4-1972	Door Controls (Closers) (BHMA 301)

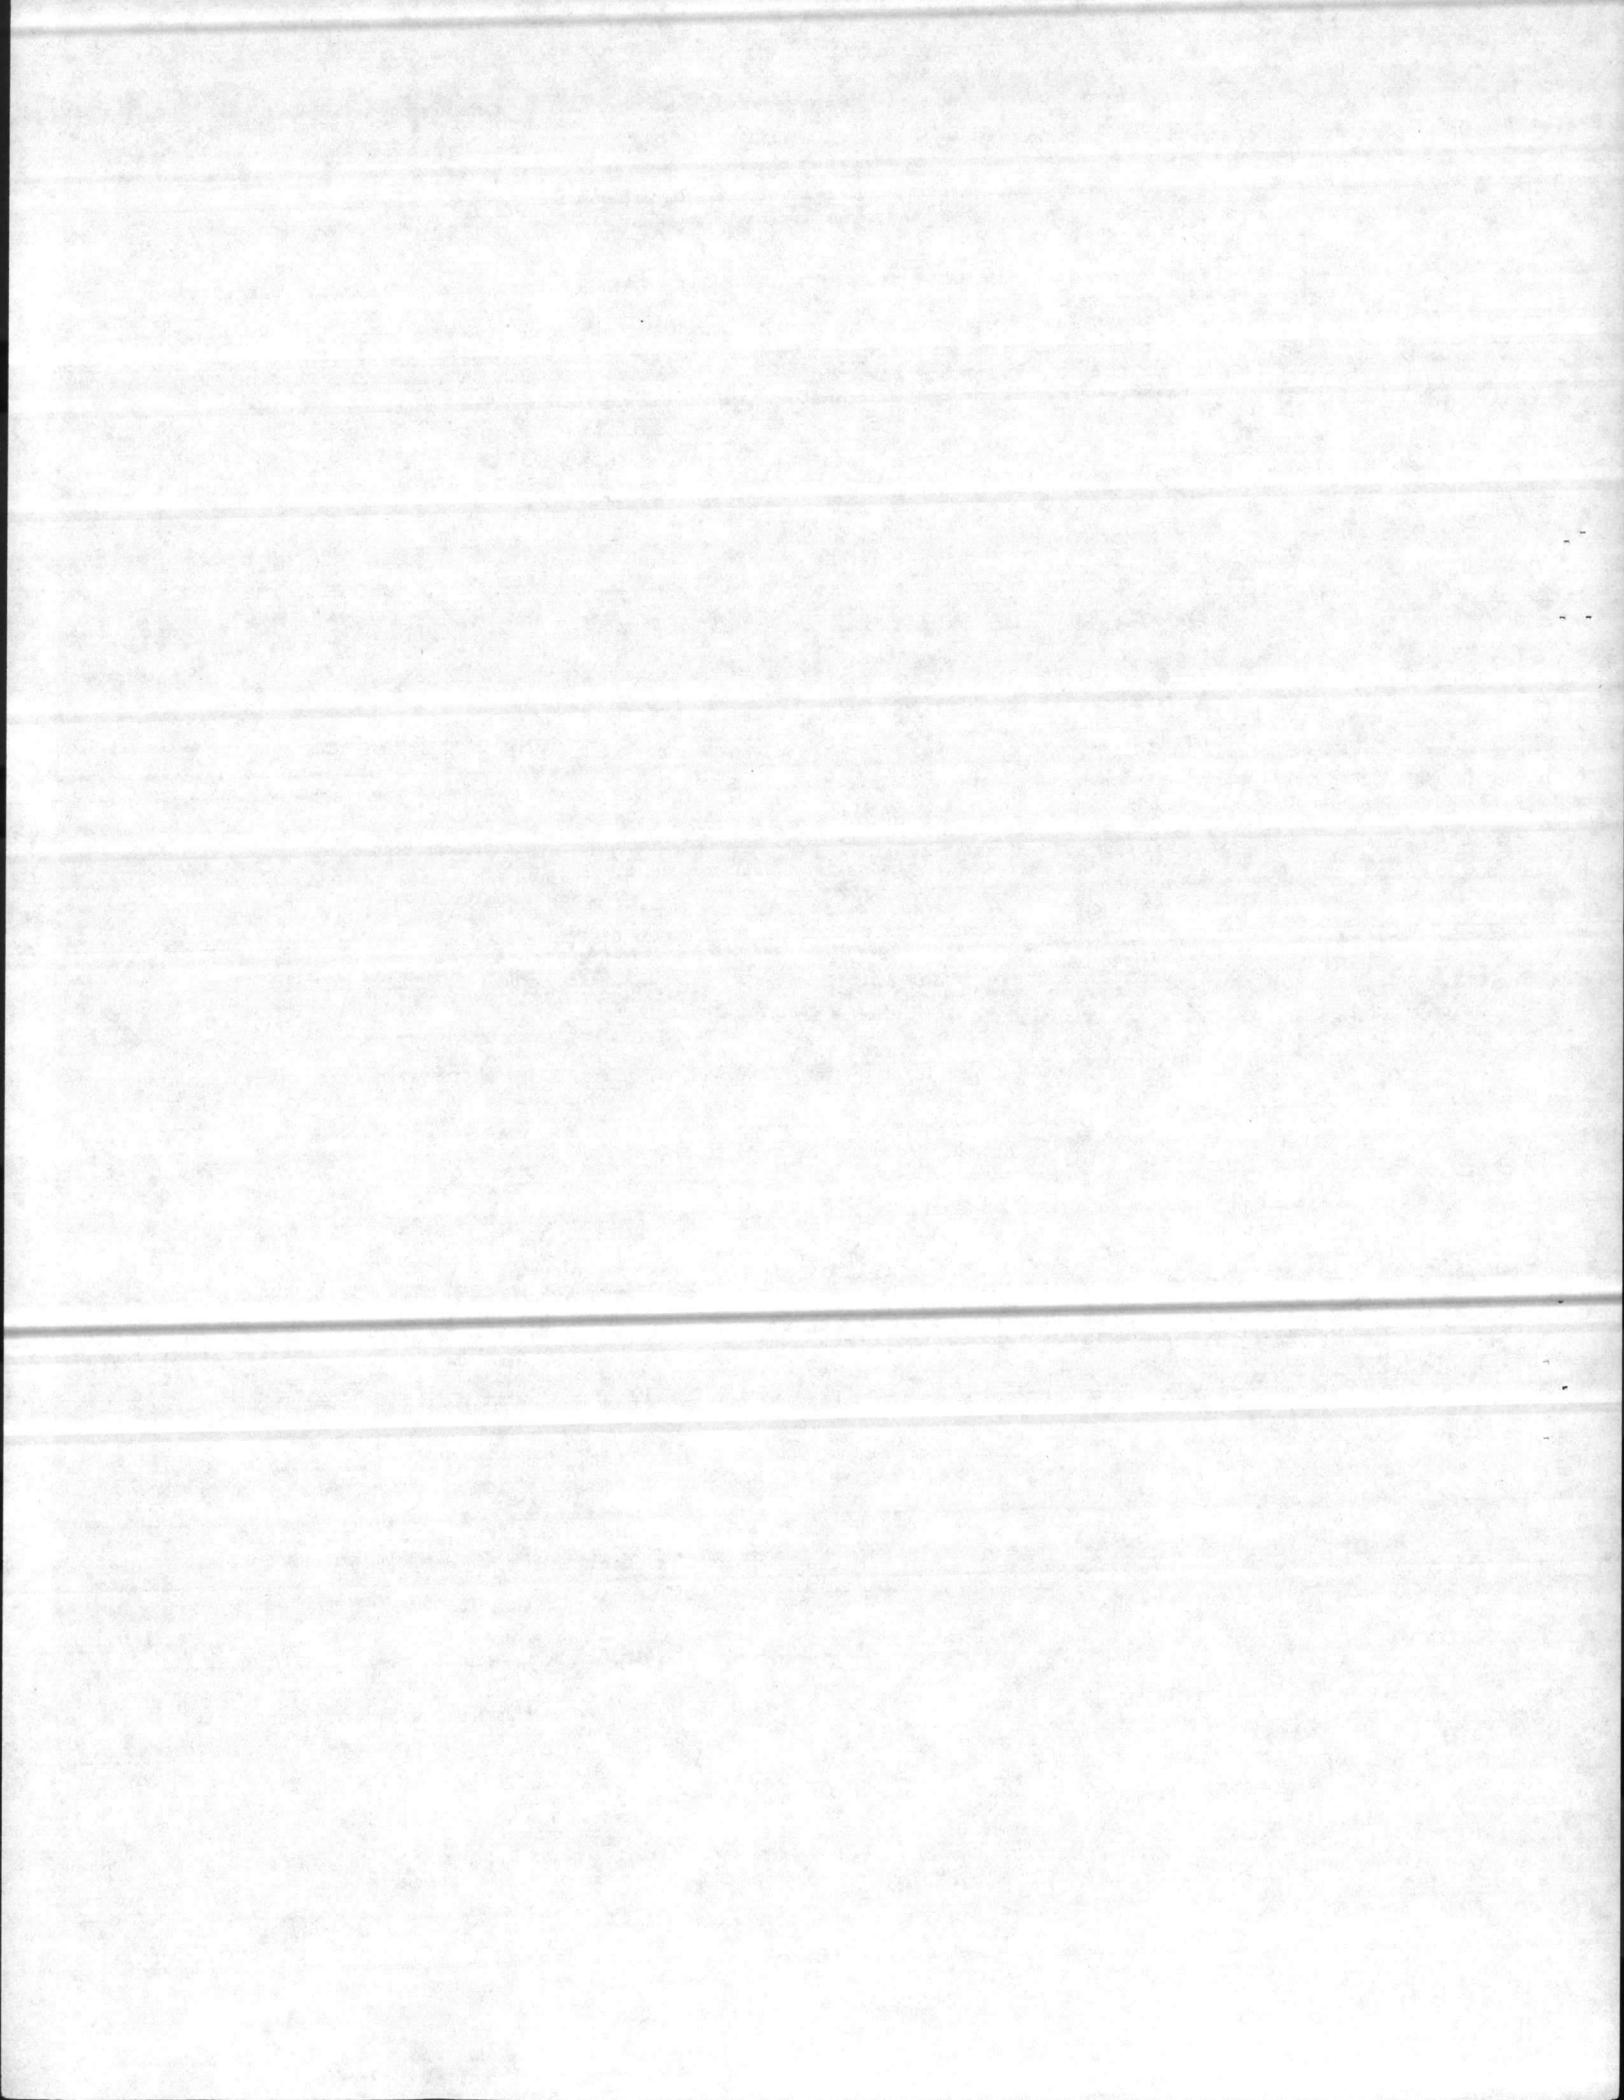

2. SUBMITTALS:

2.1 Descriptive Data: Submit for approval descriptive data on all materials to be provided under this section. Data shall be sufficient to indicate conformance to all specified requirements.

2.2 Erection Instructions and Diagrams: Instructions and diagrams as necessary to erect the building and install all components shall be submitted for approval and shall contain, but not be limited to, the following:


- a. Anchor bolt layouts and sizes
- b. Structural connections
- c. Roofing and siding connections
- d. Joint sealing and caulking
- e. Door and window frame installation
- f. Flashings
- g. Accessory installation
- h. All details and instructions necessary for complete assembly
- i. Shop drawings as necessary to supplement the instructions and drawings if required for the proper erection and installation of the building and components.

2.3 Certificates of Conformance or Compliance: Submit certificates from the manufacturer attesting that all materials conform to all requirements of this specification and of referenced documents.

2.4 Colors: Submit one sample of each color indicated for verification that products match the colors indicated. Where colors are not indicated, submit not less than eight different samples of manufacturer's standard colors for selection by the Contracting Officer.

2.5 Design Calculations: Submit for approval the engineering design calculations and stress diagrams of the following components:
Main frame and bracing.

3. DELIVERY AND STORAGE: Prefabricated components, panels, and other manufactured items shall be delivered, stored, handled, and erected in such a manner that they will not be damaged or deformed. Materials stored on the site before erection shall be stacked on platforms or pallets and covered with tarpaulins or other suitable weathertight covering. All metal sheets or panels shall be stored so that water which

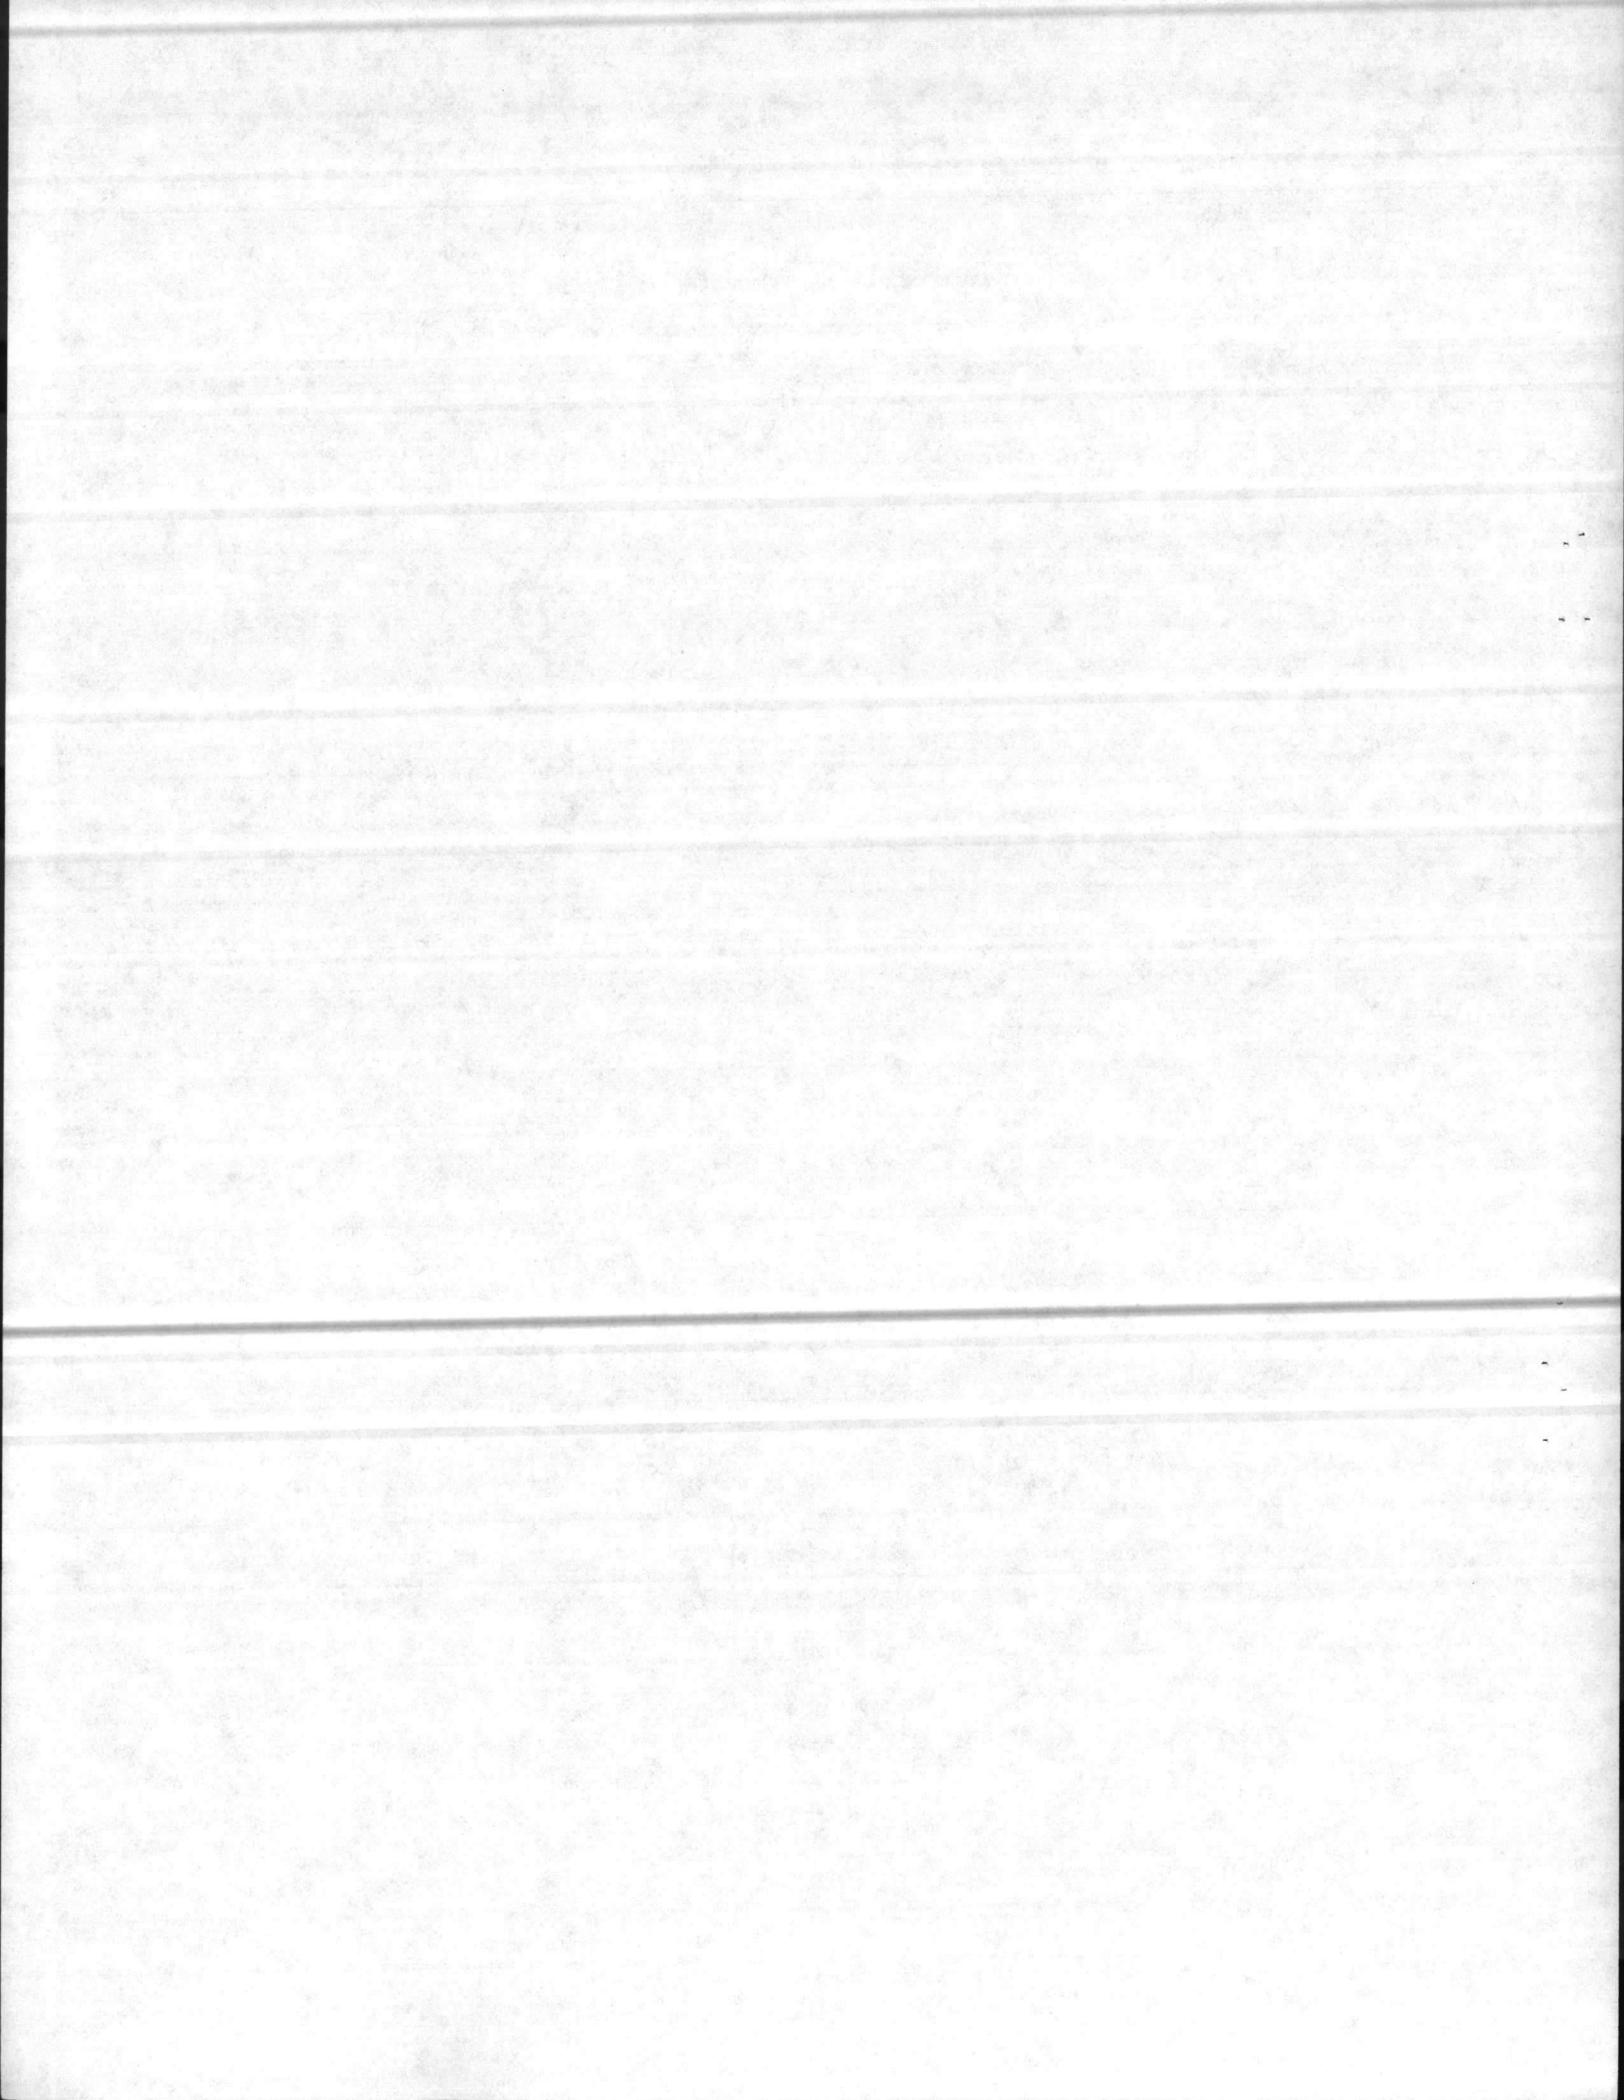

might have accumulated during transit or storage will drain off; the sheets or panels shall not be stored in contact with materials that might cause staining. Upon arrival on the job site, the sheets or panels shall be inspected; if found wet, the moisture shall be removed and the sheets or panels shall be restacked and protected until used.

4. DESIGN REQUIREMENTS: MBMA Recommended Design Practices Manual except as specified otherwise herein.


4.1 Normal Design Loads: As indicated. The vertical live loads, in addition to the applicable dead loads, shall be applied on the horizontal projection of the roof structure. The wind load on the building shall be proportioned and applied as horizontal and uplift velocity pressures. The maximum deflection in roofing or roof panels shall not exceed 1/180 of their spans, and the maximum deflection in siding or wall panels shall not exceed 1/90 of their spans.

4.2 Auxiliary Loads: Superimposed dynamic and/or static loads shall be applied in addition to the normal design loads and shall be considered in combinations with normal design loads.

5. DESCRIPTION OF BUILDINGS: Rigid frame type utilizing uniform depth. Columns and beams with connections of sufficient rigidity to maintain original angles between intersecting members after erection and loading. Spacing of frames shall be manufacturer's recommendation for design loads. End walls shall be of rigid frame and beam design. Roof slope shall be as indicated. Roof slope shall be not less than that indicated. Roof slope greater than that indicated may be furnished if all additional materials required because of the greater slope are provided and drawings are submitted for approval indicating all changes required due to the increased slope.

MATERIALS: MBMA Recommended Design Practices Manual except as specified otherwise herein. Roof and wall coverings, accessories and flashing shall be of such design and shall be installed so that they shall be completely weathertight, free of abrasions, loose fasteners, and deformations. Furnish in writing, one year warranties providing for repairs to roof and wall coverings, accessories and flashings. Correct all leaks occurring within one year from the date of acceptance by the Government.


6.1 Minimum Thickness: Materials shall be of thickness necessary to conform to design requirements but in addition shall conform to the following:

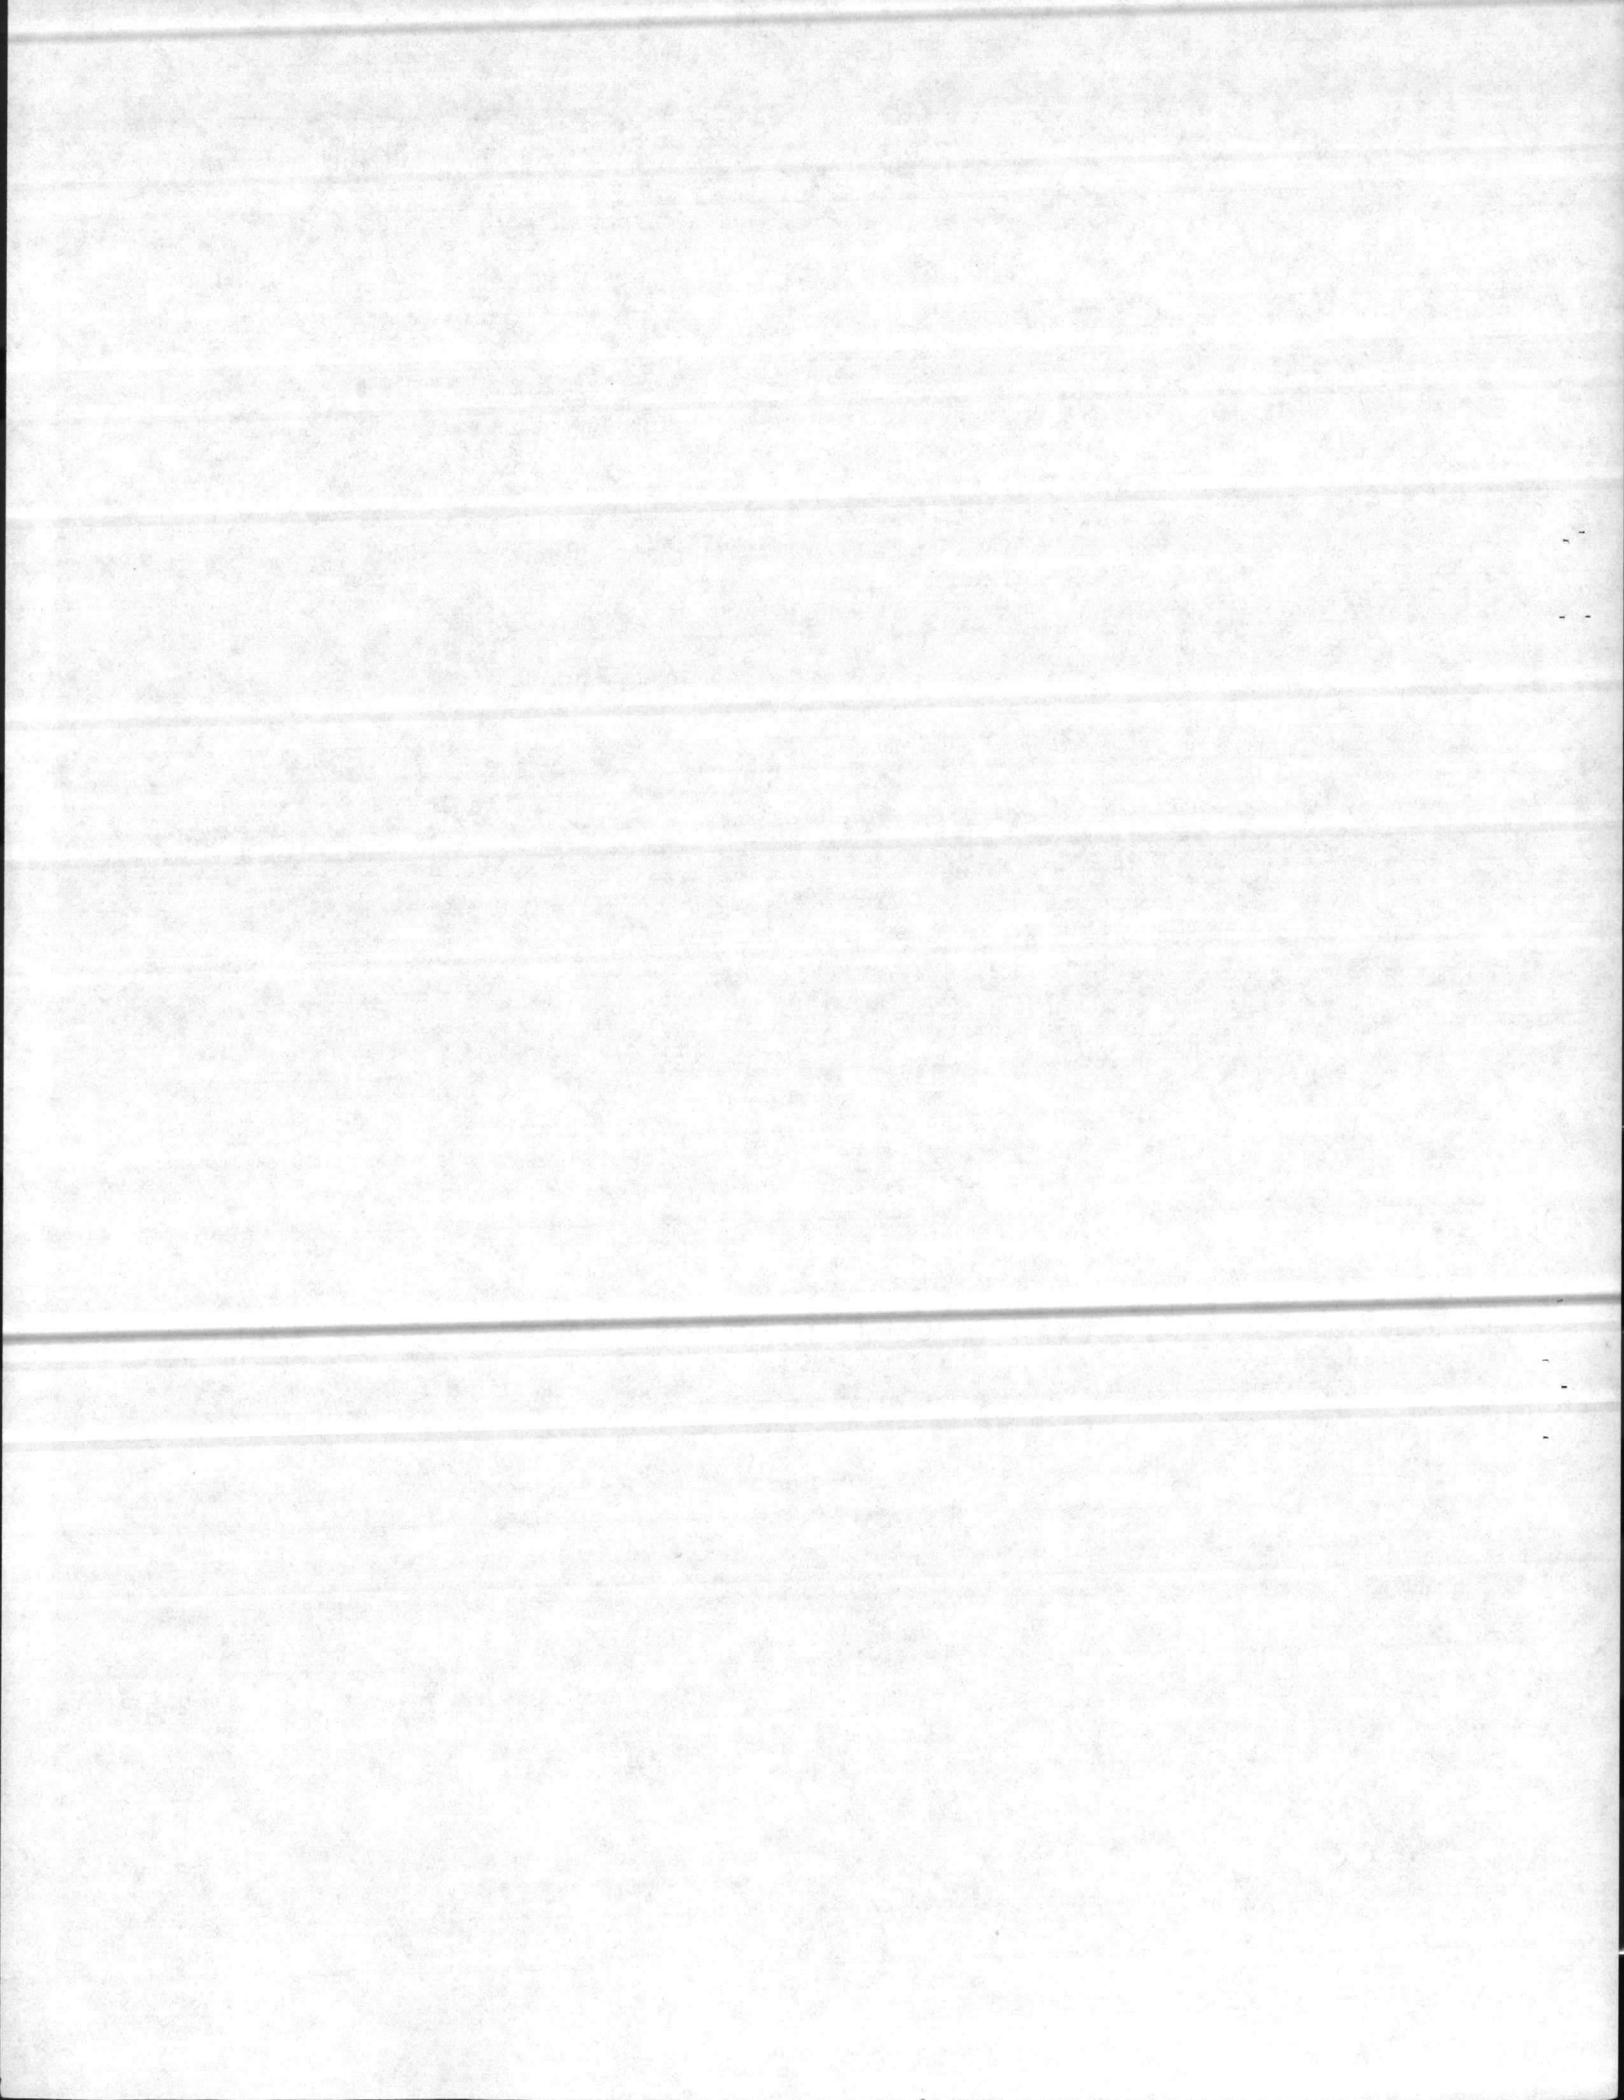

Items	Minimum Thickness (Uncoated)
Steel Structural Members other than Wall and Roof Covering	18 MFG STD (Manufacturers Standard) gage
Roof and Wall Covering	
Steel	26 MFG STD gage
Aluminum	0.032 inch
Plastic	0.045 inch
Gable and Eave Trim, Fascia Closure Strips, Rake Flashings, Copings and Liner Panels	
Steel	26 MFG STD gage
Aluminum	0.032 inch
Plastic	0.045 inch
Interior Gutters	
Steel	24 MFG STD gage
Aluminum	0.040 inch
Eave Gutters and Downspouts	
Steel	26 MFG STD gage
Aluminum	0.032 inch
Roof Ventilators	
Steel	26 MFG STD gage
Aluminum	0.032 inch
Louvers	
Steel	18 MFG STD gage
Aluminum	0.064 inch

6.2 Steel Framework: In accordance with AISC Steel Construction Manual except in accordance with AISI Cold Formed Steel Design Manual for members less than 3/16-inch thick. Structural members having cross sectional areas other than that indicated and connections that differ from the connections indicated may be used providing they conform to all design requirements and shop drawings indicating all such changes are submitted and approved.

6.3 Roof and Wall Coverings: Fabricated of zinc-coated steel or aluminum except as specified otherwise. Roof and wall coverings shall be of preformed panels. Panels shall consist of an inner and outer zinc-coated steel sheet formed and joined at edges into a tongue-and-groove joining system which are equipped with vinyl seals or factory applied non-staining butyl sealant to provide a water and weather tight joint upon installation. Insulation shall be provided in the cores of the panels as necessary to provide an overall "U" value of not more

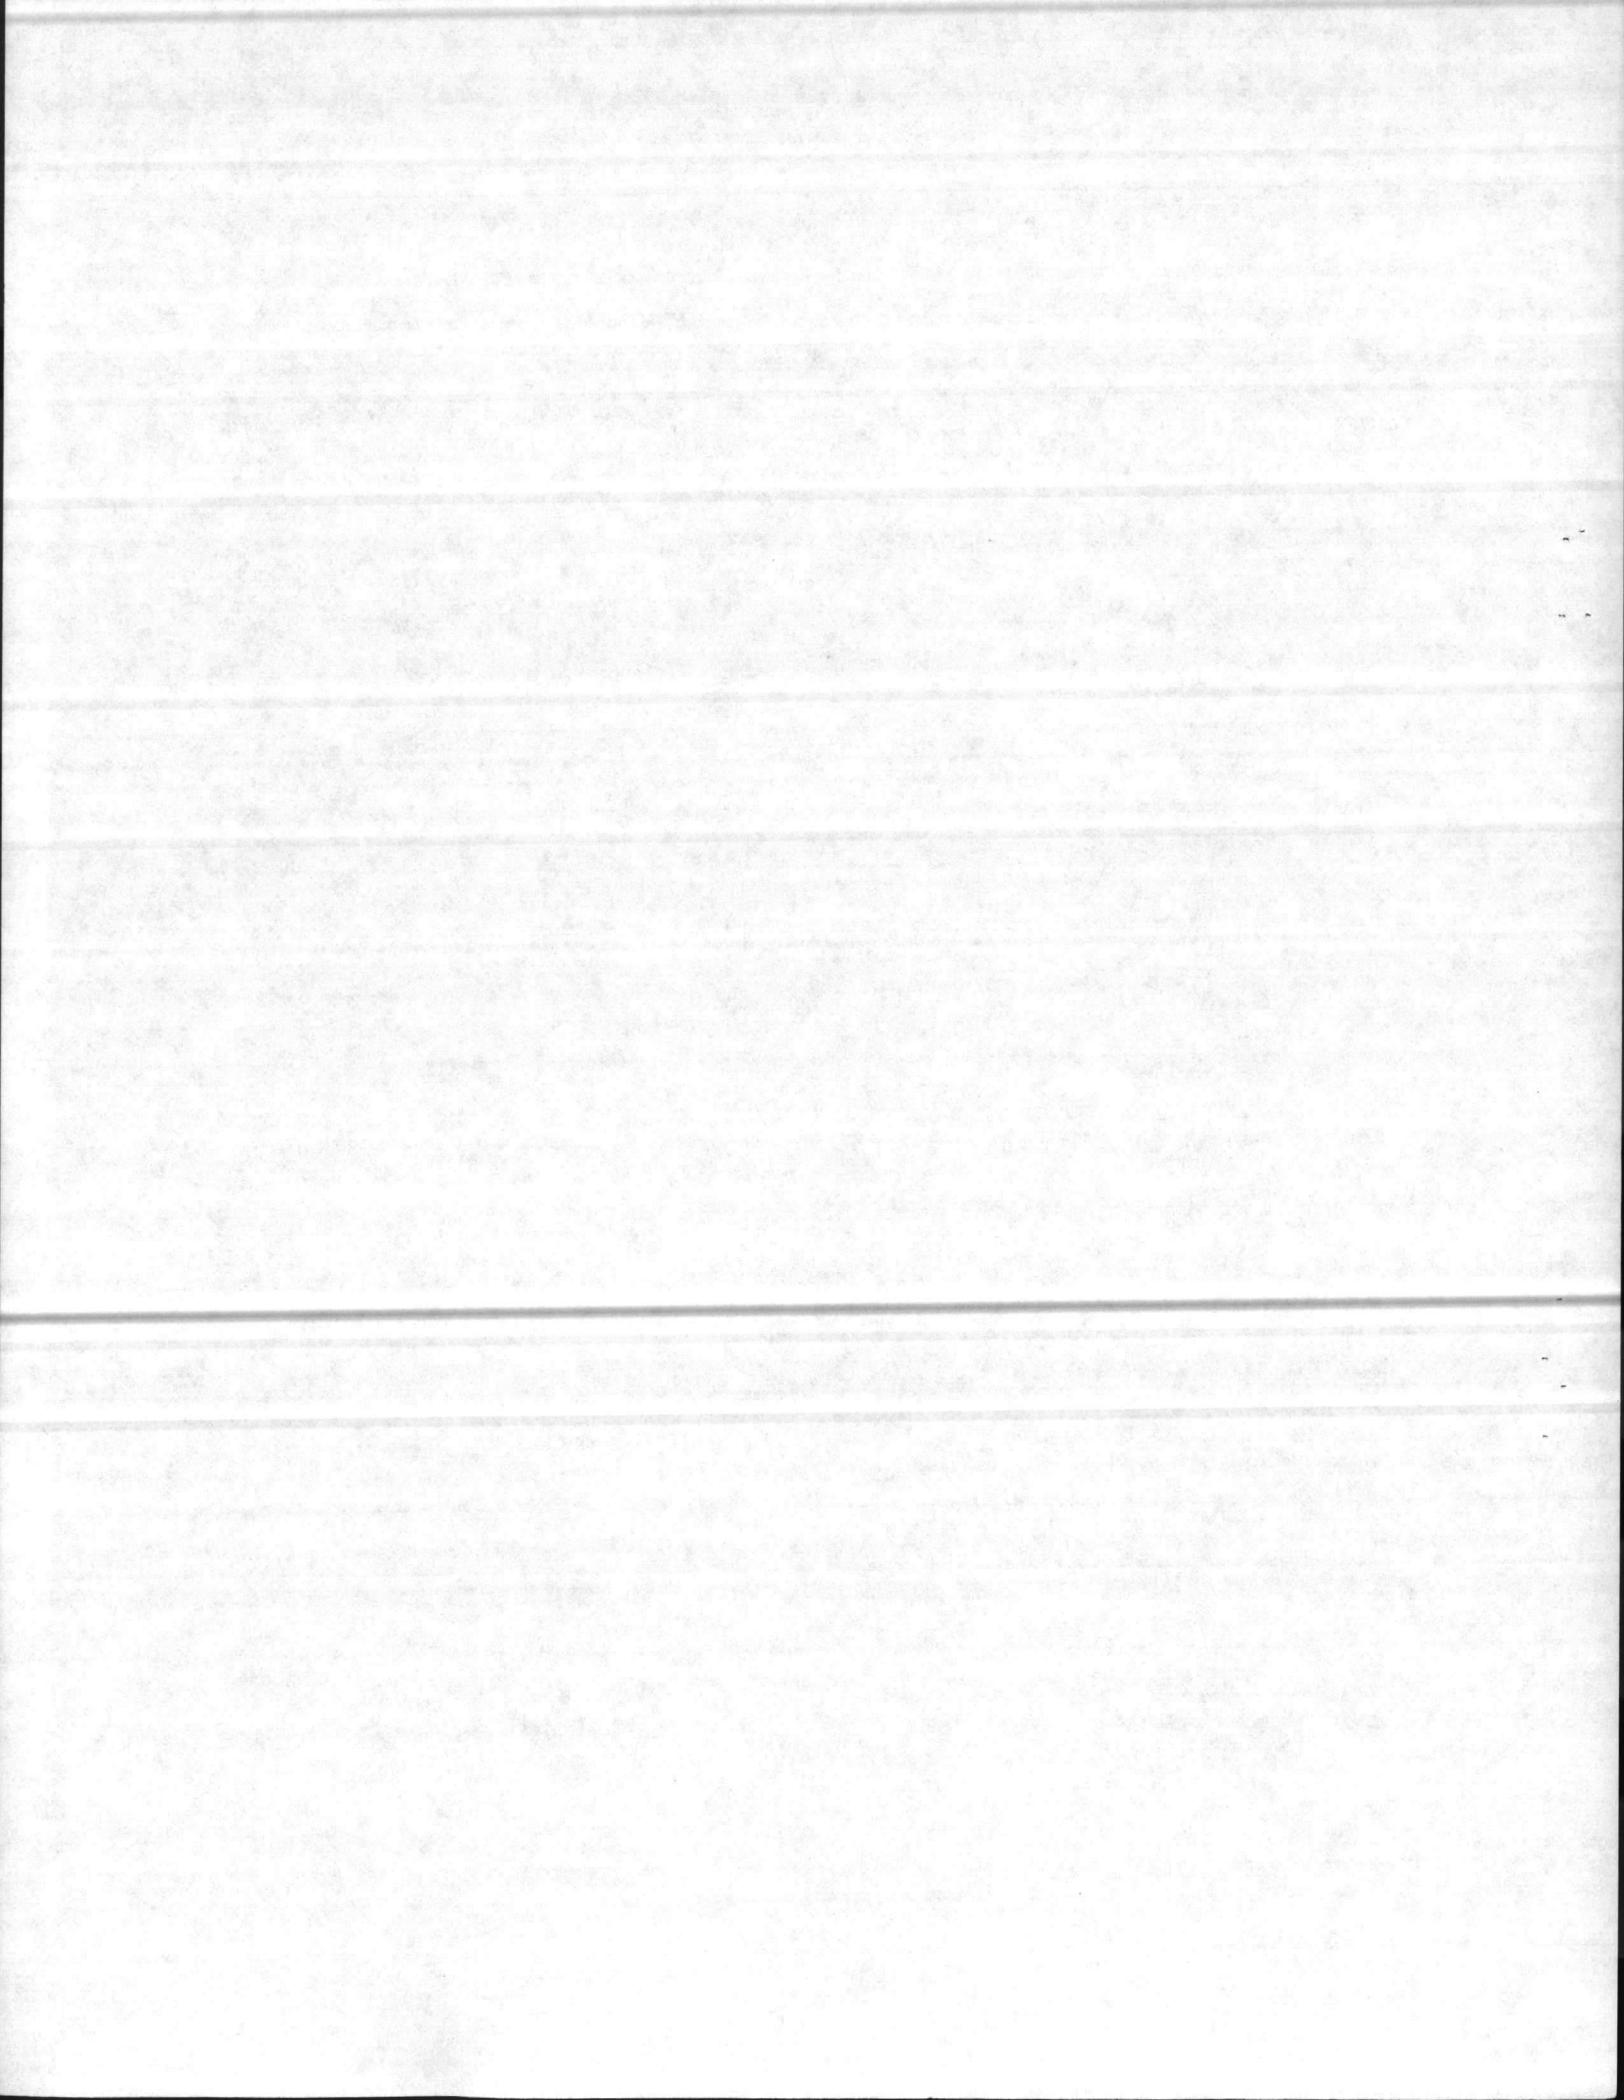

than 0.21. Insulation shall have a flame spread rating of 50 or less and a smoke development factor of 100 or less when tested in accordance with ASTM E84.

6.4 Liner Panels: Formed of same type material as used for wall panels to closely approximate configuration of panels indicated.


6.5 Sheet Metal Accessories: Of same material and finish as used for adjacent wall or roof covering except as specified otherwise herein.

6.5.1 Caps, Strips and Plates: Ridge caps, eave and edge strips, fascia strips, miscellaneous flashings, and miscellaneous sheet metal accessories, unless specified otherwise herein, shall be formed from the same material and gage as the roof covering. Wall plates, base angles or base channels, and other miscellaneous framing members may be standard structural steel shapes, or they may be formed from steel not lighter than 18-gage.

6.5.2 Gutters: Of cross sectional area not less than obtained with size gutter indicated and complete with mitered corners, end pieces, and any special pieces that may be required. The gutters shall be formed in sections not less than 8 feet in length. The ends of each length shall be joined with riveted and soldered joints or riveted and sealed joints, except that expansion-type slip joints shall be provided at the center of the runs, unless specified otherwise. Gutters shall be designed to be installed below the slope line of roof, so that snow and ice can slide clear. Hangers of an approved type, shall be provided, spaced not to exceed 36 inches on centers. Hangers and fastenings shall be constructed of metal compatible with the gutters.

6.5.3 Downspouts: Of cross sectional area not less than obtained with size gutter indicated and complete including elbows and offsets. Downspouts shall be provided in approximately 10-foot lengths; end joints shall telescope not less than 1/2 inches, and longitudinal joints shall be locked. Gutter outlets shall be provided with stainless steel wire ball strainers of a standard type. Downspouts shall be designed to be kept not less than 1/2 inch away from walls and be fastened to the walls at top, bottom and at not to exceed 5-foot centers intermediately between with approved type leader straps, or concealed type fasteners; straps and fasteners shall be formed from metal compatible with the downspouts.

6.5.4 THIS PARAGRAPH NOT USED

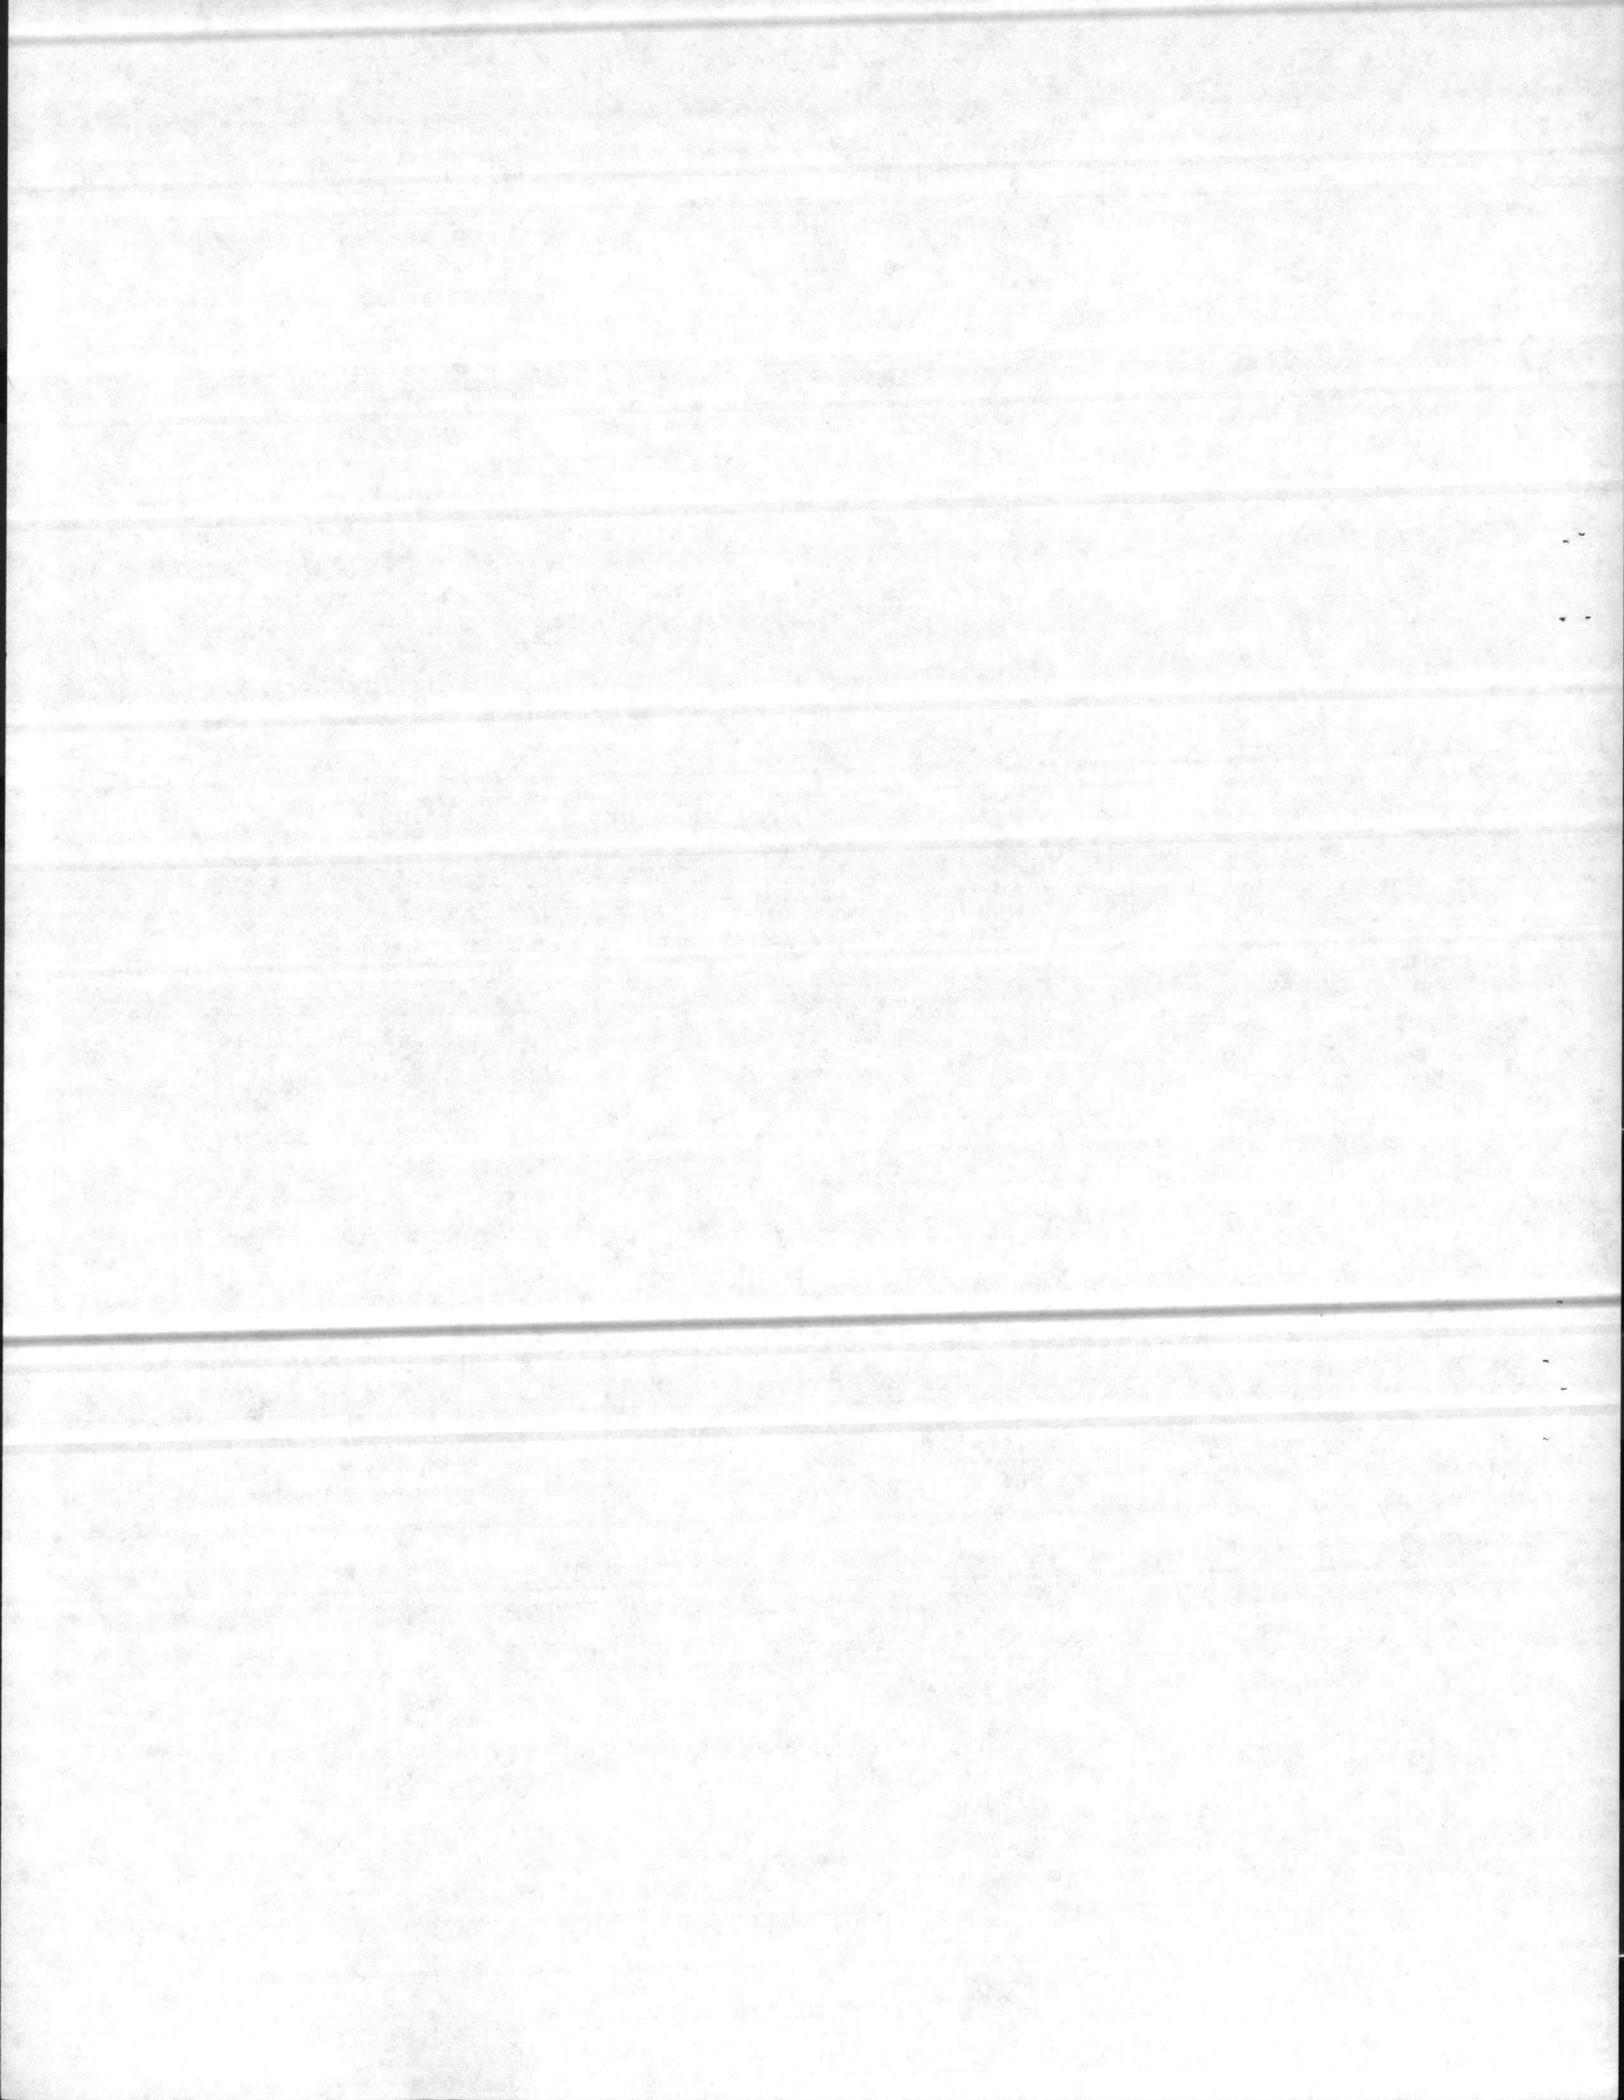


6.5.5 THIS PARAGRAPH NOT USED

6.5.6 Fixed Blade Louvers: Louvers and frames shall be of the sizes and design indicated. Blades shall be folded or beaded at the edges, set at an angle that will exclude driving rains, and firmly secured to the frames by riveting or welding, whichever is standard with the manufacturer. Mullions shall be provided for louvers 4 feet and more in width; not less than one mullion shall be provided for each 4-foot width. Flanges shall be provided on the interior face of frames where air intakes and/or exhaust louvers are indicated to be connected with mechanically-operated dampers and/or metal ductwork. Woven wire bird screening, not less than 3 by 3 mesh per square inch in rewirable frames, shall be provided on the [interior] [exterior] of louvers; screen frames shall be installed by means of clips in such a manner that they can be removed readily for cleaning and rewiring. The screens and frames shall be of the same type metal as the louvers; screen wire shall be not less than 0.0475 inch in diameter.

6.6 Closure Strips: Formed of approved compressed rubber, synthetic rubber, bituminous impregnated materials, or metal of the same respective type as the roof and wall panels, and as standard with the manufacturer. Molded closure strips shall be free of open voids and shall not absorb or retain water. Closure strips shall be formed to match the corrugations or configurations of the roofing or siding being used and shall be provided where indicated and where necessary to provide weathertight construction.

6.7 Joint Sealing Material: All side and end laps shall be sealed with Type II, Class B ribbon form sealant conforming to Fed. Spec. TT-C-1796, except that bituminous type materials shall not be used. Minimum sizes of ribbons shall be 3/32-inch by 1/2-inch for rectangular areas and 1/4-inch diameter for circular areas. All joints at doors, windows, accessories, and flashings shall be sealed in a manner similar to the sealing of sheets and panels.

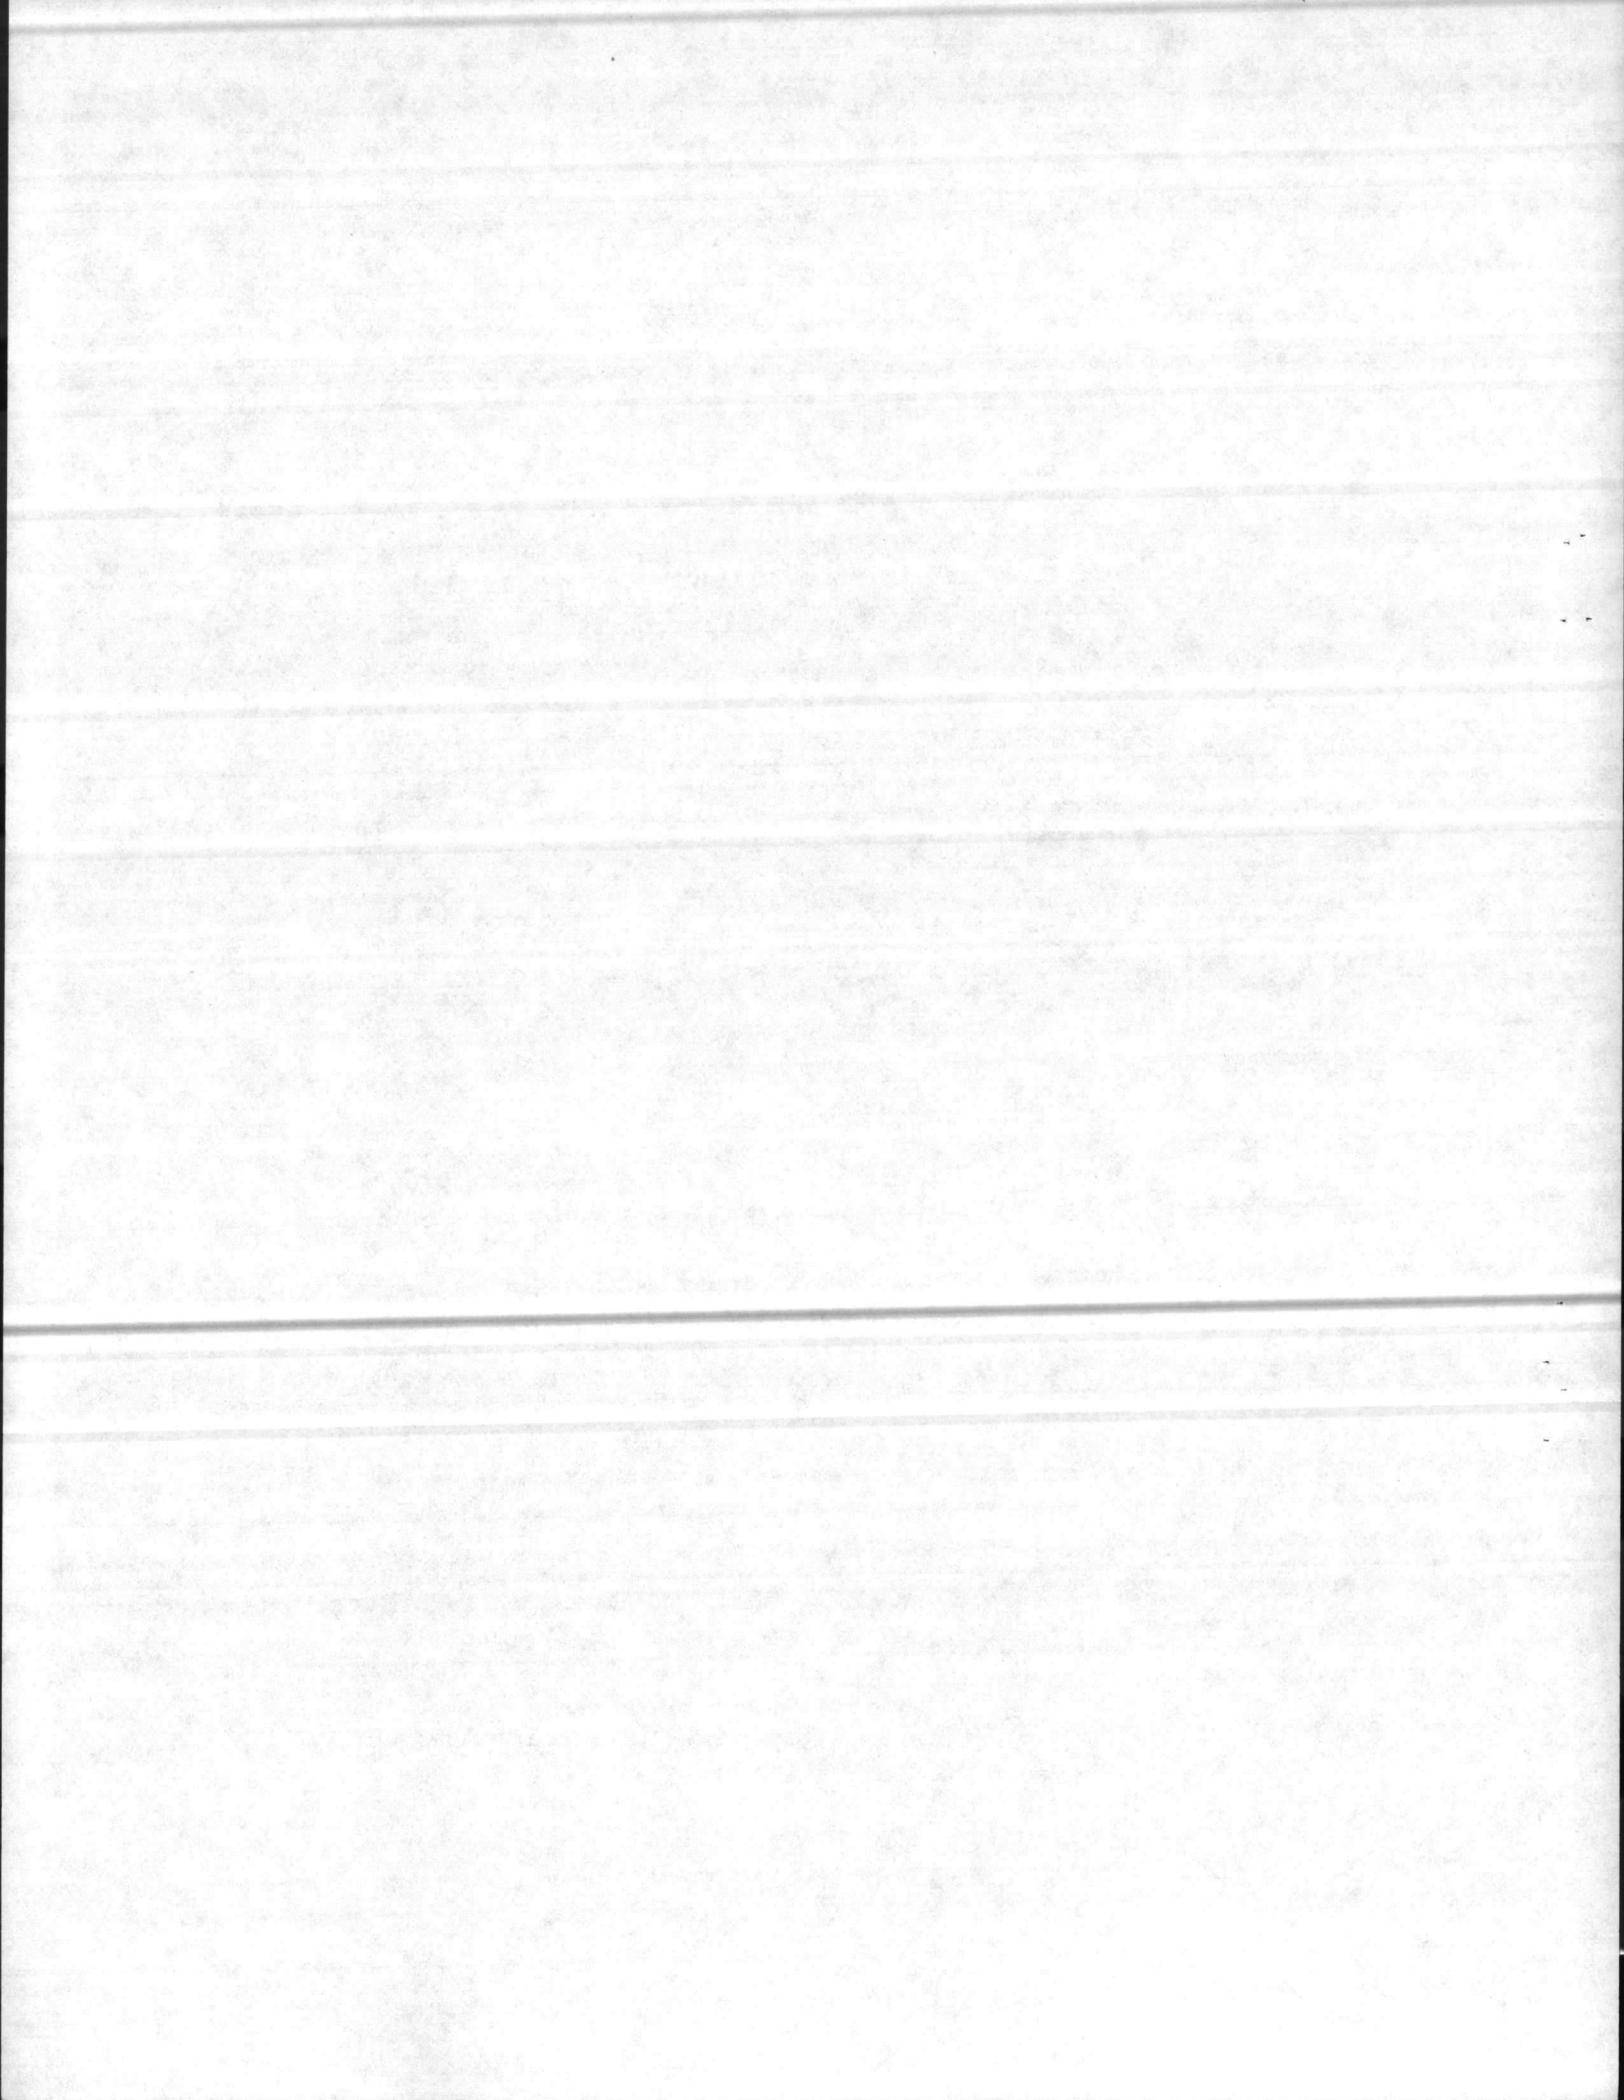


6.8 Skylights (Insulating): Standard with the manufacturer of size indicated. The skylight shall consist of an interior and exterior plastic face with a sealed air space of approximately 1-3/8 inches between. The exterior plastic face shall be not less than 0.062 inch in thickness and shall have the same configurations as the roofing panels. The interior plastic face shall be not less than 0.035 inch in thickness. Plastic faces shall be fiberglass consisting of polyester synthetic resin reinforced with a fibrous glass mat and shall be rated self extinguishing by Underwriters Laboratories, Inc. The "U" factor of the skylights shall not be more than 0.45. Surface of plastic faces that will be exposed to the weather after installation shall have a one mil thick layer of extruded polyvinylflouride film conforming to Fed. Spec. L-P-1040, Type 1, bonded to it during the molding operation.

6.9 THIS PARAGRAPH NOT USED

6.10 THIS PARAGRAPH NOT USED

6.11 Fasteners: Fasteners for attachment to structural supports and fasteners for attachment to adjoining sheets or panels shall be as approved, and in accordance with the manufacturer's recommendation. Unless specified otherwise herein, the fasteners shall be either self-tapping screws, bolts and nuts, self-locking rivets, self-locking bolts, end-welded studs, bolted or riveted studs, or step rivets held by aluminum straps. Other types of fasteners of the building manufacturer's standard type may be used if prior approval is obtained. The fastening system shall be designed to withstand the design loads specified hereinbefore. Fasteners shall be stainless steel, cadmium-plated steel, or aluminum. All fasteners, with the exception of those having integral hex washer heads and those having aluminum drive caps, shall have composite metal and polychloroprene washers. Fasteners having integral hex washer heads and fasteners having aluminum drive caps shall have polychloroprene washers. Side laps of roofing sheets or panels having configurations 3/4-inch deep, or less shall be fastened at a maximum spacing of 12 inches on centers. Heads of screw or bolts exposed on exterior face of factory finished wall coverings shall be nylon headed to match color of coverings.

6.12 Zinc Coated Steel Sheet: ASTM A446, Coating Class G-90.

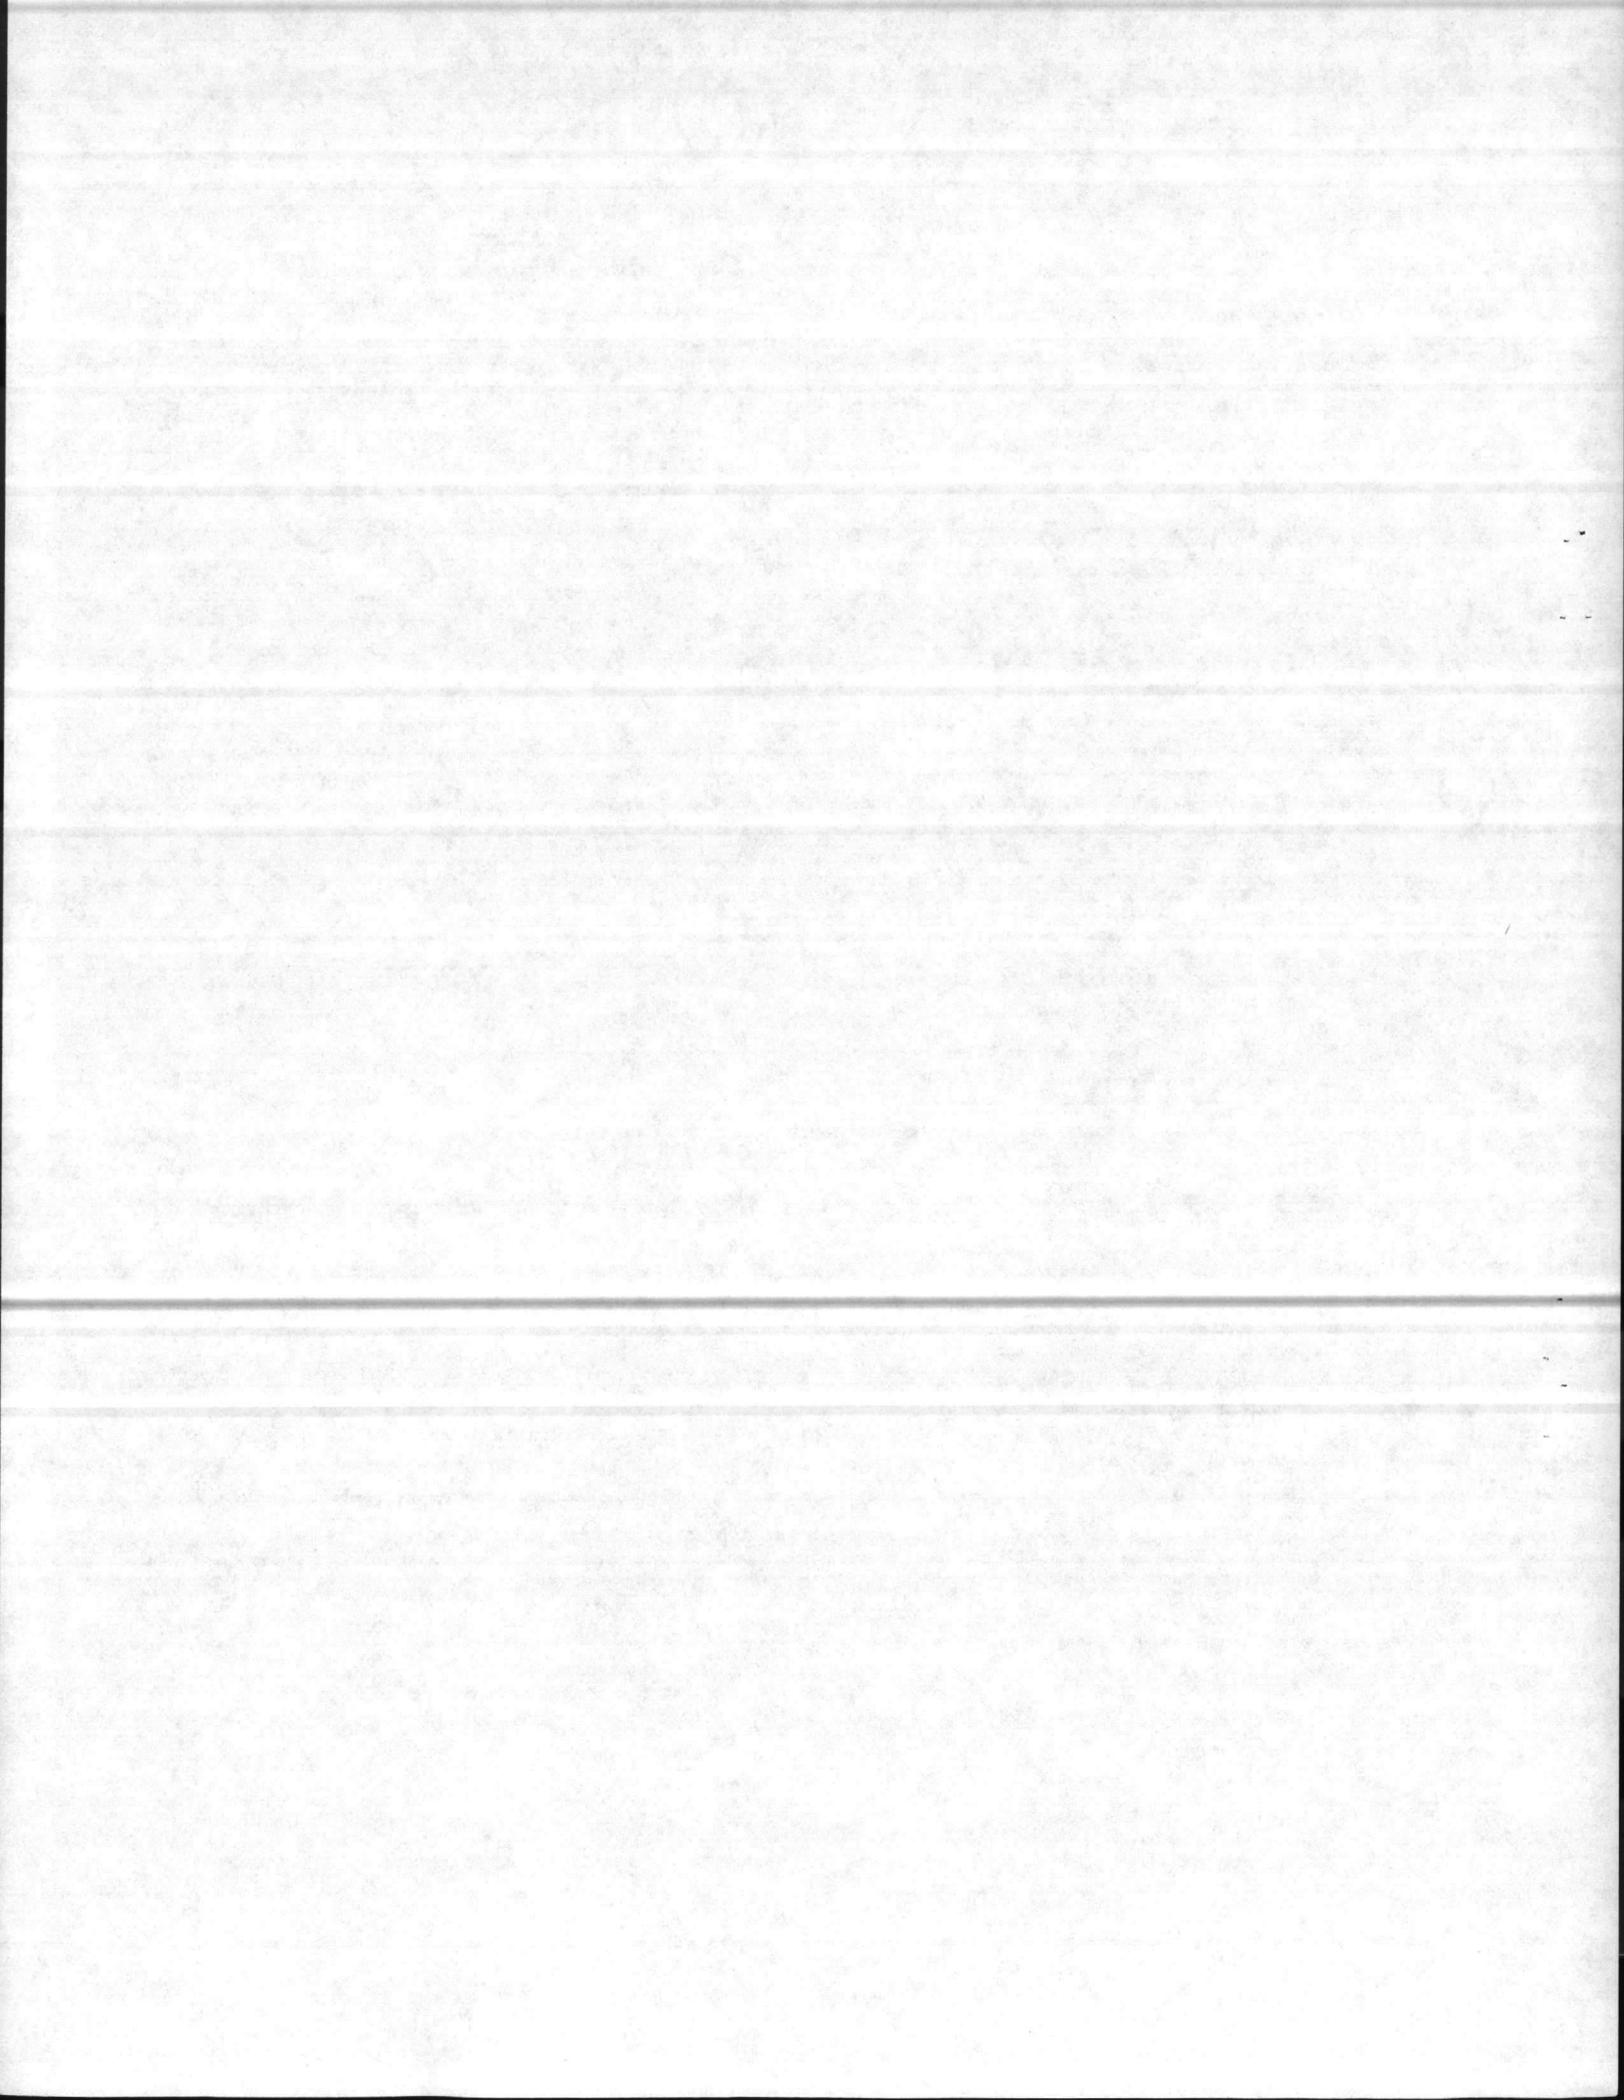

6.13 Aluminum Coated Steel Sheet: Mil. Spec. MIL-S-4174.

6.14 Aluminum Sheet: Alloy 3004 ALCLAD.


6.15 Insulation, Field Installed: Blanket type 0.6 pound fiber glass as standard with the metal building manufacturer with a factory applied facing on one side with a permeance rating of 0.05 perm or less when tested in accordance with ASTM E96. Facing on insulation shall be vinyl-scrim foil except that it may be 0.002-inch thick aluminum foil. The insulation, including facings, shall have a flame spread rating of 50 or less and a smoke development factor of 100 or less when tested in accordance with ASTM E84. Wall insulation shall have a "R" factor of 7 or more. Roof insulation shall have a "R" factor of 7 or more.

6.16 Doors and Windows: [Doors and windows are specified in other sections. Framing members and flashings shall be provided as necessary for installation of the doors and windows.]

6.16.1 Swinging Personnel Doors and Frames: Fed. Spec. RR-D-575, Type II, Style 1, 2, 3 or 4, class as indicated, zinc-coated and shop primed, exterior mounting.

Hardware shall conform to Fed. Spec. FF-H-106, Fed. Spec. FF-H-111, ANSI A156.1, ANSI A156.2, ANSI A156.3 and ANSI A156.4. Doors shall be provided with the following hardware:

DOOR NO.	HARDWARE REQUIRED
1	3 Hinges - A2112 4½X4½ BHMA Finish Code 612 1 Lockset Series 4000 F81 BHMA Finish Code 612

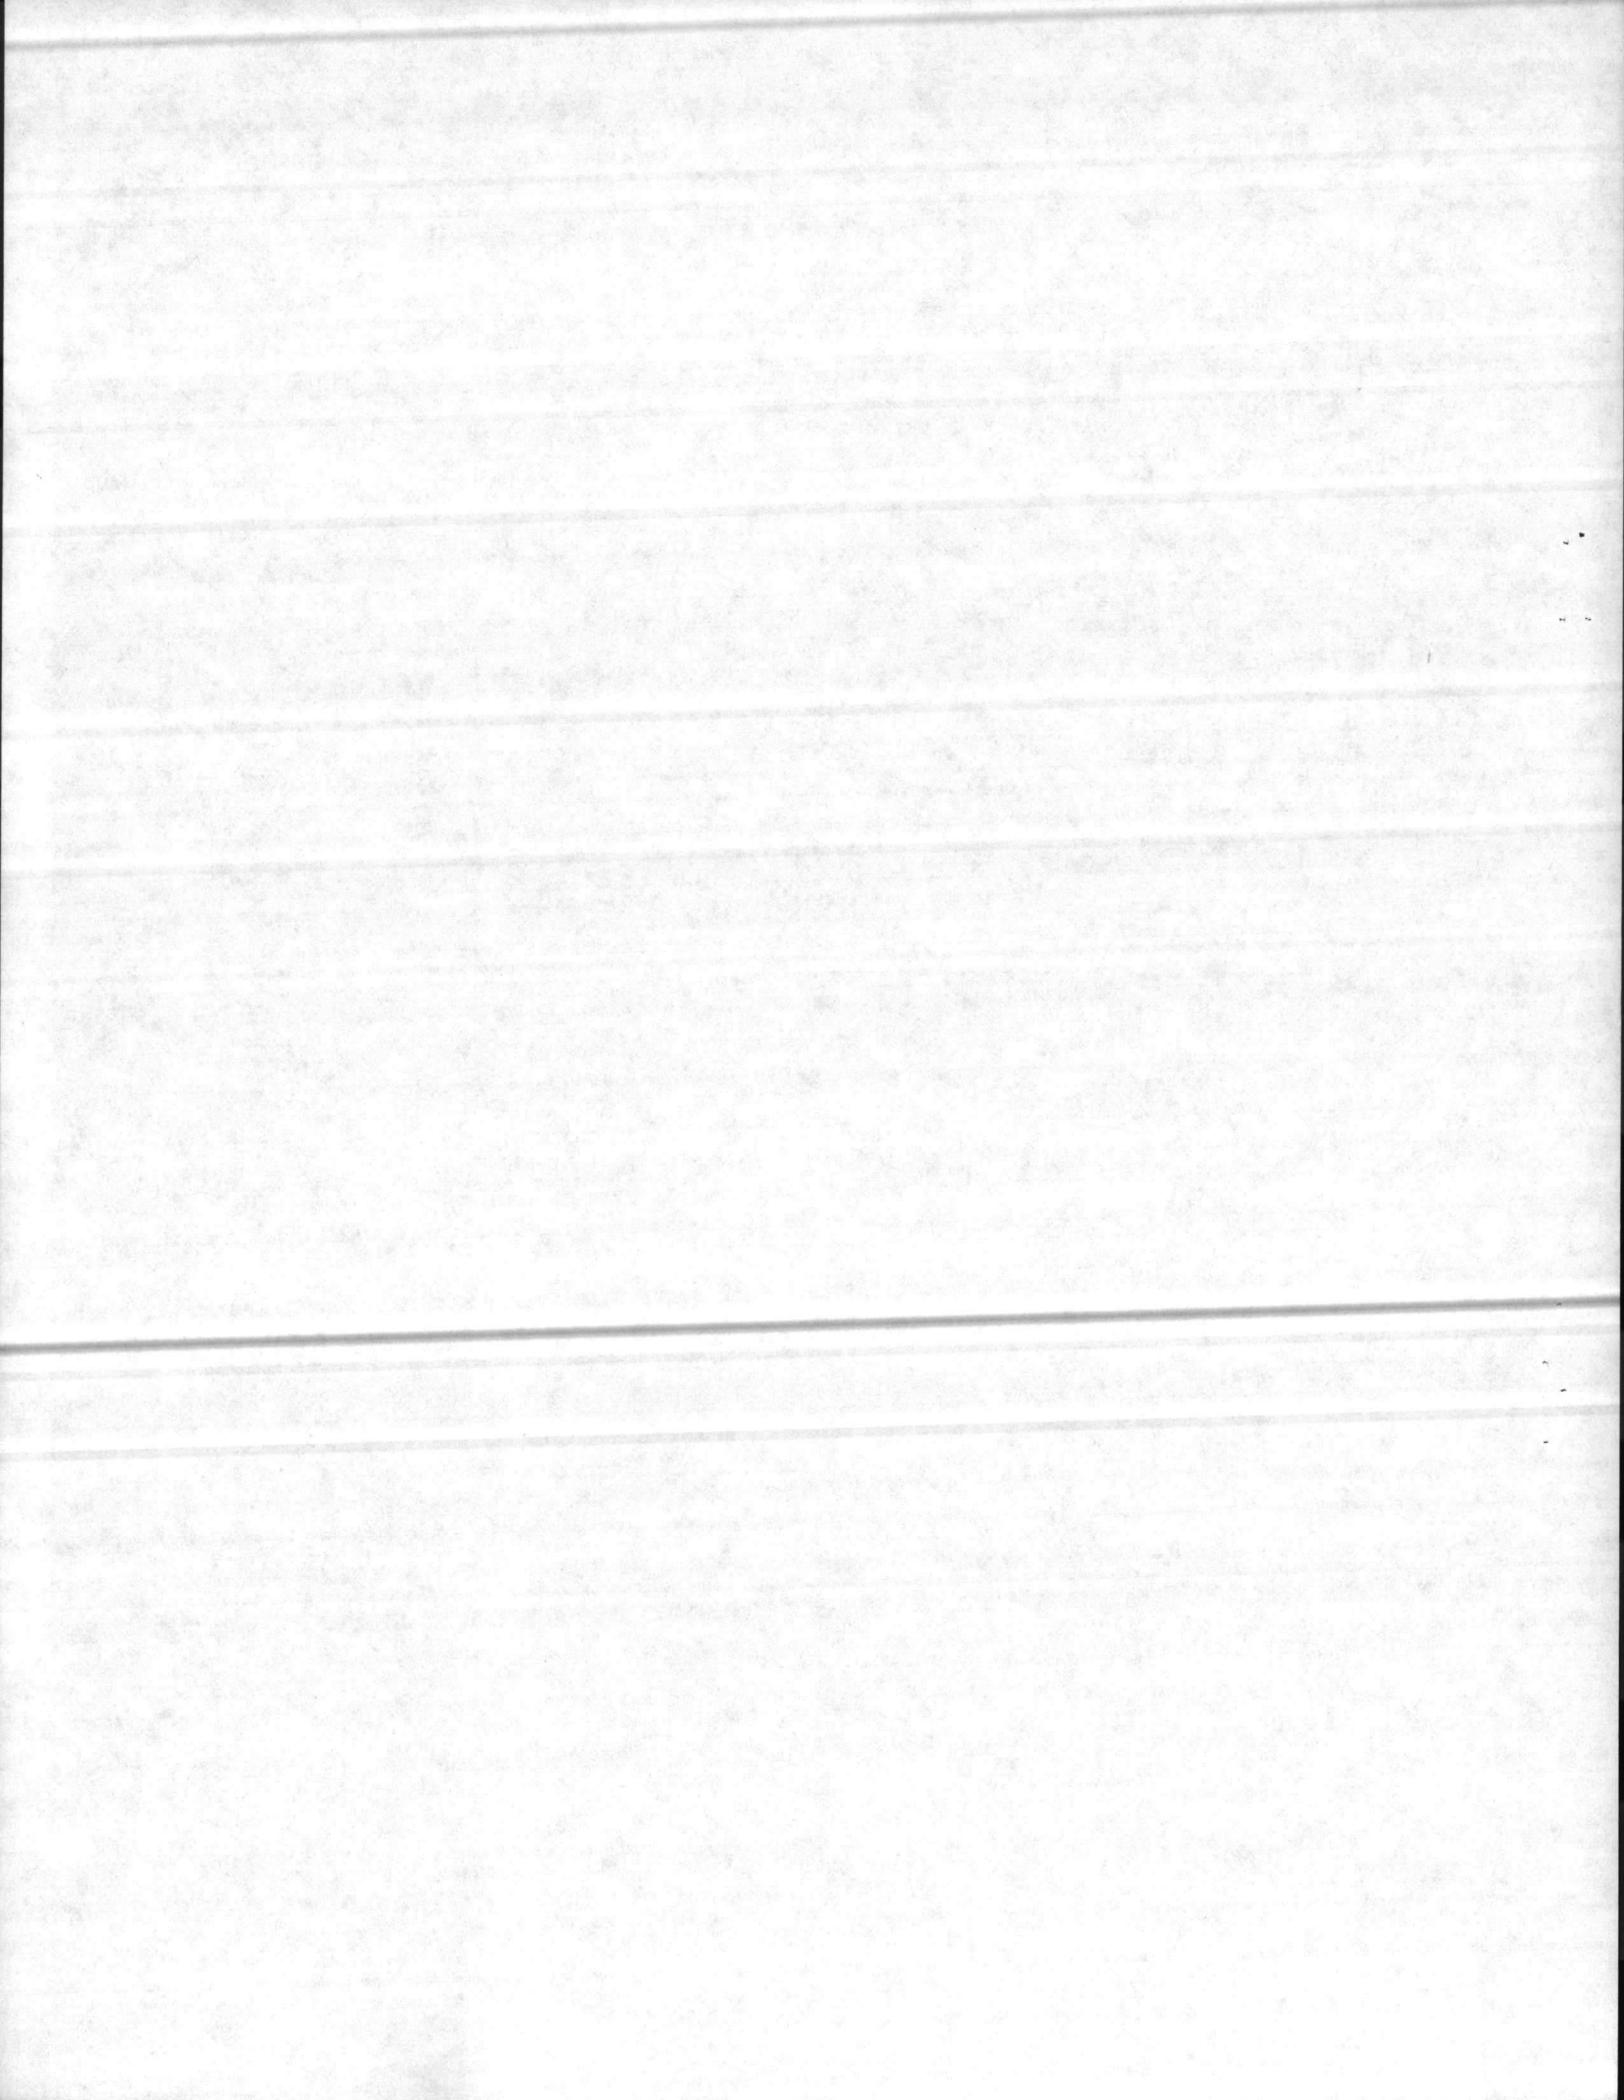

6.17 THIS PARAGRAPH NOT USED


6.18 Finish:

6.18.1 Shop Painting: All ferrous metal work, except factory finished work, zinc-coated work, aluminum-coated work, and work specified to be painted hereinbefore, shall be (1) cleaned of all dirt, rust, scale, loose particles, grease, oil, and other deleterious substances, (2) given a coat of pretreatment primer conforming to Mil. Spec. DOD-P-15328 applied to a dry film thickness of 0.3 to 0.5 mil or chemically treated with a phosphoric type cleaner, and (3) then be given one coat of an approved rust-inhibiting primer paint of the type standard with the metal building manufacturer.

6.18.2 Factory Finishing: Exterior and interior exposed surfaces of metal roof and wall panels, roof ventilators, louvers, gutters, downspouts and metal accessories shall be provided with a factory applied baked on enamel finish. The finish shall consist of cleaning, pretreatment with a chemical conversion coating and one coat of baked on synthetic enamel applied to a dry film thickness of not less than one mil. Factory finished materials of the same types and finishes as proposed for this project shall have been tested and have passed the following tests:

05-79-4476

13121 - 10

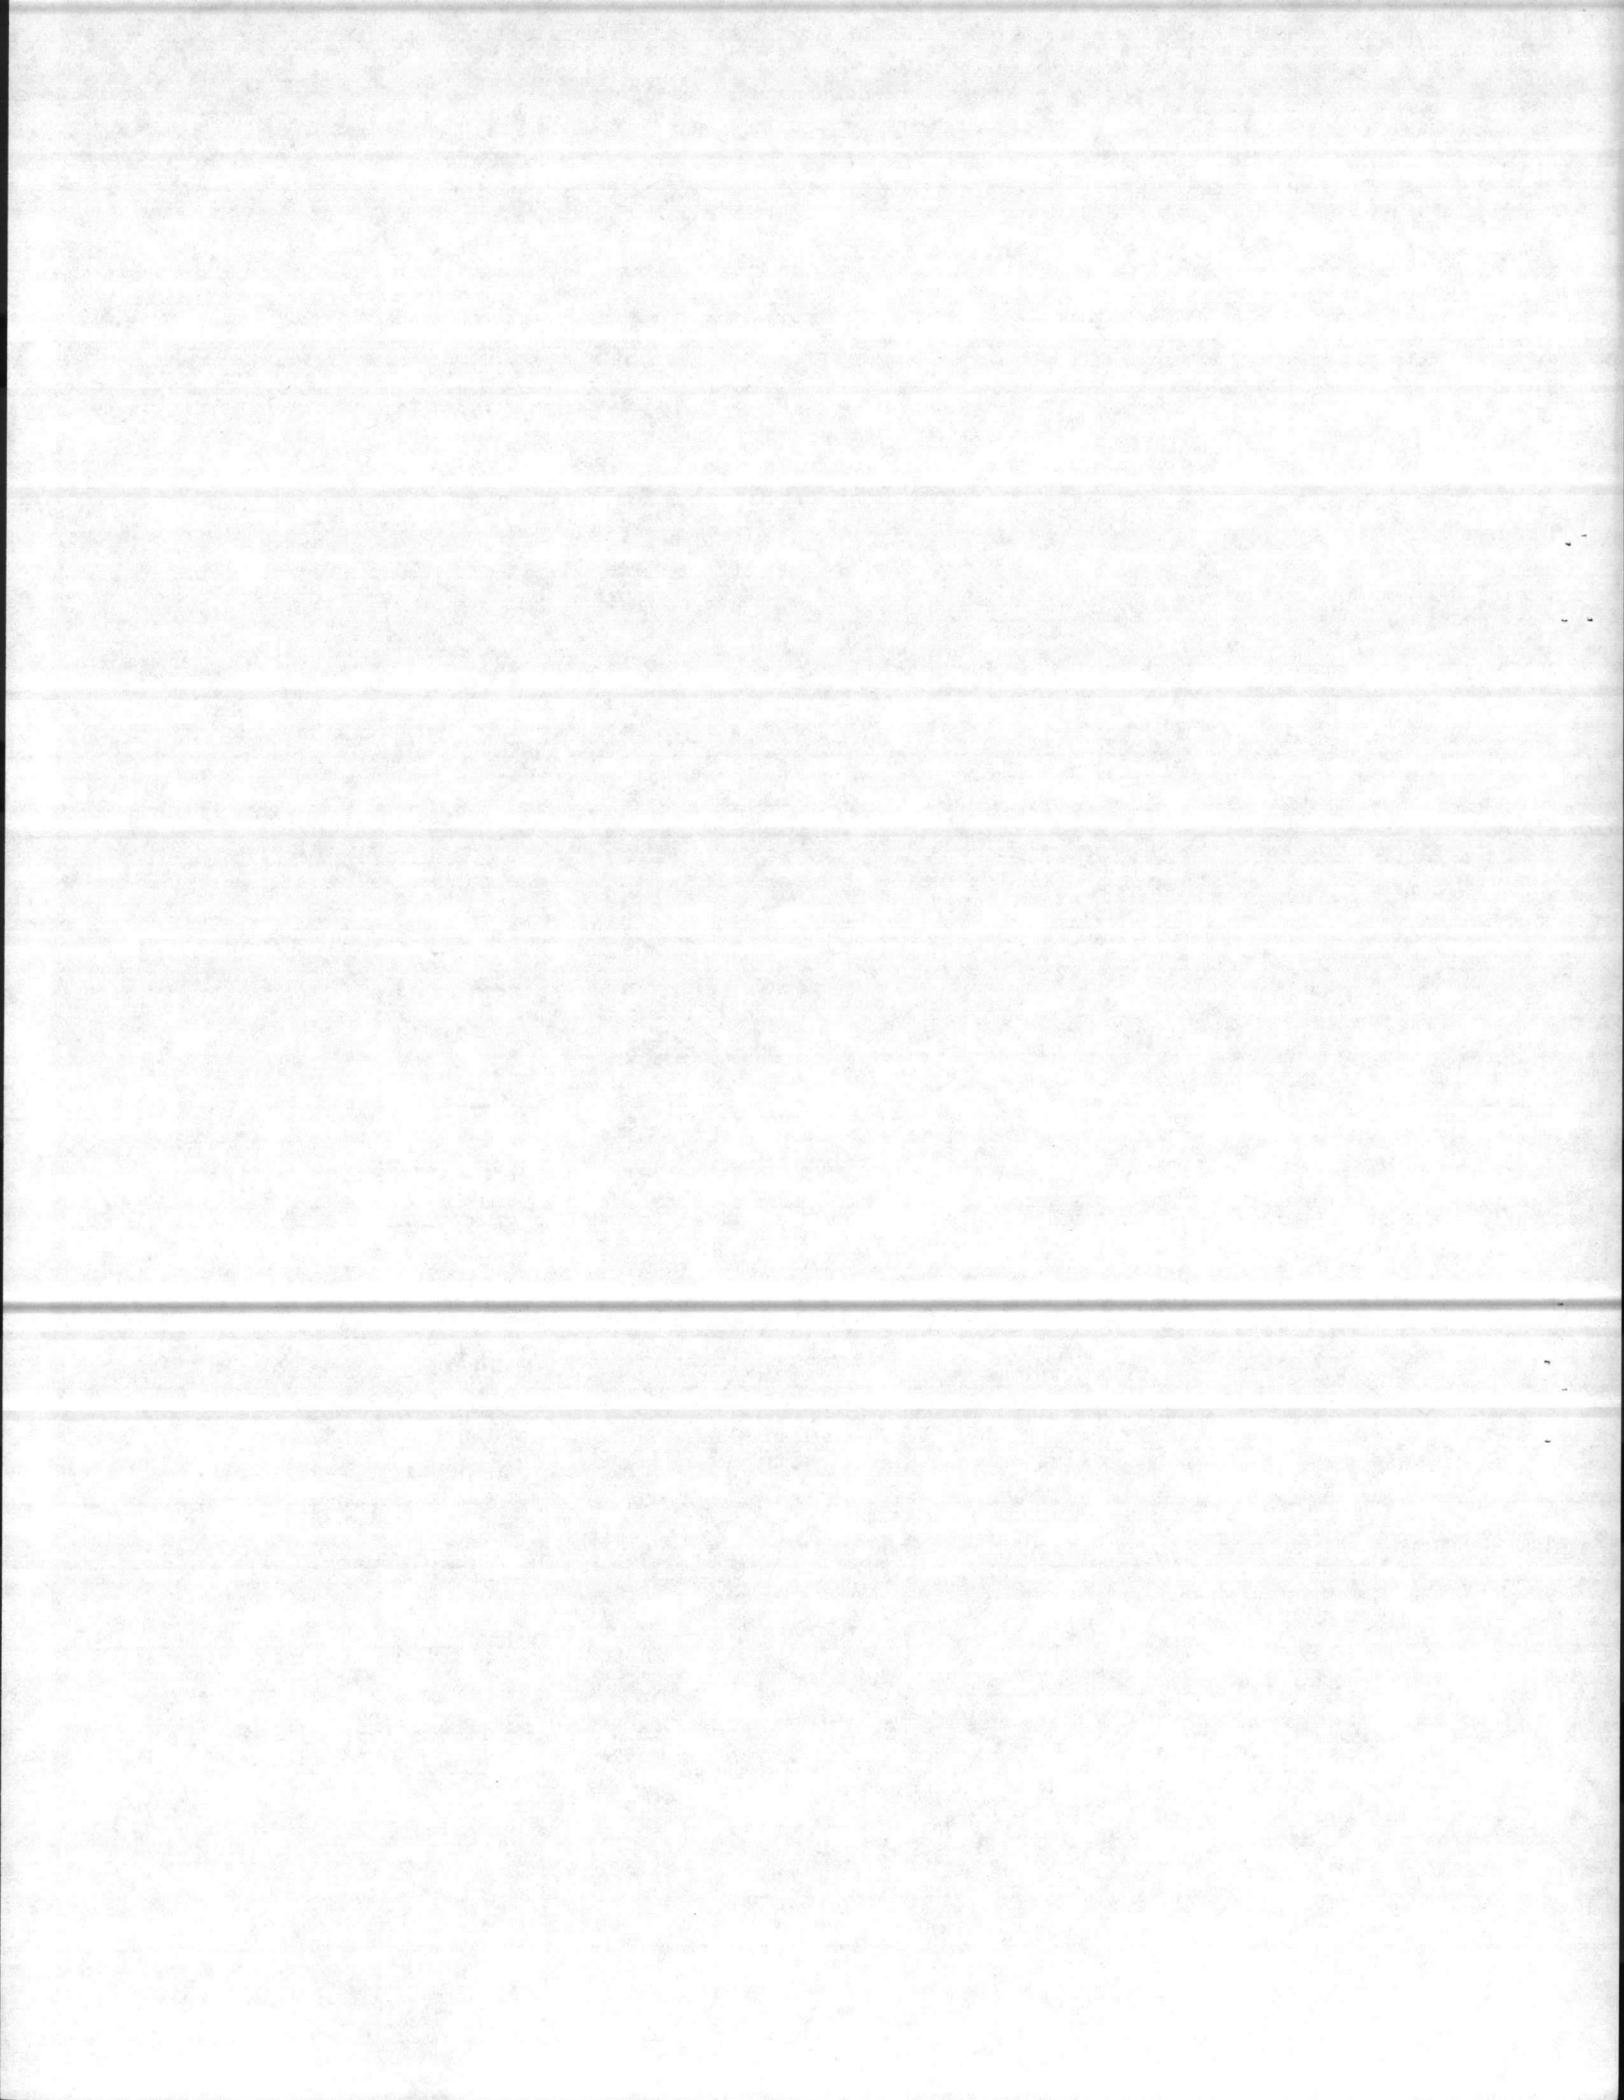


- a. Salt Spray Test: A 12 inch by 12 inch sample with a minimum of two raw cut edges, shall withstand a salt spray test for a minimum of 500 hours in accordance with ASTM B117. Undercutting of the paint film from the score line shall not exceed 1/16 inch.
- b. Accelerated Weathering Test: A 12 inch by 12 inch sample with a minimum of two raw cut edges shall withstand a weathering test a minimum of 1,000 hours in accordance with ASTM D822 without checking, cracking, or loss of adhesion.
- c. Flexibility: When formed over a conical mandrel, the film shall show no crack beyond a point where the mandrel diameter is equal to five times the metal thickness.
- d. Adhesion: There shall be no film removed by pulling off sharply No. 600, 3/4-inch wide scotch cellophane tape applied to 10 parallel cuts spaced 1/16 inch apart plus 10 similar cuts at right angles. Cuts shall be made with a sharp knife.
- e. Field Tests: At the discretion of the Contracting Officer, sample sheets for tests may be taken at random from each delivery or from stockpiles on the site at any time during the construction period. Tests may be made to check the conformance of the materials with tests and with other requirements specified herein. Failure of the sample sheets to pass all of the required tests shall be cause for rejection of all sheets represented by the samples.

7. ERECTION: In accordance with the manufacturer's approved erection instructions and diagrams, except as specified otherwise. Defects or errors in the fabrication of building components shall be corrected in an approved manner. Defects or errors in fabrication of components, which can not be corrected in an approved manner, shall be replaced by nondefective members. Columns and rigid frames shall be plumbed in both directions, guyed and stayed, and all framing elements shall be accurately spaced to assure the proper fitting of prefabricated wall and roof panels.

7.1 Dissimilar Materials: Where aluminum surfaces come in contact with ferrous metal or other incompatible metals, the aluminum surfaces shall be kept from direct contact by one of the following methods:

Method (a). Painting the incompatible metal with a coating of heavy-bodied bituminous paint conforming to Fed. Spec. TT-C-520.

Method (b). Painting the incompatible metal with a prime coat of zinc-chromate primer conforming to Fed. Spec. TT-P-645, followed by one or two coats of aluminum metal-and-masonry paint, or other suitable protective coating, excluding those containing lead pigmentation

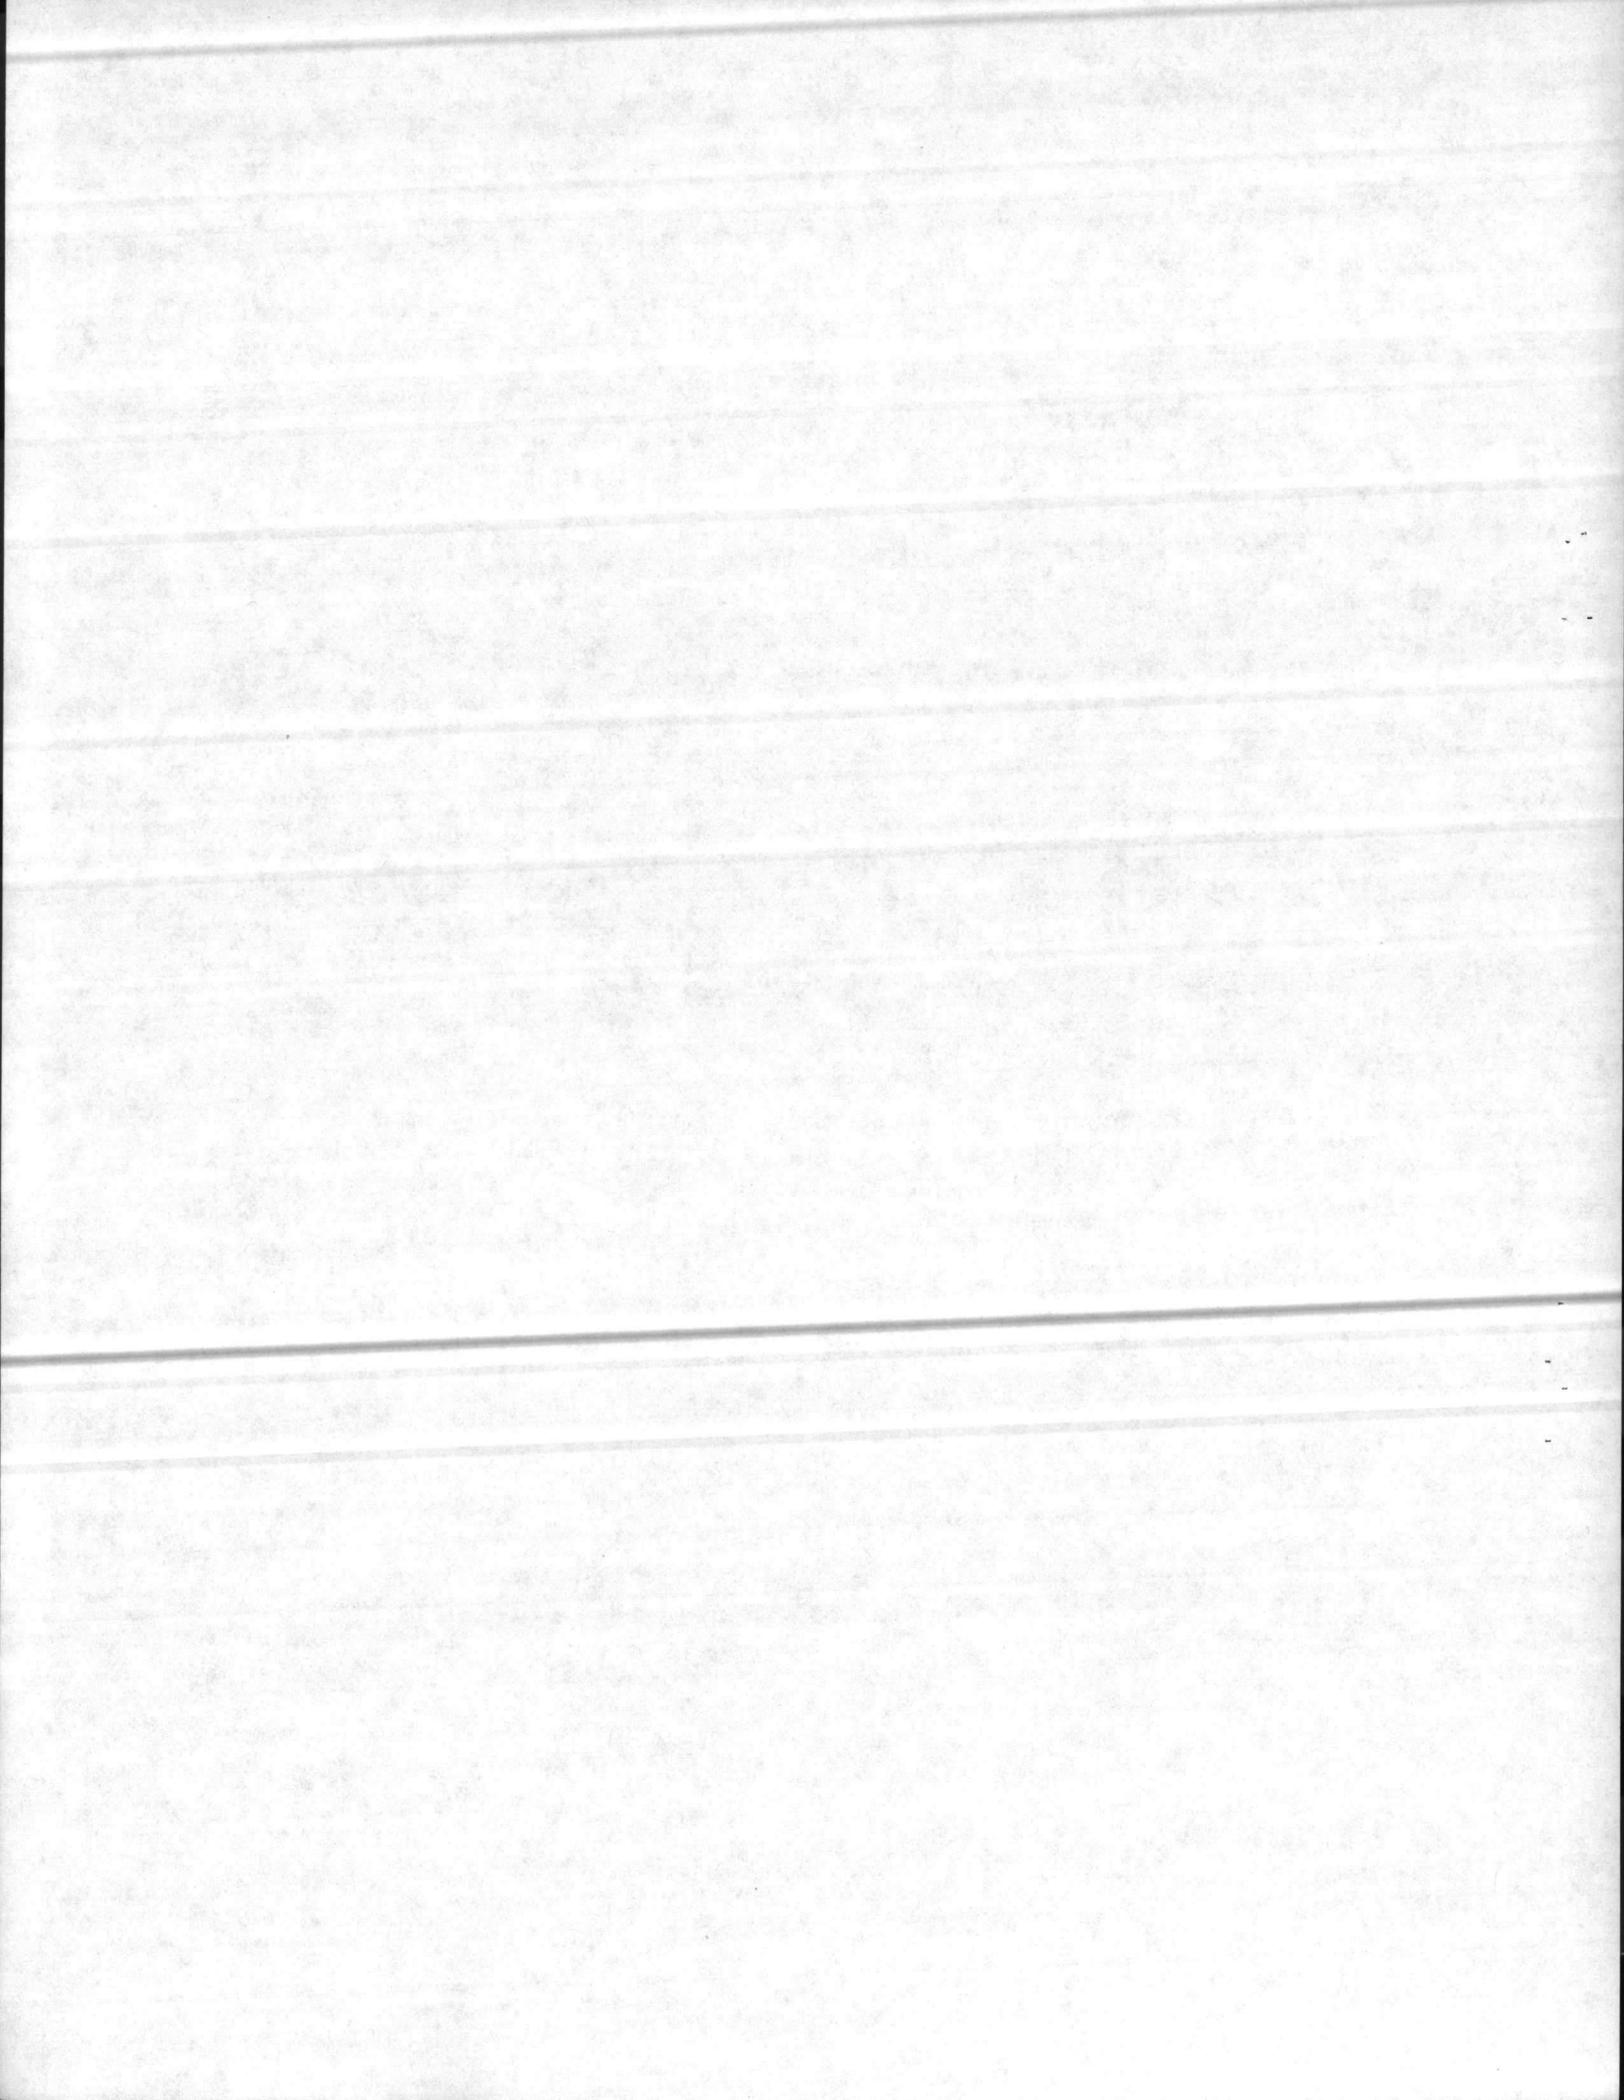

Method (c). An approved nonabsorptive gasket.


Method (d). An approved calking placed between the aluminum and the incompatible metal.

If drainage from incompatible metal passes over aluminum, the incompatible metal shall be painted by method (a) or method (b). Aluminum surfaces in contact with concrete or masonry materials shall be painted by method (a). Green or wet wood, or wood treated with incompatible wood preservatives, shall be painted by method (a) or shall be given two coats of aluminum paint.

7.2 Rigid Frames, Column Bases, and Sill Members: Set accurately, using a non-shrinking grouting mortar if needed to obtain uniform bearing on the concrete and to maintain a level base line elevation. Anchors and anchor bolts for securing rigid frames, columns, or sill members to foundations shall be steel, unpainted, set accurately to templates, and of proper size to adequately resist all applicable design loads at the base. Grouting mortar shall be a mixture of one part of blended portland cement, to two parts of well-graded fine aggregate, and enough water to provide a maximum water cement ratio of 0.50. The blended portland cement shall be a mixture of cement with 1/4 ounce of aluminum powder to each sack of cement. Surfaces to receive the mortar shall be cleaned and moistened thoroughly immediately before placement of mortar. Exposed surfaces of mortar shall be water cured with wet burlap for 7 days.

7.3 Wall Construction: All panels shall be applied with the configurations in a vertical position. Panels shall be supplied in full wall heights from base to eave with no horizontal joints except at the junctions of door frames, window frames, louver panels, and similar locations. All side and end laps shall be sealed with the joint sealing material specified hereinbefore. All walls shall be flashed and/or sealed at the base, at the top, around windows, door frames, framed louvers, and all other similar openings. The placement of closure strips, flashing and sealing material shall be accomplished in an approved manner that will assure complete weathertightness. Flashing will not be required where approved "self-flashing" sheets or panels are used. Minimum end laps for all types of panels shall be 2-1/2 inches. Minimum side laps for all types of panels shall be one corrugation or one configuration. Liner panels shall be provided to height indicated.

7.4 Roof Construction: All roofing panels shall be applied with the configurations parallel to the slope of the roof. The roofing panels shall be supplied in full lengths from ridge to eaves with no transverse joints except at the junction of skylights. All side laps shall be laid away from the prevailing

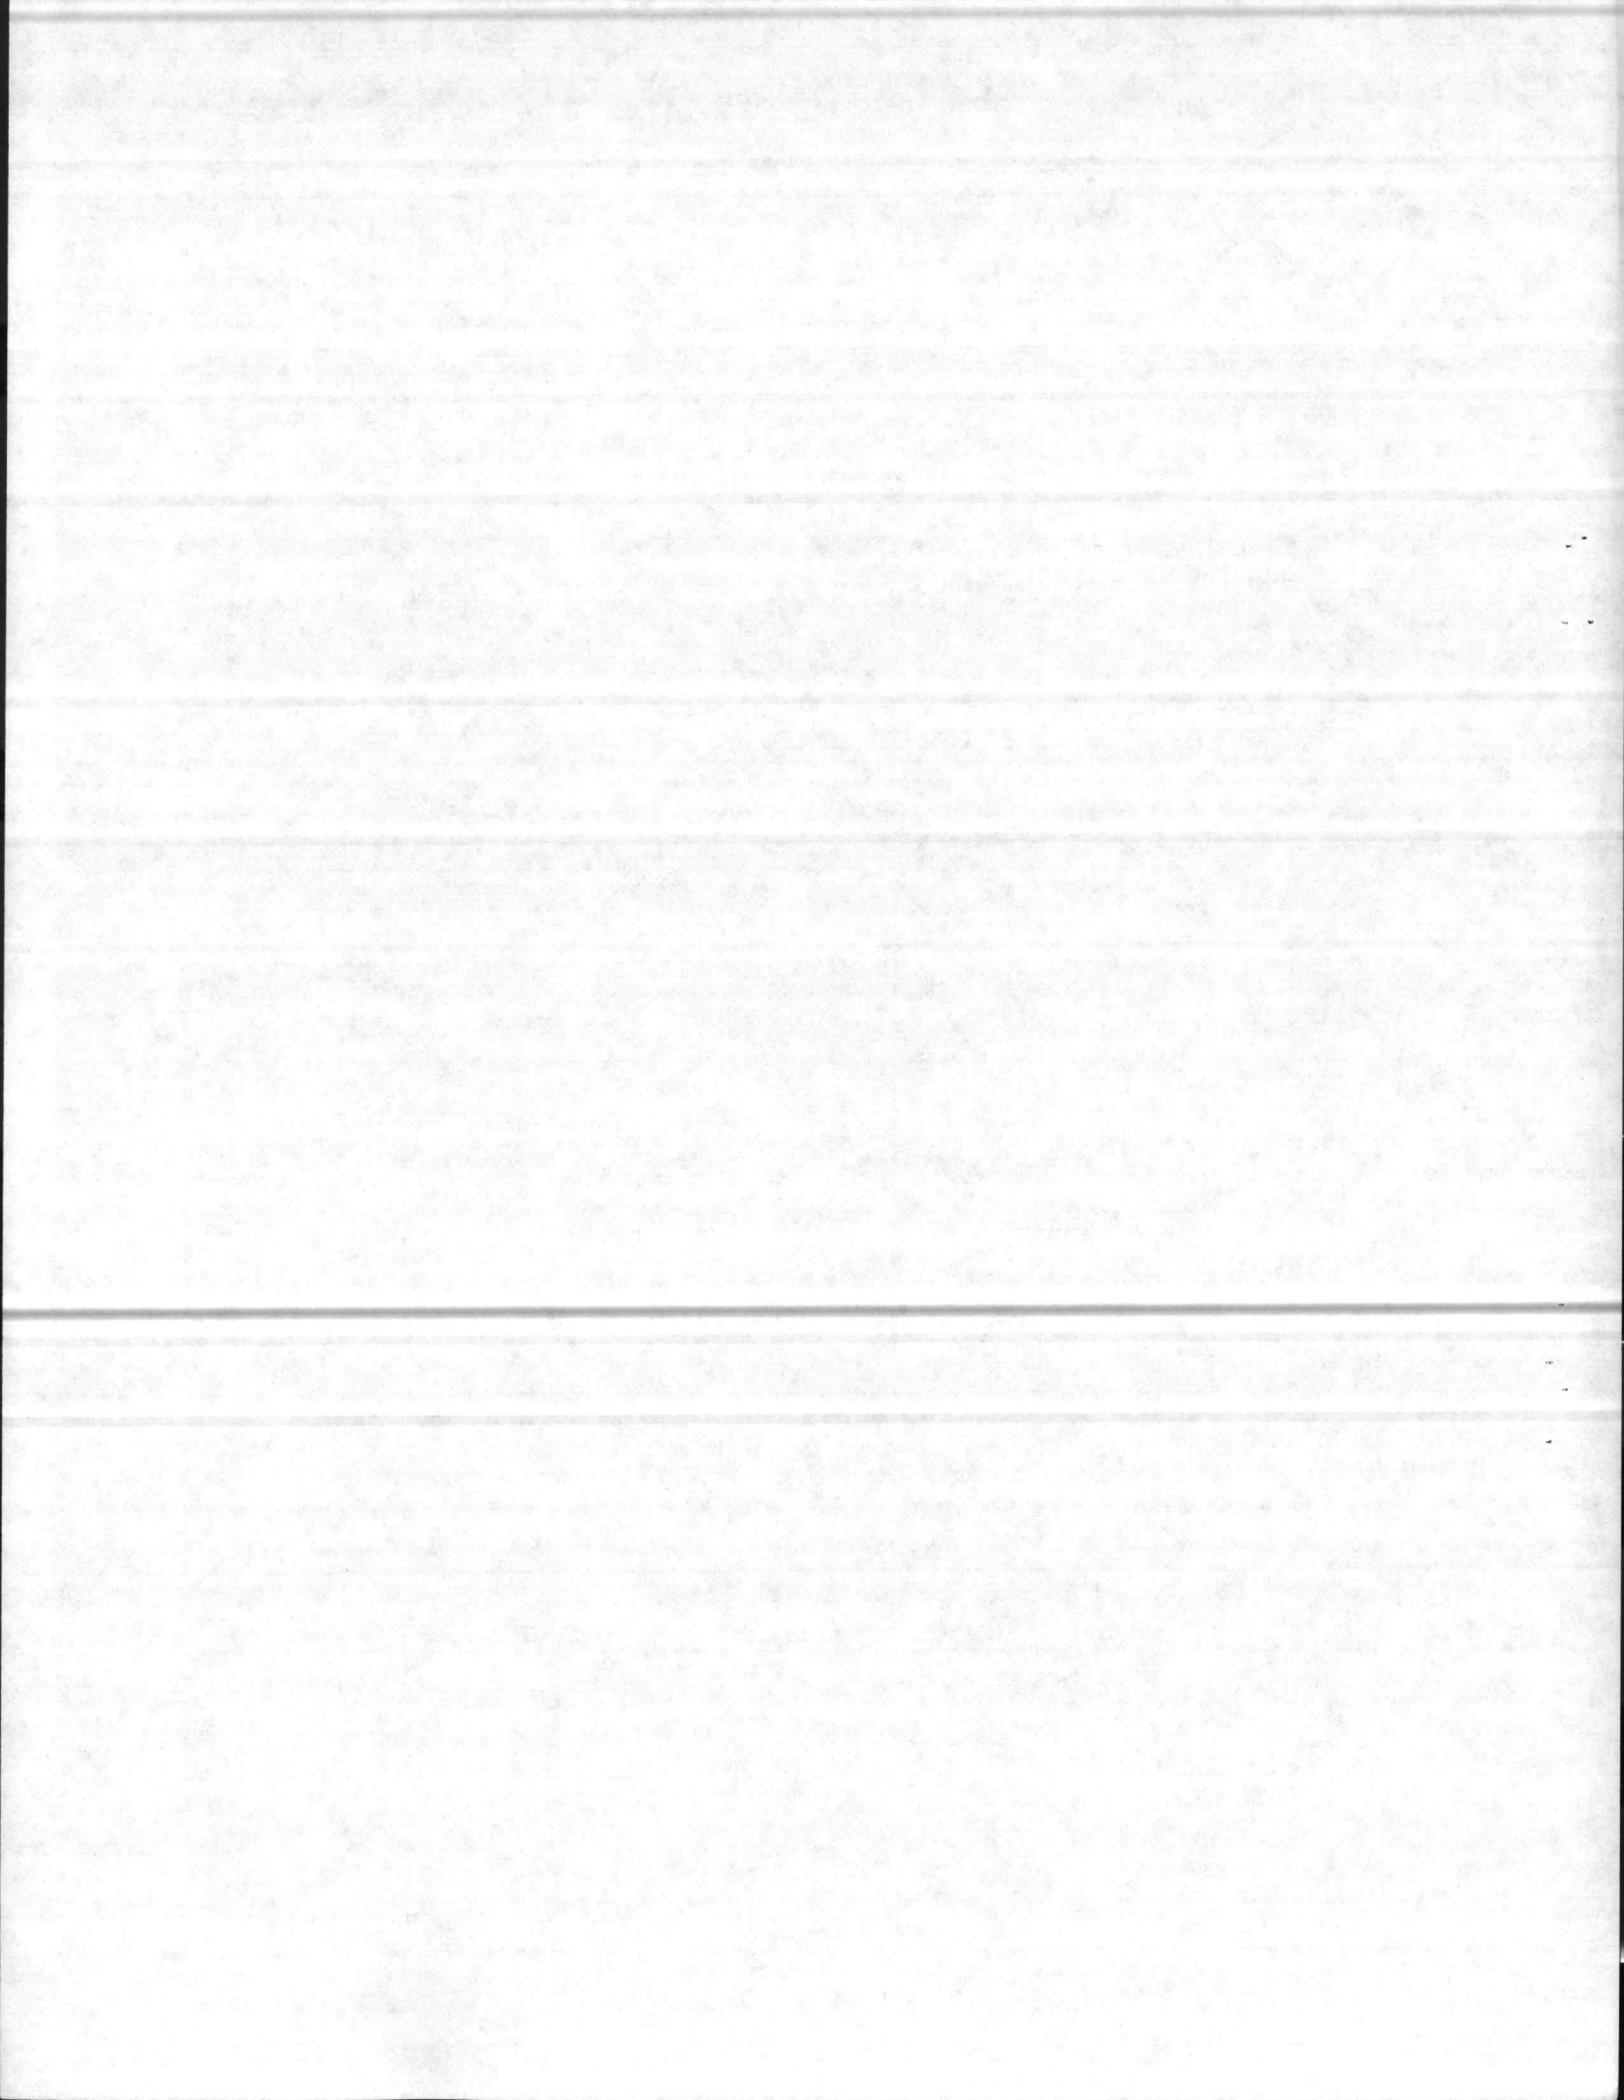


wind, and all side and end laps shall be sealed with the joint sealing material specified hereinbefore. The roof shall be flashed and sealed at the ridge, at eaves and rakes, at projections through the roof, and elsewhere as necessary. The placement of closure strips, flashing, and sealing material shall be accomplished in an approved manner that will assure complete weathertightness. Minimum side lap shall be one corrugation, configuration or interlocking rib.

7.5 Installation of Insulation:

7.5.1 Roof Insulation: Install over purlins before roof coverings are applied. Insulation shall be held rigid until secured in place. Facing shall be exposed on the interior side of the building. Facing tabs of insulation shall be folded and stapled on 6-inch centers to completely seal joints. If folding and stapling is accomplished from the inside, the tabs shall be pushed neatly up between the edges of adjoining blankets. Side laps of insulation shall be covered with metal strips formed for this purpose and painted to match the facing material. The strips shall span from purlin to purlin and shall be installed in accordance with the metal building manufacturer's recommendations.

7.5.2 Wall Insulation: Install over girts before roof coverings are applied. Insulation shall be held rigid until secured in place. Facing shall be exposed on the interior side of the building. Facing tabs of insulation shall be folded and stapled on 6-inch centers to completely seal joints. If folding and stapling is accomplished from the inside, the tabs shall be pushed neatly up between the edges of adjoining blankets. Side laps of insulation shall be covered with metal strips formed for this purpose and painted to match the facing material. The strips shall span from girt to girt and shall be installed in accordance with the metal building manufacturer's recommendations.

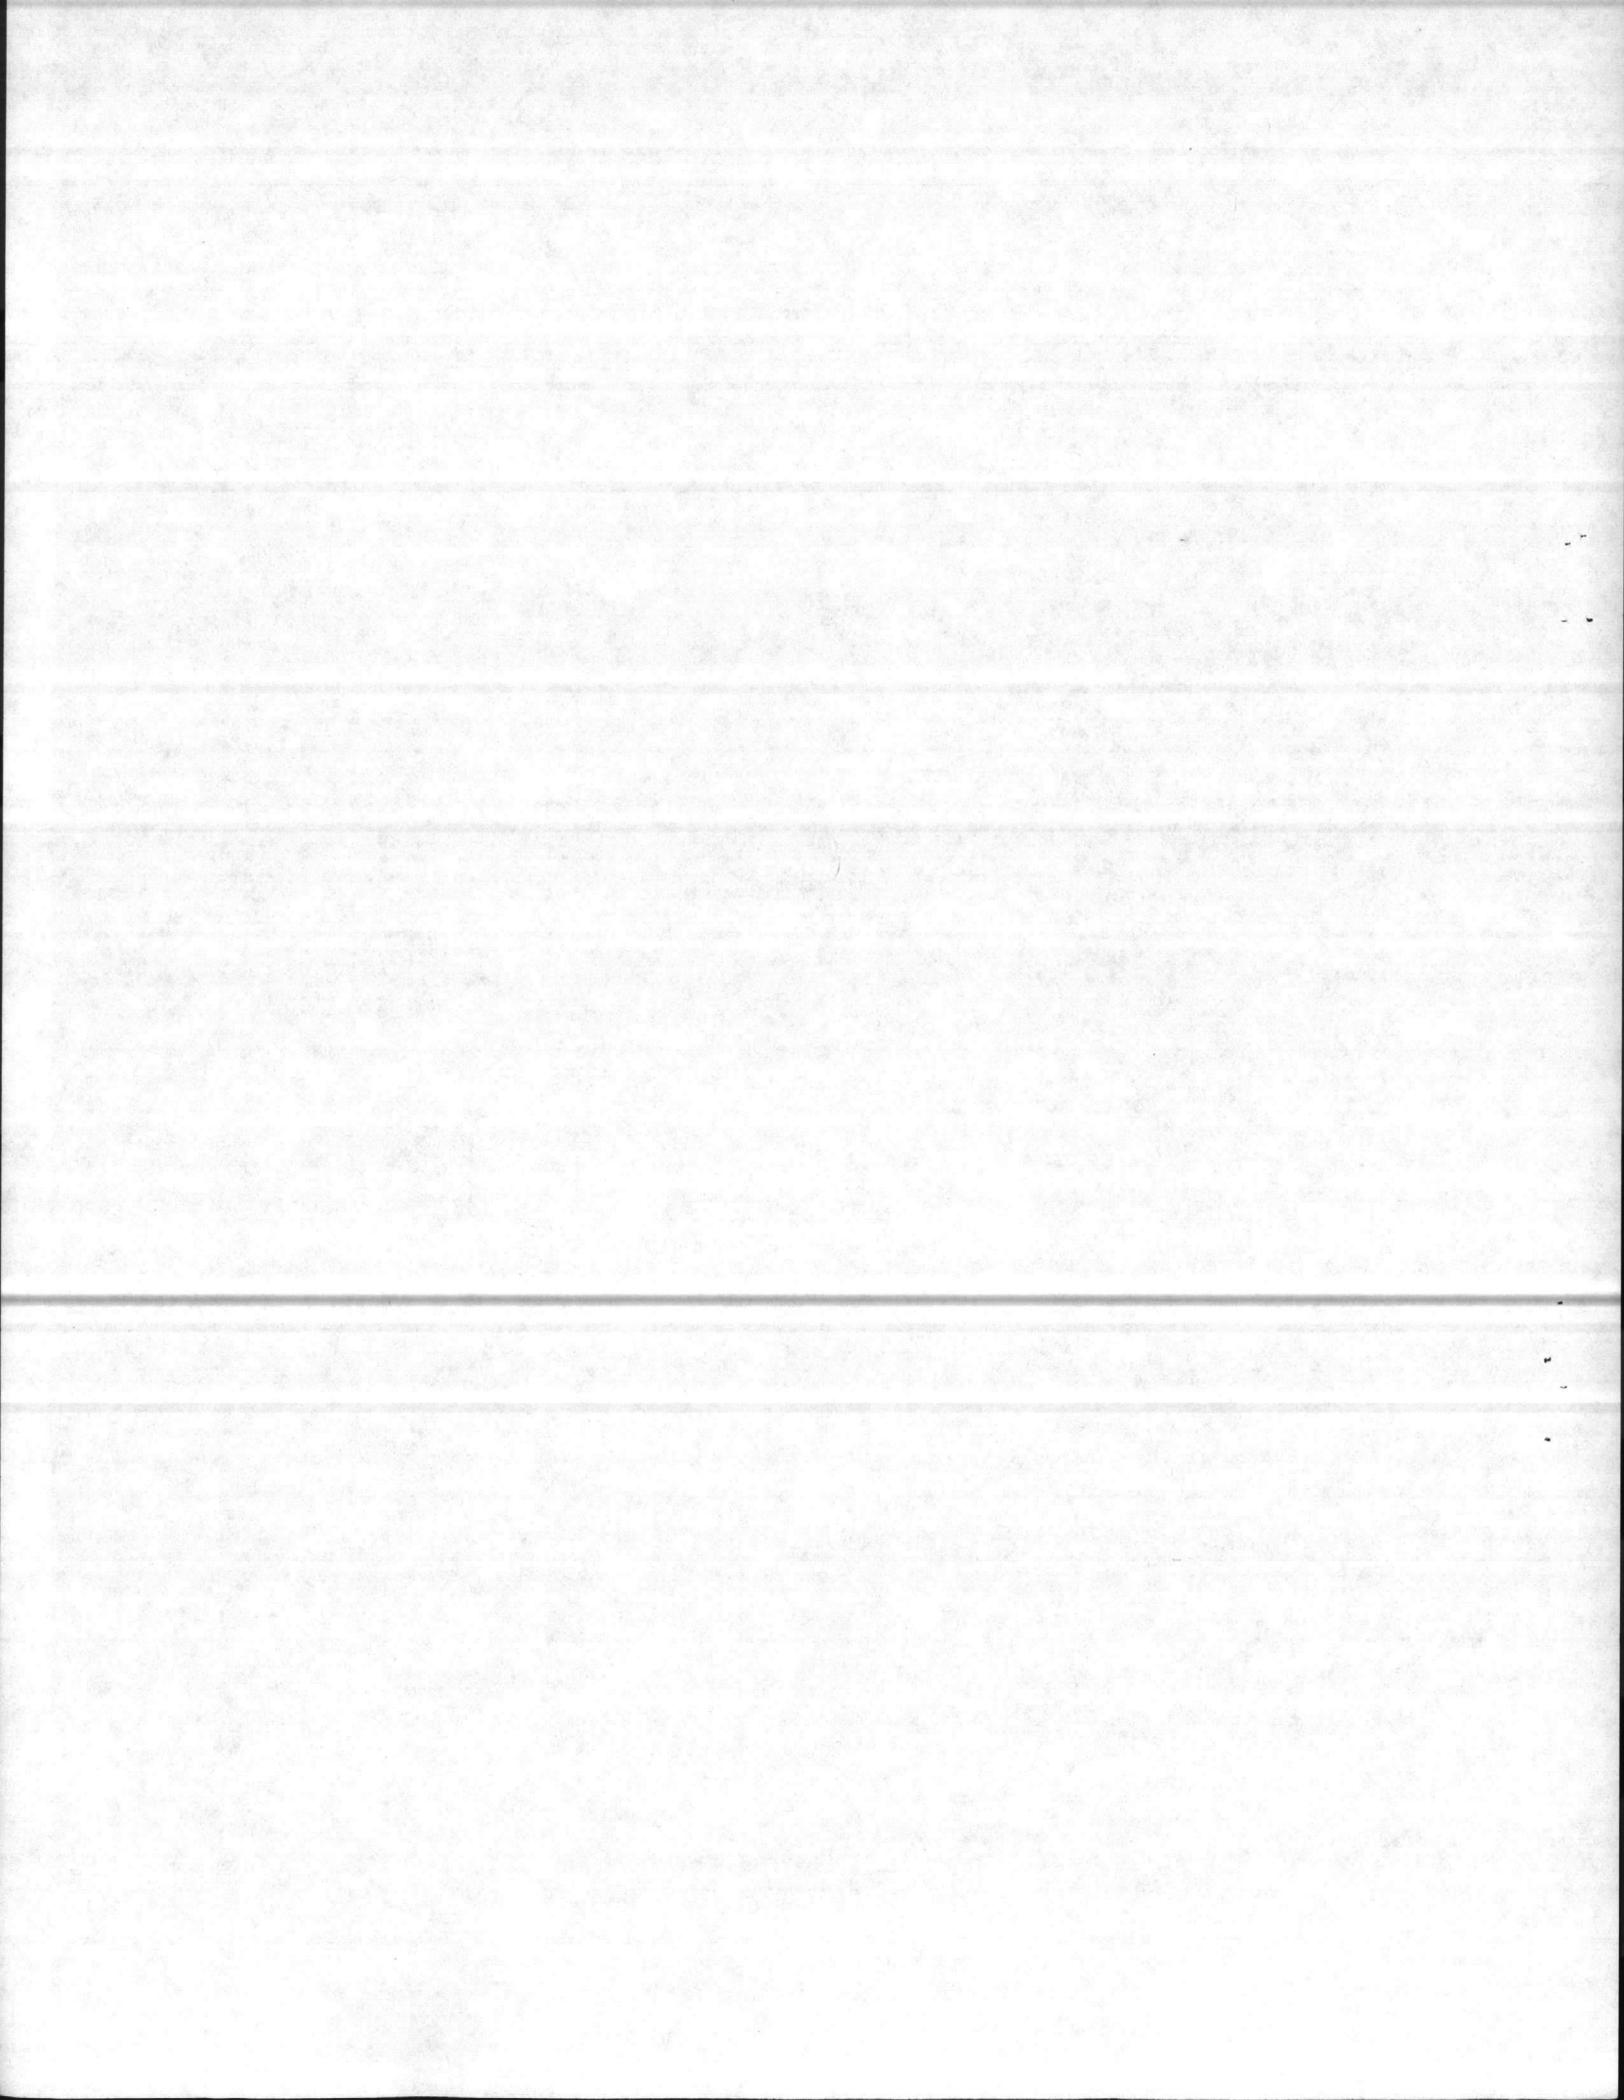

DIVISION 15. MECHANICAL

SECTION 15011. GENERAL REQUIREMENTS, MECHANICAL

1. APPLICATION: This section applies to all sections of Division 15 of this project, except as specified otherwise in the individual sections.


2. QUALITY CONTROL provisions of Division 1, General Requirements, apply to this division. Approvals, except those required for field installations, field applications, and field tests, shall be obtained before custom fabrication is started and before delivery of material or equipment to the project site.

3. SUBMITTALS:

3.1 Manufacturer's Data: Before executing any work, four copies of information in one completely marked and coordinated package sufficient to assure full compliance with the contract requirements shall be submitted for approval. Piecemeal submittal of data is not acceptable and such submittal will be returned without review. Information shall be submitted for all material and equipment the Contractor proposes to furnish for accomplishment of the contract work. Submittals for each manufactured item shall be manufacturer's descriptive literature, equipment drawings, diagrams, performance and characteristic curves, and catalog cuts, and shall include the manufacturer's name, trade name, catalog model or number, nameplate data, size, layout dimensions, capacity, specification reference, applicable Federal and Military specification references, and all other information necessary to establish contract compliance.

3.2 Shop Drawings: Four copies of consolidated shop drawings in one complete package shall be submitted for approval. The drawings shall be drawn to a minimum scale as approved by the Contracting Officer, shall be a minimum of 8 X 10 inches in size, and shall include plans, elevations, and sections of equipment and control spaces identifying and indicating proposed and existing location, layout, and arrangement of items of equipment, control panels, accessories, piping, and any other items that must be shown to assure a coordinated installation. Drawings also shall indicate adequate clearance for operation, maintenance, and replacement of operating equipment devices. If any equipment is disapproved, drawings shall be revised to show acceptable equipment resubmitted. Piecemeal submittal of drawings or marked-up contract drawings or copies are not acceptable and such submittals will be returned without review.


3.3 Standards Compliance: Where equipment or materials are specified to conform to requirements of the standards of organizations such as American Society for Mechanical Engineers (ASME), Underwriters' Laboratories (UL), American Gas Association (AGA), and American Refrigeration Institute (ARI), that use a label or listing as method of indicating

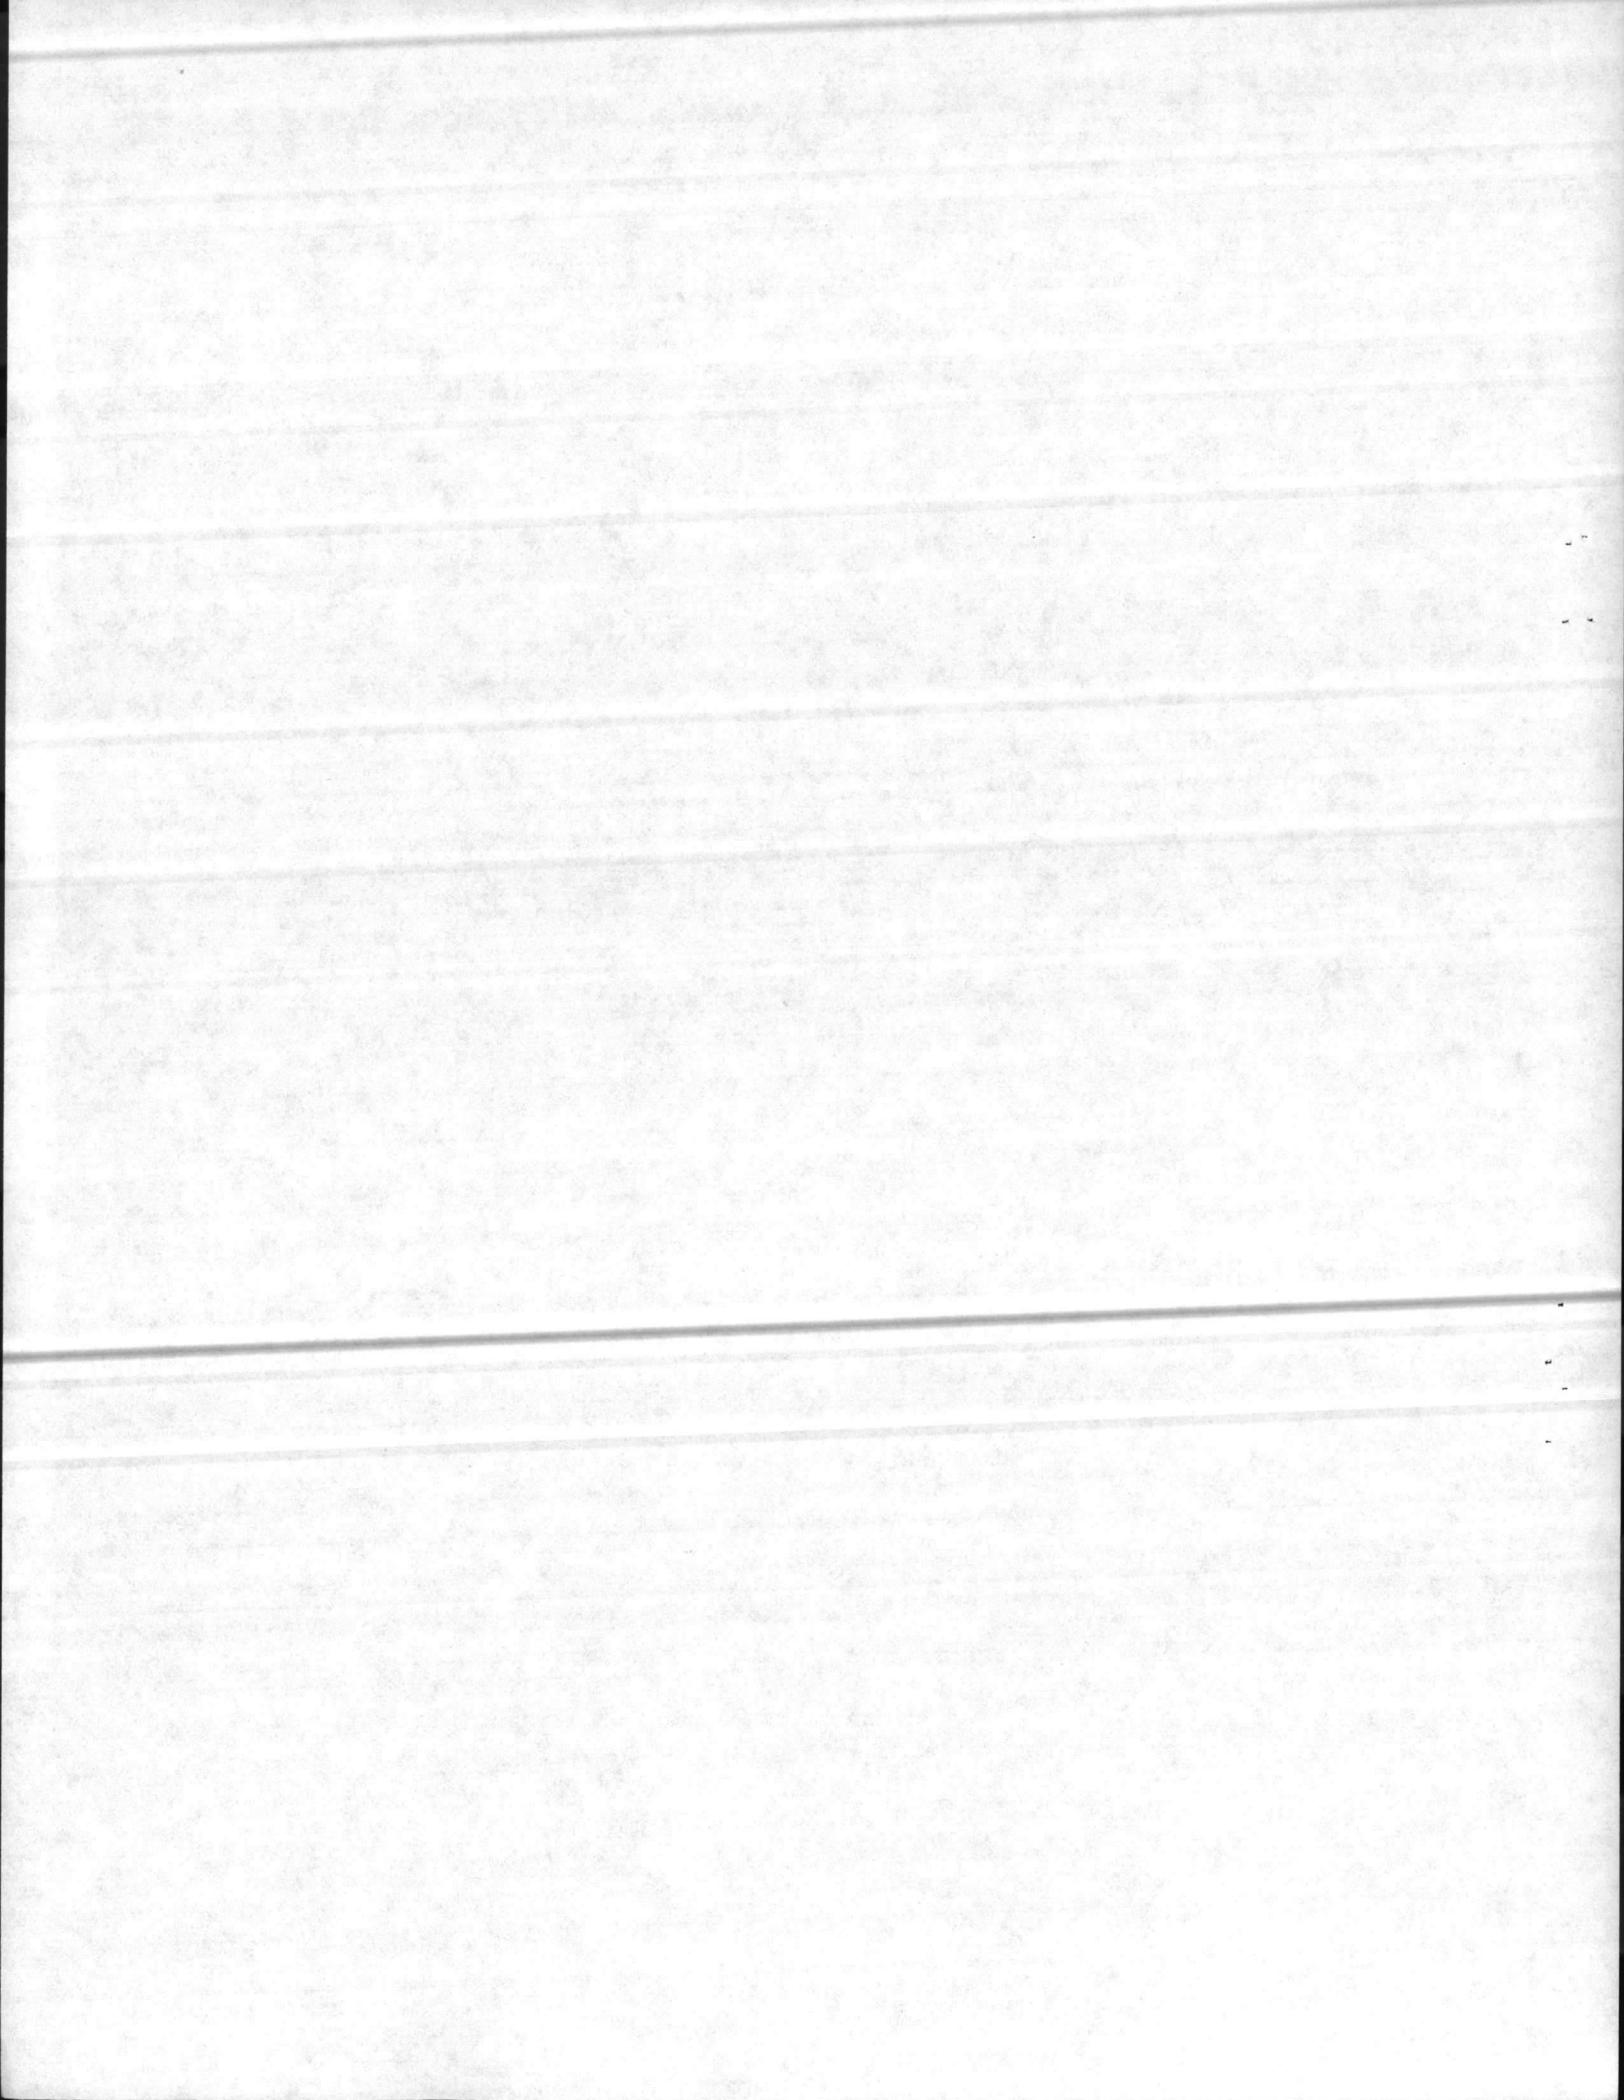

compliance, proof of such conformance shall be submitted and approved. The label or listing of the specified organization will be acceptable evidence. In lieu of the label or listing, the Contractor shall submit a notarized certificate from an independent testing organization adequately equipped and competent to perform such services, and approved by the Contracting Officer, stating that the item has been tested in accordance with the specified organization's test methods and that the item conforms to the specified organization's standard or code. For materials whose compliance with the organizational standards or specifications is not regulated by an organization using its own listing or label as proof of compliance, a notarized certificate from the manufacturer shall be furnished to the Contracting Officer stating that the material complies with the applicable referenced standard or specification. This statement shall be in addition to any proof required in the paragraph entitled "Certified Test Reports" herein.

3.4 Certified Test Reports: Except as otherwise specified in this division, before delivery of materials and equipment, four certified copies of the reports of all tests required in referenced publications or specified in an individual section shall be resubmitted and approved. The testing shall have been performed in accordance with the Quality Control Section of Division 1. The tests shall have been performed within three years of submittal of the reports for approval. Test reports shall be accompanied by notarized certificates from the manufacturer certifying that the tested material and equipment is of the same type, quality, manufacture, and make as that proposed to be supplied.

3.5 Operations and Maintenance Manual: Three copies each of an operation and maintenance manual for each piece of equipment shall be furnished by the Contractor. Manuals shall have hardback binders or an approved equivalent. The manual shall include the names, addresses, and telephone number of each subcontractor installing equipment and systems and of the local representatives for each item of equipment and each system. The instruction sheets shall be legible and easily read, with large sheets of drawings folded in. The manual shall include, but not be limited to, the following: a system layout showing piping, valves, and controls; wiring and control diagrams with data to explain detailed operation and control of each component; a control sequence describing start-up, operation and shut-down; a detailed description of the function of each principal component of the system; the procedure for starting; the procedure for operating; shut-down instructions; installation instructions; maintenance and overhaul instructions; lubrication schedule including type, grade, temperature range and frequency; safety precautions, diagrams, and illustrations; test procedures; performance data; and parts lists. The parts lists for equipment shall indicate the sources of supply, recommended spare parts, and the service organization which is reasonably convenient to the building site. The manual shall be complete in all respects for all equipment, controls, accessories, and associated appurtenances provided.

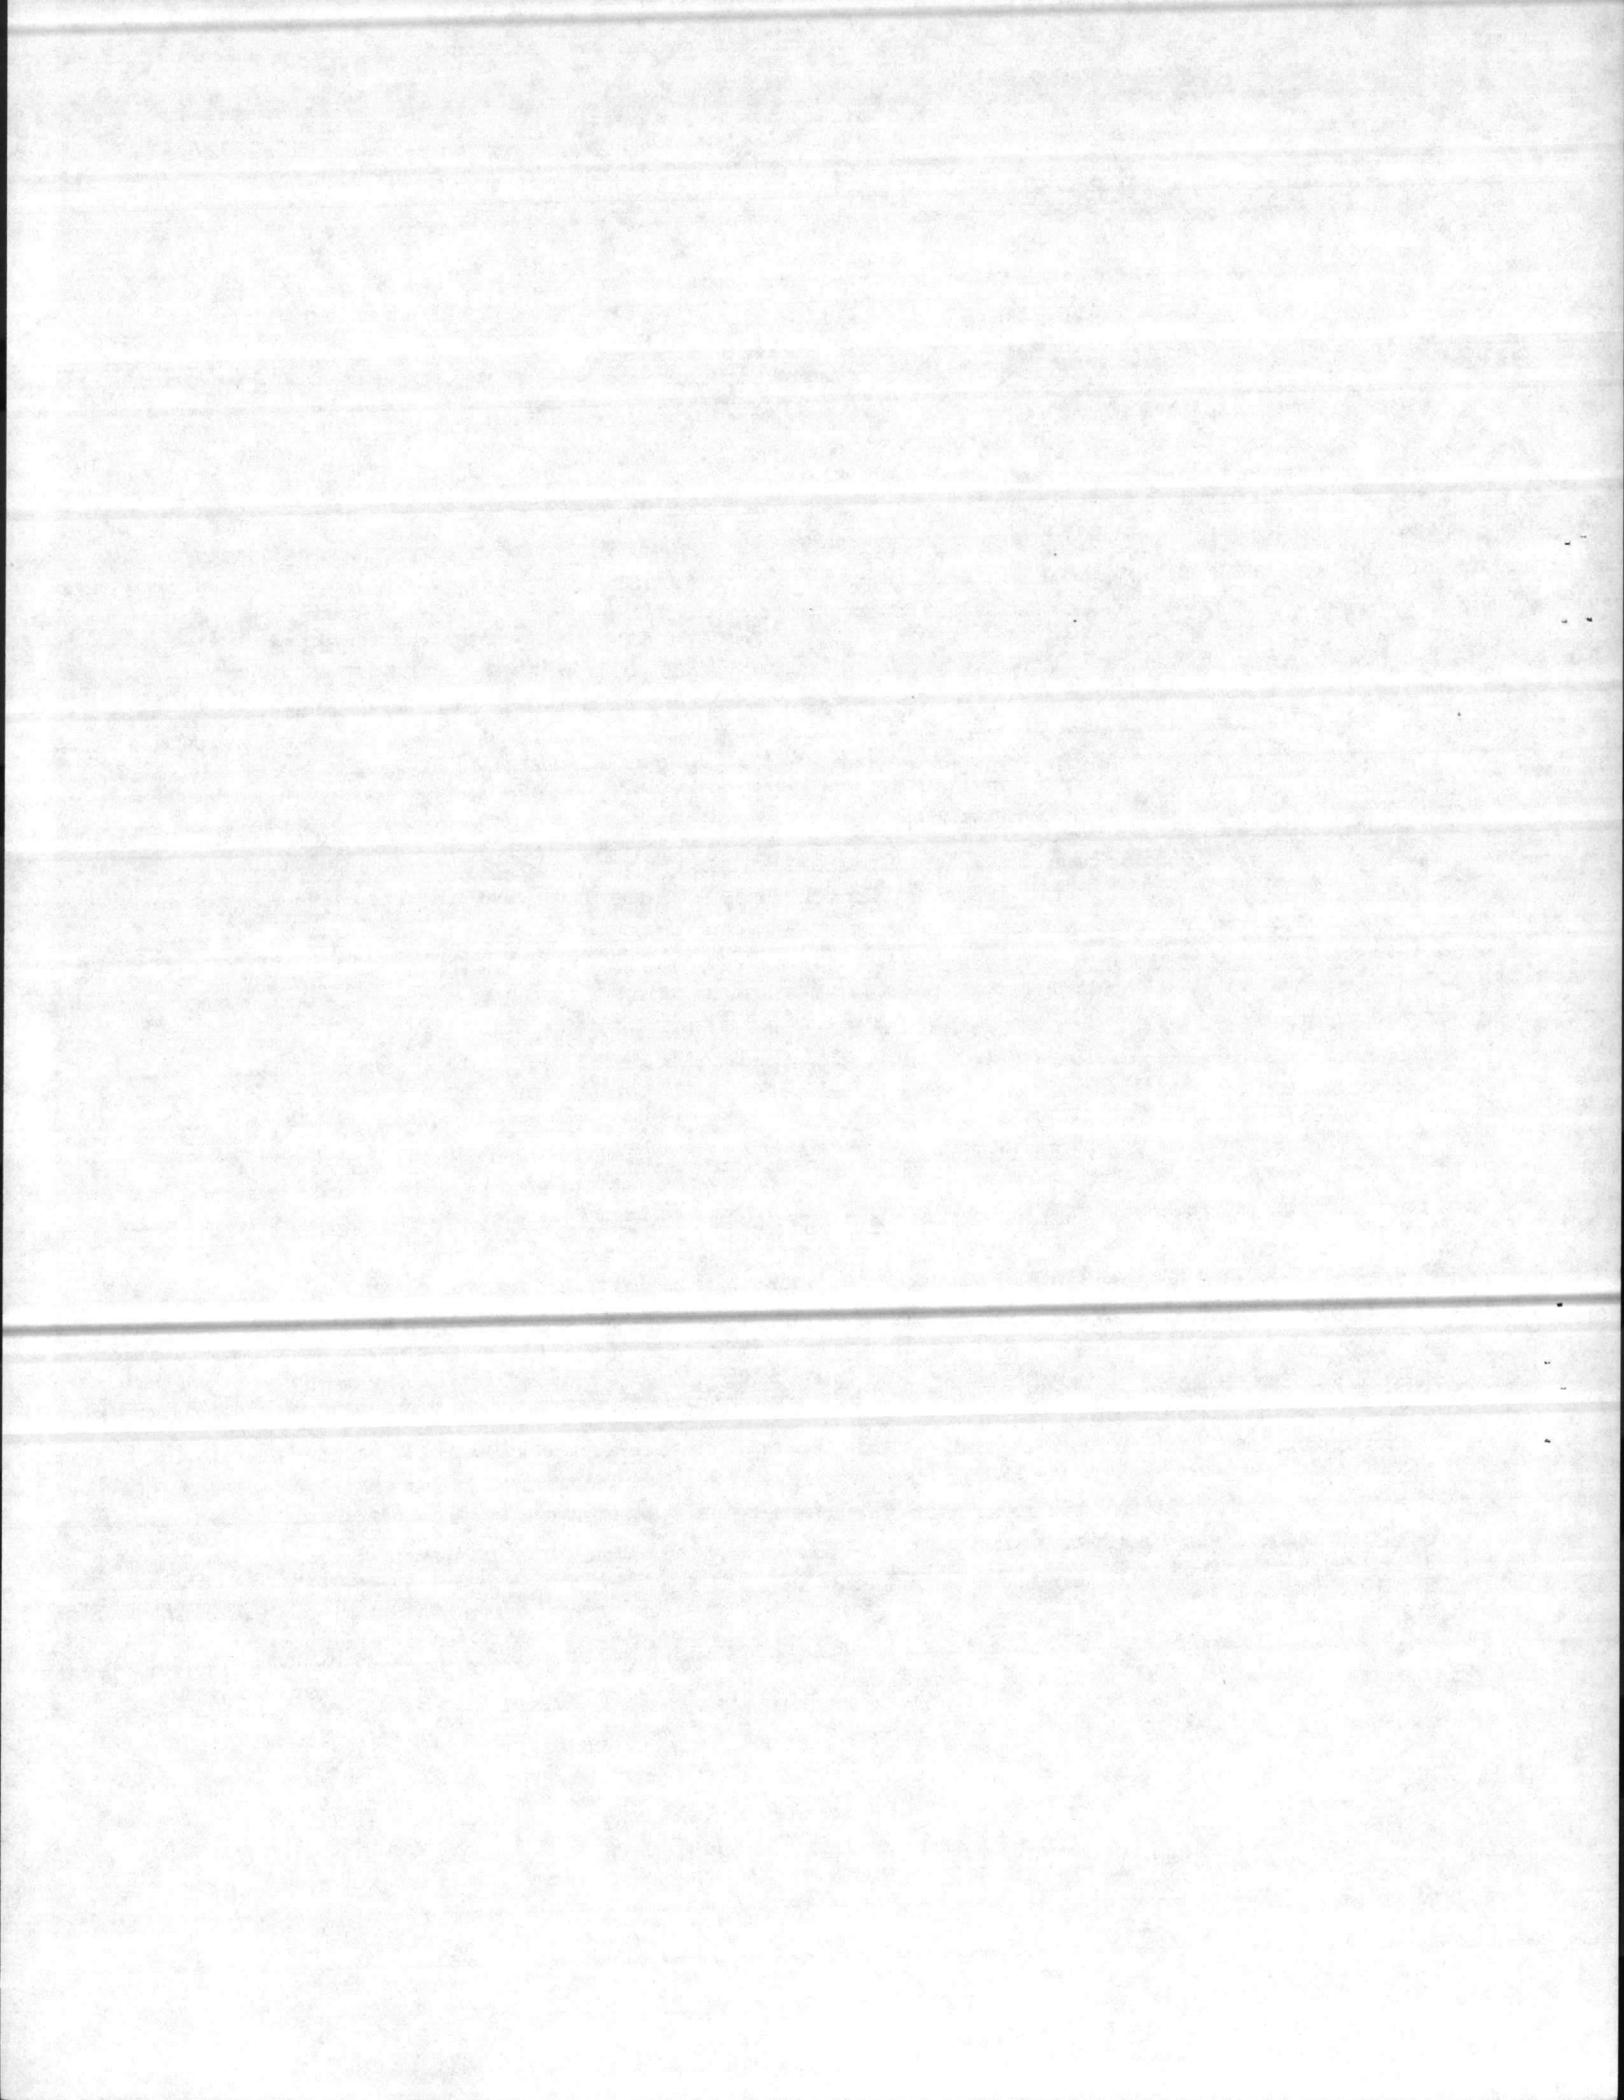


3.6 Posted Operating Instructions: Operating instructions approved by the Contracting Officer shall be provided for each system and each principal piece of equipment for the use of operation and maintenance personnel. The operating instructions shall include wiring and control diagrams showing the complete layout of the entire system, including equipment, piping, and valves, and control sequence and shall be framed under glass or in approved laminated plastic and posted where directed by the Contracting Officer. Printed or engraved operating instructions for each principal piece of equipment including start-up, proper adjustment, operating, lubrication, shut-down, safety precautions, procedure in the event of equipment failure, and any other necessary items of instruction as recommended by the manufacturer of the unit shall be attached to or posted adjacent to the piece of equipment. Operating instructions exposed to the weather shall be made of weather-resisting materials or shall be suitably enclosed to be weather protected. Operating instructions shall not fade when exposed to sunlight and shall be secured to prevent easy removal or peeling.

4. INSTRUCTION TO GOVERNMENT PERSONNEL: When specified in other sections, the Contractor shall furnish, without additional expense to the Government, the services of competent instructors who will give full instruction to the designated personnel in the adjustment, operation, and maintenance, including pertinent safety requirements, of the equipment or system specified. Each instructor shall be thoroughly familiar with all parts of the installation and shall be trained in operating theory as well as practical operation and maintenance work. Instruction shall be given during the first regular work week after the equipment or system has been accepted and turned over to the Government for regular operation. The number of mandays (eight hours) of instruction furnished shall be as specified in other sections. When more than four mandays of instruction are specified, approximately half of the time shall be used for classroom instruction. All other time shall be used for instruction with the equipment or system. When significant changes or modifications in the equipment or system are made under the terms of the contract, additional instruction shall be provided to acquaint the operating personnel with the changes or modifications.

5. DELIVERY AND STORAGE: Equipment and materials shall be properly stored and adequately protected and carefully handled to prevent damage before and during installation. Equipment and materials shall be handled, stored, and protected in accordance with the manufacturer's recommendations and as approved by the Contracting Officer. Damaged or defective items, in the opinion of the Contracting Officer, shall be replaced at no cost to the Government.

6. STANDARD PRODUCTS: Materials and equipment shall be essentially the standard cataloged products of manufacturers regularly engaged in production of such materials or equipment and shall be manufacturer's latest standard design that complies with the specification requirements. Materials and equipment shall essentially duplicate items that have been

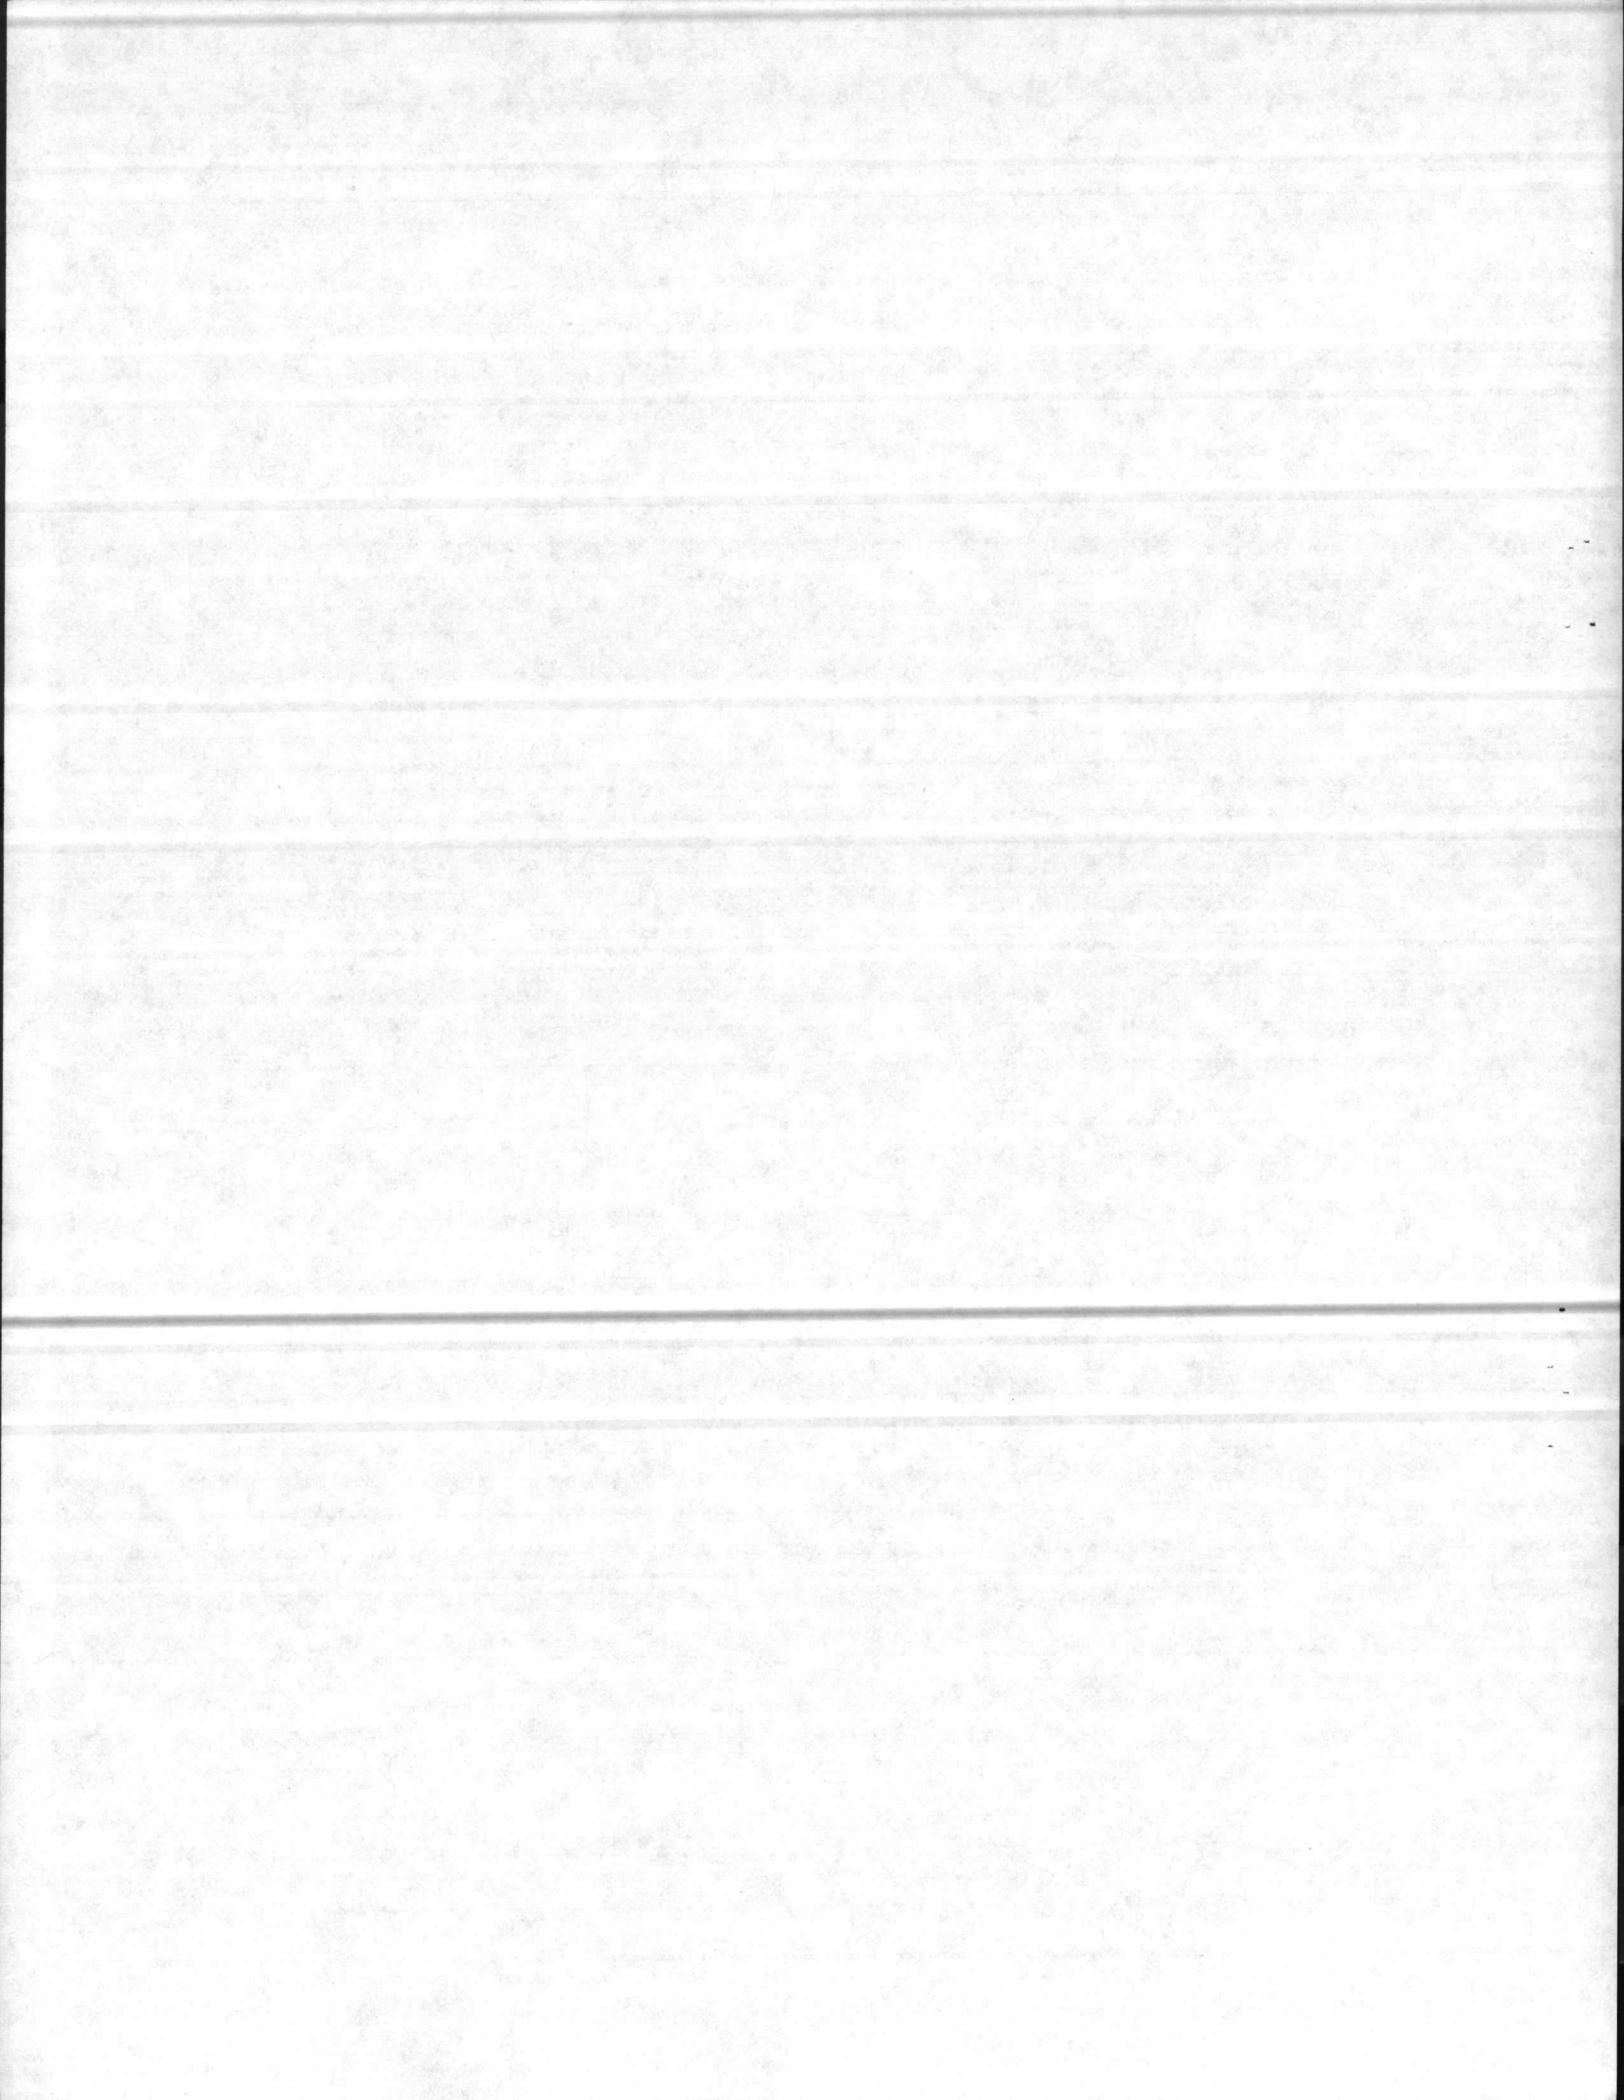


in satisfactory commercial or industrial use at least two years prior to bid opening. Where two units of the same class of equipment are required, these units shall be products of a single manufacturer. However, the component parts of the system need not be the products of the same manufacturer. Each major component of equipment shall have the manufacturer's name and address, and the model and serial number on a nameplate securely affixed in a conspicuous place. The nameplate of the distributing agent will not be acceptable.

7. SAFETY REQUIREMENTS: Belts, pulleys, chains, gears, couplings, projecting setscrews, keys, and other rotating parts located so that any person can come in close proximity thereto shall be fully enclosed or properly guarded. High-temperature equipment and piping so located as to endanger personnel or create a fire hazard shall be properly guarded or covered with insulation of a type as specified herein. Items such as catwalks, ladders, and guardrails shall be provided where required for safe operation and maintenance of equipment.

8. MANUFACTURER'S RECOMMENDATIONS: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the Contracting Officer prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.

9. ELECTRICAL REQUIREMENTS: Electrical components of mechanical equipment and systems such as motors, starters, and controls shall be provided under this division and shall be as specified herein and as necessary for complete and operable systems. Extended voltage range motors will not be permitted. Interconnecting wiring for components of packaged equipment shall be provided as an integral part of the equipment. All interconnecting power wiring and conduit for field erected equipment and all control wiring rated over 100 volts and conduit shall be as specified in Division 16. Control wiring rated under 100 volts and conduit shall be as specified in this division. Motor control equipment forming a part of motor control centers or switchgear assemblies and all necessary conduit and wiring connecting such assemblies, centers, or other power sources to mechanical equipment shall conform to Division 16.

END

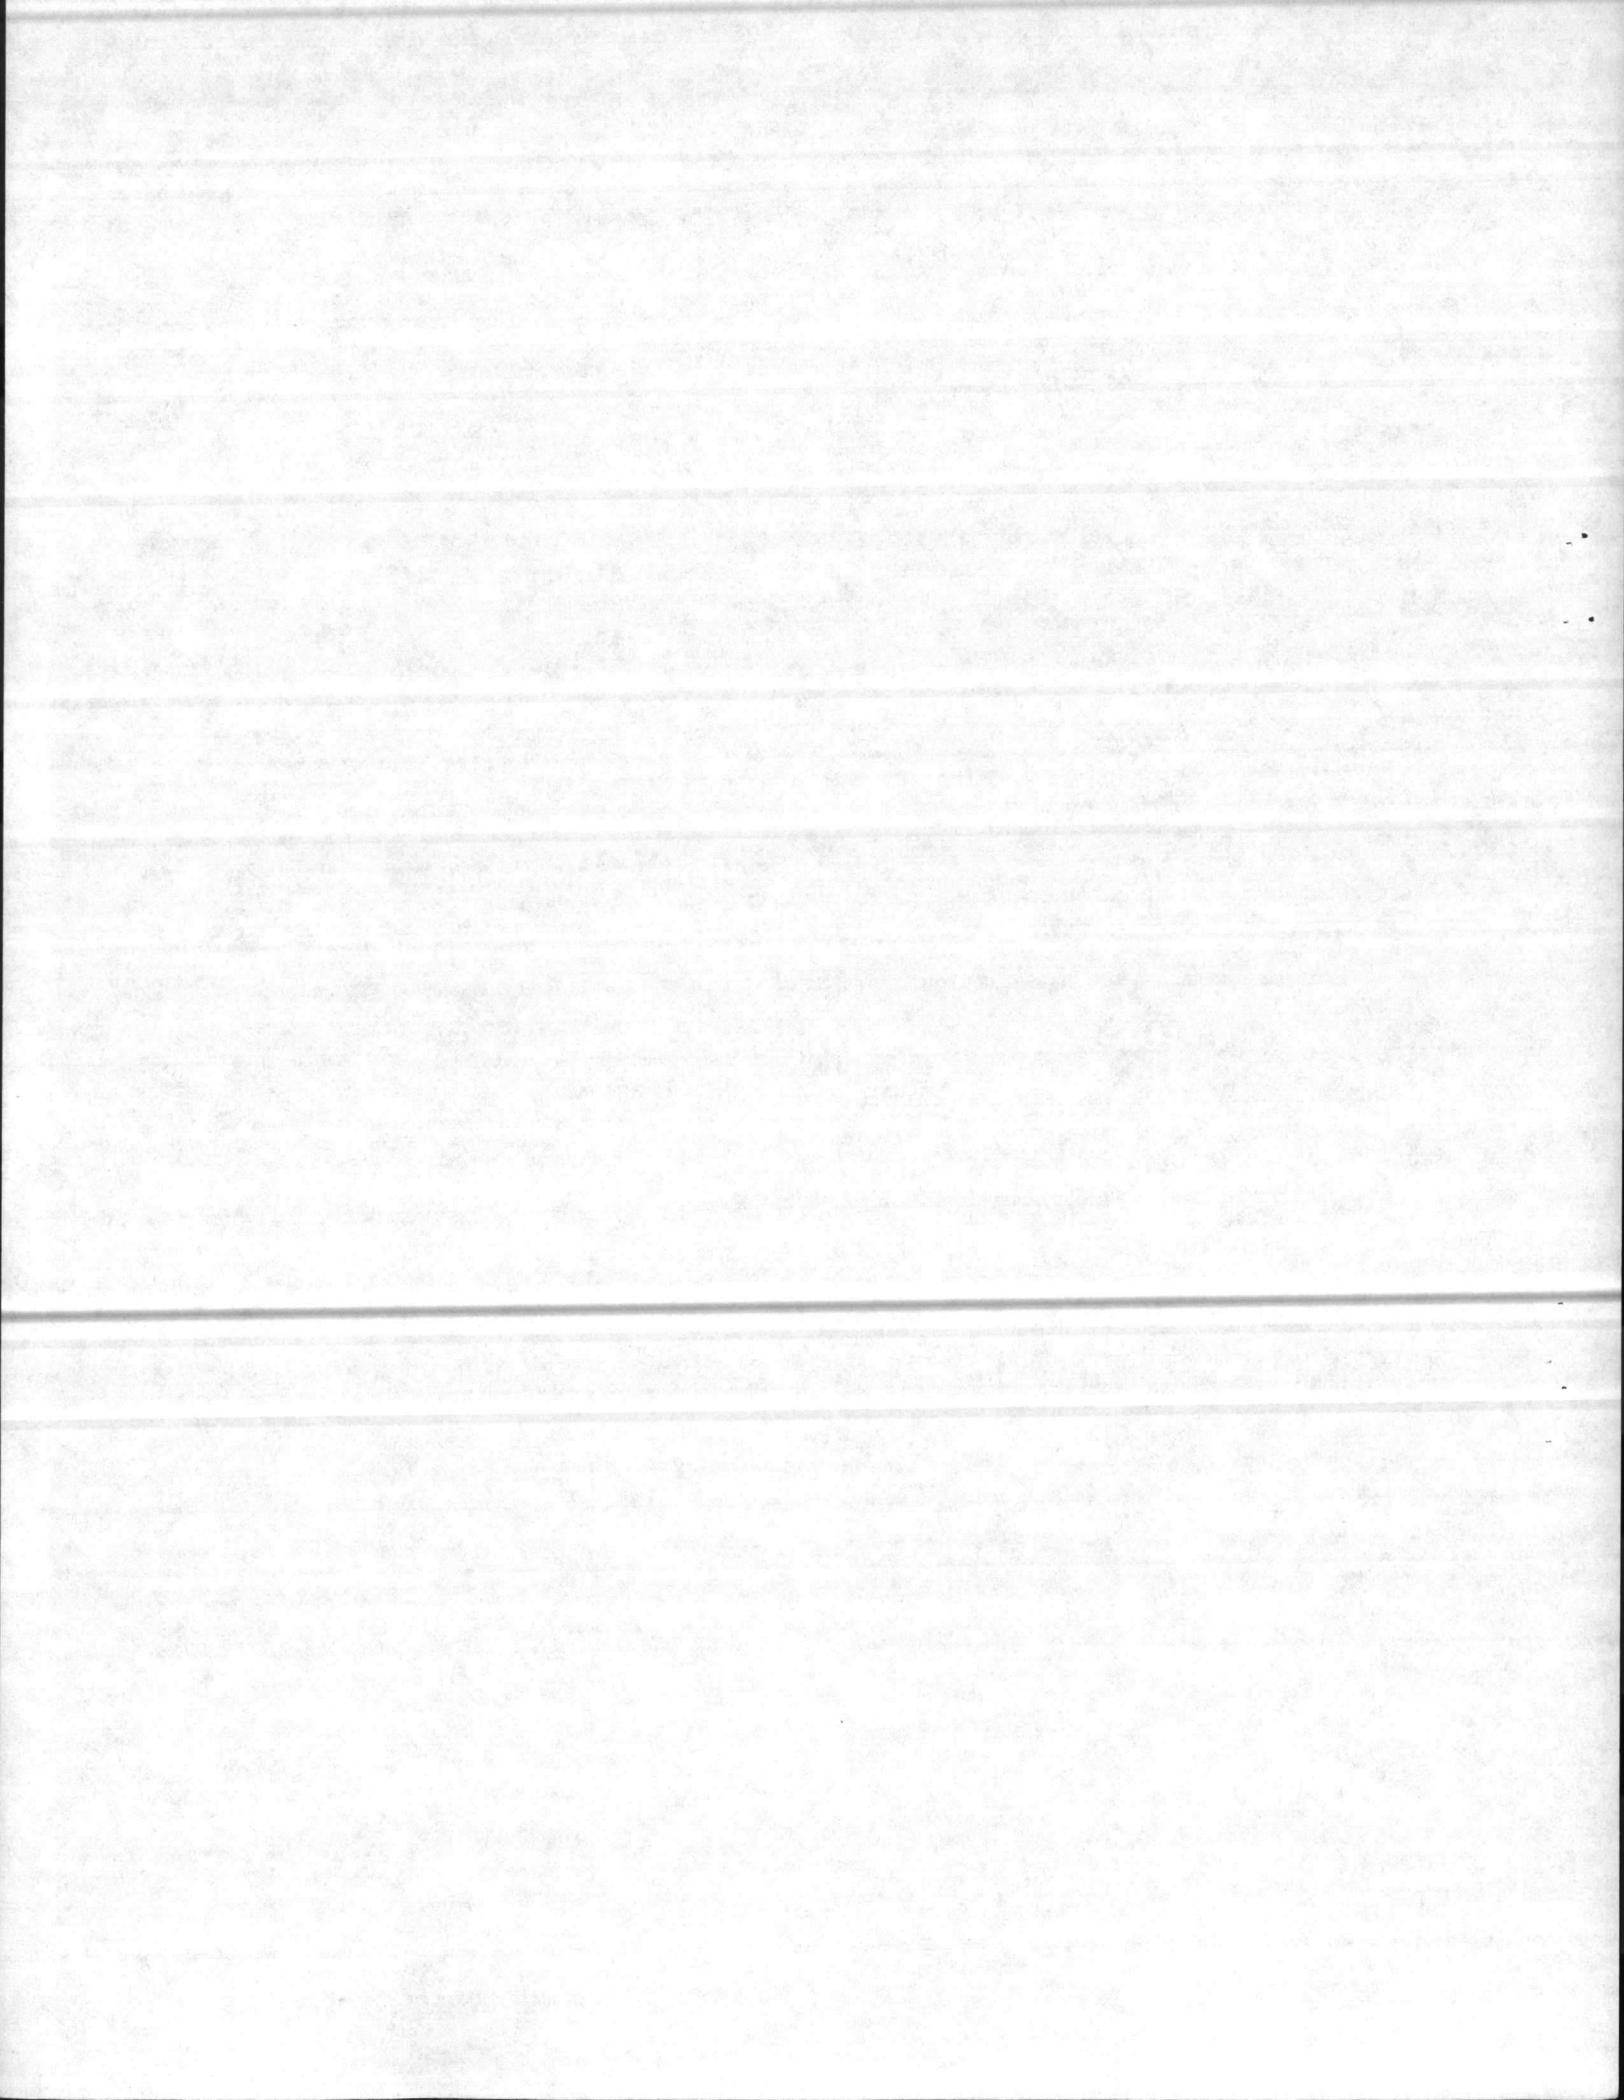

SECTION 15201. WELLS

1. APPLICABLE PUBLICATIONS: The following publications of the issues listed below, but referred to elsewhere by basic designation only, form a part of this specification to the extent indicated by the references thereto (where a number in parenthesis is suffixed to the specification number, it denotes the effective amendment to the specification):

1.1 Federal Specifications:

GG-G-76C(1) Gages, pressure and vacuum, dial indicating.


1.2 American Water Works Association (AWWA):

A100-66 Deep wells.
C601-68 Disinfecting water mains.

1.3 American Society for Testing and Materials (ASTM):

A120-73 Black and hot dipped zinc-coated (galvanized) welded
and seamless steel pipe for ordinary uses.
B88-76 Seamless copper water tube.
C150-74 Portland cement.

2. GENERAL REQUIREMENTS: Section 15011, General Requirements, Mechanical, also applies to this section except as otherwise specified. The work includes the provision of four new permanent gravel packed wells at the locations of the new well houses shown, and incidental related work. Each well shall have a minimum capacity of 250 gallons per minute. Each well shall be guaranteed by the Contractor to furnish a continuous supply of clear potable water, completely free of sand conforming to the limits specified hereinafter, of not less than the specified quantities for a period of one year after acceptance of the completed work. A test well shall be drilled at each location of a new well. Should the data obtained from any test well indicate unfavorable conditions, exploration shall be continued at other locations approved by the Contracting Officer until a suitable site is located. All materials and workmanship shall conform to AWWA A100, except as specified or indicated otherwise. All exploration shall be at the expense of the Contractor.

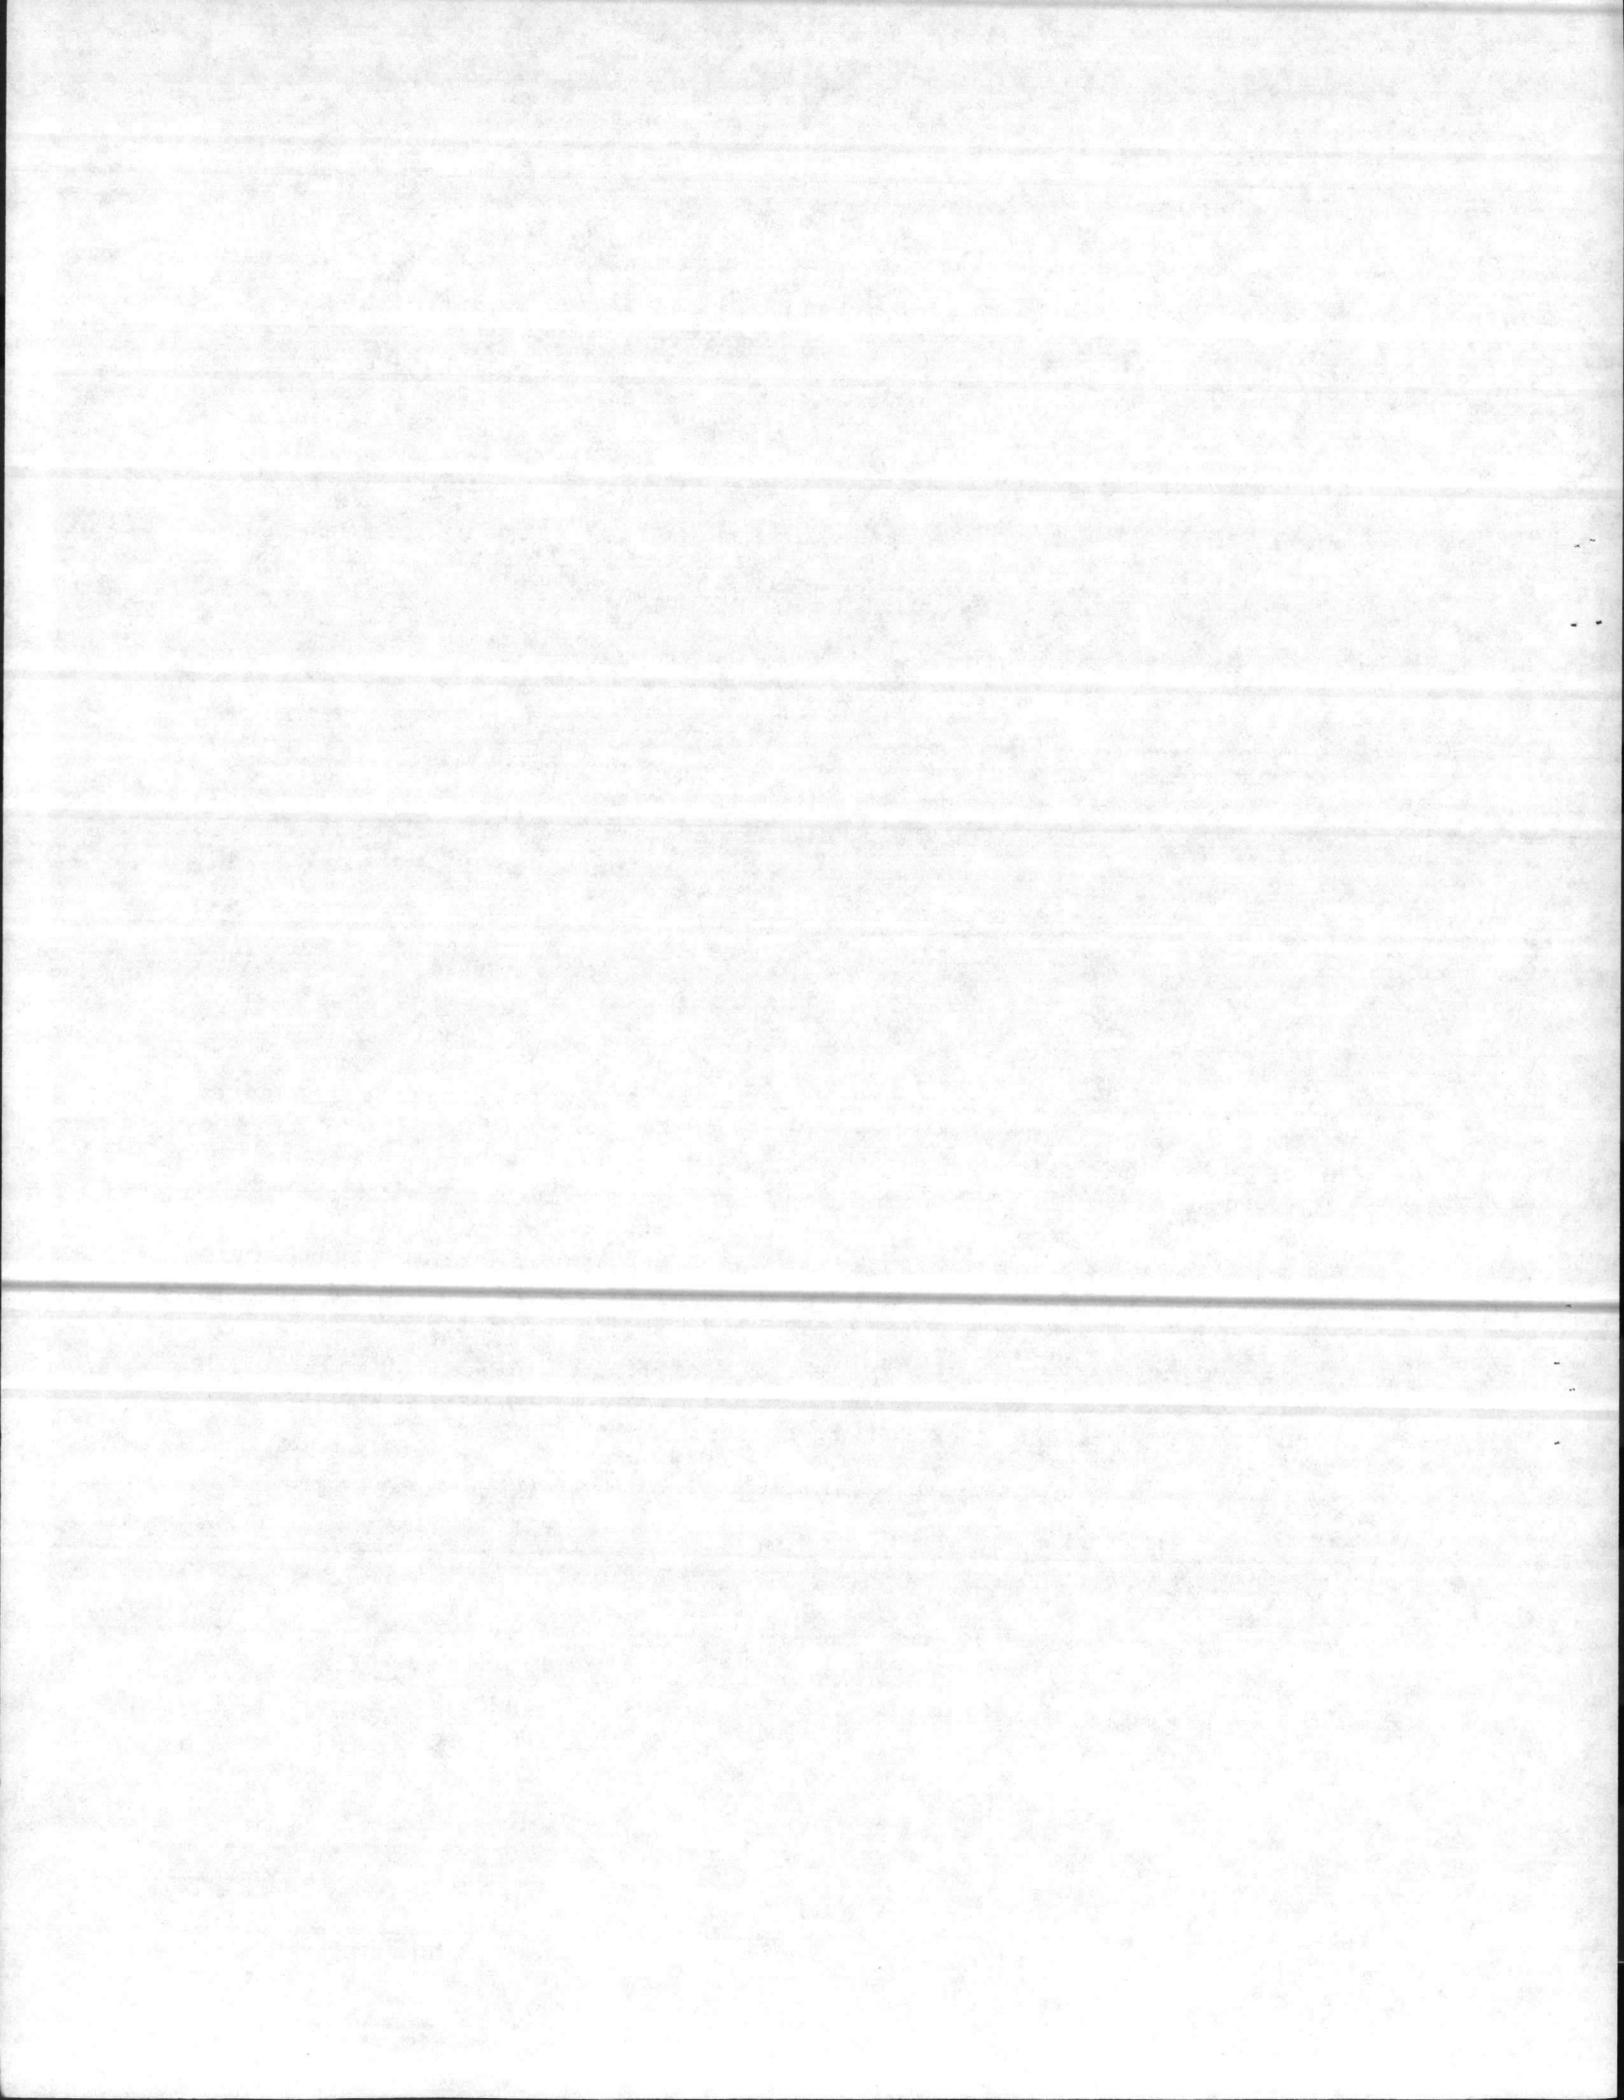


2A. Capacity and Depth of Wells: It is intended that each permanent well continually produce 250 gallons per minute of potable water. Bids shall be based on each test well having a depth of 200 feet and permanent wells having the following depths:

<u>ITEM</u>	<u>WELL</u> TC-325	<u>WELL</u> HP-655	<u>WELL</u> TT-25	<u>WELL</u> M-267
Total Depth of Well	200 Ft.	200 Ft.	200 Ft.	200 Ft.
Total Length of 18-inch outer casing	50 Ft.	50 Ft.	50 Ft.	50 Ft.
Total Length of 8-inch inner casing	160 Ft.	160 Ft.	160 Ft.	160 Ft.
Total Length of all section of 8-inch screen	40 Ft.	40 Ft.	40 Ft.	40 Ft.

In case the actual conditions differ substantially from those stated and/or shown, the provisions respecting an adjustment for changed conditions shall apply, subject to the notification thereunder being given.

3. SUBMITTALS REQUIRED: Shop drawings, manufacturer's data and certificates for equipment, materials, finish, and pertinent details for each system shall be submitted and approved before procurement, fabrication or delivery of such items to the job site. Partial submission will not be acceptable. Descriptive data shall be annotated to show the specific model, type and size of each item the Contractor proposes to furnish. The submittal requirements of Section 15011, General Requirements, Mechanical, apply to the following lists.

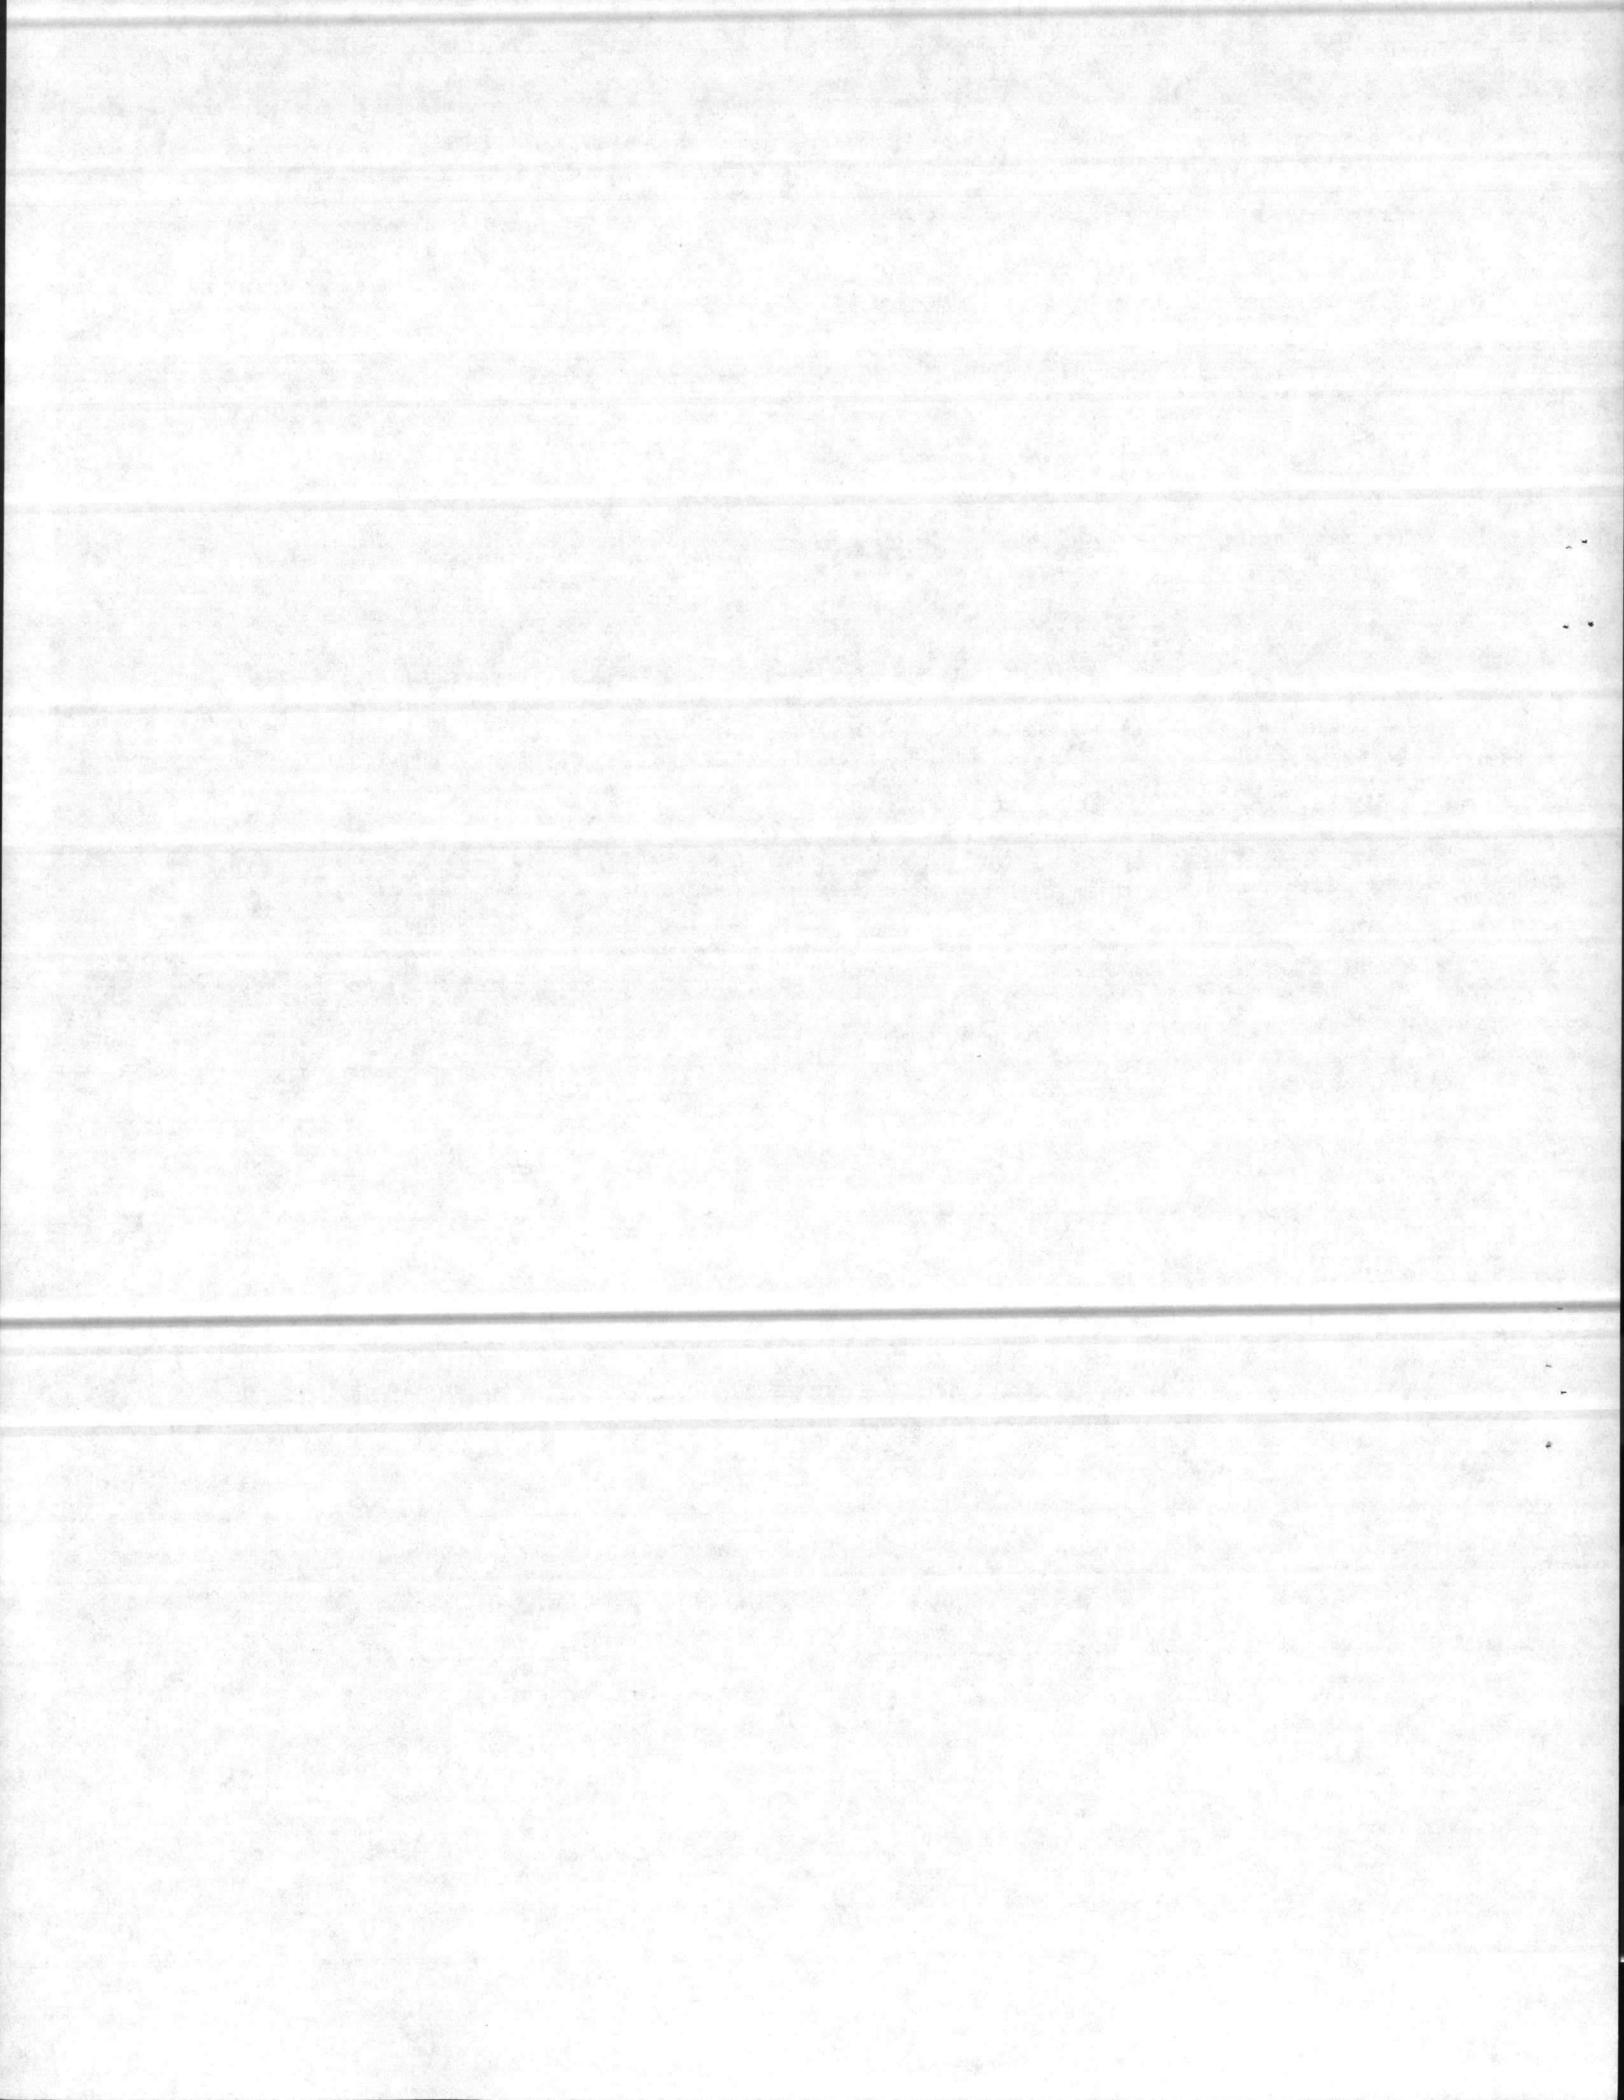

3.1 Manufacturer's Data:

- (a) Well casings
- (b) Well screens

3.2 Shop Drawings:

- (a) Well casings, screens, and air lines

3.3 Certificates: Submit notarized certificates from the manufacturer attesting that each of the following items conform to all requirements of this specification and of reference publications.

- (a) Well casings
- (b) Well screens
- (c) Air lines
- (d) Gages
- (e) Cement

3.4 Samples: Submit one sample of each of the following items:


- (a) Gravel (50 lb. sample)

4. DELIVERY, STORAGE, AND PROTECTION: Materials shall be delivered to the site in an undamaged condition. Materials shall be carefully stored off the ground to provide proper protection against oxidation caused by ground contact. Defective or damaged materials shall be replaced by the Contractor at no expense to the Government.

5. MATERIALS:

5.1 Casings: The outer pit casing 18 inch nominal diameter shall be black steel pipe, 0.375-inch wall thickness, conforming to ASTM A120. All other casings shall be seamless zinc-coated steel pipe conforming to ASTM A120, and shall be not less than 8 inches diameter and not less than 0.322-inch wall thickness. All joints shall be either threaded or coupled, with heavy recessed type couplings in which the ends of the pipe shall butt, or they may be field welded.

5.2 Well Screen: Shall have an inside diameter of not less than 8 inches and be of not less than 6 gauge material, and shall be of AISI Type 304 stainless steel with continuous slot openings of proper size and design to hold back and support the gravel used in the gravel envelope around the screens. Joints shall be made with heavy butt type couplings of the same materials, or by welding. Length shall be as required to provide the amount of water specified. Water velocity thru the slots shall not exceed 0.20 feet per second.

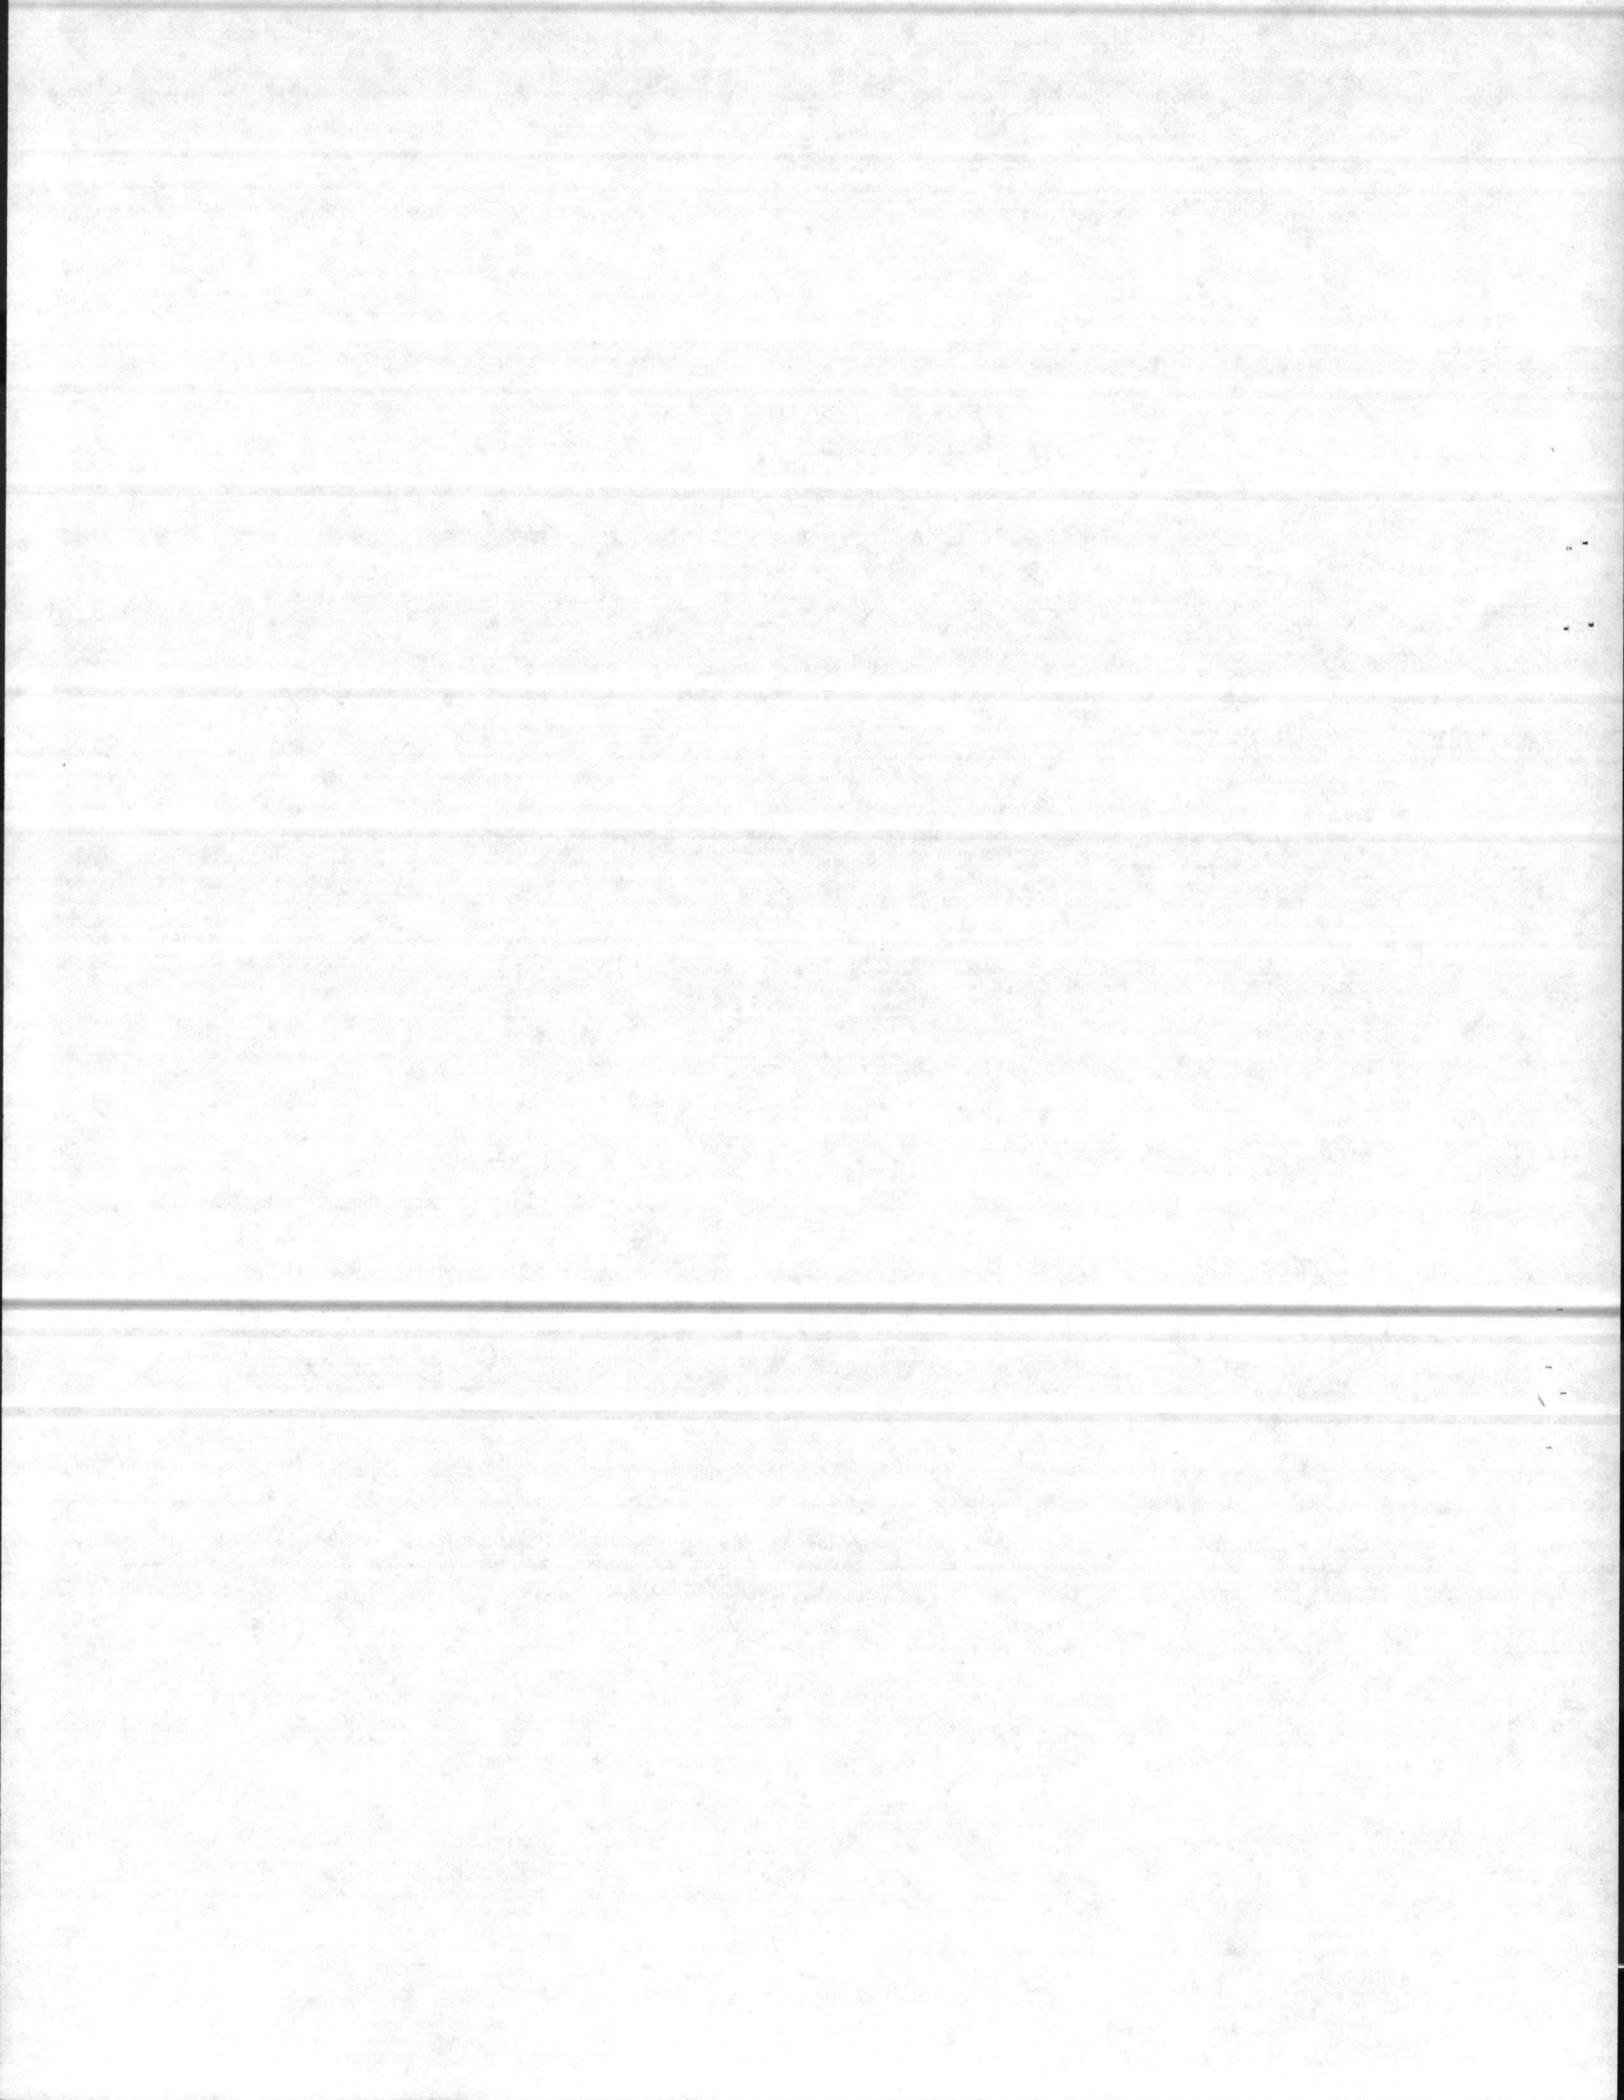

5.3 Gravel: All gravel used for the gravel envelope around screens shall be round, hard, water worn, gravel of proper gradation that will allow free flow of water in the well and positively prevent the infiltration of sand. It shall be of siliceous material, reasonably smooth and round, and shall be free of flat or elongated pieces, as well as of dirt, vegetable matter, or other foreign material. The gravel shall be thoroughly sterilized with hypochlorite before being placed.

5.4 Grout: Cement grout for sealing the space between the casing and the drilled hole, shall be composed of portland cement, type 1, conforming to ASTM C150, and water. The mixed grout shall weigh not less than 14 pounds per gallon.


5.5 Air Lines: Each well shall be provided with an air line. The pipe shall be 1/2 inch copper tubing conforming to ASTM B88, Type K, with solder joint wrought copper fittings. Air line shall extend a minimum of 10 feet below the drawdown level.

5.6 Gages: Gages shall conform to GG-G-76, Class 1, Style A, Type 1, with 4 1/2-inch dial, brass case, bronze tube, and scale calibrated in feet of water.

5.7 Auxiliary Equipment: The Contractor shall provide the necessary discharge piping to dispose of pumped water during developing and testing of well of sufficient distance from each well so as to prevent flooding of the site and flow back into the well.

6. TEST WELLS: The Contractor shall drill a test well at each site before construction of the permanent well is started. Each test well shall be of sufficient size to obtain the necessary information required for the construction of the permanent well, but shall be not less than 6 inches. The location, size of well, and method of drilling must be approved before work is started. Test wells shall be not less than 200 feet deep. The Contractor shall keep an accurate log and record of all material drilled through and the depths at which changes in formation occur. Permanent wells shall not be driven until all data submitted for test wells has been analysed and approved by the Contracting Officer. Test wells may be incorporated into the finished construction provided they meet the requirements for finished wells. Wells not used in finished construction shall be sealed as recommended in AWWA A100.

6.1 Samples: Samples of the type of material found in each stratum shall be taken by the Contractor and preserved in approved containers furnished by the Contractor. Samples shall be appropriately labeled to show depth below ground surface and thickness of the stratum from which the samples were obtained. All water bearing strata must be described in detail as to whether material is loose or compact, its color, and if gravel, whether it is water worn or angular. The presence of clay must be noted.

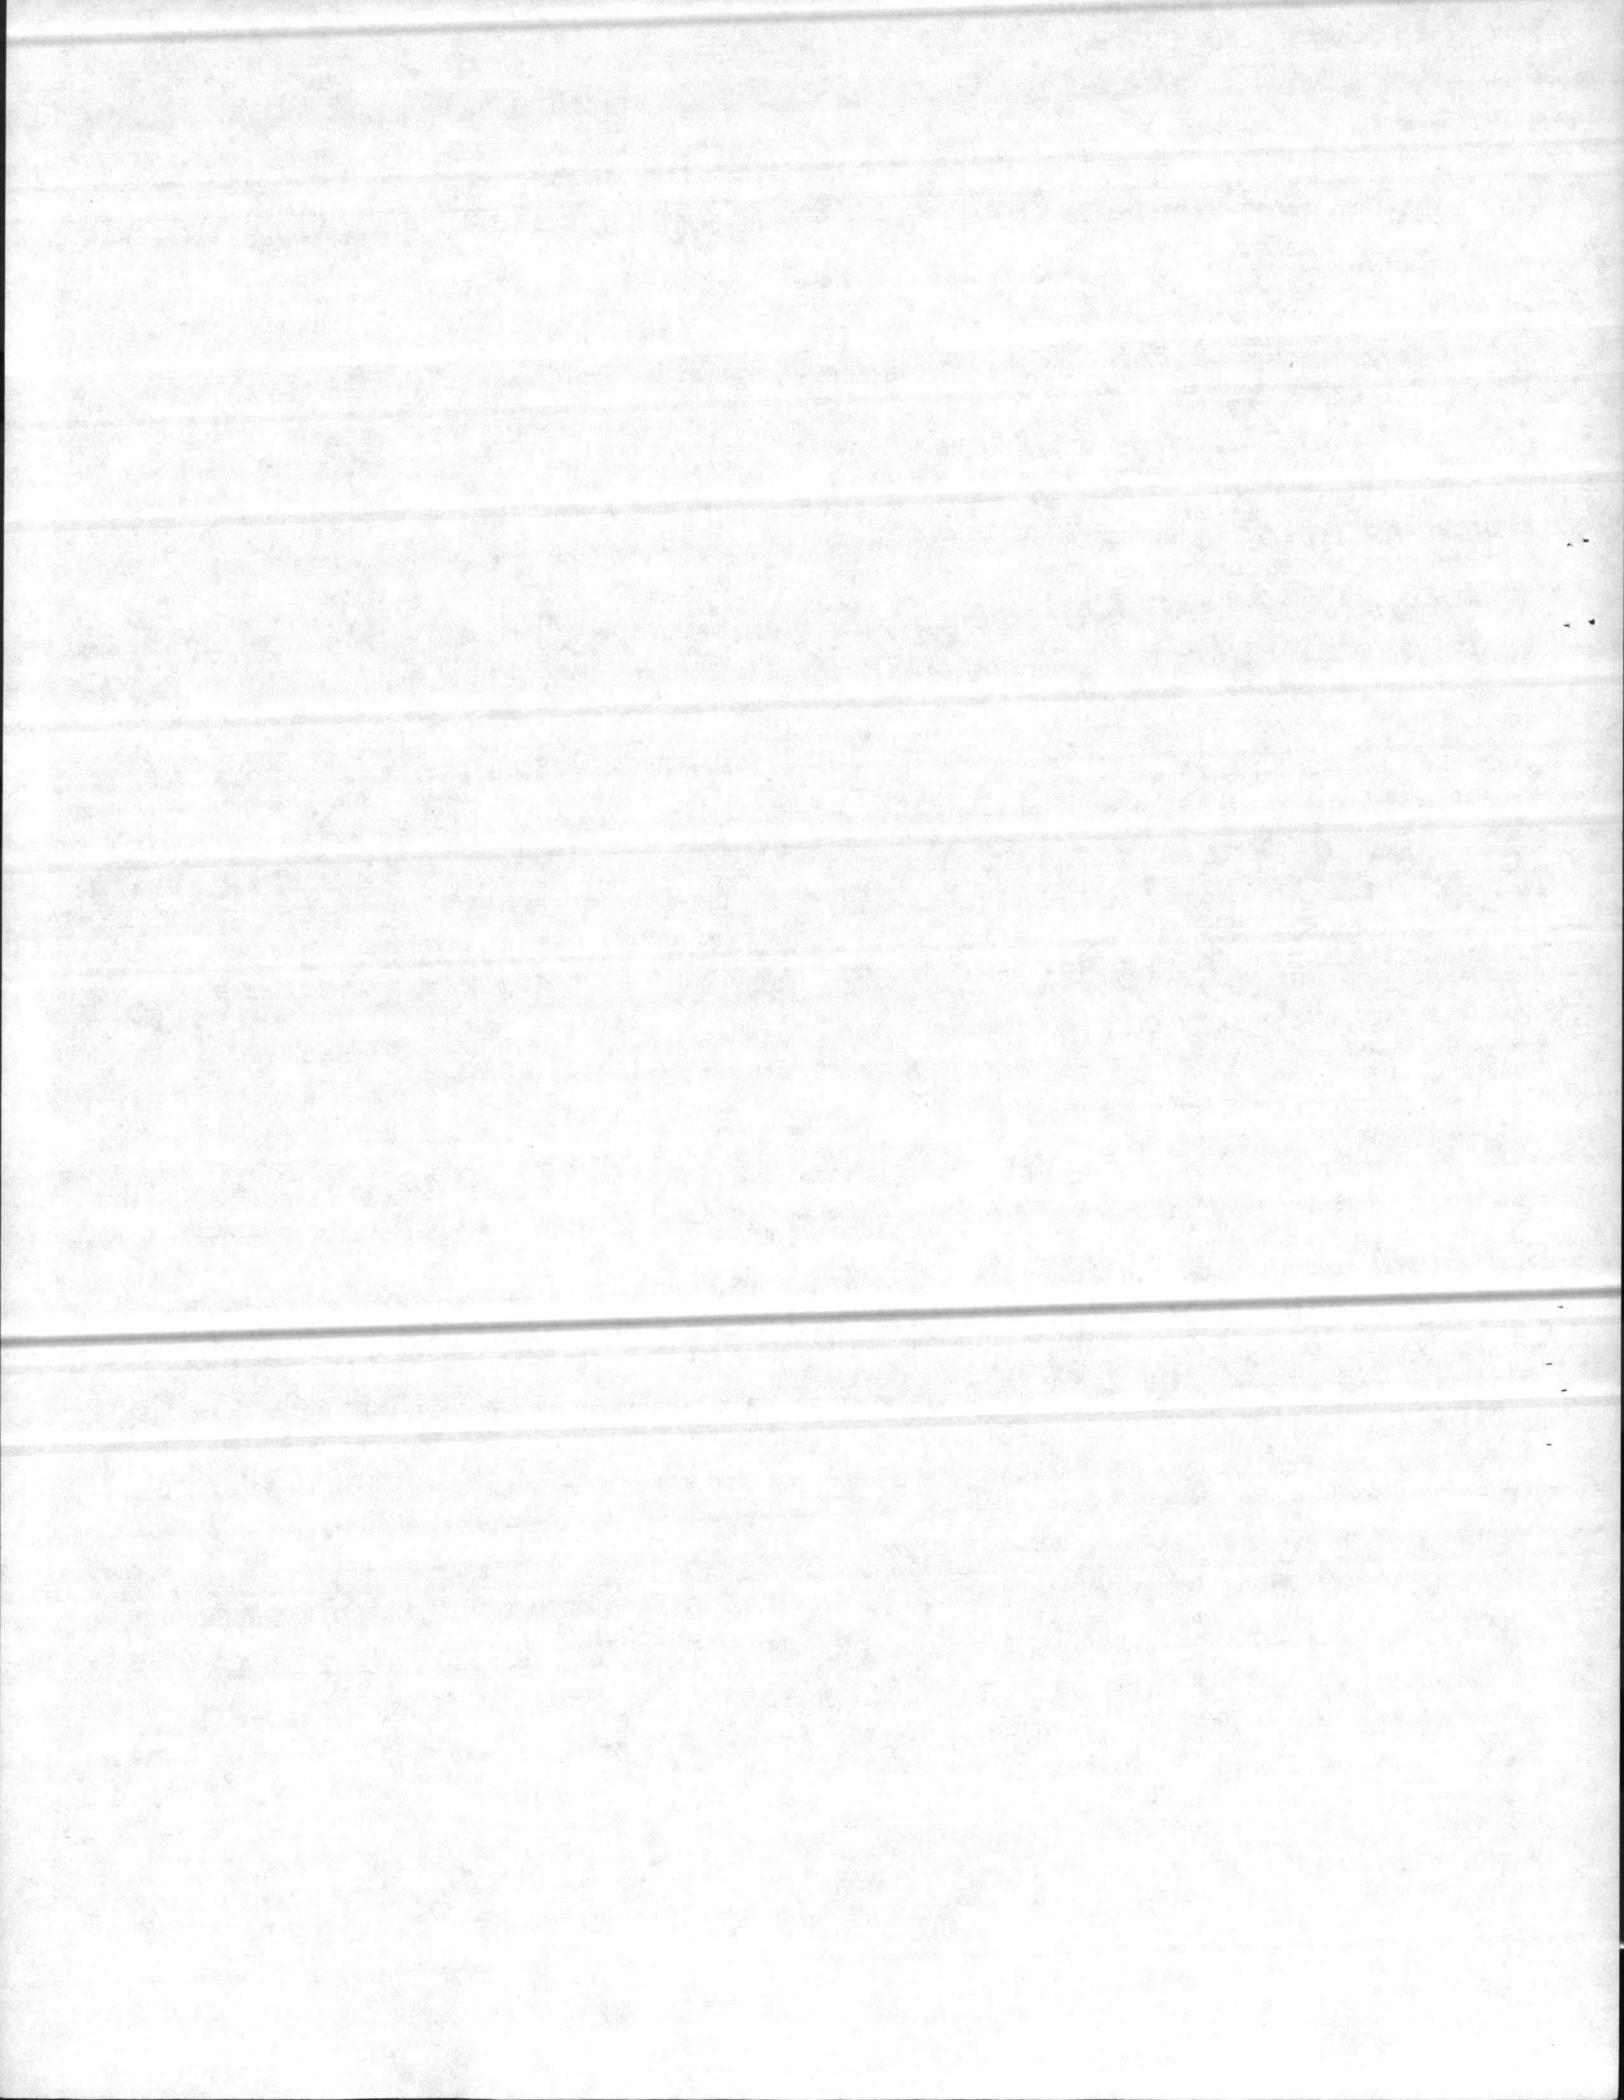

6.2 Water Quality Determination: The Contractor shall collect and have analysed samples of water from all water bearing strata encountered so as to accurately show the quality of water from each stratum. These preliminary tests shall show in P.P.M. the phenolphthalein alkalinity, total alkalinity, calcium, magnesium, chlorides, carbon dioxide, carbonates, sulfides, bicarbonates, iron manganese, hardness, turbidity, odor and PH.


6.3 Electric Log: A complete electric log indicating resistivity and potential of all formations shall be furnished.

6.4 Recommendation and Data Submittal: The Contractor shall make recommendations for the permanent wells and shall submit all data obtained at each site. The recommendations shall include the appropriate depth, details of construction, length and location of screens, screen openings, and an estimation of the quantity of water that can be obtained from each water bearing stratum and from each completed well.

7. CONSTRUCTION OF PERMANENT GRAVEL WALL WELLS:

7.1 Pit Casing: A hole not less than 24 inches in diameter shall be drilled to a minimum depth of 50 feet and to additional depth as necessary to terminate in an impervious stratum. A pit or surface casing 18 inches in diameter shall be installed concentrically in the hole and extending to 6 inches from the bottom. The pit casing shall be grouted in by pumping a cement slurry around the casing in such manner as to completely fill the hole and seal the casing to the wall of the formation drilled. Before pumping cement, clear water shall be pumped to the bottom of the casing to clear the hole of slush and cuttings. The cement seal formed in the bottom of the casing shall be cut through for further drilling in a manner that will not disturb the seal.

7.2 Drilling: The drilling hole shall be a minimum of 17 inches in diameter and shall extend to the bottom of the lowest water bearing formation as determined from the formation samples and the electric log. Each water bearing formation to be developed shall be under-reamed to at least 22 inches in diameter and hold open for placing of gravel after screens and inner casing has been set. All drilling shall be accomplished with proper drilling clay of the bentonite type having a weight not to exceed 9 pounds per gallon at 15 centipoise viscosity. The ph value of the drilling mud shall be maintained at 7.6 or more at all times. The drilling clay shall be of a type readily thinned with commercial mud thinners for easy removal from the walls of the wells and introduced gravel. Sufficient screens shall be provided at each formation to be developed to secure therefrom all available flow. The depth of the well and quantity of screen used shall be adequate to produce the specified guaranteed capacity. Casing and screens, as specified, shall be installed concentrically in the hole and completely enveloped by gravel and permanently sealed at the lower end. The gravel shall be pumped into place under

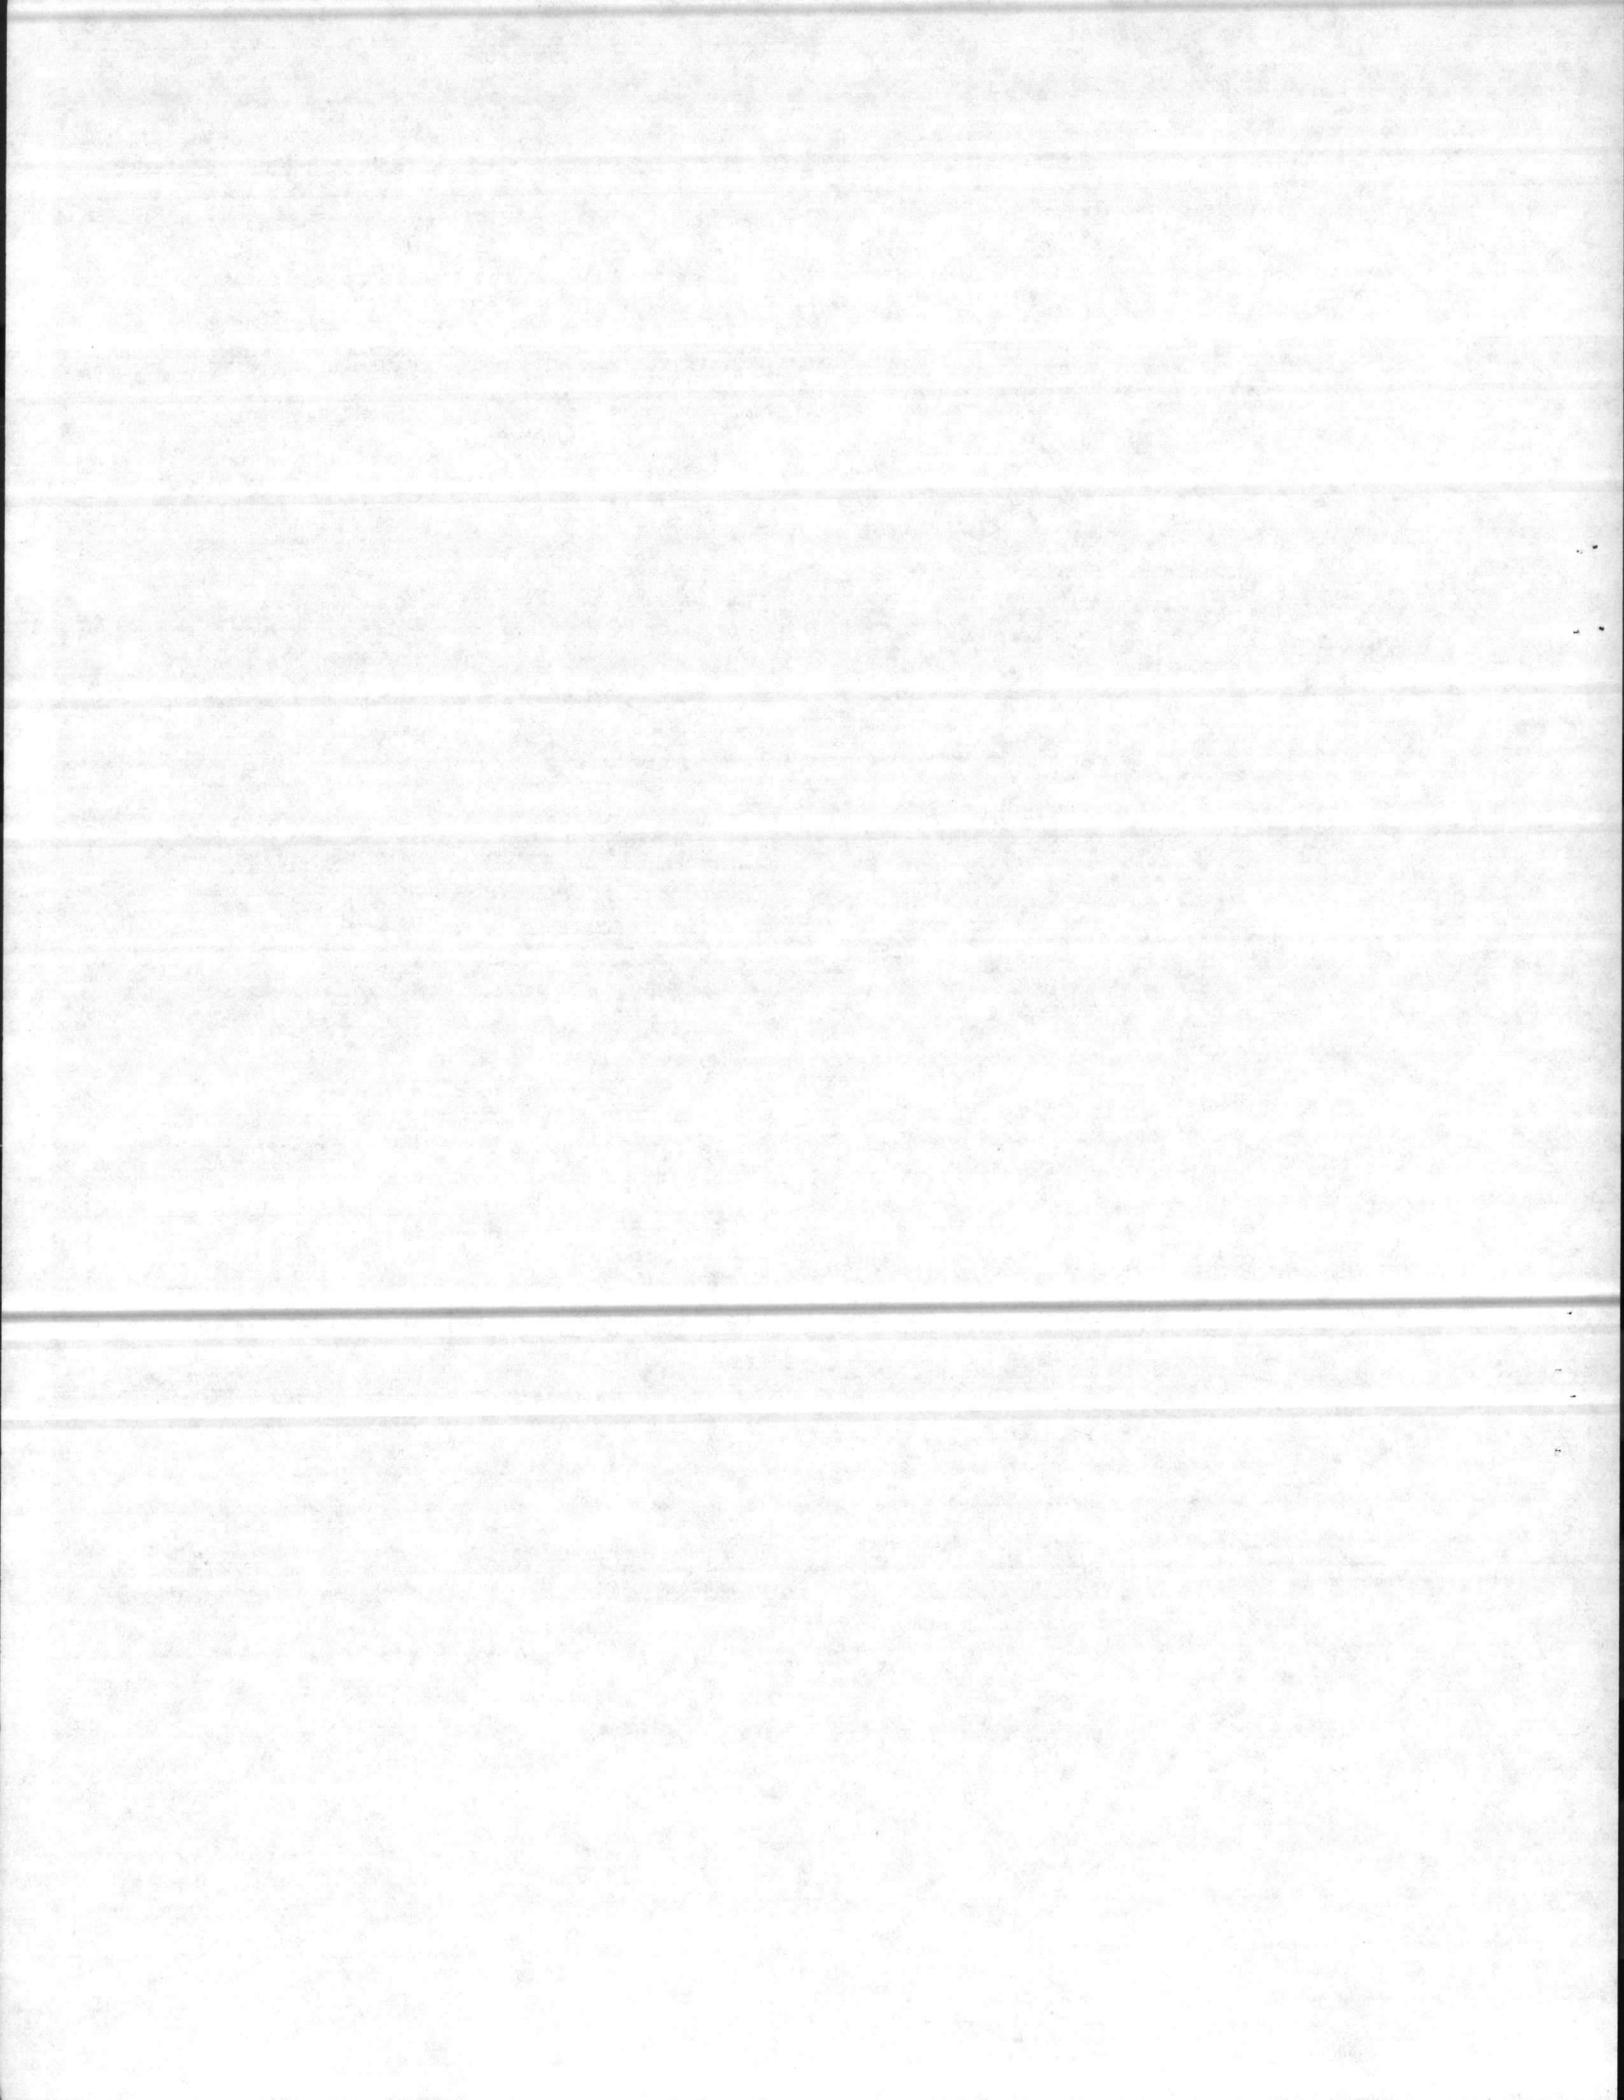


pressure, through a temporary pipe line, extending to the bottom of the screen. The pipe line shall be raised as the gravel fills the hole, so that the lower end of the pipe is always 2 to 6 feet below the gravel level. The gravel shall entirely fill the space around the screens and casing, and equipment and methods for placing the gravel shall be approved as adequate to accomplish the result before placement is begun. When the placement of gravel is completed, the drilling clay shall be thinned and the well pumped free of all sand, mud, drillings, and other foreign matter. The gravel shall extend from the bottom to a minimum of 10 feet above the top screen. The remaining annular space around the casing shall be filled with earth in 12 inch layers and each layer thoroughly tamped.

7.3 Tests: Upon completion of each permanent well, the Contractor shall provide a temporary pump in each well for measuring the flow and drawdown. The temporary pump shall have a capacity of not less than 500 gallons per minute. After determining the static water level in the well, the pumping shall begin at a rate of approximately 100 gallons per minute and the drawdown checked at 15 minute intervals until it stabilizes, after which pumping shall be continued at that rate for 2 hours and the water level checked at 30 minute intervals. The pumping rate shall then be increased in uniform increments not exceeding 50 gallons per minute and the described procedure repeated at each increment of increased rate until the capacity of the well is determined. The capacity of the well shall be the flow obtained at a drawdown level 10 feet above the top of the uppermost screen. After the safe maximum yield of the well has been determined, continuous 24 hour pumping test shall be conducted at that rate and the drawdown checked at hourly intervals. The Contractor shall provide necessary pipe and ditches to take the water away from each well site. A complete written log of the test showing static water level, pumping rate and drawdown at the specified intervals shall be furnished. At the end of the 24 hour test, water samples shall be taken and tested by an approved testing laboratory for complete chemical and bacteriological analysis. Additional samples shall be furnished in suitable containers.

7.4 Disinfection: Well and equipment and material therein shall be disinfected in accordance with AWWA A100. Discharge piping shall be disinfected in accordance with AWWA C601.

8. ABANDONING EXISTING WELLS: Existing wells shall be abandoned and sealed in accordance with AWWA A100 and as shown on the drawings.

9. DISPOSAL OF SOIL: Soil removed at drilled holes shall be removed from the sites and disposed of as specified in section entitled "Earthwork".

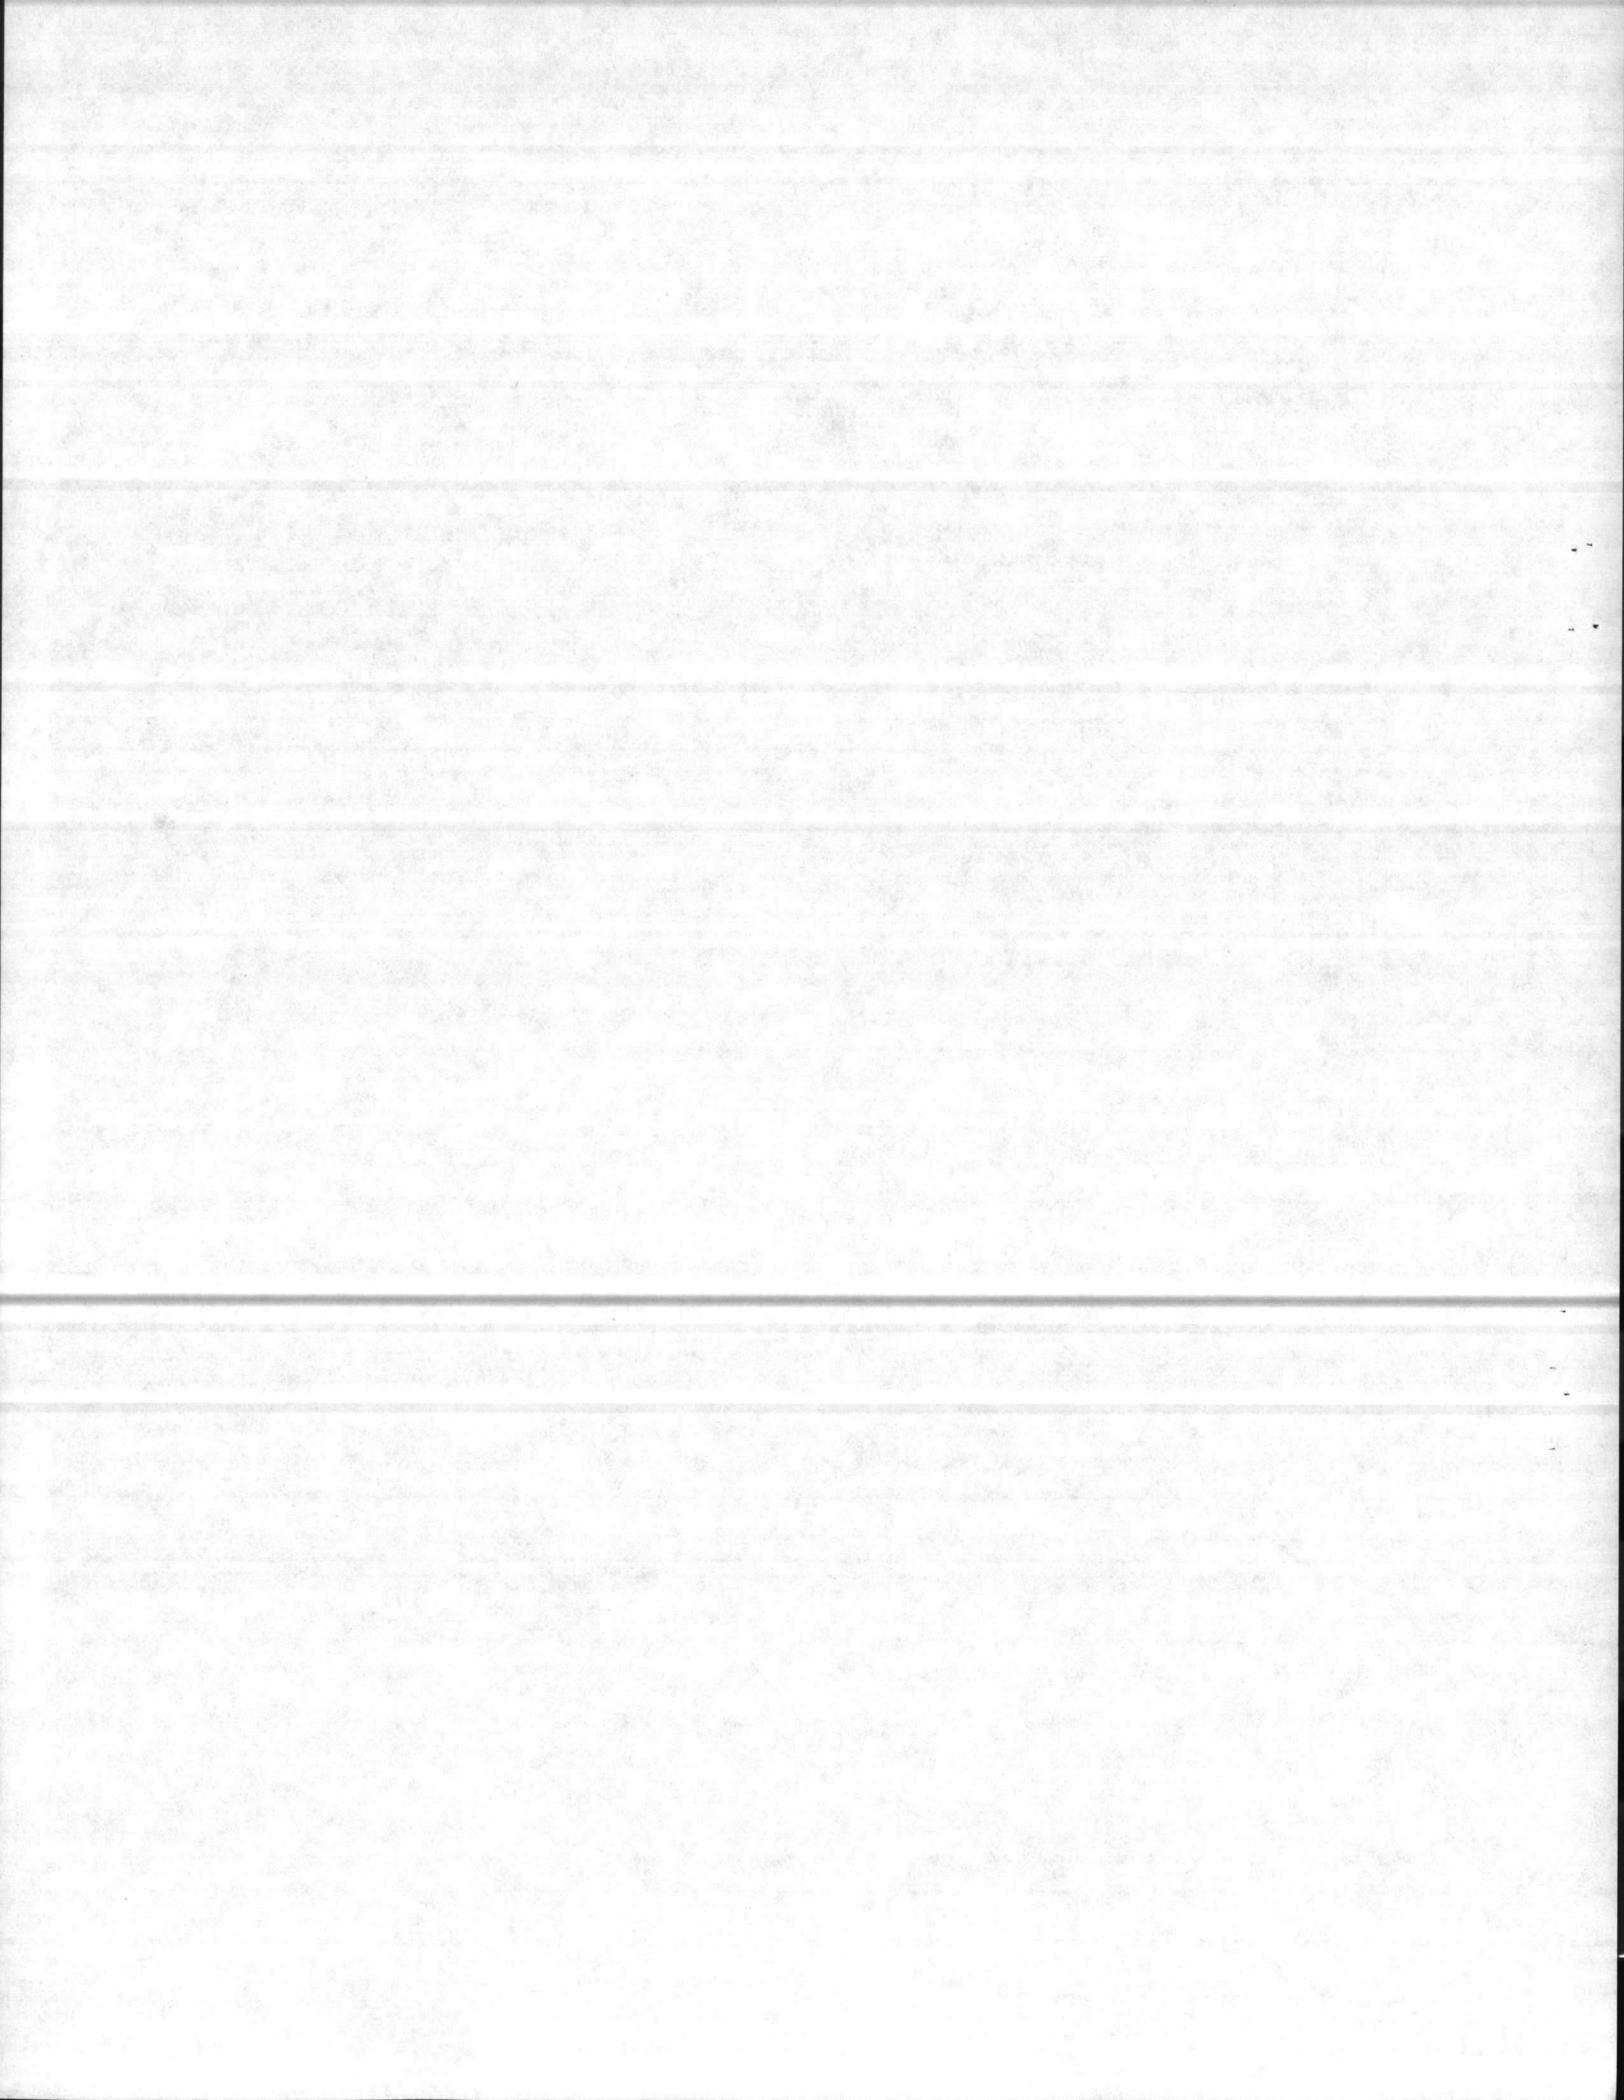

SECTION 15221. PUMPING EQUIPMENT

1. APPLICABLE PUBLICATIONS: The following publications of the issues listed below, but referred to elsewhere by basic designation only, form a part of this specification to the extent indicated by the references thereto (where a number is suffixed to the specification number, it denotes the effective amendment of the specification):

1.1 Federal Specifications:

HH-I-523C	Insulation blocks and pipe covering, thermal (calcium silicate).
HH-P-46E	Packing; asbestos, sheet, compressed.
TT-E-489F	Enamel, alkyd, gloss.
TT-E-496B(1)	Enamel, heat-resisting (400 degrees F.), black.
TT-P-28E	Paint, aluminum, heat-resisting (1000 degrees F.).

1.2 American National Standards Institute (ANSI):

B16.3-71	Malleable-iron screwed fittings, 150 and 300 pounds.
B16.9-71	Wrought steel butt welding fittings.

1.3 American Society for Testing and Materials (ASTM):

A53-73	Welded and seamless steel pipe.
A120-73	Black and hot dipped zinc-coated (galvanized) welded and seamless steel pipe.


1.4 American Water Works Association (AWWA):

E101-71	Deep Well Vertical Turbine Pumps - Line Shaft and Submersible types.
---------	--

1.5 National Fire Protection Association (NFPA):

No. 70-1975	National Electrical Code.
-------------	---------------------------

2. SUBMITTALS REQUIRED: Shop drawings, manufacturer's data and certificates for equipment, materials, finish, and pertinent details for each system shall be submitted and approved before procurement, fabrication or delivery of such items to the job site. Partial submission will not be acceptable. Descriptive data shall be annotated to show the specific model, type and size of each item the Contractor proposes to furnish. The submittal requirements of Section 15011, General Requirements, Mechanical, applies to the following lists.

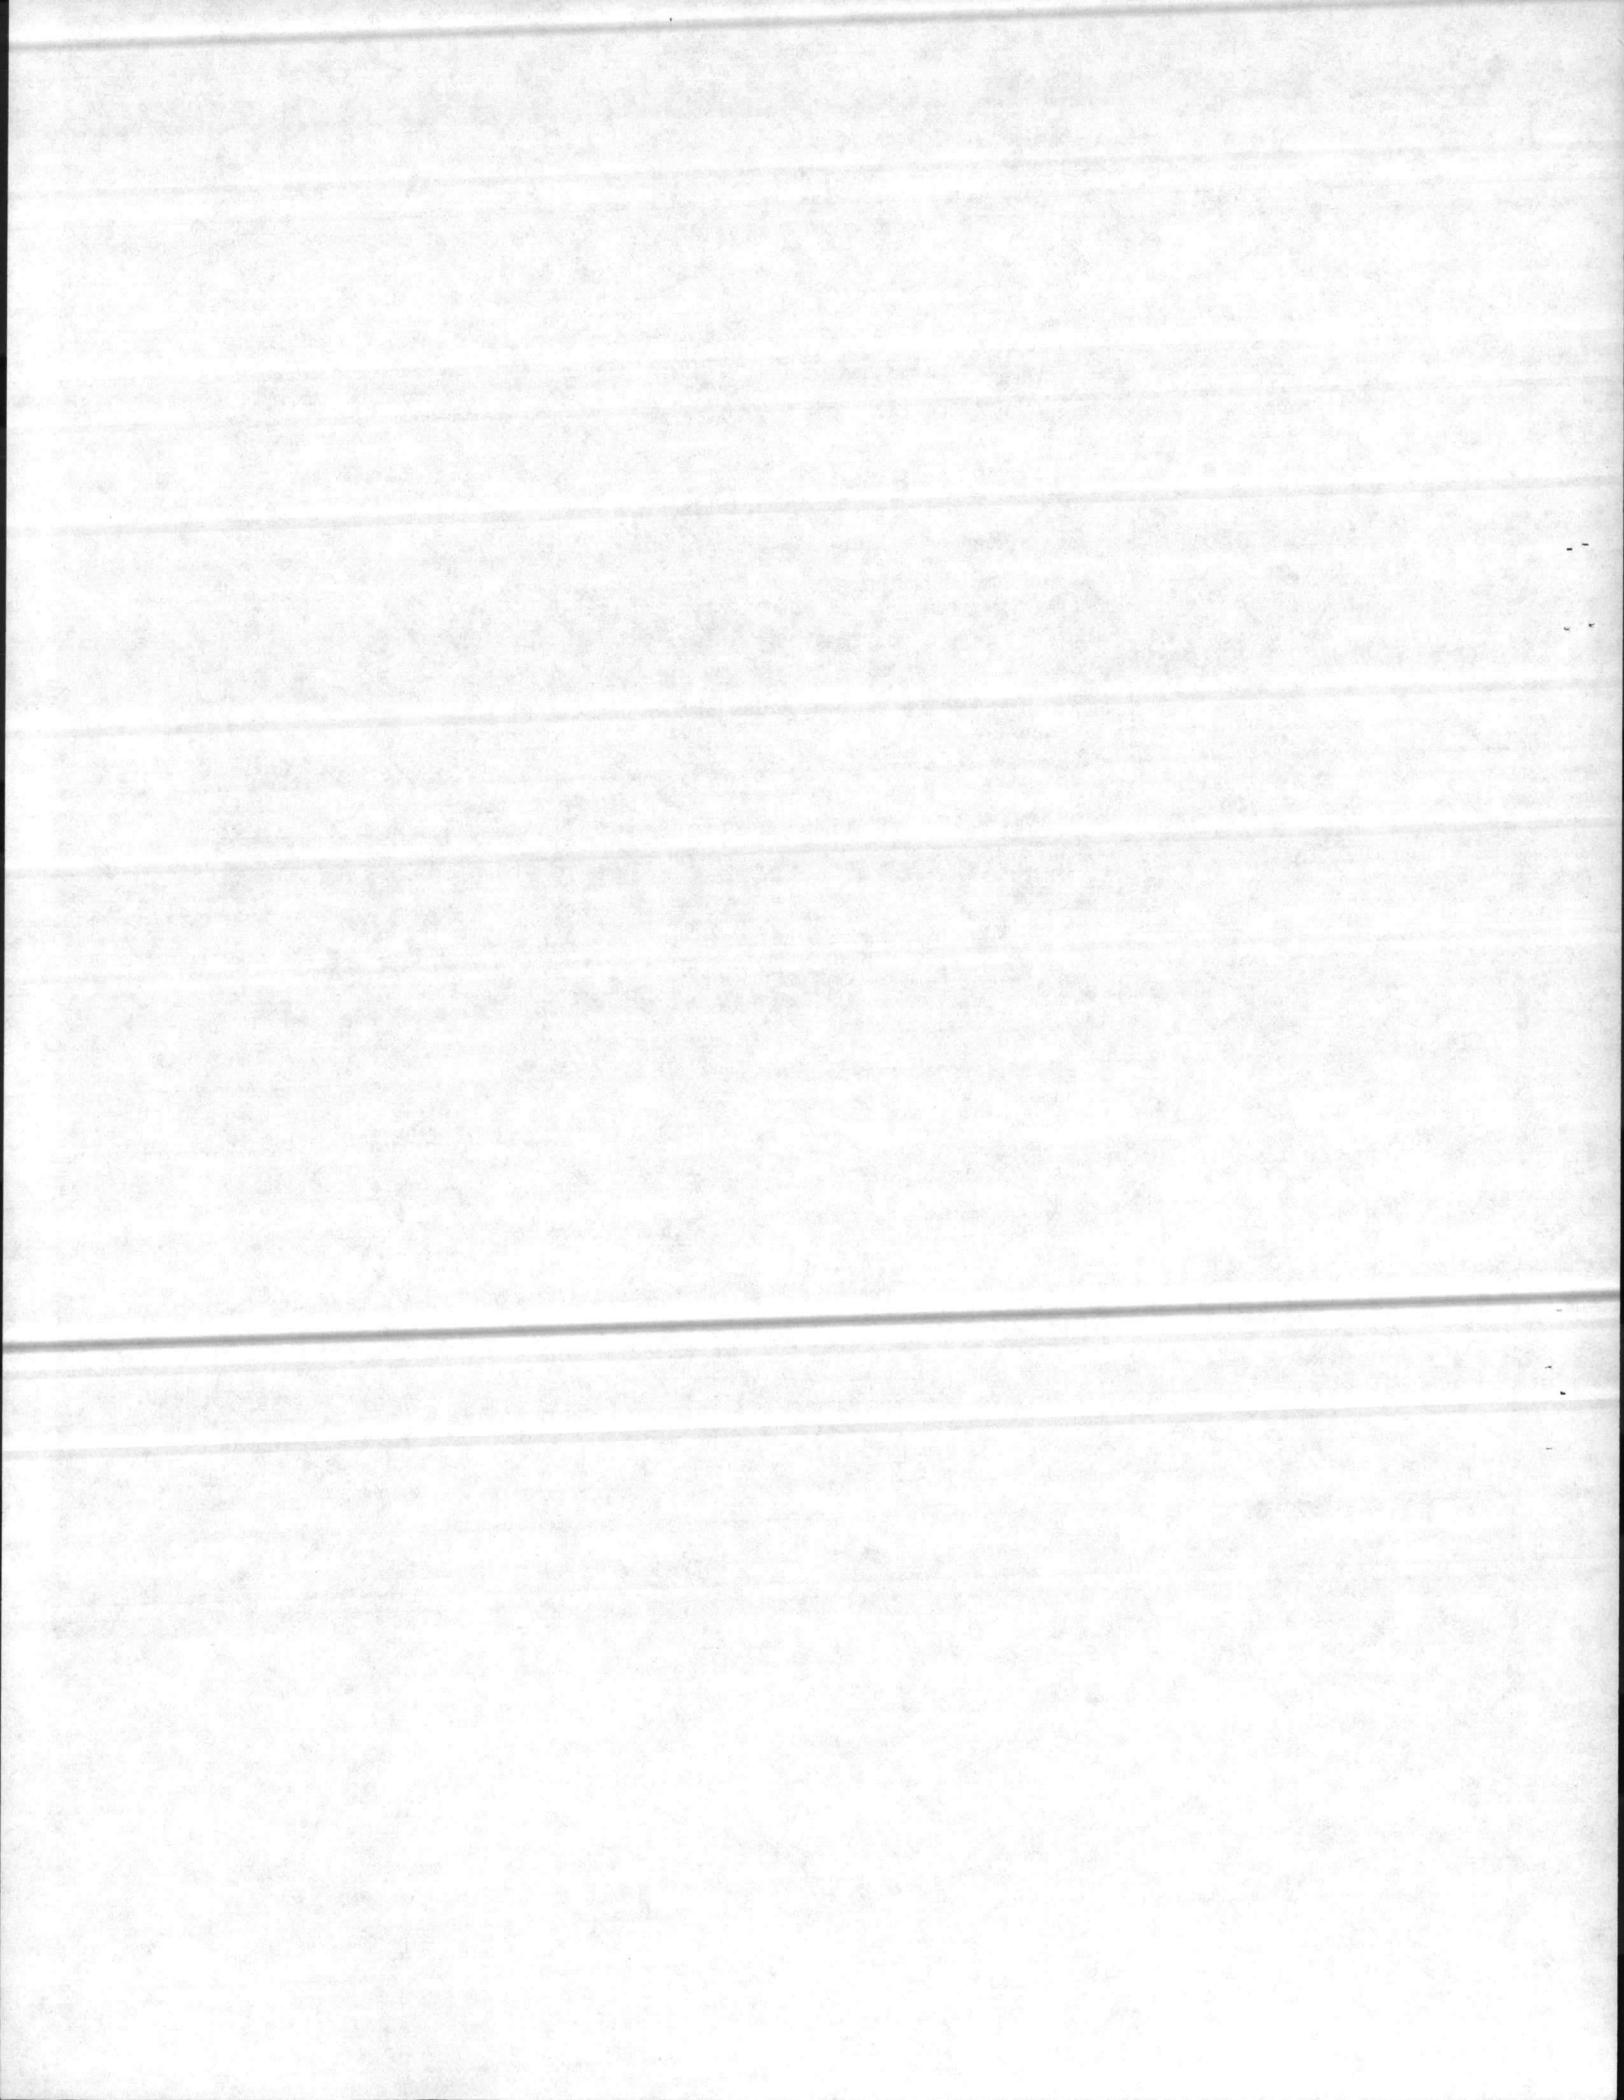

2.1 Manufacturer's Data:

- a. Pumps
- b. Motors and Controllers
- c. Diesel engine
- d. Battery and battery charger
- e. Exhaust piping and muffler

2.2 Shop Drawings: Pumps, motors, controllers, diesel engine and exhaust system. Drawings shall show complete layout of pumping system showing arrangement of pumps, motors, drives, diesel engine, controllers, starting system, and fuel and exhaust system.

2.3 Certificates: Submit notarized certificates from the manufacturer attesting that each of the following items conform to all requirements of this specification and of reference publications.


- a. Pumps
- b. Motors and Controllers
- c. Diesel Engine
- d. Battery charger
- e. Exhaust piping
- f. Paints and coatings

2.4 Pump characteristics curves: The Contractor shall furnish with each pump and drive prior to shipment, certified characteristics curves showing the capacity, head, efficiency, and brake horsepower throughout the entire range of the pump.

3. GENERAL REQUIREMENTS: Section 15011, General Requirements, Mechanical, applies to all work in this section. The work includes the provision of pumping assemblies for the two new wells, complete with all appurtenances. All pumps shall be electric motor driven; in addition, the pump at Well House "A" shall be provided with combination right angle drive for use with the auxiliary diesel engine which shall be provided at this well house. Each installation shall be provided complete, tested, and in operation.

4. PUMPS: All pumps shall be of the deep well, turbine type, water-lubricated, open line shaft pumps with surface discharge, and shall conform to AWWA E101 as modified herein. Each pump shall be provided with a non-reverse ratchet to prevent reverse rotation. Each pump shall have an efficiency of not less than 80 percent.


4.1 Pump Materials: Materials for all components of the pumps shall be as set forth in "Table 1" and "Section A4-Specifications" of AWWA E 101, as modified herein. Impellers shall be of bronze, and of the enclosed type. The steel pipe for the pump columns shall be of standard weight zinc-coated steel pipe conforming to ASTM A53 or A120. Strainer is required on the suction pipe. Motors and controllers are specified hereinafter in the paragraph titled "Electrical".

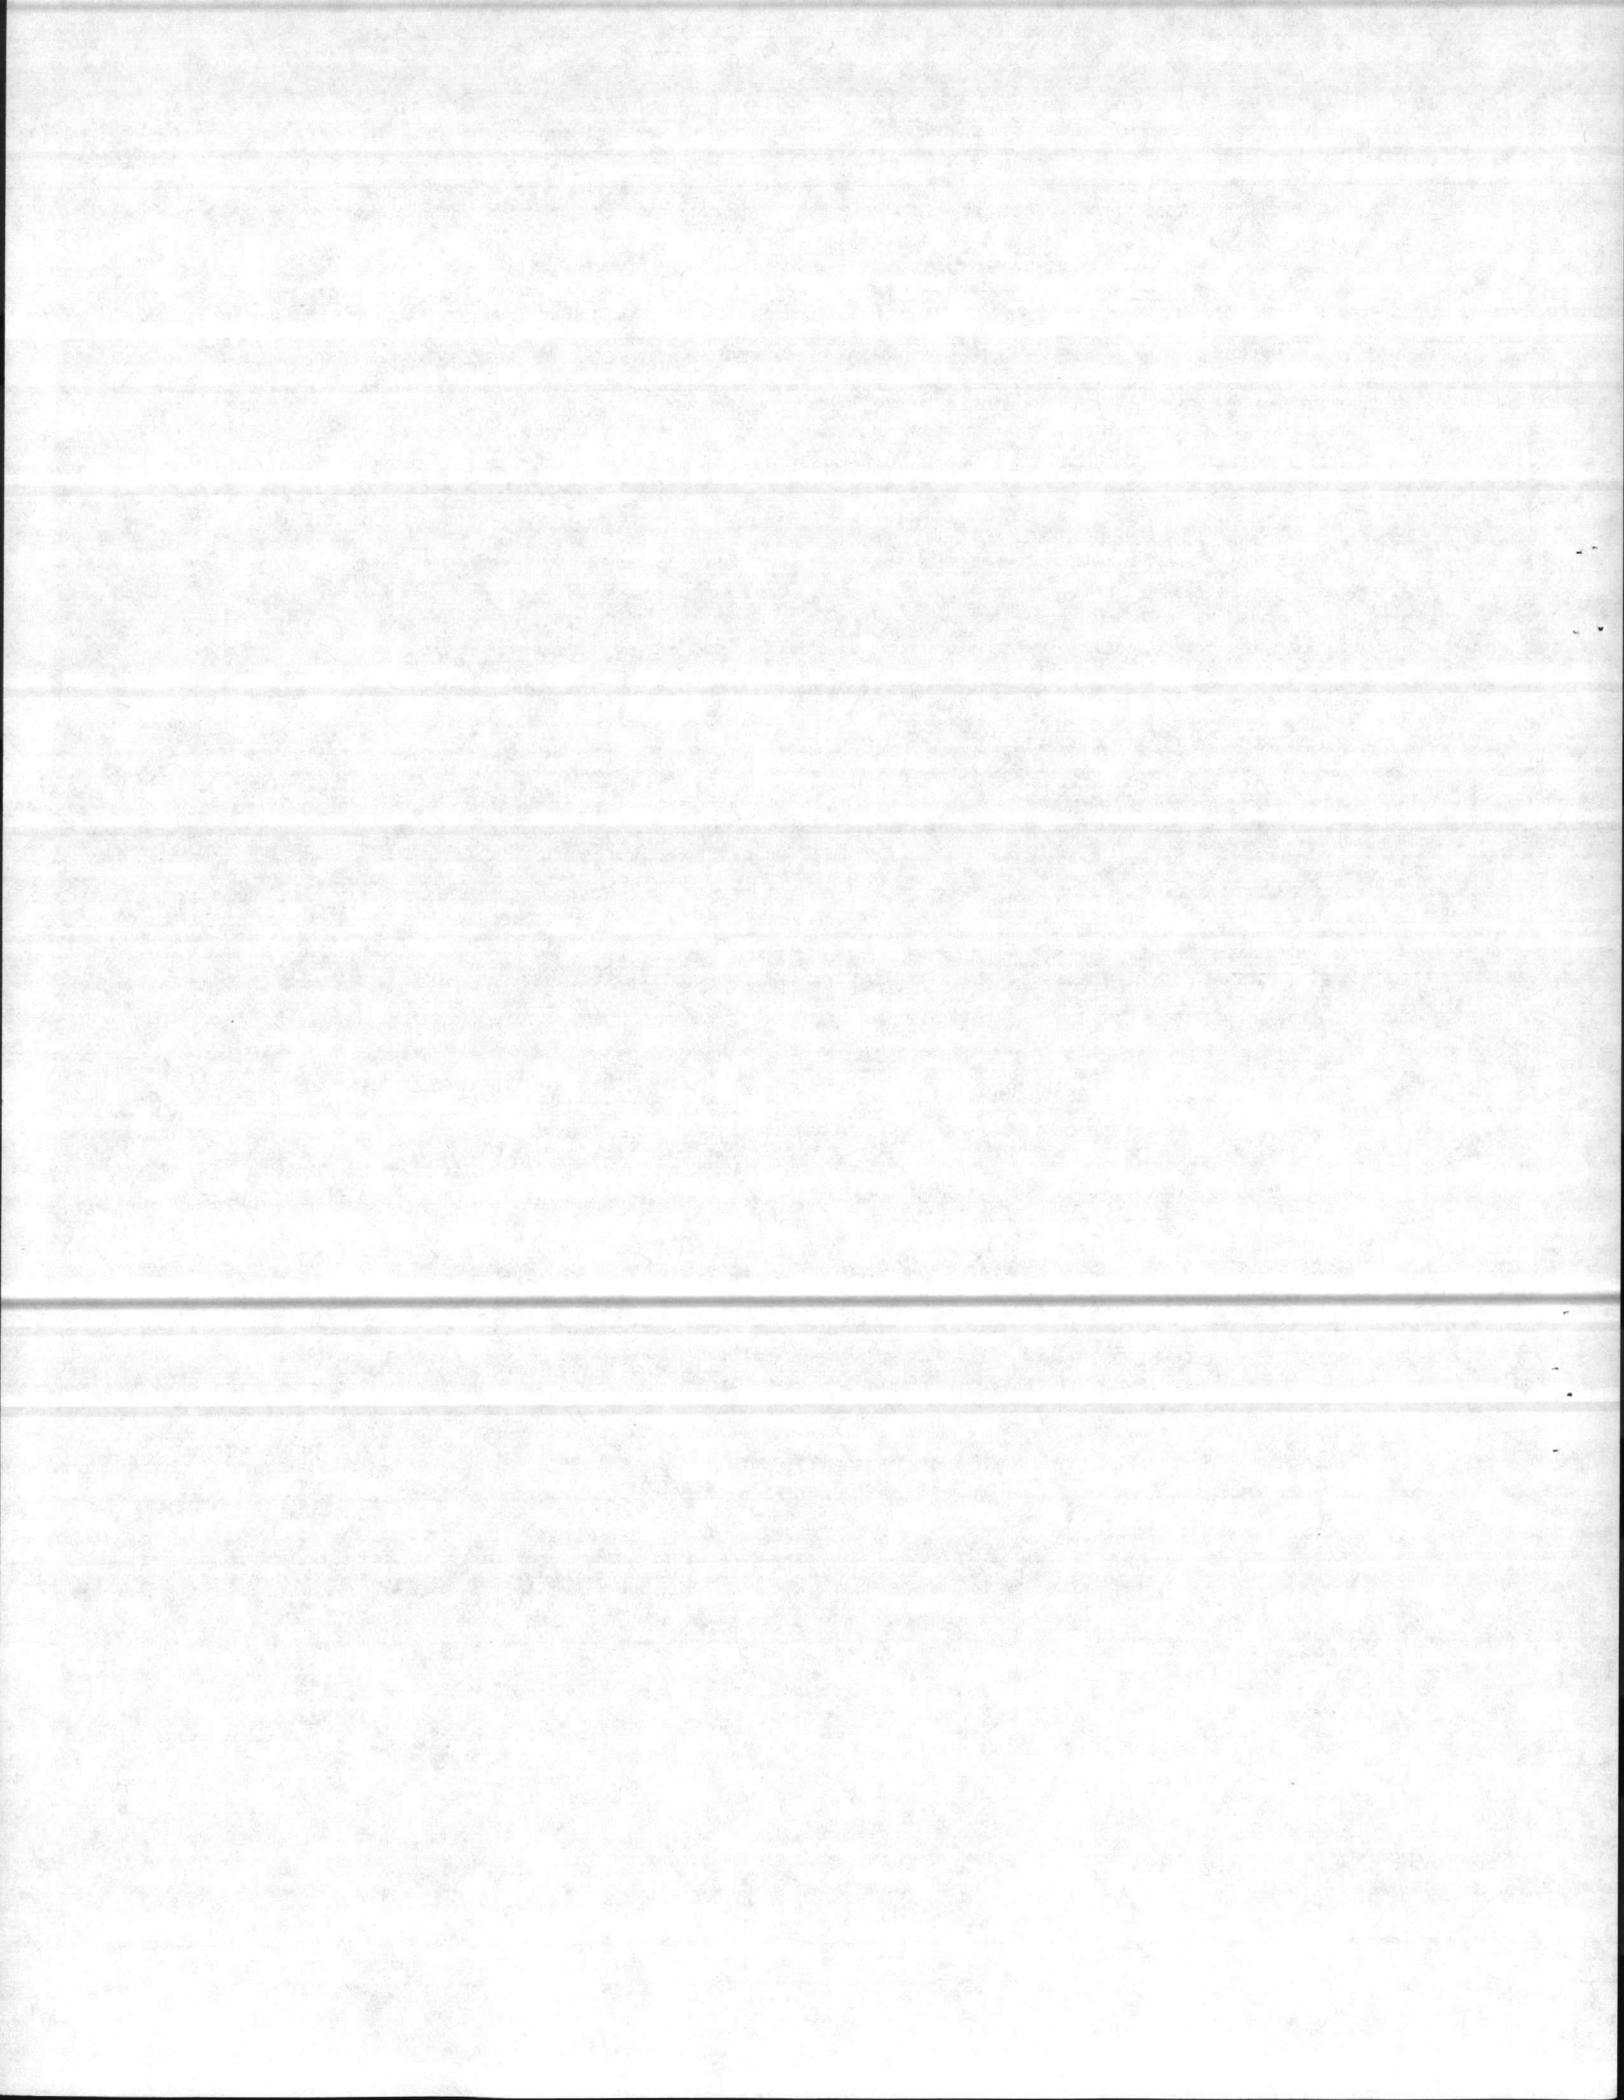

4.2 Pumping Conditions: Speed of pumps shall be coordinated with standard speed of electric motor used and shall be nominally 1750 RPM. Bids shall be based on pumps operating with a capacity of 250 gallons per minute against the heads indicated, and with motor horsepowers and electrical characteristics indicated. Discharge heads indicated are those at the discharge flange of the pump. Total dynamic head on each pump shall also include the lift in the well, as determined by flow tests of the respective completed well. Pumps shall be provided with sufficient column and line shaft to prevent breaking suction. In case actual conditions differ from those specified or shown, or both, the contract price will be adjusted in accordance with the contract.

5. RIGHT ANGLE DRIVE: All pumps shall be provided with combination electric motor and right angle gear drive for dual drive arrangement. The drive shall have one to one gear ratio to transmit the power from the engine to the pump at normal operating speed and shall be of the vertical, hollow shaft, spiral bevel gear type equipped with anti-friction bearings and a base flange matching the pump head flange. It shall be conservatively rated to transmit the maximum power requirements of the pump and be equipped with a heavy duty ball thrust bearing capable of carrying the hydraulic thrust of the pump and the weight of the rotating element. An oil reservoir of ample capacity shall supply adequate lubrication to the gears and bearings. A suitable motor stand shall be furnished which provides ample room for a sliding clutch for alternating the prime mover. A sliding clutch shall be mounted on the head shaft so the gears do not operate when the pump is driven by the electric motor. A non reverse ratchet shall be incorporated in the clutch to prevent backspin in the event of reverse rotation.

6. AUXILIARY DIESEL ENGINE: An auxiliary diesel engine shall be provided for all pumps for operating the pump through the right angle drive. The diesel engine shall be a multi-cylinder, water cooled diesel power plant with maximum horsepower required to operate the pump continuously at the rated speed of the pump over the entire head capacity range of the pump. Engine shall be a 4-cylinder overhead valve type for operation on No. 2 diesel fuel. Bore and stroke shall be at least 3.90 inches by 3.60 inches, with at least 172 cubic inches displacement. RPM shall not exceed 1750. The engine shall be arranged for electric motor cranking and shall be equipped with a compression ignition system, battery and required appurtenances, and shall include an adjustable governor, fuel injection pump and injection system, control panel with oil pressure and water temperature gages, gravity fuel tank, air cleaner, oil filter, batter charging generator, radiator and associated cooling system components, exhaust pipe and muffler, clutch take-off assembly, and all other accessories necessary for proper and efficient engine operation. Gravity fuel tank shall be mounted on the unit, and shall have sufficient capacity for at least four hours operation at full pump operating capacity. Diesel engine shall have manual push button start and stop. Starting shall be manually by push button from a battery power source.

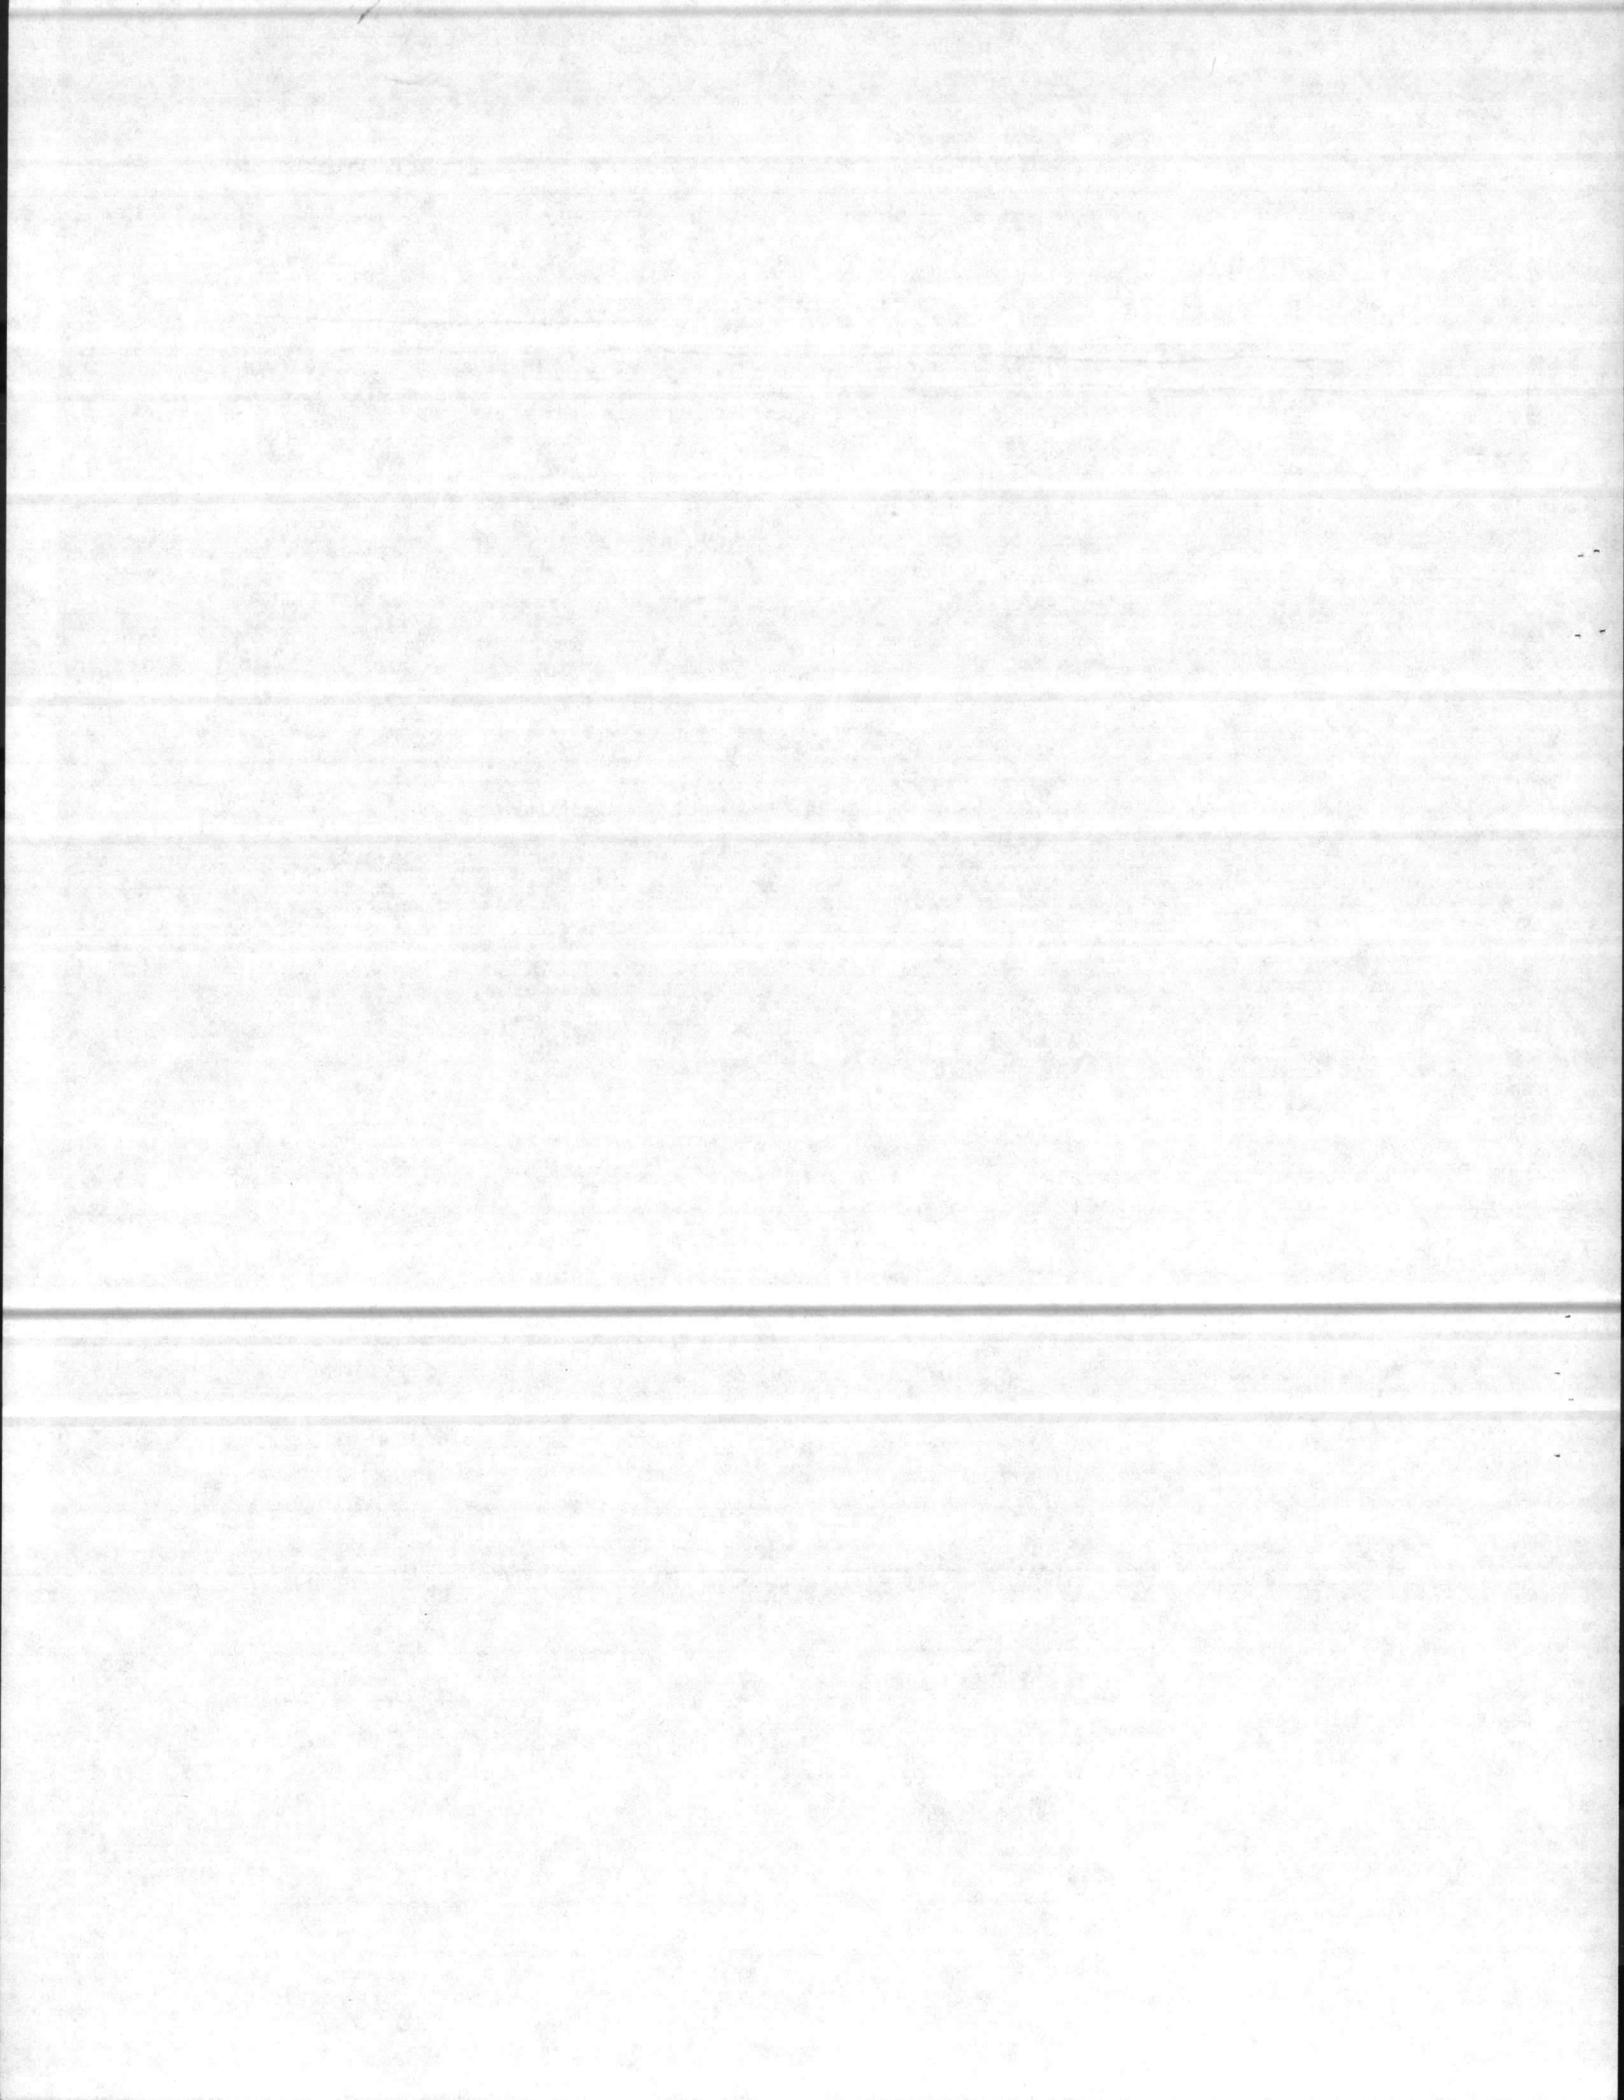

6.1 Engine Cranking Battery shall be sized by manufacturer to provide 10 successive cranking attempts of 30 seconds each with a two minute rest between each attempt, at a temperature of 32 degrees Fahrenheit, while retaining a battery voltage of 2.0 volts or more per cell. Specific gravity shall not exceed 1.250. Battery shall be complete with connectors, cable terminals, acid resistant racks and one filling of electrolyte.

6.2 Battery Charger, electric type, shall be mounted on wall of pump house and shall be the rectifier type for operation with 120 volt 60 hertz. Charger shall be protected by an automatic circuit breaker and shall have capacity to charge two 6 volt batteries or one 12 volt battery at five to eight amps. One direct current ammeter shall be included and shall be flush mounted on the front of the enclosure. All metal parts shall be corrosion resistant or shall be suitably protected against corrosion. Housing for charger shall be drip-proof construction. Battery charger shall have self regulation and shall operate automatically for both cranking and charging modes so that manual switch on-off is not required.

6.3 Engine exhaust muffler (silencer) shall have flanged connections and shall be furnished in accordance with the engine manufacturer's recommendations for residential class silencing. Muffler & all exhaust piping shall be supported independently of engine exhaust manifold.


6.4 Exhaust Piping shall be extra strong black steel pipe conforming to ASTM A53 or A120. Piping 2 inches and smaller shall have threaded fittings. Piping 2-1/2 inches and larger shall have welded fittings. Threaded fittings shall conform to ANSI B16.3, Class 300. Welding fittings shall conform to ANSI B16.9 of the same material and weight as the piping in which they are installed. Flanges shall be provided for final connections to diesel engine and exhaust muffler. Gaskets shall be 1/16 inch thick asbestos packing conforming to HH-P-46. Where pipe passes through the building wall it shall be run in an asbestos cement sleeve securely mounted in the wall.

6.4.1 Insulation: Exhaust piping shall be insulated inside the building with calcium silicate insulation conforming to HH-I-523, Type II, Class A, 2 inches thick. Insulation shall be protected by a 0.016 inch thick aluminum jacket with a factory applied moisture barrier and secured by aluminum straps or screws spaced 8 inches on centers.

6.5 Metal Instruction Plate shall be mounted on the engine unit giving the manufacturer's recommendations for lubricating oil and other pertinent information.

6.6 Safety guards: The interconnecting shafting between the diesel engine and the combination drive and all other rotating units shall be provided with approved safety guards for protection of operating personnel.

7. ELECTRICAL:

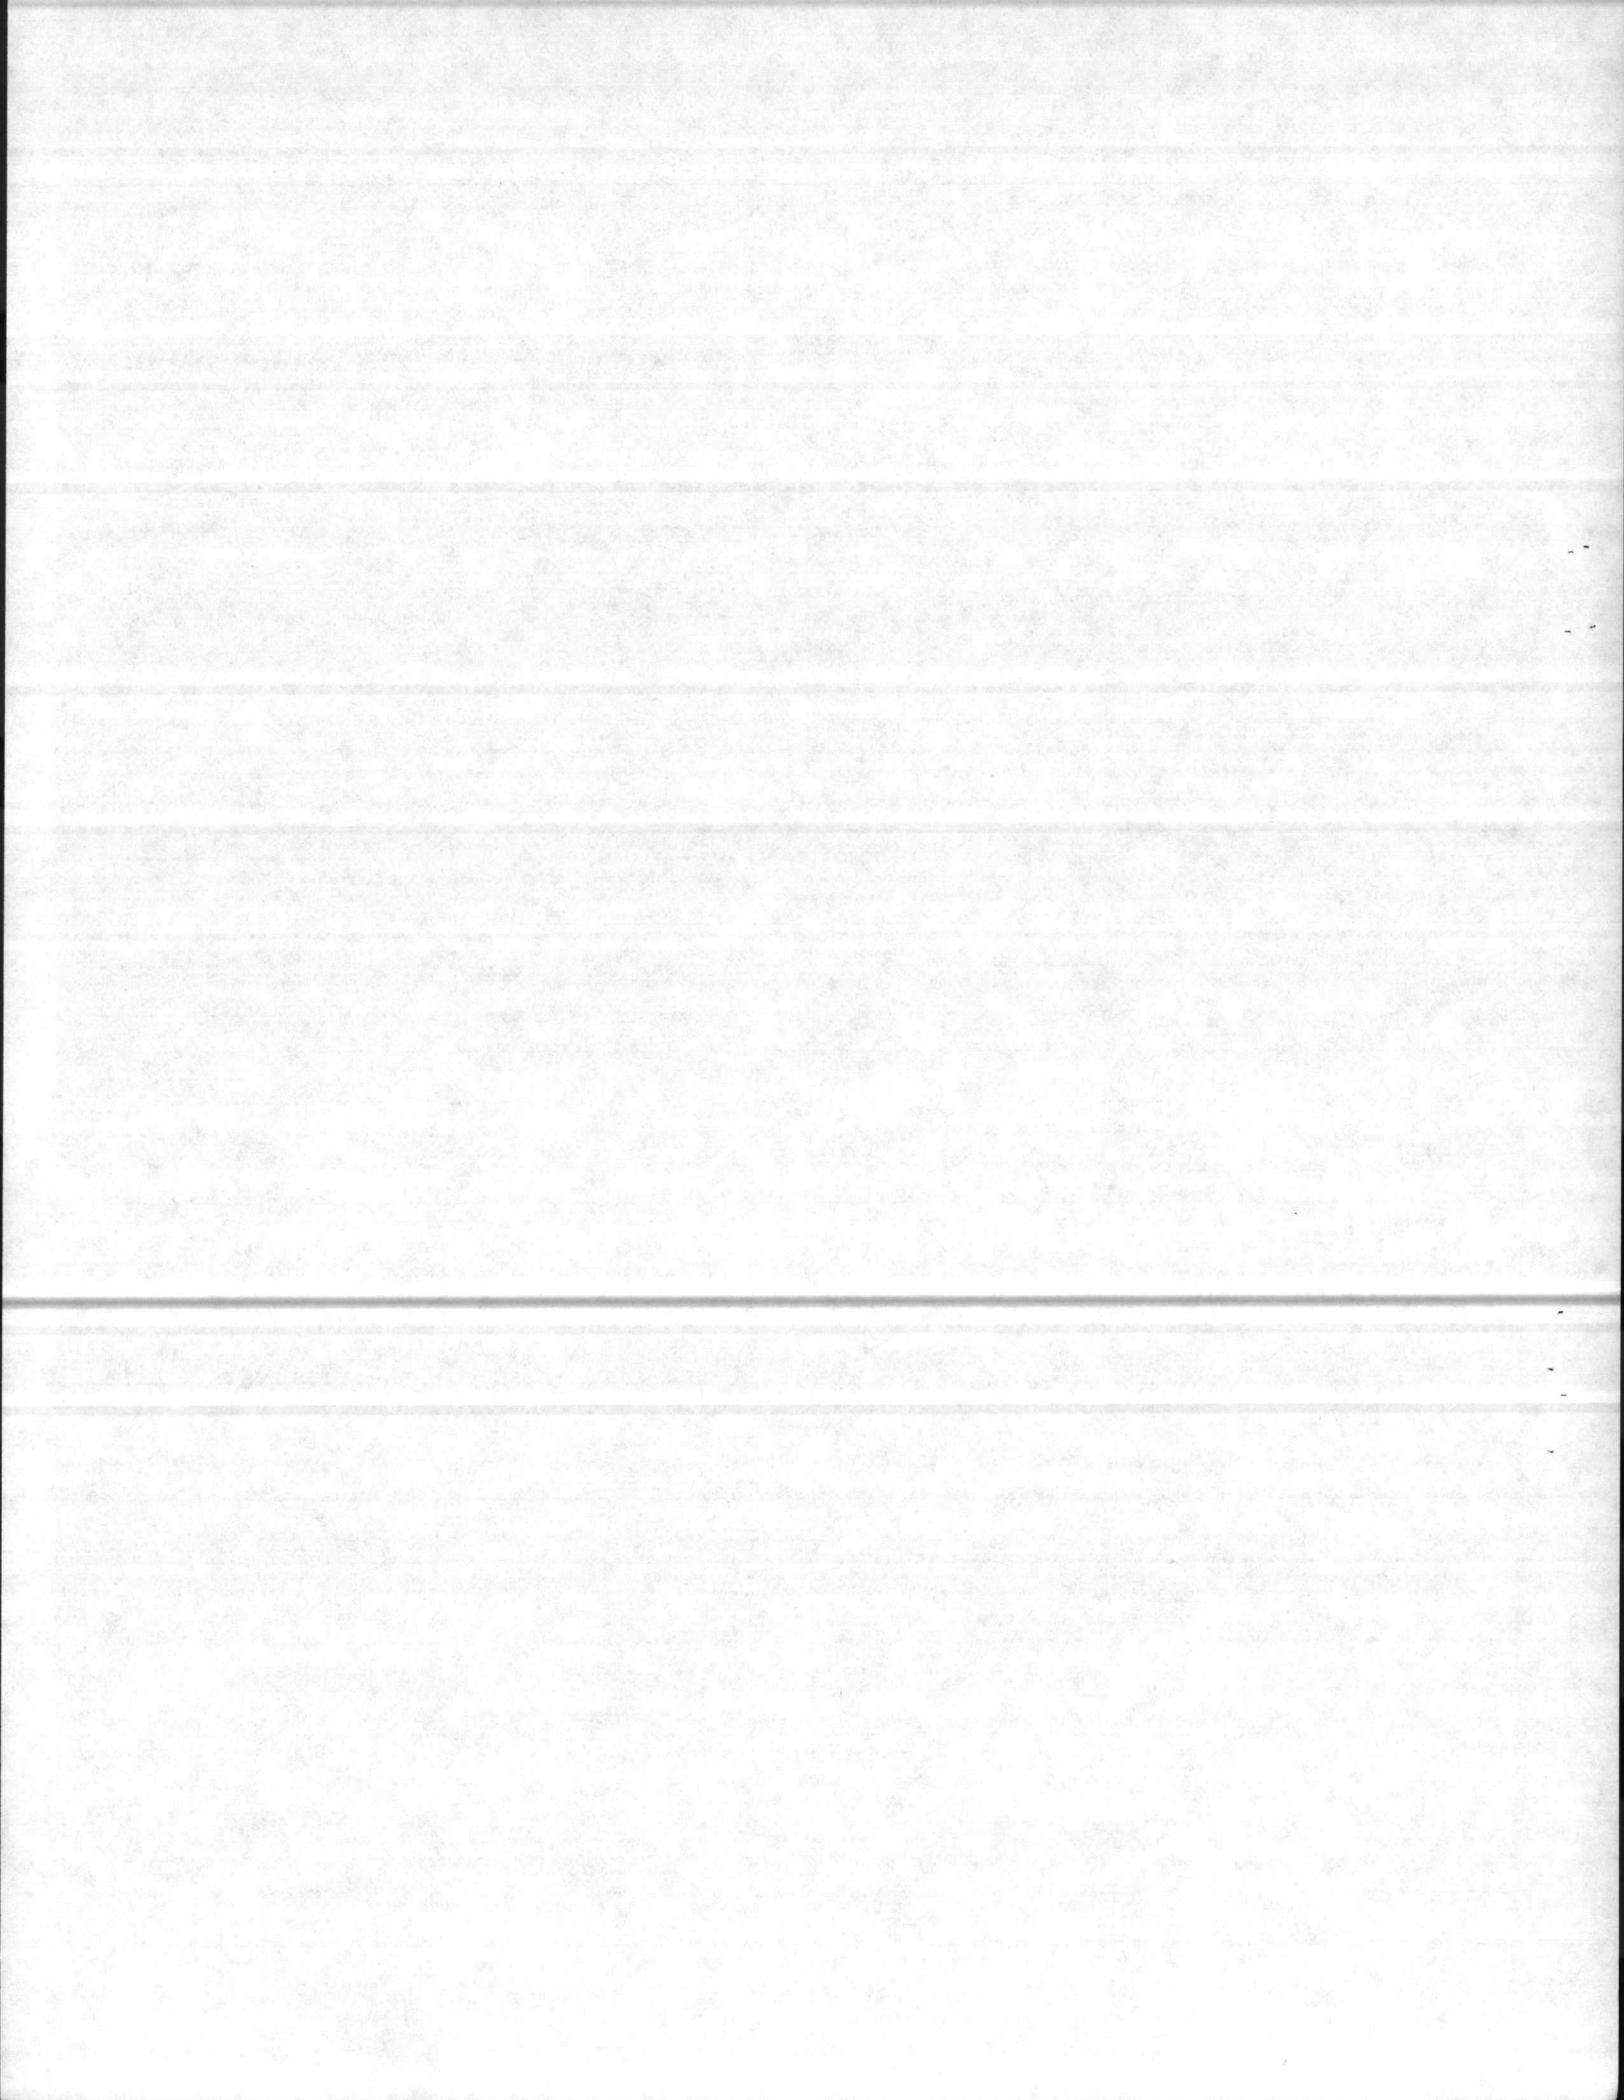

7.1 Motors and controllers shall be furnished with their respective pieces of equipment and shall conform to and shall have all electrical connections provided under section entitled "Interior Electrical Systems". The cost of providing additional electrical service and related work shall be included under this section when motors and equipment furnished are larger than sizes indicated.

7.2 Electrical work is specified in the section entitled "Interior Electrical Systems", except for control wiring. Control wiring shall be provided under this section and shall conform to NFPA 70. The conduit shall be rigid zinc coated steel.


8. PAINTING OF EQUIPMENT: Exterior surfaces of equipment shall be provided with, as a minimum, one coat of primer and two coats of paint; except that surfaces subject to temperatures above 120 degrees F. shall be provided with, as a minimum, two coats of heat resisting paint applied directly on bare, clean metal. It is desirable that all coats be shop applied; however, if the manufacturer's standard shop painting system does not meet these requirements, field applied coats shall be provided. Shop coats shall be lightly sanded before application of field applied coats. Field applied paint shall be applied to a dry film thickness of not less than one mil for each coat; paint shall conform to TT-E-489, except heat resisting paint shall conform to TT-E-496, Type II for surfaces temperatures between 120 and 400 degrees Fahrenheit, and to TT-P-28 for surfaces temperatures greater than 400 degrees F. Equipment painting, both shop and field, shall be provided under this section.

9. FIELD PAINTING:

9.1 Exhaust Piping: Before insulating exhaust piping, the piping shall be painted as specified herein. Before application of paint, the surfaces to be painted shall be cleaned to bare metal; paint shall be applied on the same day as cleaning of surfaces. Metal surfaces shall receive two coats of heat-resisting aluminum paint conforming to TT-P-28, applied to a total minimum dry film thickness of 2.0 mils. The first coat shall be allowed to thoroughly dry before application of the second coat.


9.2 Equipment: Factory finishes damaged during transit, handling, and installation shall be restored to original condition. Bolts and other anchorage devices shall be painted with paint systems equal to that specified for the equipment.

10. INSTALLATION: All equipment shall be provided with the equipment manufacturer's printed installation instructions, and the equipment shall be installed in strict accordance with these printed instructions. Pump motors and engine shall be set accurately, properly aligned, and securely mounted to supporting construction.

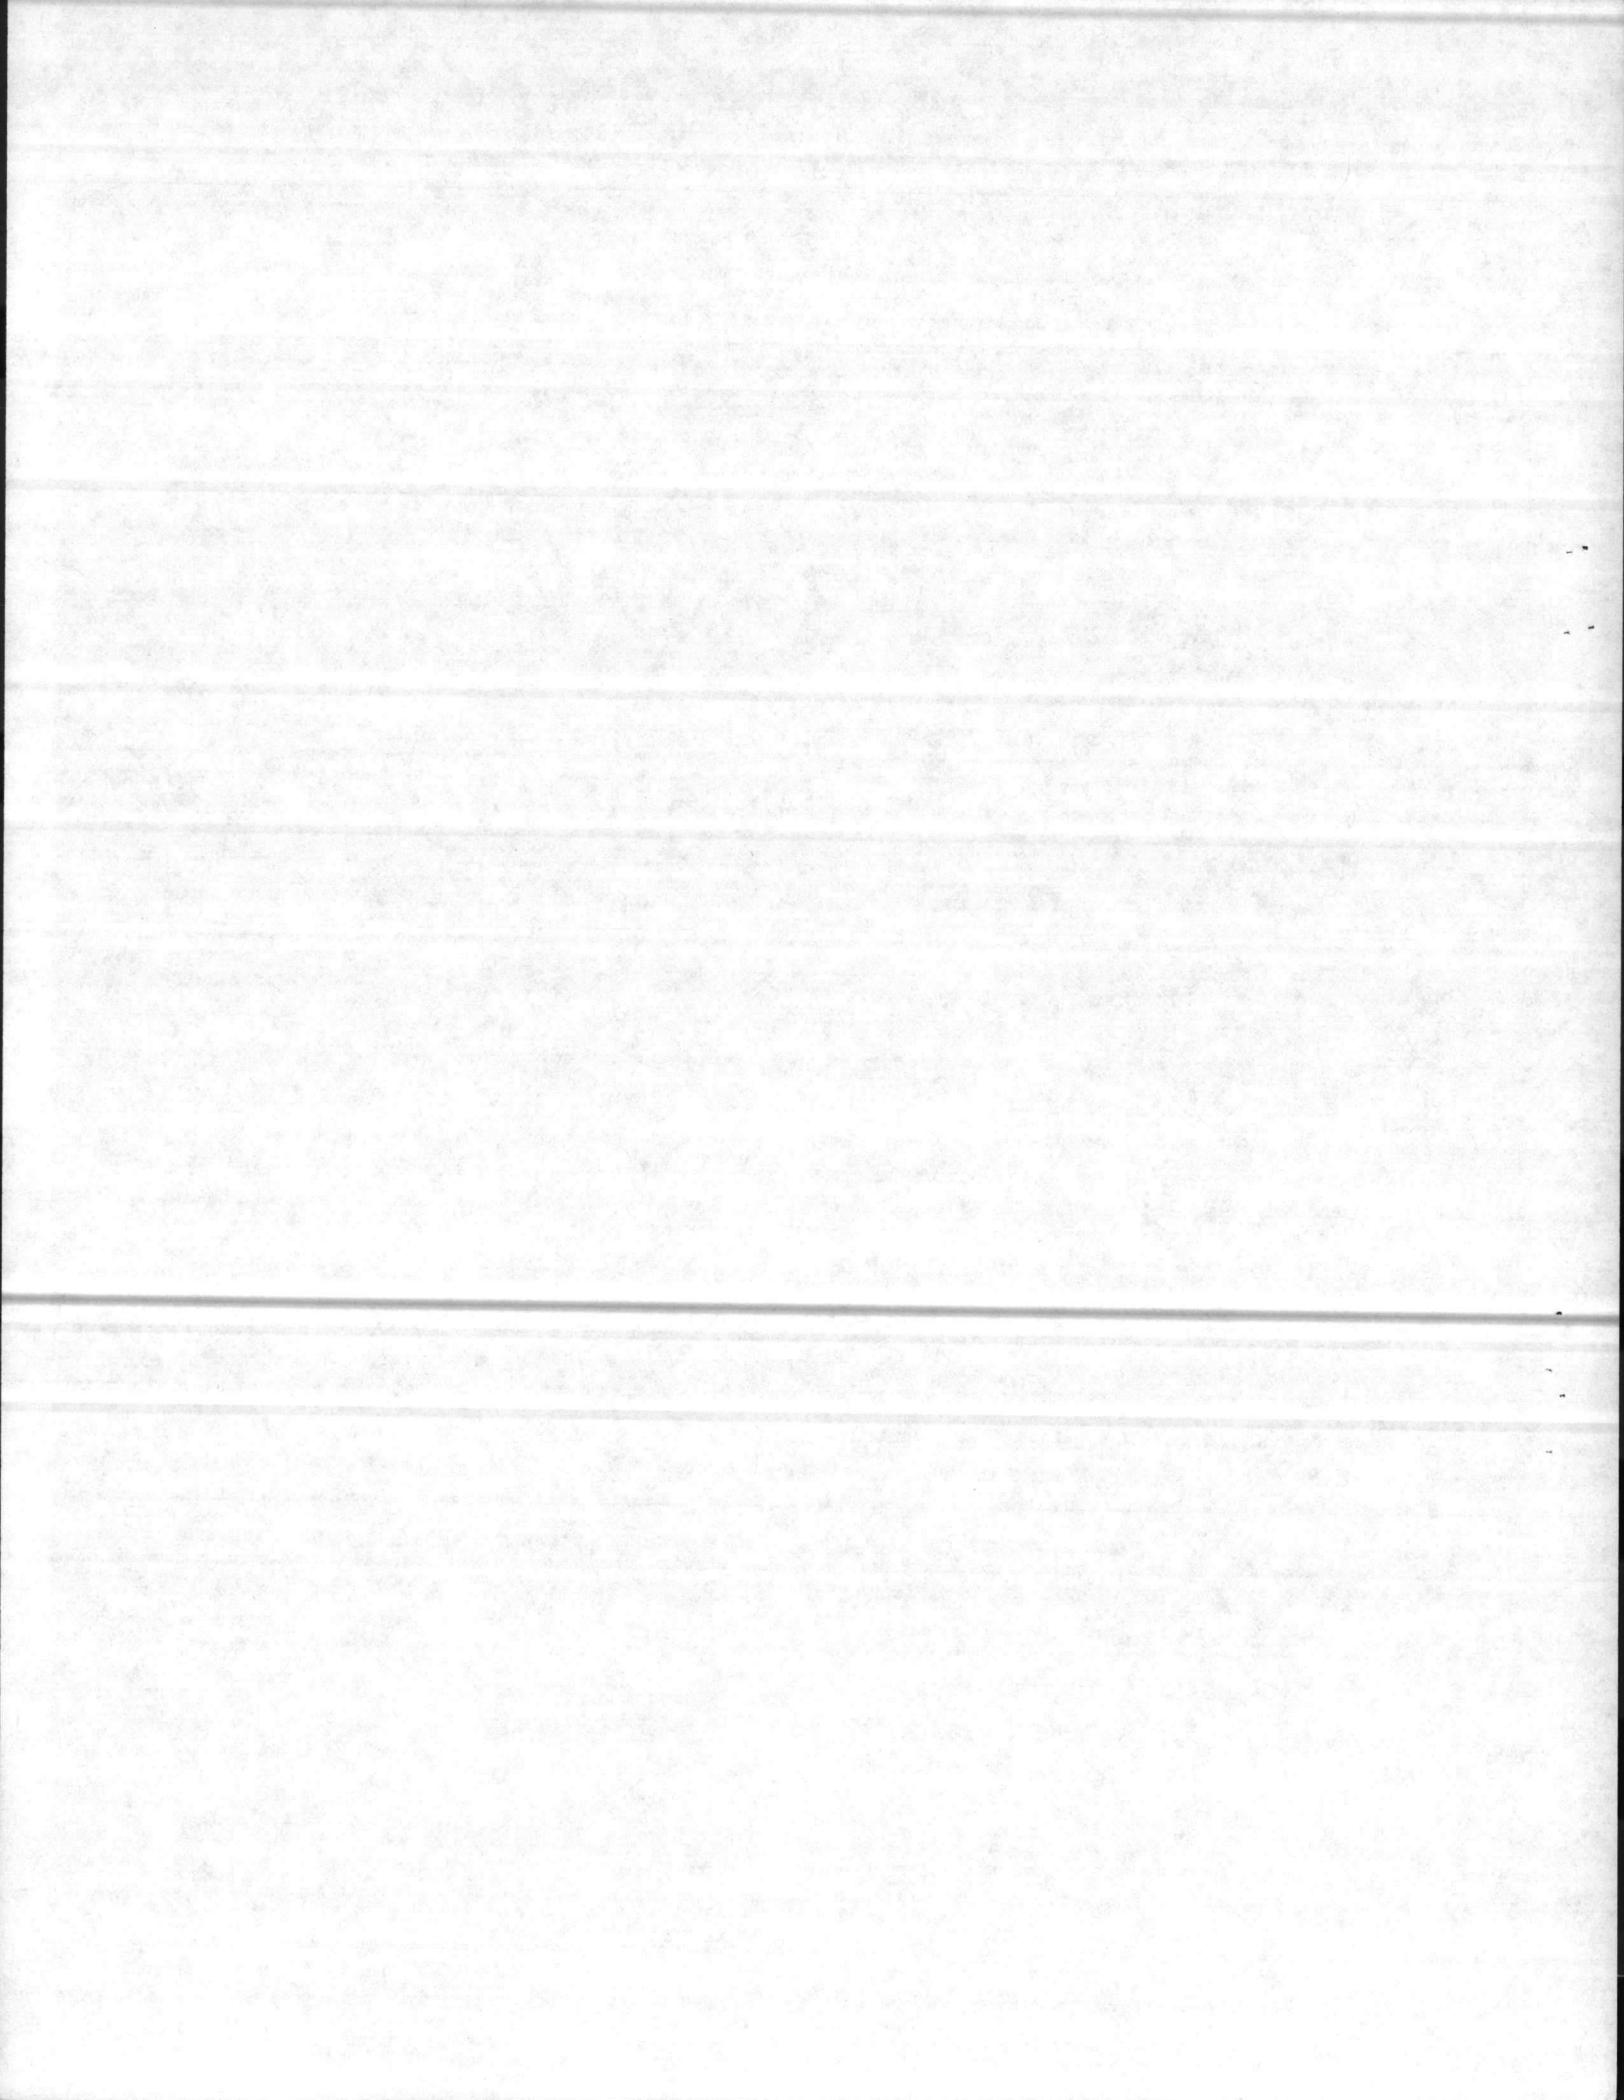

11. PERFORMANCE TESTS: Each pumping unit and diesel engine, after being put into operation, shall be tested to demonstrate conformance with the specified requirements. Pumps and diesel engine shall be operated at the design capacities for a period of at least two hours and shall be observed during this period. All defects shall be corrected. Tests shall be repeated as necessary until all defects are corrected. Equipment which fails to meet the specified requirements shall be removed and replaced with proper equipment, at no additional cost to the Government.

—o0o—

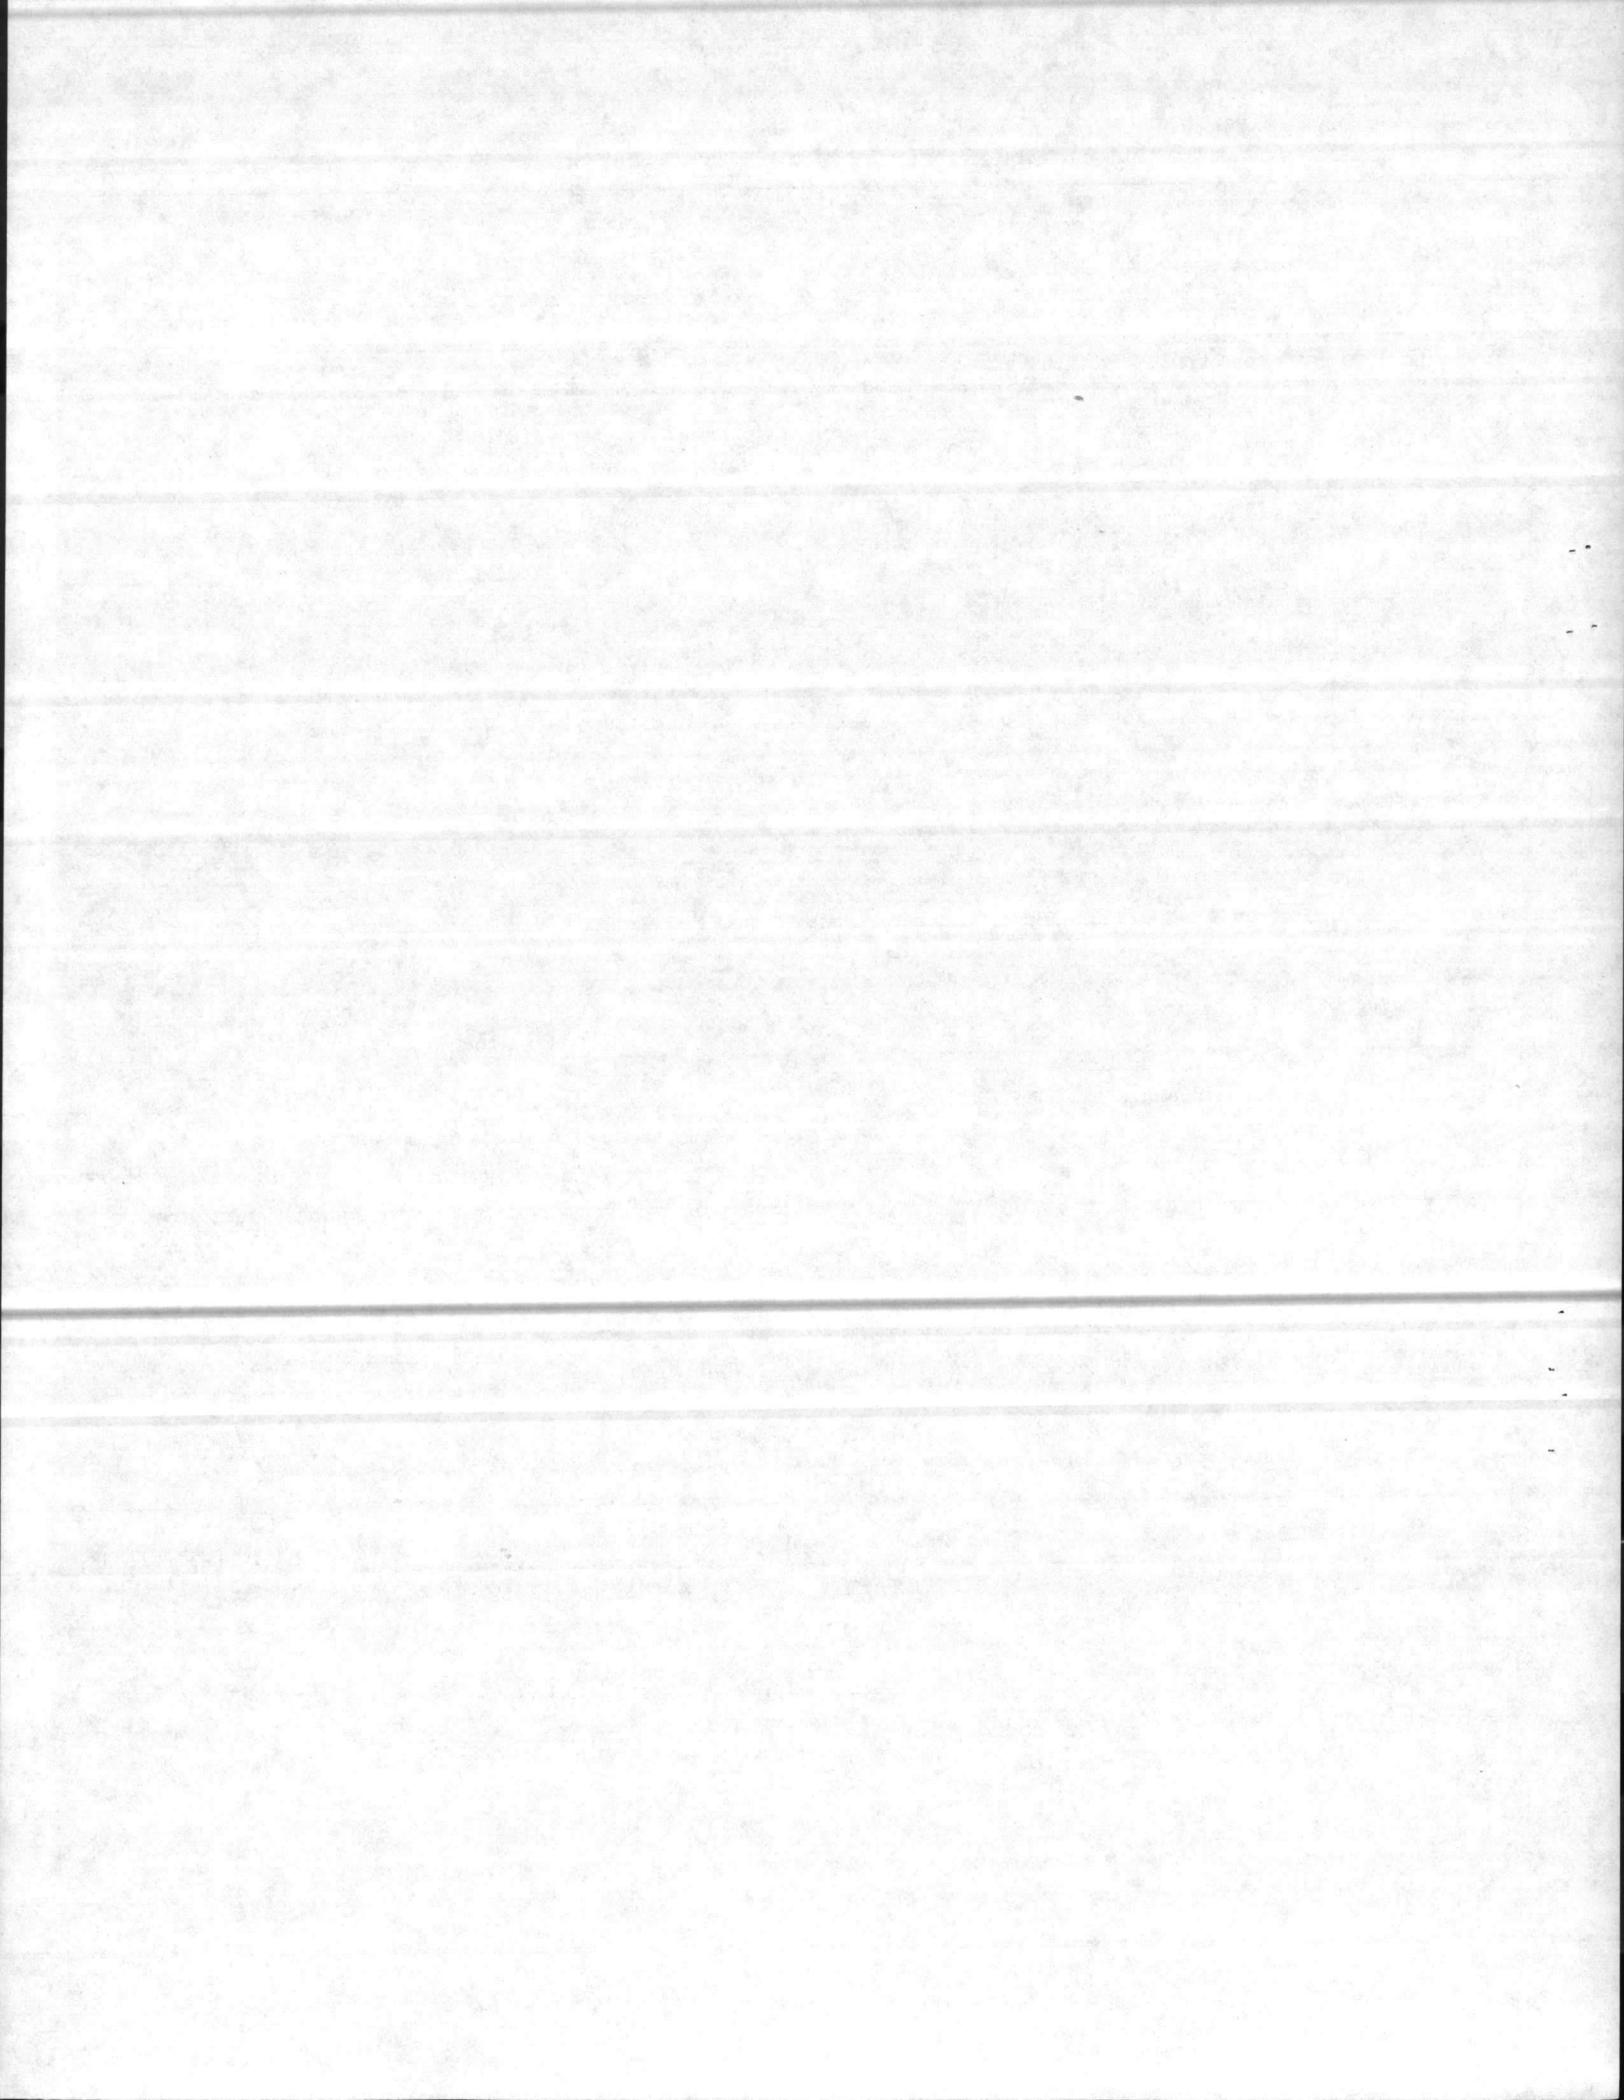

SECTION 15272

WATER DISTRIBUTION

I. **APPLICABLE PUBLICATIONS:** The following publications of the issues listed below, but referred to elsewhere by basic designation only, form a part of this specification to the extent indicated by references thereto (where a number is suffixed to the specification number, it denotes the effective amendment to the specification):

1.1 Federal Specifications:

GG-G-76C(1)	Gages, Pressure and Vacuum, dial indicating.
WW-P-421D	Pipe, cast gray and ductile iron, pressure (for water and other liquids).
WW-V-54D(1)	Valve, gate, bronze (125, 150, and 200-pound; threaded ends, flange ends, solder end, and brazed ends, for land use).
WW-V-58B	Valves, gate, cast-iron; threaded and flanged (for land use).

1.2 Military Specifications:


MIL-C-18480A(3)	Coating Compound, bituminous solvent, coal tar base.
MIL-V-18436c(2)	Valves, check: bronze, cast-iron, and steel body.

1.3 American Society for Testing and Materials (ASTM):

B 88-76	Seamless copper water tube.
D 1869-66(1972)	Rubber rings for asbestos-cement pipe.

1.4 American Water Works Association (AWWA):

C 106-75	Cast-iron pipe centrifugally cast in metal molds, for water or other liquids.
C 108-75	Cast-iron pipe centrifugally cast in sand-lined molds, for water or other liquids.
C 110-71	Gray-iron and ductile-iron fittings, 2 in. through 48 in., for water and other liquids.
C 111-72	Rubber gasket joints for cast-iron and ductile-iron pressure pipe and fittings.
C 115-75	Flanged cast-iron and ductile-iron pipe with threaded flanges.
C 151-76	Ductile-iron pipe, centrifugally cast in metal molds or sand-lined molds, for water or other liquids.
C 400-75	Asbestos cement pressure pipe for water and other liquids.
C 500-71	Gate valves - 3 in. through 48 in. - for water and other liquids.
C 600-64	Installation of cast-iron water mains.
C 601-68	Disinfecting water mains.
C 603-65	Installation of asbestos-cement water pipe.
C 702-71	Cold-Water Meters

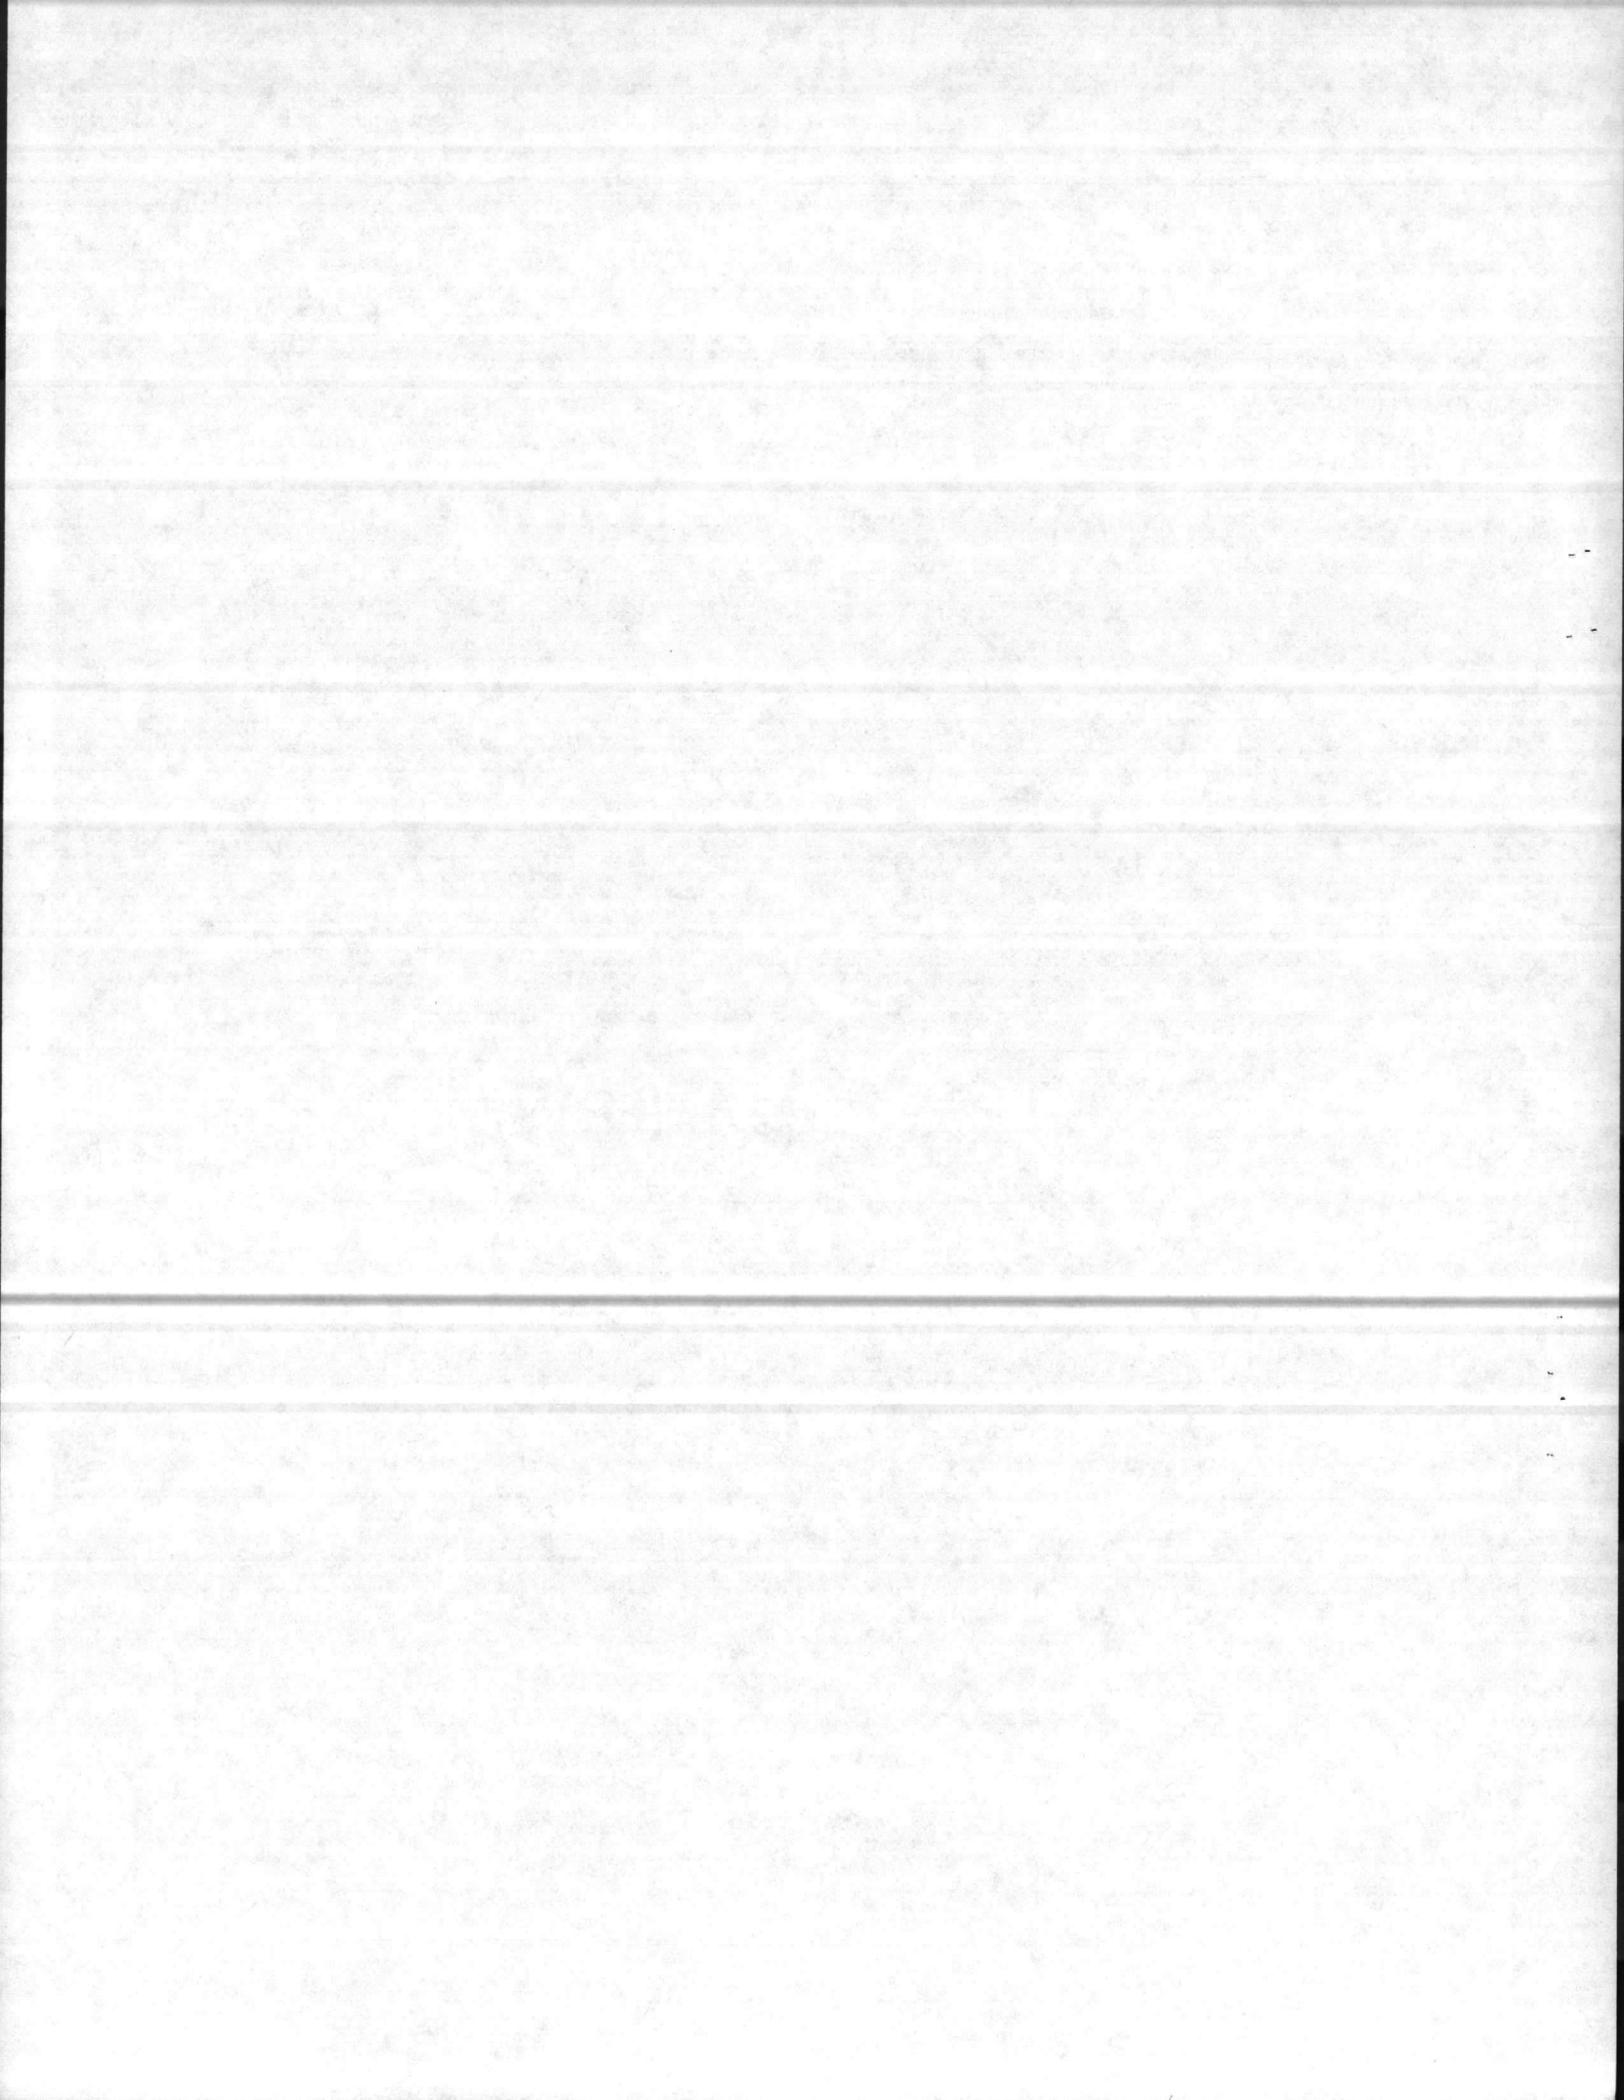

1.5 Underwriters' Laboratories (UL):

- UL 194 The performance of gasketed joints for cast-iron pressure pipe and fittings, May 1973.
UL 262 Gate valves for fire-protection service, May 1973.
UL 312 Swing-check valves for fire-protection service, June 1975.

1.6 American National Standards Institute (ANSI):

- A21.1-(1967)(R1972) Thickness design of cast-iron pipe.
A21.6-1975 Cast-iron pipe centrifugally cast in metal molds for water or other liquids.
A21.8-1975 Cast-iron pipe centrifugally cast in sand-lined molds, for water or other liquids.
A21.10-1971 Gray-iron and ductile-iron fittings, 2 in. through 48 in., for water and other liquids.
A21.11-1972 Rubber gasket joints for cast-iron and ductile-iron pressure pipe and fittings.
A21.15-1975 Flanged cast-iron and ductile-iron pipe with threaded flanges.
A21.51-1976 Ductile-iron pipe, centrifugally cast in metal molds or sand-lined molds, for water or other liquids.
B16.18-1972 Cast bronze solder-joint pressure fittings.
B16.22-1973 Wrought copper and bronze solder-joint pressure fittings.

1.7 National Fire Protection Association (NFPA):


- 24-73 Outside Protection.

1.8 LANTDIV Plates:

- WD-1 Standard thrust blocks for water mains.

2. GENERAL REQUIREMENTS: Section 15011, General Requirements, Mechanical, also applies to this section except as specified otherwise. The work includes provision of water piping and appurtenances both inside and outside of well houses.

3. SUBMITTALS REQUIRED: Shop drawings, manufacturer's data and certificates for equipment, materials, finish, and pertinent details for each system shall be submitted and approved before procurement, fabrication or delivery of such items to the job site. Partial submission will not be acceptable. Descriptive data shall be annotated to show the specific model, type and size of each item the Contractor proposes to furnish. The submittal requirements of Section 15011, General Requirements, Mechanical, applies to the following lists:

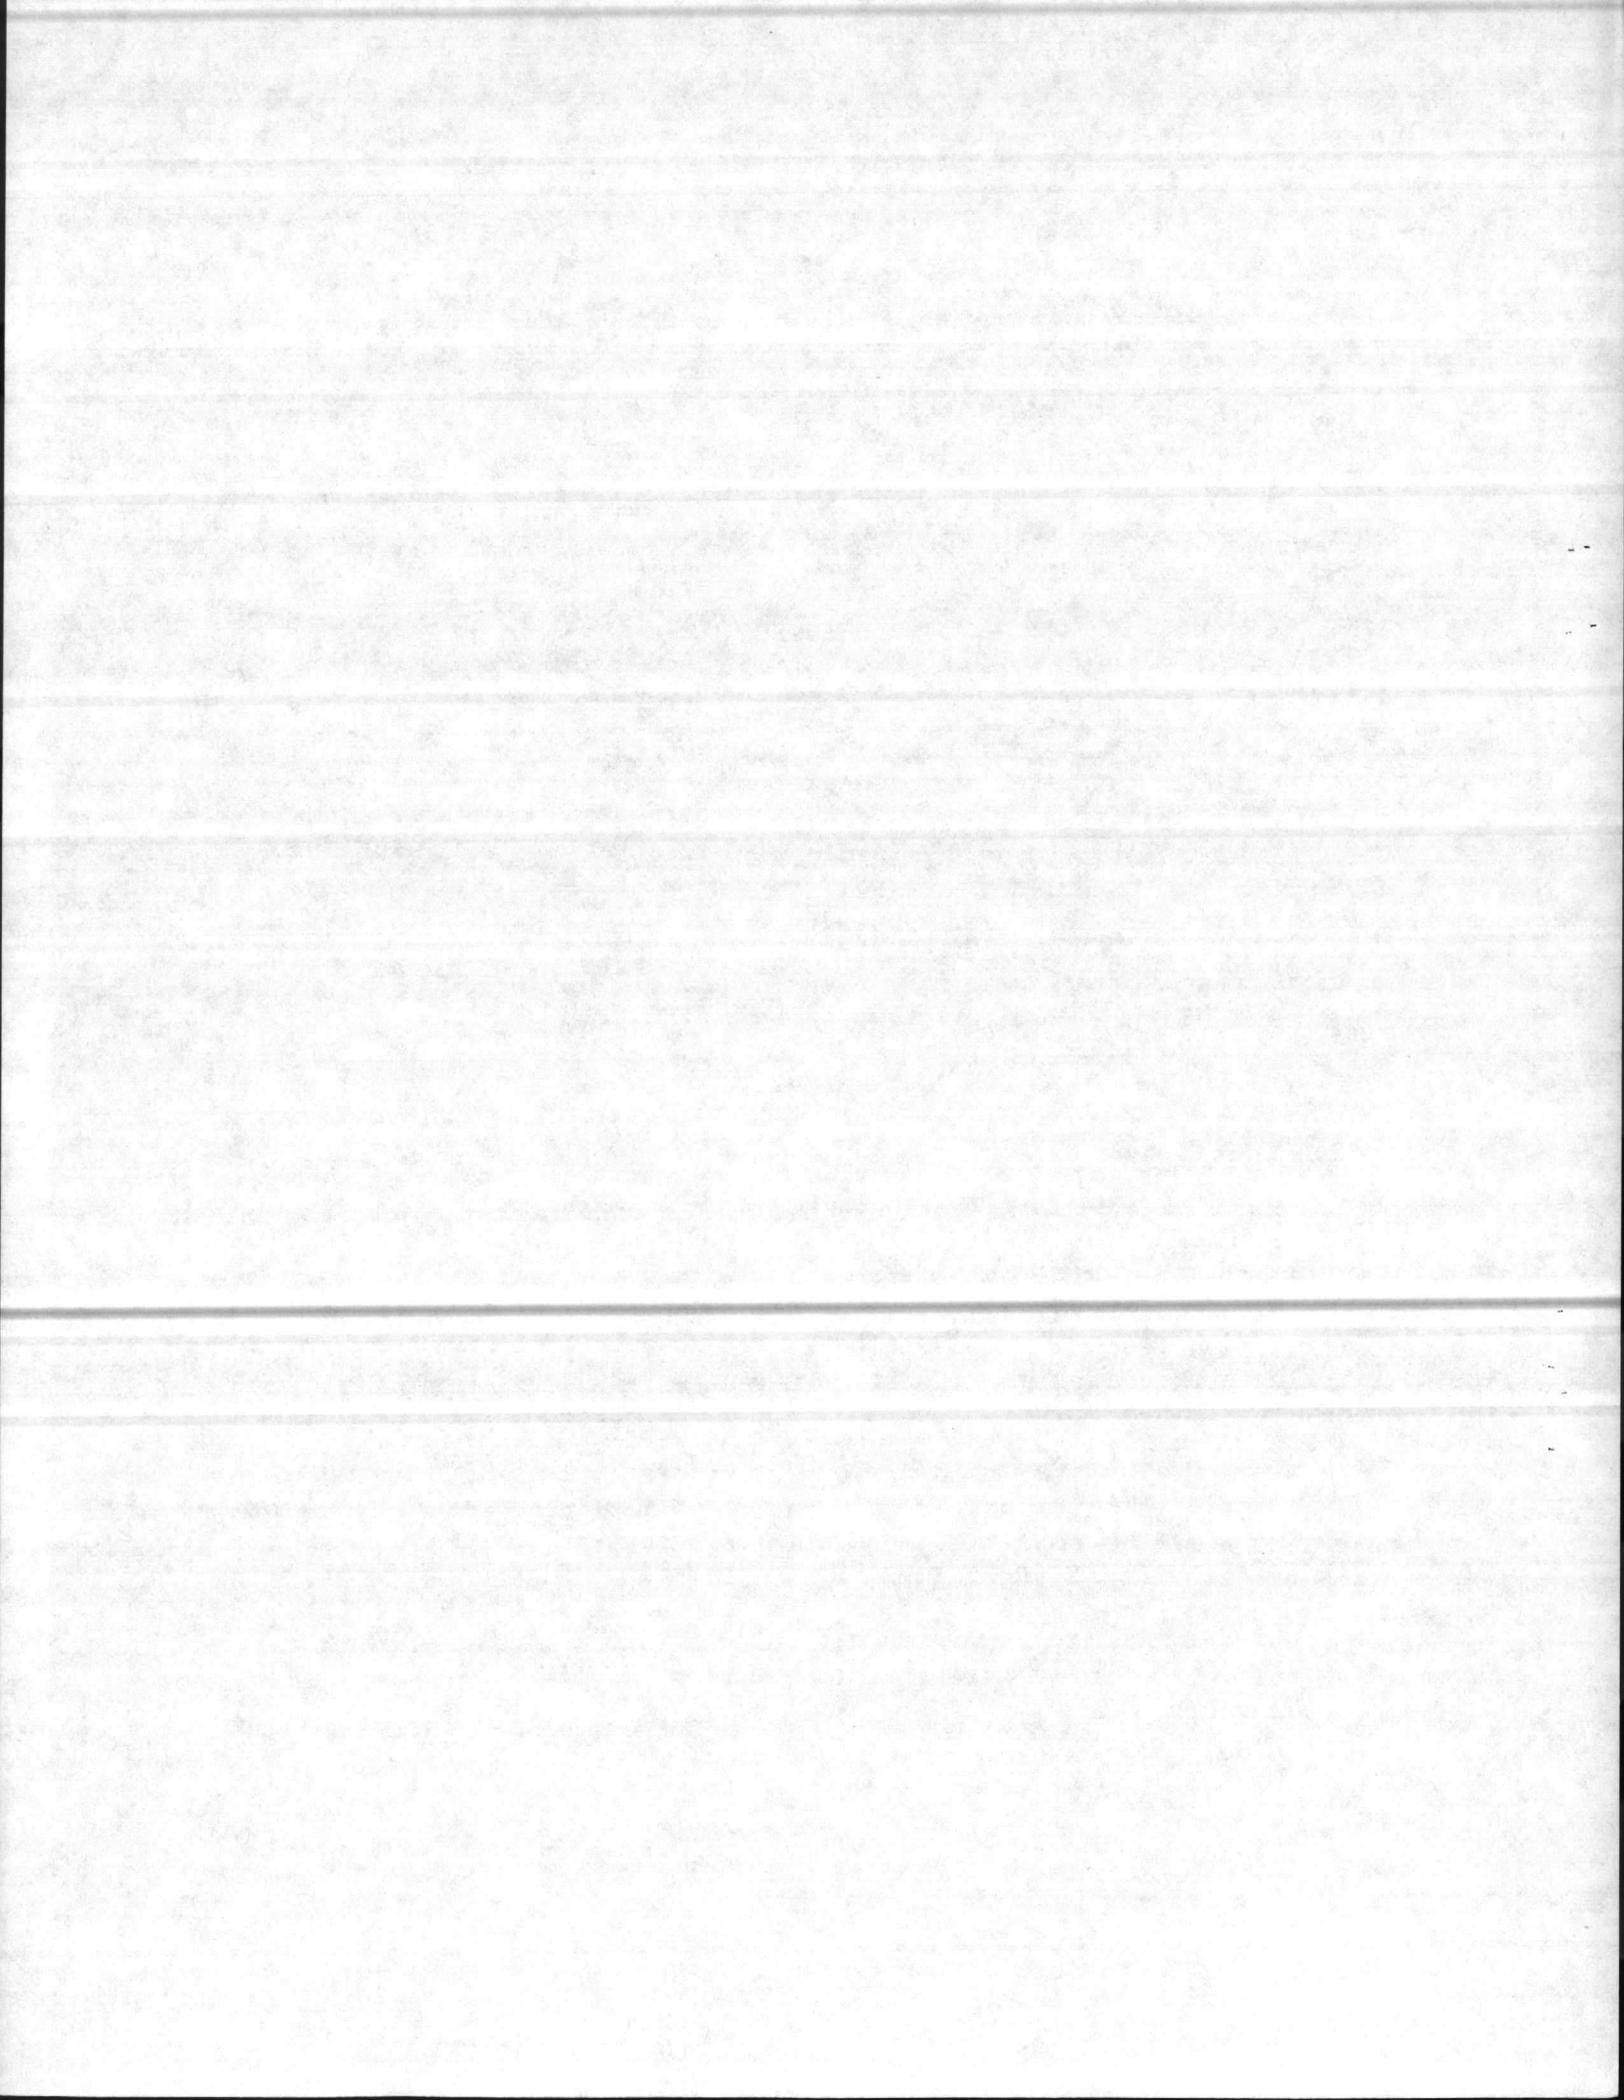

3.1 Manufacturer's Data:

Valves

Valve Boxes

Gages

3.2 Certificates: Submit notarized certificates from the manufacturer attesting that each of the following items conform to all requirements of this specification and of reference publications.

Pipe
Valves

Pipe Fittings
Gages

Joints

4. DELIVERY, STORAGE, AND PROTECTION: Materials shall be delivered to the site in an undamaged condition. Materials shall be carefully stored to provide proper protection against damage. Defective or damaged materials shall be replaced by the Contractor at no expense to the Government. Handling requirements are specified hereinafter.

5. MATERIALS:

5.1 Pipe: Water piping 4 inches in diameter and larger shall be either cast-iron or asbestos cement, except that piping within well houses shall be flanged cast iron. Air release lines on water piping shall be copper tubing.


5.1.1 Asbestos cement pipe shall conform to AWWA C 400, Class 150. Asbestos cement pipe shall be provided with tracer where as specified hereinafter.

5.1.2 Cast-iron pipe shall conform to the applicable requirements of WW-P-421 for Grade A, B, or C, as modified herein. Pipe wall thickness shall be based on a working pressure of 150 pounds per square inch and a depth of cover of 5 feet with laying condition B. Pipe shall have cement-mortar lining and shall have ends suitable for joints specified hereinafter. Factory-applied coatings on pipe shall be of a coal tar base material compatible with the coal tar base coating specified for field painting.

(a) Gray cast-iron pipe shall conform to the applicable requirements of ANSI A21.6 (AWWA C106) or ANSI A21.8 (AWWA C108), except as modified by WW-P-421, and except that flanged pipe shall conform to ANSI A21.15 (AWWA C115) minimum 150 PSI working pressure, outside coated, cement-mortar lined.

(b) Ductile-iron pipe shall conform to the applicable requirements of ANSI A21.51 (AWWA C151), except as modified by WW-P-421, and except that flanged pipe shall conform to ANSI A21.15, minimum 150 PSI working pressure, outside coated, cement-mortar lined.

5.1.3 Copper tubing shall be hard copper tubing conforming to ASTM B88, Type K.

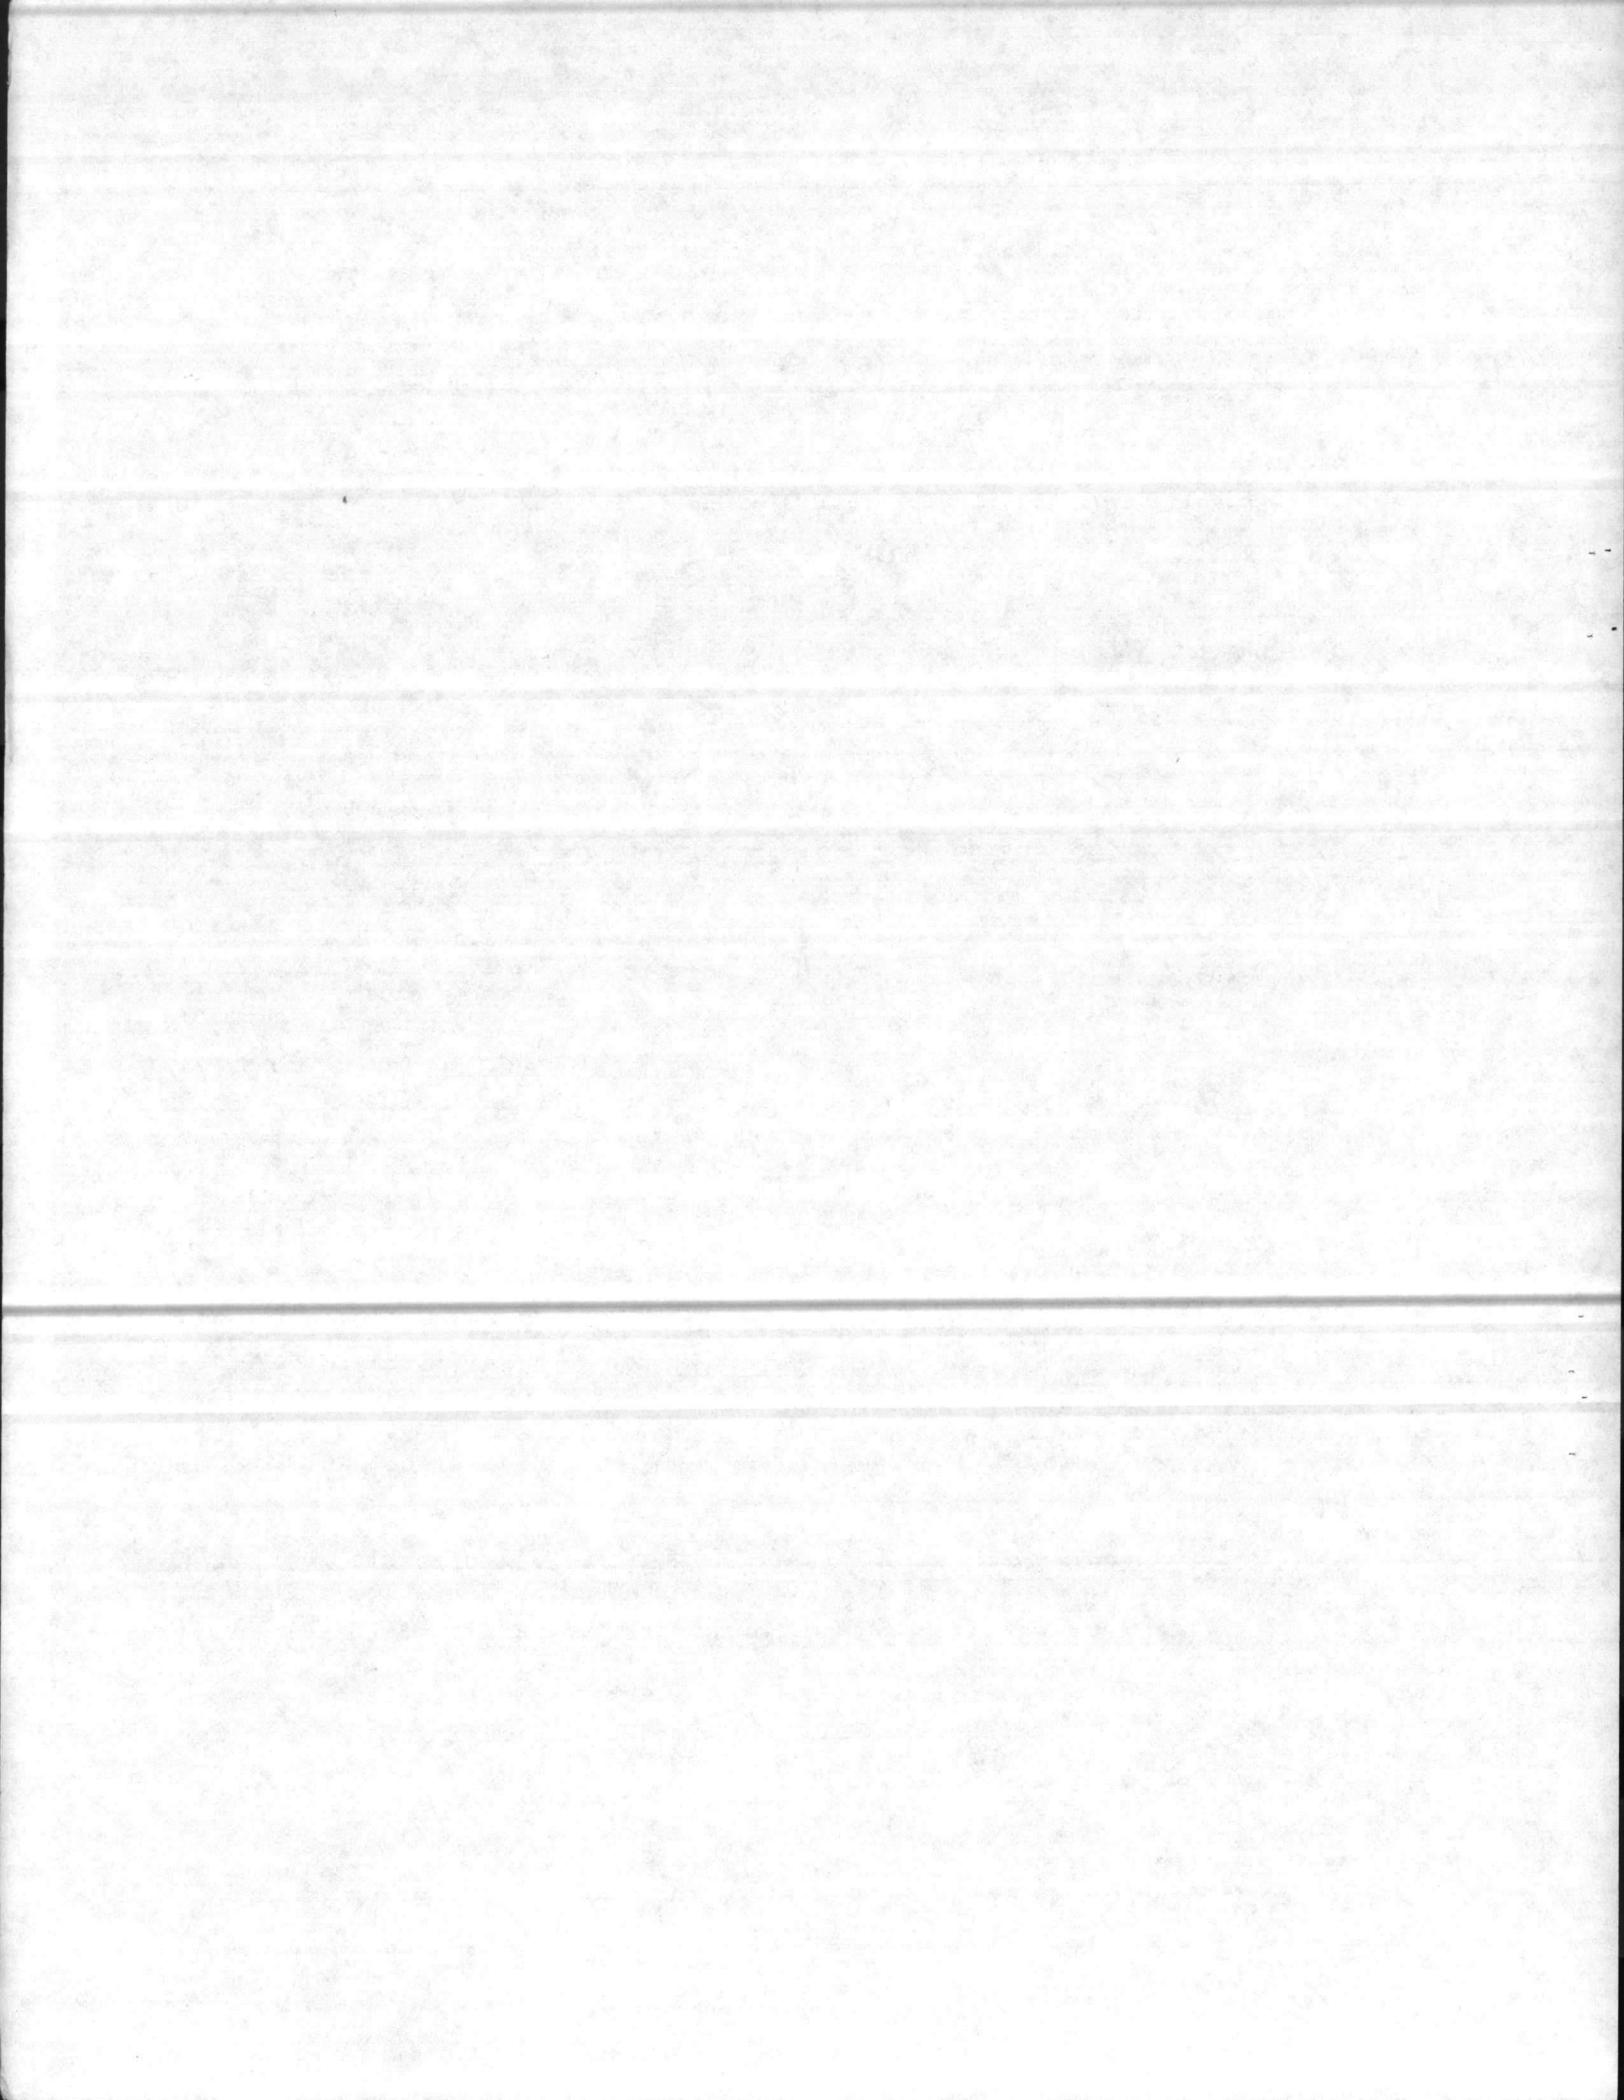

5.2 Fittings: Within the well houses fittings shall be flanged cast iron. Fittings where gages and air release lines occur shall have tapped bases for connections thereof. Fittings for aboveground pipe shall be shop primed with a coal tar base coating material compatible with the coal tar base coating specified for field painting.

5.2.1 Asbestos cement pipe fittings shall be cast-iron conforming to the applicable requirements of ANSI A21.10 (AWWA C110), and may be either mechanical joint or push-on joint type. Push-on joint fittings shall have bell design to fit the particular make of pipe and sealing ring on which the fittings are to be used. Fittings shall have cement-mortar lining equivalent to that specified for cast-iron pipe.

(a) Fittings for asbestos-cement pipe may, at the option of the Contractor, be solid copper with rubber ring gaskets of a type approved by the manufacturer of the pipe. Fittings shall be designed for pressure and water hammer in accordance with the applicable requirements of ANSI A21.1; fittings 8-inches and over shall be factory tested to not less than 500 pounds per square inch hydraulic pressure. Rubber gaskets shall be suited to assembly by the same method used for assembling pipe and couplings. Installation shall be in accordance with the printed directions of the manufacturer of the fittings. Only one type of fitting (copper or cast iron) shall be used for the work.

5.2.2 Fittings for cast gray and ductile iron pipe shall conform to the applicable requirements of ANSI A21.10 (AWWA C110) and may be either cast gray or ductile iron; fittings with push-on joint ends shall be as specified for bell-and-spigot joint ends except that bell design shall be modified, as approved, for push-on joints. Fittings shall have pressure rating at least equivalent to that of the pipe. Fittings shall have cement mortar lining equivalent to that of the pipe lining.


5.2.3 Fittings for copper tubing shall conform to the applicable requirements of ANSI B16.18 or B16.22 for solder-joint fittings.

5.3 Joints and Jointing Materials: All cast gray on ductile iron piping within the well houses shall have flanged joints.

5.3.1 Asbestos-Cement Piping: Jointing materials for pipe and fittings shall conform to the applicable requirements of ASTM D1869 and shall be non-oil-resistant type.

5.3.2 Cast Gray and Ductile Iron Pipe:

(a) Push-on Joints: Shape of pipe ends shall conform to the applicable requirements of WW-P-421 for Type II pipe. Conformation of ends for fittings shall conform to the applicable requirements of ANSI A21.11 (AWWA C111). Gaskets and lubricants for pipe and fittings shall conform to the applicable requirements of ANSI A21.11 (AWWA C111). Drawings of the joint and gasket shall be furnished. Push-on joints shall also meet the applicable requirements of UL 194.

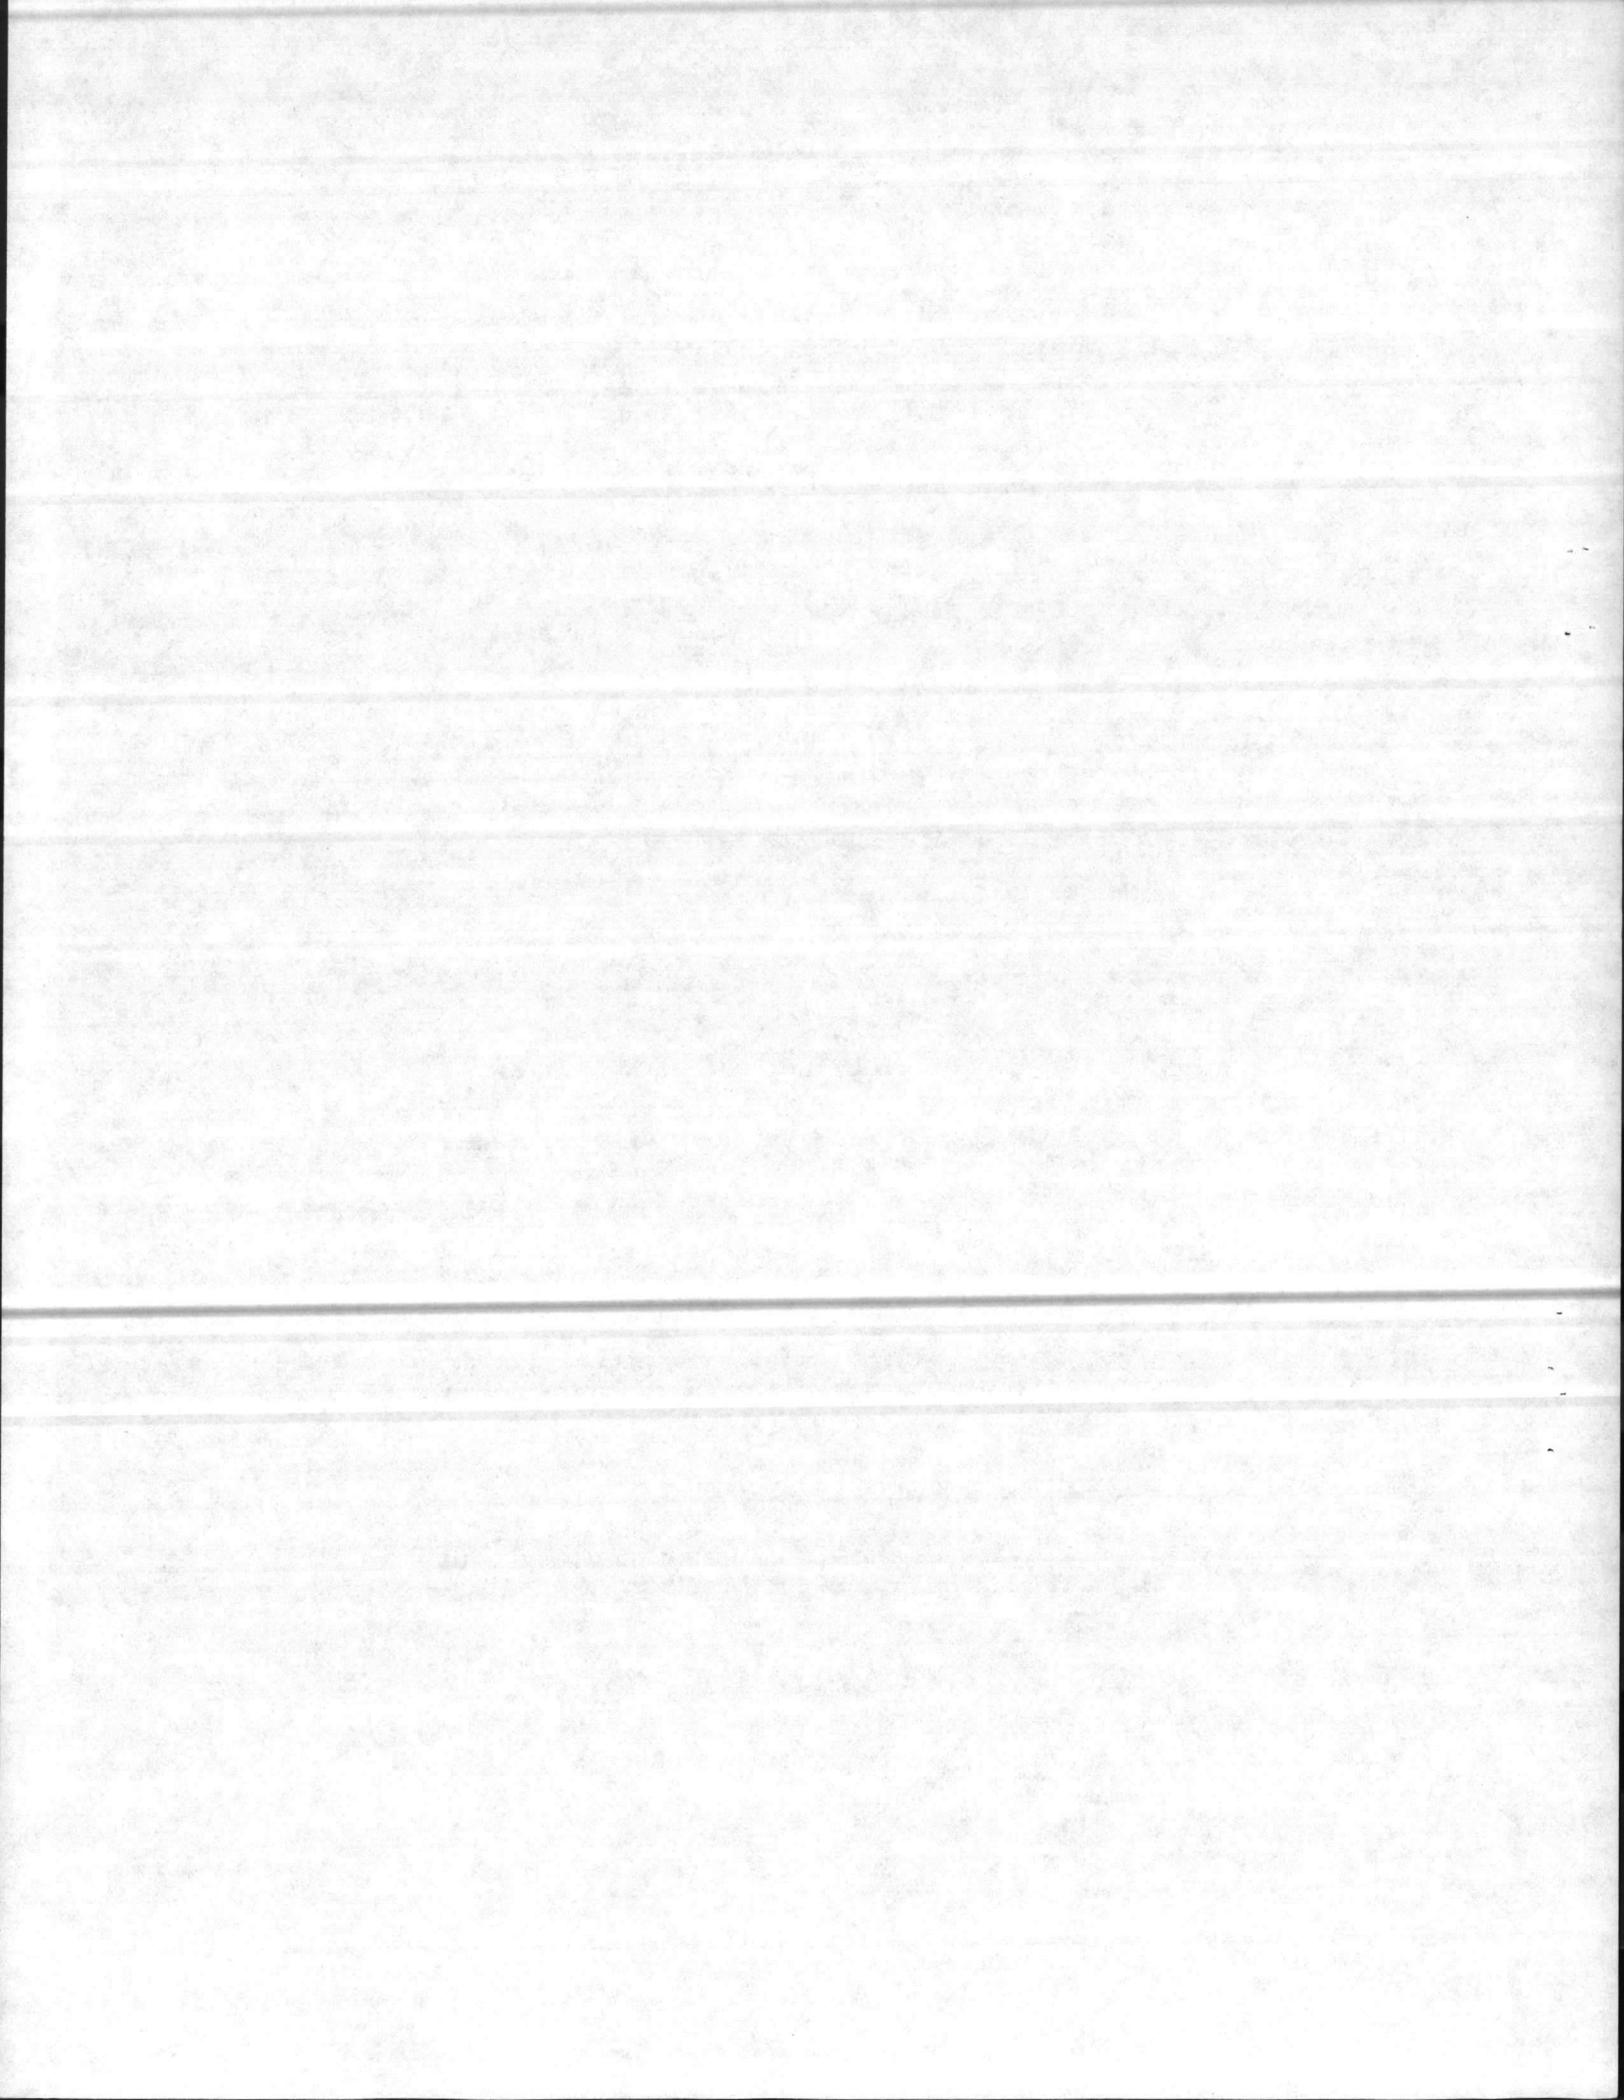

(b) **Mechanical Joints:** Dimensional and material requirements for pipe ends, glands, bolts and nuts, and gaskets shall conform to the applicable requirements of ANSI A21.11 (AWWA C111) or to the applicable requirements specified for Type III pipe in WW-P-421. Mechanical joints shall also meet the applicable requirements of UL 194.

(c) **Flanged Joints:** Ends of pipe and fittings shall be provided with cast-iron flanges conforming to the applicable requirements of ANSI A21.15. Bolts, nuts, and gaskets for flanged connections shall conform to the recommendations in the Appendix to ANSI A21.15. Gaskets shall be plain rubber, 1/8-inch thick.

(d) **Adapters:** Adapters shall be provided for connections of cast-iron pipe or asbestos-cement pipe to flanged accessories.

5.3.3 Insulating Joints: Joints between pipe of dissimilar metals shall be made up with a rubber-gasketed or other suitable approved type of insulating joint or dielectric coupling which will effectively prevent metal-to-metal contact between adjacent sections of piping.

5.4 Valves: Valves conforming to the same specification shall be of one make throughout the project.


5.4.1 Gate Valves:

(a) **Gate Valves on Buried Piping:** Valves shall have non-rising stems and shall be double-disc parallel seat type. Valves shall open by counterclockwise rotation of the valve stem. Valves shall have O-ring stem seals, except when gearing is specified, in which case conventional packing shall be used in lieu of O-ring seal. Stuffing boxes shall be bolted and constructed so as to permit the easy removal of parts for repairs.

(1) **Valves 3-inch Size and Larger:** Except as otherwise specified hereinafter, valves shall conform to AWWA C500 or to UL 262. Valves shall have mechanical-joint or push-on joint ends and gaskets conforming to ANSI A21.11 (AWWA C111), except as follows: Valves may have special ends, as approved, for connection to asbestos-cement piping. Valves conforming to UL 262 shall be designed for a hydraulic working pressure of 175 psi.

(b) **Gate Valves in Above Ground Locations:**

(1) **Valves 3-inch Size and Larger:** Valves shall conform to WW-V-58 or to UL 262. Valves shall be of the outside-screw-and-yoke configuration. Valves shall have flanged ends unless otherwise indicated or otherwise specified hereinafter. Valves conforming to WW-V-58 shall be Type II, Class 1. Valves conforming to UL 262 shall be designed for a hydraulic working pressure of 175 psi.

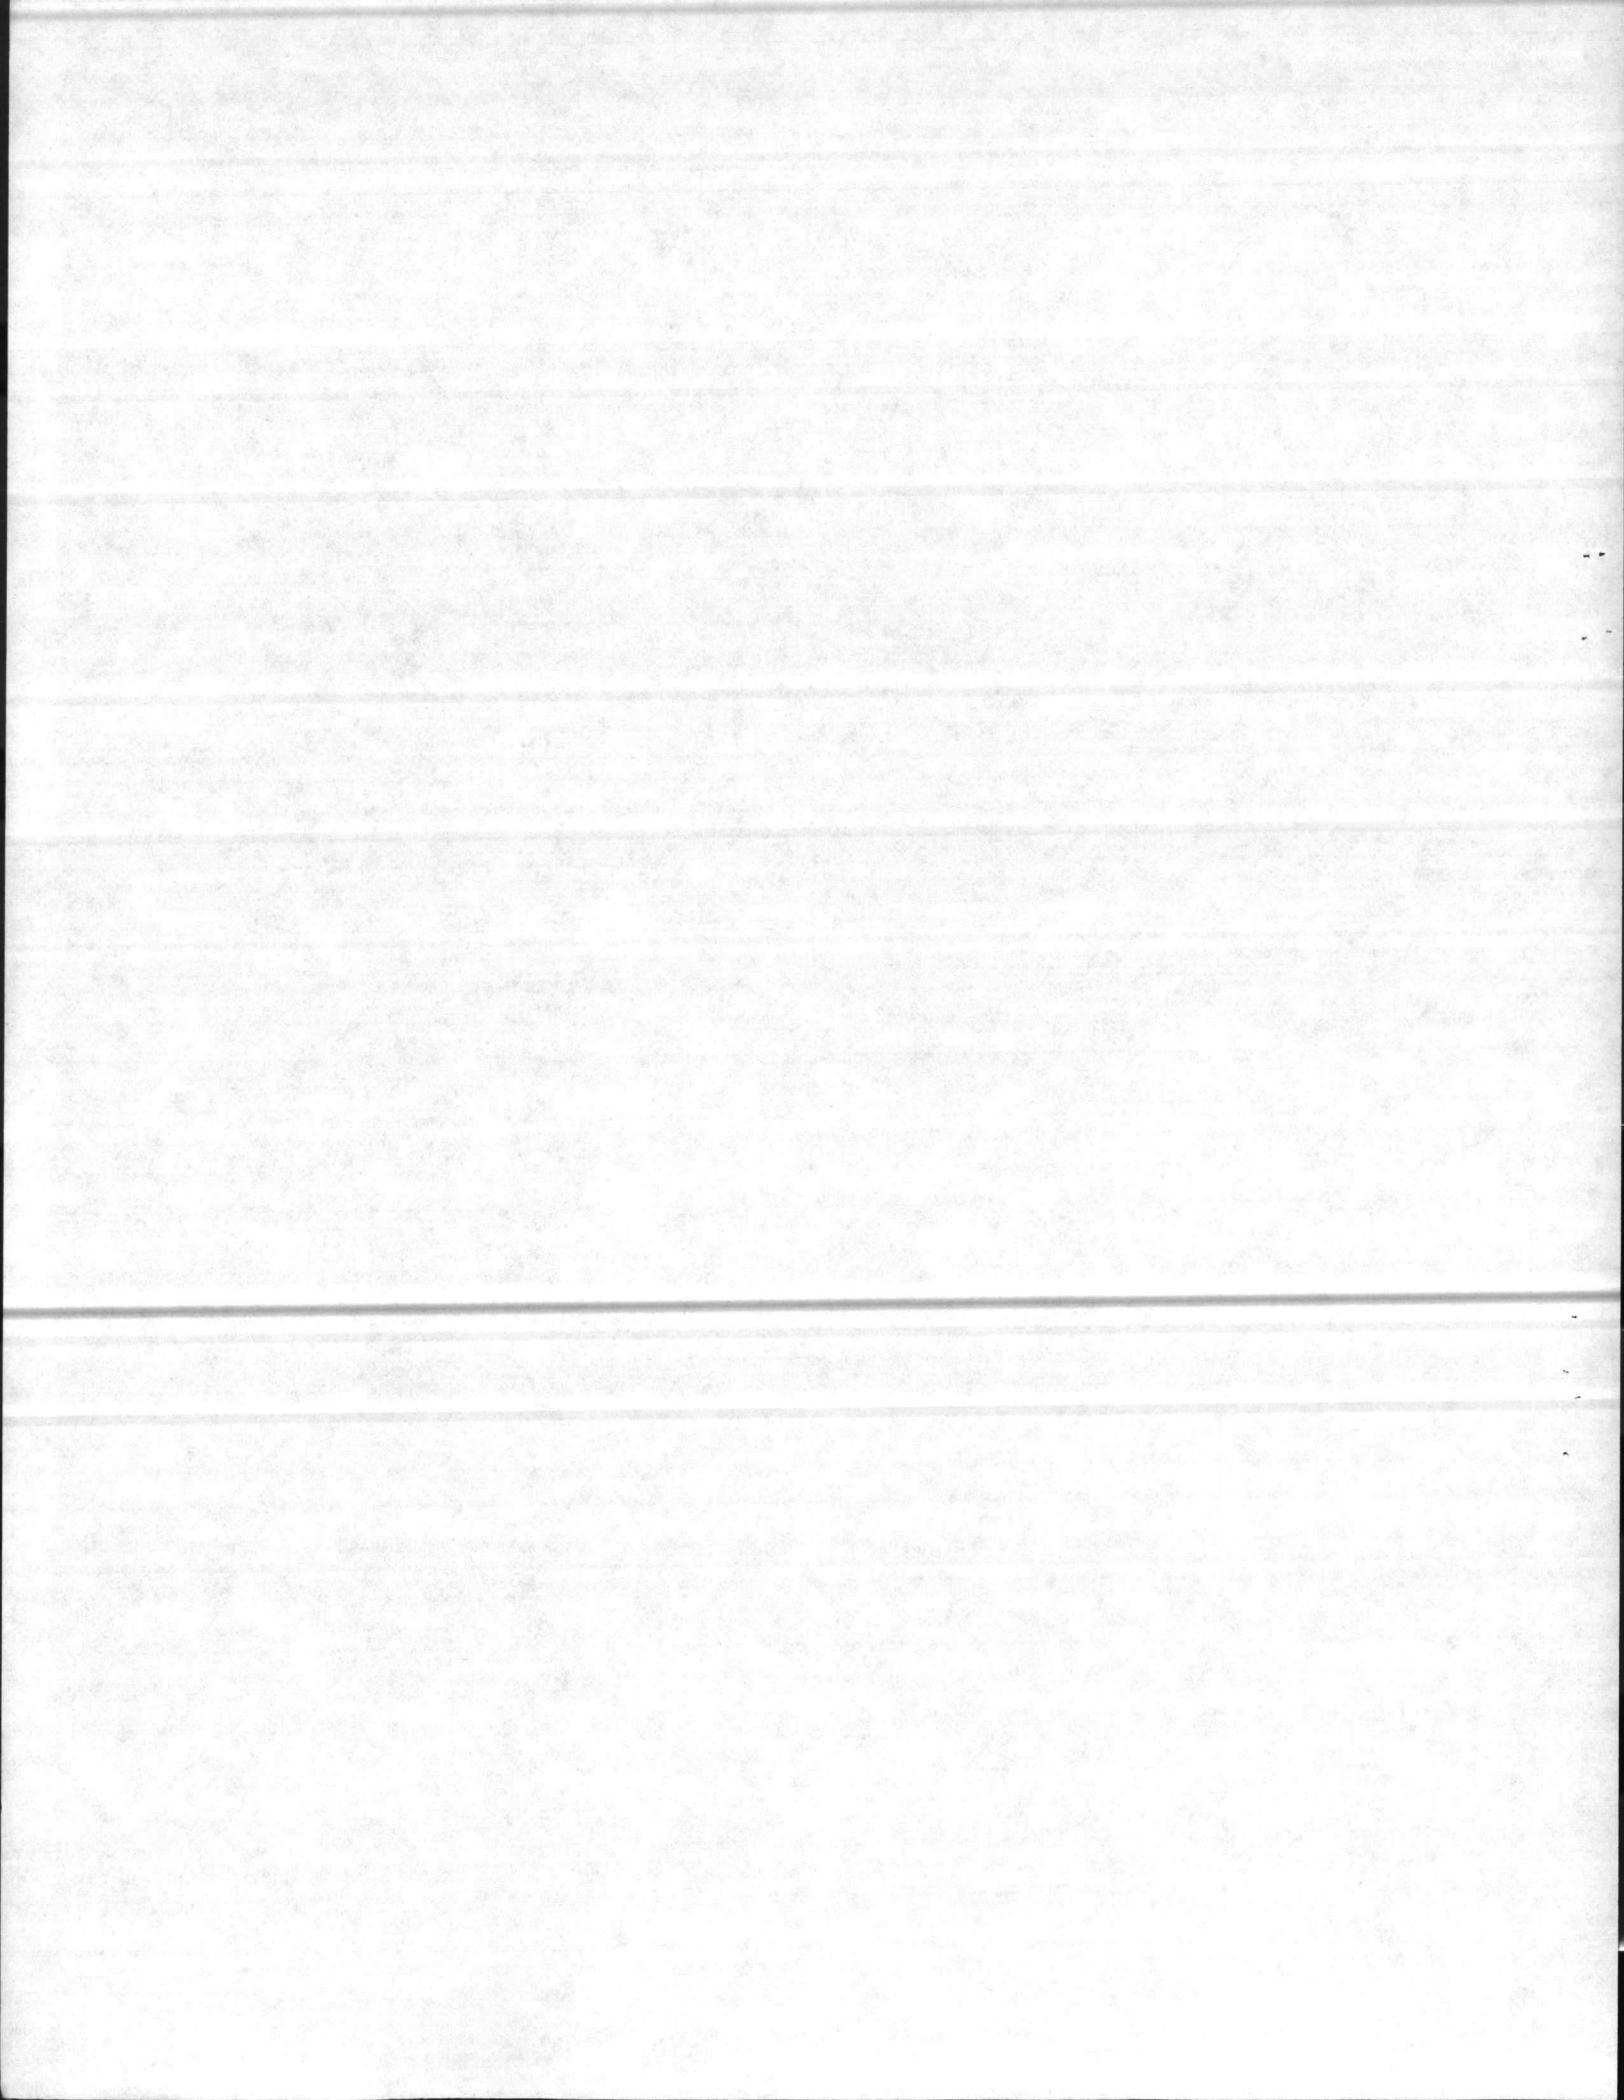

(2) Valves Smaller Than 3-inch Size: Valves shall conform to either WW-V-54, WW-V-58, or to UL 262. Valves conforming to WW-V-54 shall be Type III, Class A. Valves conforming to WW-V-58 shall be Type II, Class 1. Valves conforming to UL 262 shall be of outside-screw-and-yoke configuration and shall be designed for a hydraulic working pressure of 175 psi. Valves shall have threaded ends.


5.4.2 Check Valves:

(a) Check Valves 3-inch Size and Larger: Valves shall conform to MIL-V-18436 or to UL 312. Valves shall have flanged ends. Swing-check valves shall have clear-port opening. Valves conforming to MIL-V-18436 shall be Type III, shall have cast-iron or steel bodies with bronze trim, and shall be designed for a hydraulic working pressure of 175 psi.

5.4.3 Automatic Air Release Valves: Automatic air release valves shall be designed to operate under pressure to allow entrapped air to escape from the pipeline. After air escapes from the valve, it shall close to prevent escape of water. Valve shall then remain closed until air again accumulates, and the opening cycle shall then be automatically repeated. Valves shall have 3/4-inch threaded inlet and shall have cast iron bodies and covers, stainless steel floats, bronze trim, and Buna-N seats. Valves shall be rated for 150 psig minimum working pressure. Venting capacity shall be a maximum of 22 cubic feet of free air per minute. Valves shall be cleaned and shop painted in accordance with manufacturers' standard practice.

5.5 Gages: Gages shall conform to GG-G-76, Class 1, Style A, Type 1, with 4 1/2 inch dial, brass case, bronze tube, and scale calibrated in feet of water for the direct reading for static & drawdown. The scale shall be calibrated in psig for all other gages.

5.6 Valve Boxes: Each gate valve on buried piping shall be provided with an adjustable cast-iron valve box of a size suitable for the valve on which it is to be used. Outside of paved areas boxes may be of plastic; such plastic valve boxes shall be constructed of ABS (Acrylonitrile-Butadiene-Styrene) plastic or of inorganic fiber reinforced black polyolefin plastic. The head shall be round and the lid shall have the word "WATER" cast on it. The least diameter of the shaft of the box shall be 5-1/4 inches. Each cast-iron box shall be given a heavy coat of bituminous paint.

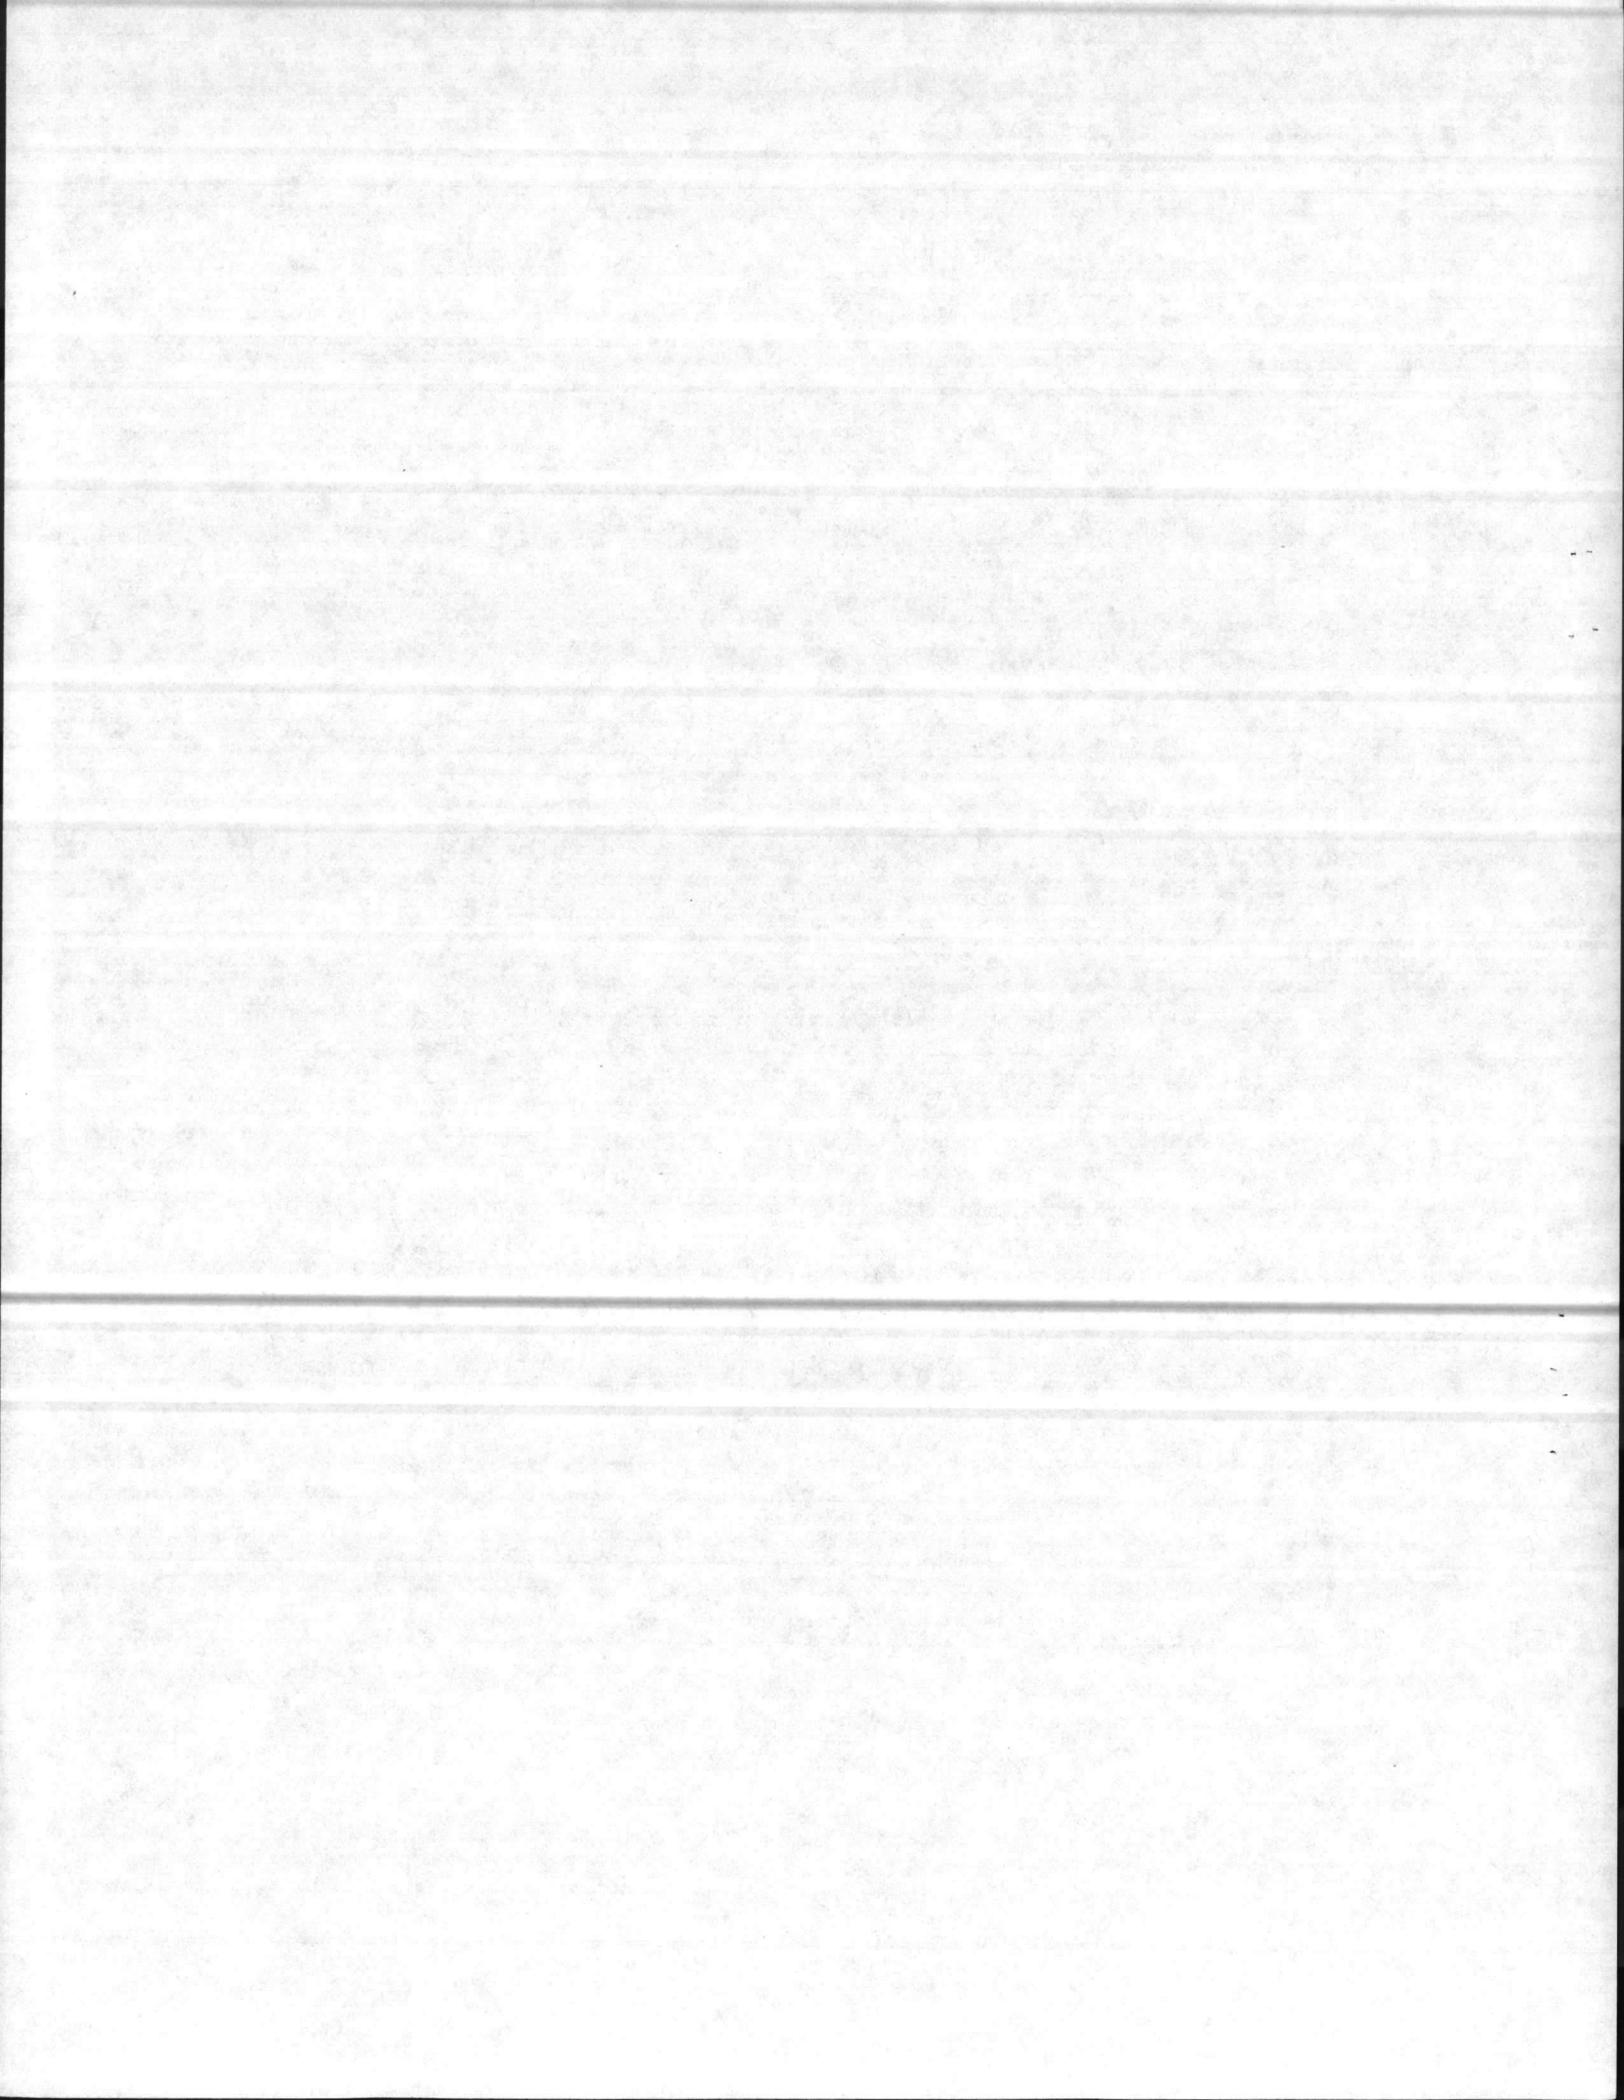


5.7 Totalizer meters shall conform to AWWA C-702.

6. INSTALLATION OF PIPELINES:

6.1 Location of Water Lines: Where the location of the water line is not clearly defined by dimensions on the drawings, the water line shall not be laid closer horizontally than 10 feet from any sewer line. Where water lines cross under gravity sewer lines, the sewer line for a distance of at least 10 feet on each side of the crossing shall be fully encased in concrete, unless sewer line is made of pressure pipe with rubber-gasketed joints and no joint is located within 3 feet horizontally of the crossing. Water lines shall in all cases cross above sewer force mains and inverted siphons and shall be not less than 2 feet above sewer line. Joints in sewer line closer horizontally than 3 feet to the crossing shall be encased in concrete. Water lines shall not be laid in the same trench with gas lines, fuel lines, or electric wiring.


6.2 Handling: Pipe, fittings, valves, and other accessories shall be handled in such manner as to insure delivery to the trench in sound, undamaged condition. Special care shall be taken not to injure pipe coatings or linings. If coatings or linings of pipe and fittings are damaged, satisfactory repairs shall be made at no extra cost to the Government. Pipe shall be carried and not dragged. Rubber gaskets that are not to be installed immediately shall not be left in the sunlight, but shall be stored under cover out of direct sunlight.

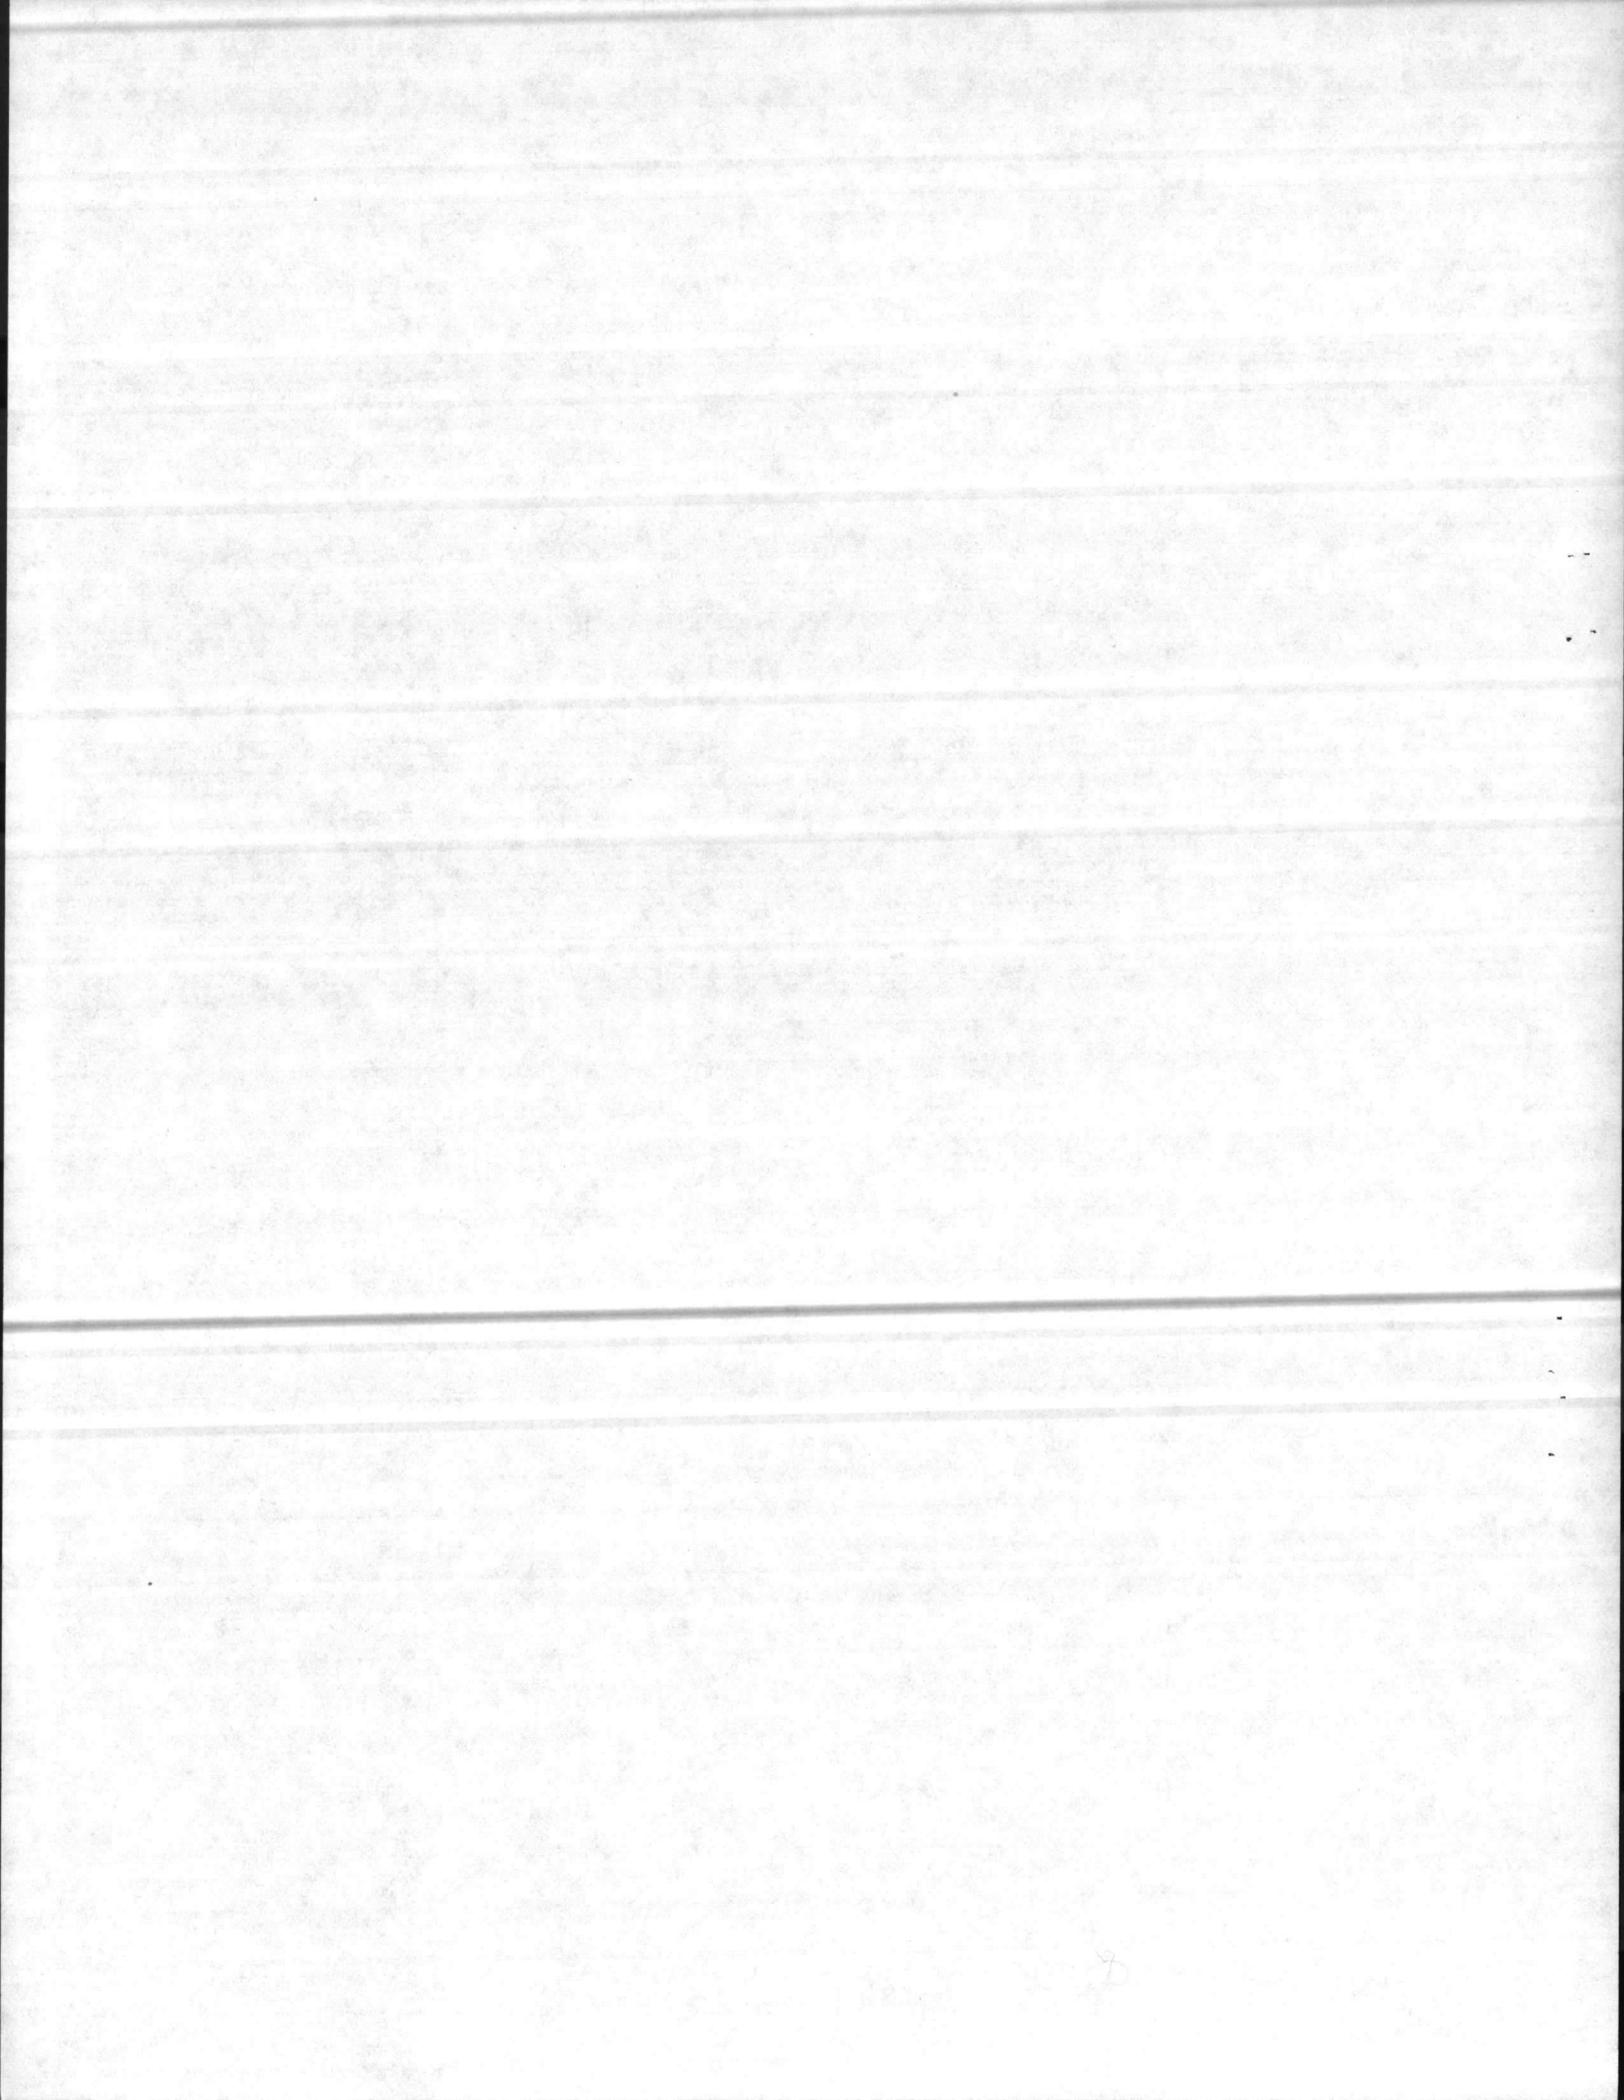

6.3 Pipe Laying and Jointing: Pipe, fittings, valves and accessories will be carefully inspected before and after installation and those found defective will be rejected. Pipe and fittings shall be free from fins and burrs. Before being placed in position, pipe, fittings, valves, and accessories shall be cleaned, and shall be maintained in a clean condition. Proper facilities shall be provided for lowering sections of pipe into trenches. Under no circumstances shall pipe, fittings, valves, or any other water line material be dropped or dumped into trenches. Pipe shall be cut accurately to measurements established at the site and shall be worked into place without springing or forcing. Piping that does not allow sufficient space for proper installation of jointing material shall be replaced by one of proper dimensions. Blocking or wedging between bells and spigots will not be permitted. Bell-and-spigot pipe shall be laid with the bell end pointing in the direction of laying. The pipe shall be graded in straight lines, taking care to avoid the formation of any dips or low points. Pipe shall be supported at its proper elevation and grade, care being taken to secure firm and uniform support. Wood support blocking will not be permitted. The full length of each section of buried pipe and fittings shall rest solidly on the pipe bed, with recesses excavated to accommodate bells, joints, and couplings. Anchors and supports shall be provided where necessary and where indicated on the project drawings for fastening work into place. Proper provision shall be made for the expansion and contraction of pipe lines. Trenches shall be kept free of water until joints have been properly made. Open ends of pipe at the end of each day's work shall be closed temporarily with wood blocks or bulkheads. Pipe shall not be laid when the conditions of trench or weather are unsuitable. Depth of bury for buried pipe shall be not less than three feet; depth of bury shall be greater where so shown. Piping shall be inspected, tested, and approved before being completely buried, covered, or concealed. Excavation bedding and backfilling of pipe trenches shall be as specified in the section entitled "Earthwork", as modified herein.

6.4 Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the Contracting Officer prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.

6.5 Special Installation Requirements: Asbestos-cement pipe shall be installed in accordance with AWWA-C-603 except as modified herein. Cast-iron pipe and copper tubing shall be installed in accordance with AWWA-C-600 except as modified herein.

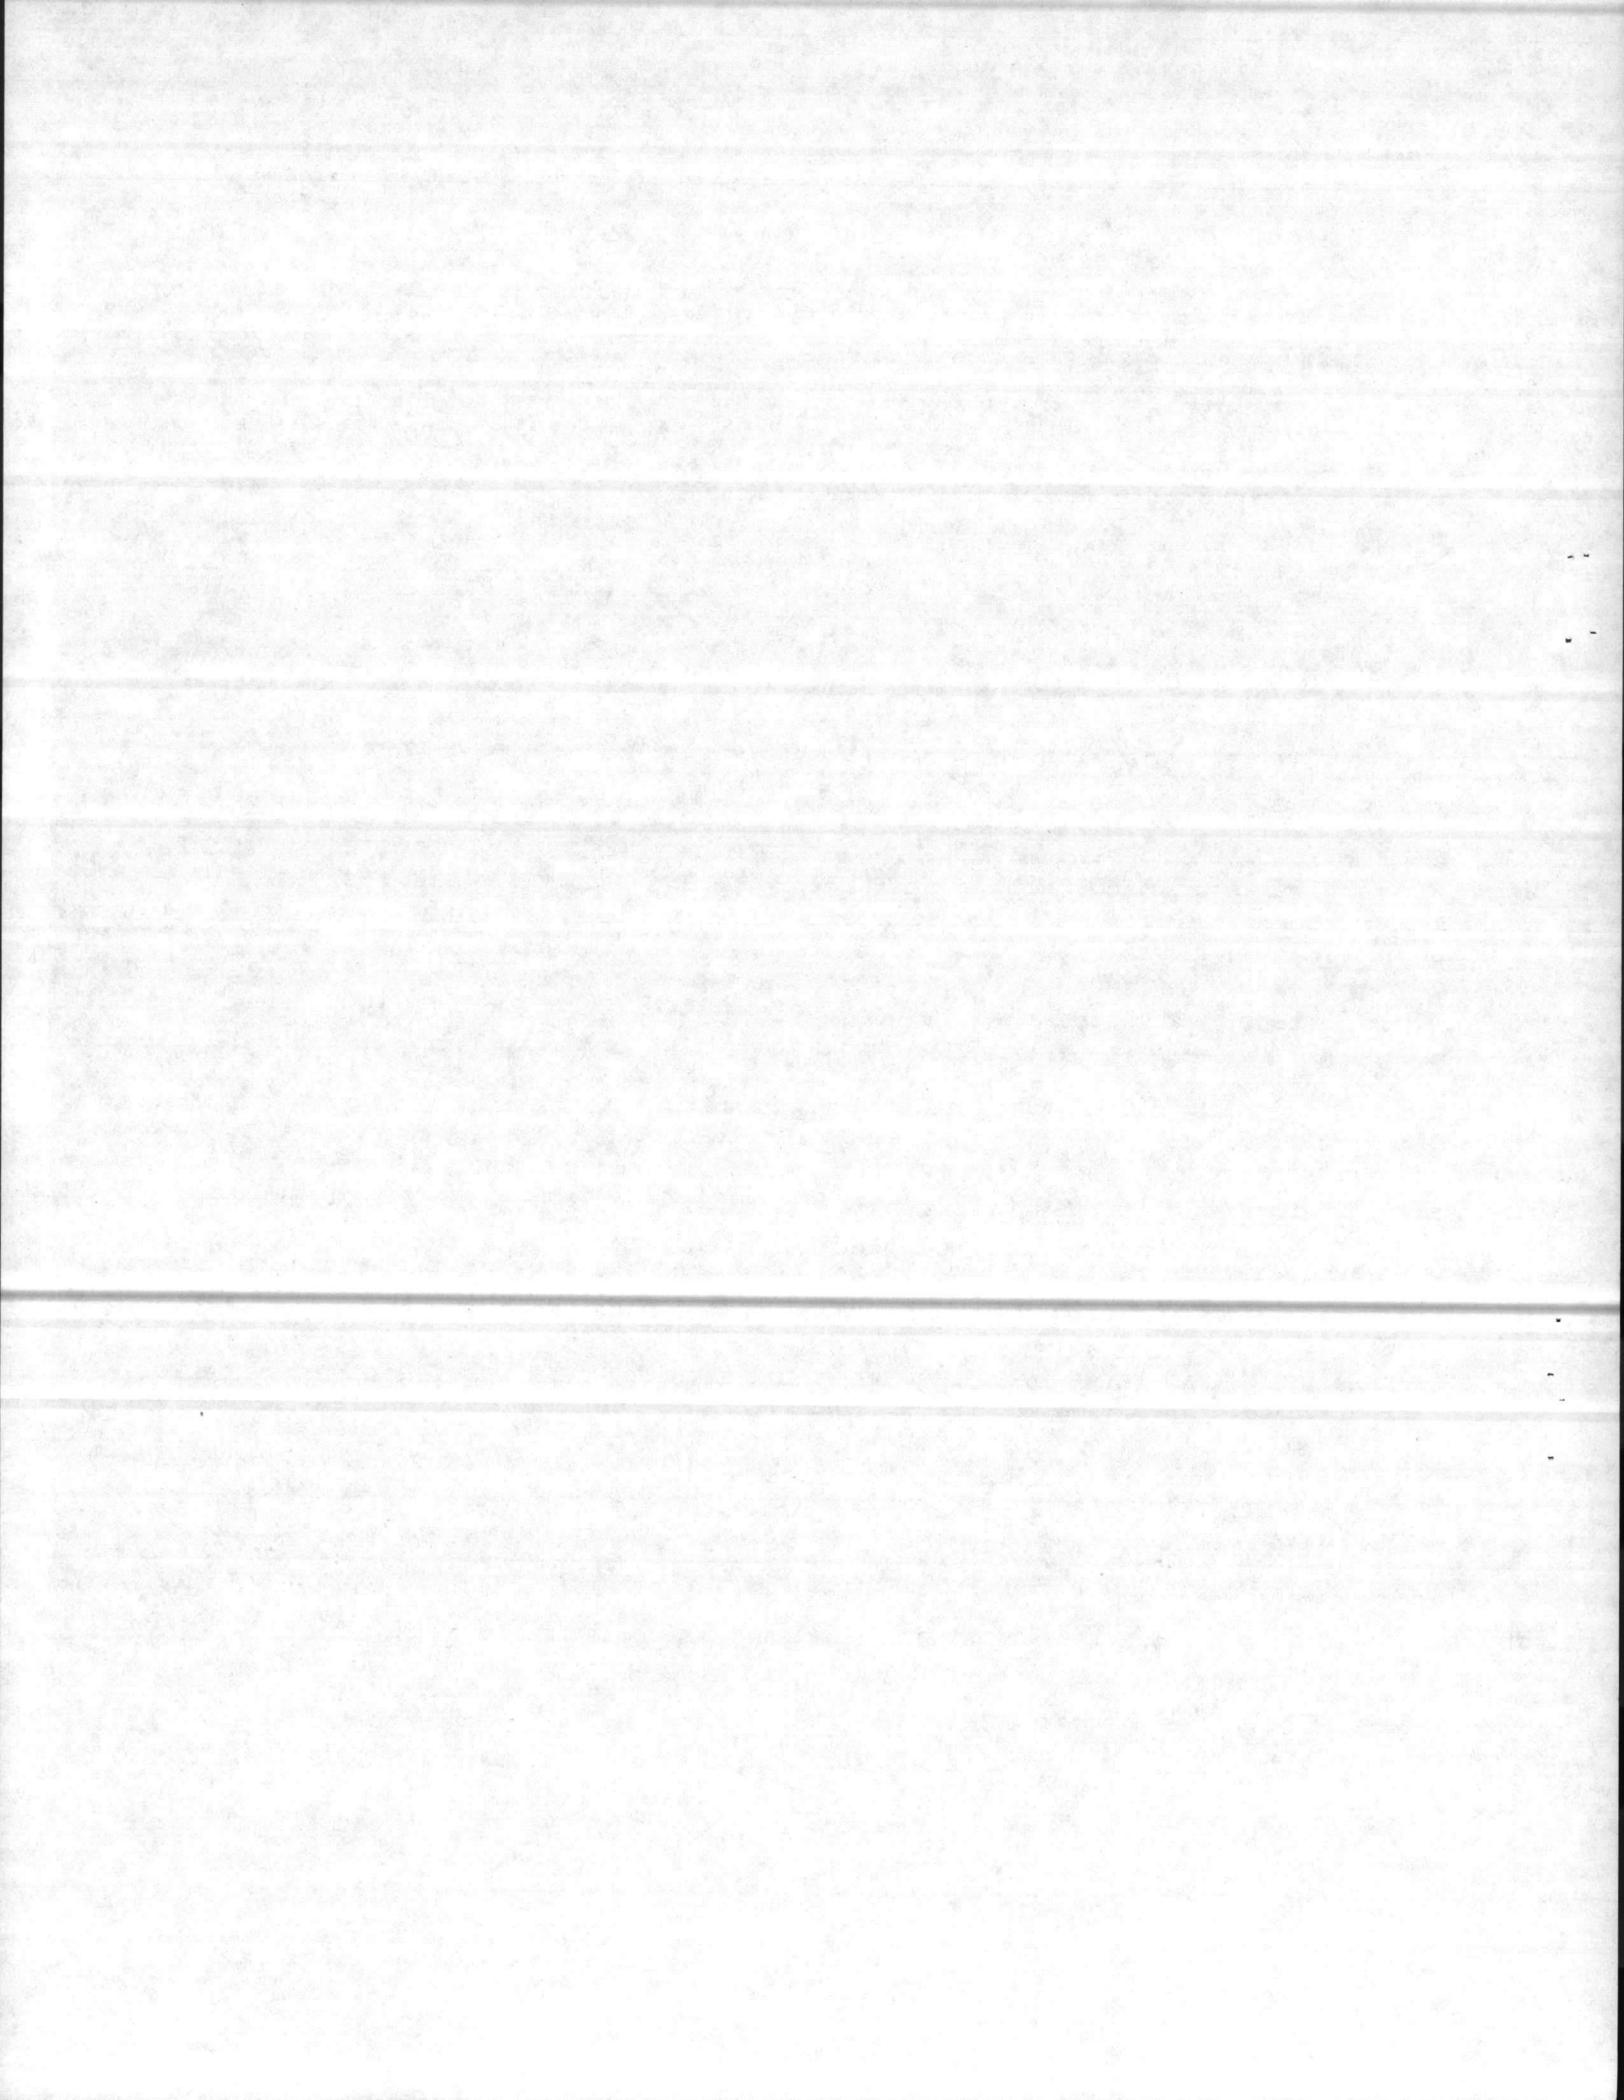

6.6 Joints:


6.6.1 Joints for asbestos-cement pipe shall be made with couplings and sealing rings. Joints between asbestos-cement pipe and cast-iron fittings shall be push-on joints or mechanical joints. Sealing rings as specified hereinbefore shall be used with push-on joints; gaskets for mechanical joint shall conform to ANSI A21.11 (AWWA C111).

6.6.2 Joints for Cast-Iron Pipe: Push-on and mechanical joints shall be made in accordance with the requirements of AWWA C 600; mechanical joints shall further follow the "Notes on Installation of Mechanical Joints" given in ANSI A21.11 (AWWA C111). Flanged-joints shall be made up tight, care being taken to avoid undue strain on flanges, valves, fittings, pump nozzles, and other equipment and accessories.

6.6.3 Joints for Copper Tubing: Copper tubing shall be cut with square ends, and all burrs and fins removed. Tubing shall be handled carefully and all tubing dented, gouged, or otherwise damaged shall be replaced with undamaged tubing. Solder joints shall be made using 50-50 lead-tin solder. End of tubing and inside of fitting or coupling shall first be cleaned with wire brush or abrasive. A rosin flux shall then be applied to the tubing end and on the recess inside of fitting or coupling. Tubing end shall then be inserted to the full depth of the recess and soldered. For compression joints on flared tubing, the tubing shall be inserted through the coupling nut and flared with an approved flaring tool.

6.7 Connections to Existing Water Supply Systems: Tapping or drilling machine valve and sleeves shall be used for connections to existing water lines. The sleeves shall be bolted around the mains and calked; the valve bolted to the branch. The valve shall conform to the latest specification for valves of the American Water Works Association. The valve shall be opened, the drilling machine attached; the tap made, the valve closed and the drilling machine removed all without interruption of service. The Contractor shall furnish all material required to make connections into the existing water supply systems; and shall perform all necessary excavating, backfilling and other incidental labor as required. The Contractor shall furnish the labor and the tapping or drilling machine for making the actual connections to the existing systems. The Contracting Officer shall be notified in writing at least ten days prior to the date the connections are required. Approval by the Contracting Officer shall be received before any service is interrupted.

6.8 Pipe Anchorage: Anchorage of buried pipe lines shall be by means of concrete thrust blocks (reaction backing), using concrete with a minimum compressive strength of 2000 psi. All 1/16 and sharper bends, tees, and dead ends of pipe shall be securely blocked in the direction of flow with poured-in-place concrete bearing solidly against the pipe and affording a minimum of 3 square feet of bearing area against a vertical trench face for 3- and 4-inch pipe, and in accordance with LANTDIV Plate WD-1 for piping 6-inch diameter and larger. Plate WD-1 appears at the end of this section.

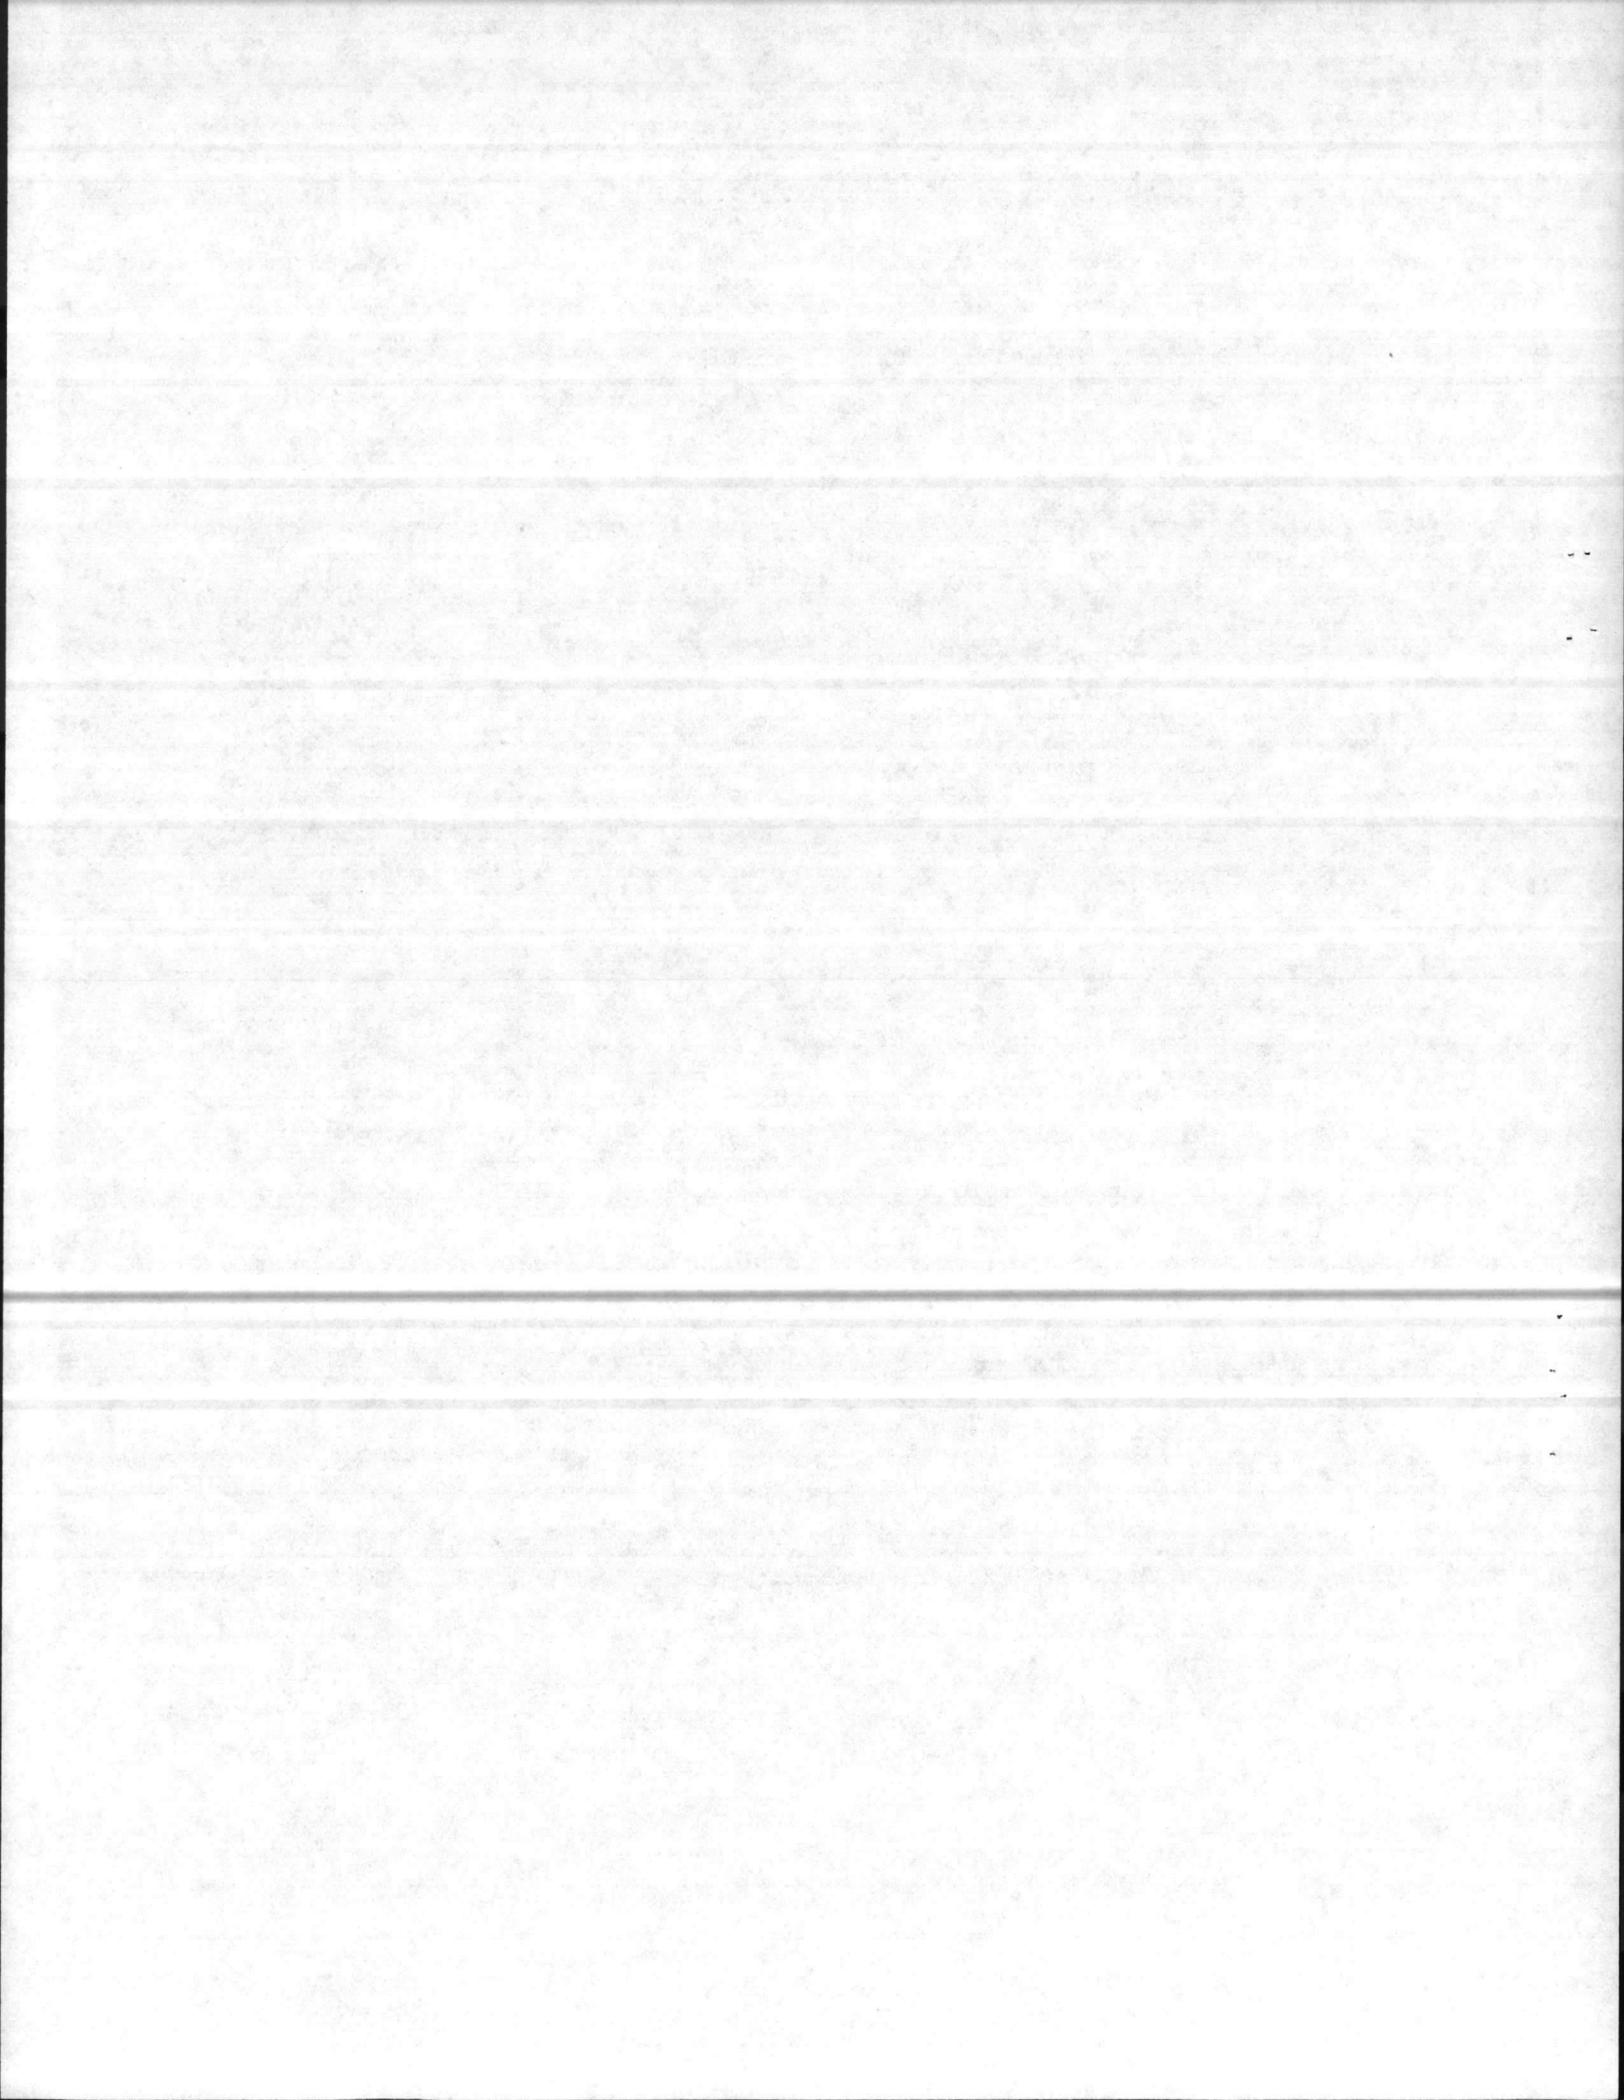

6.9 Setting Valves and Valve Boxes: Valves and valve boxes shall be set plumb, and centered, with valve boxes placed directly over the valves. Valve boxes shall, if possible, be located outside the area of the roads and streets. Earth fill shall be carefully tamped around the valve box to a distance of 4 feet on all sides of the box, or to the undisturbed trench face if less than 4 feet. Valves shall have the interiors cleaned of all foreign matter before installation. Stuffing boxes shall be tightened and the valve shall be inspected in opened and closed positions to see that all parts are in working condition.

6.10 Wire Tracer for Nonmetallic Pipe: The full length of runs of nonmetallic pipe, if used, shall be provided with a continuous bare copper or aluminum wire, not less than 0.10 inch in diameter, which will provide means of location of pipes with an electronic metal detector applied at the ground surface above the pipe. Wire shall be secured to the pipe sufficiently to insure that the wire remains in place during construction operations.


7. DISINFECTION: New water piping and existing water piping affected by Contractor's operations shall be disinfected in accordance with AWWA C601. Piping system shall be filled with solution containing minimum of 50 parts per million of available chlorine and allowed to stand for minimum period of 24 hours. Solution shall be flushed from system with clean water until maximum residual chlorine content is not greater than 0.2 parts per million.

8. IDENTIFICATION TAGS AND PLATES: Valves shall be provided with tags or plates numbered and stamped for their usage. Plates and tags shall be of brass or suitable nonferrous material and shall be securely mounted or attached.

9. FIELD TESTING AND INSPECTION:

9.1 General: All work shall be proved to be in first class condition and constructed properly in accordance with the drawings and specifications. All defects and leaks disclosed by the tests shall be corrected. Piping shall not be completely buried, covered, or concealed until it has been inspected, tested, and approved, except when procedure is modified by the referenced installation and testing standard.

9.2 Field Tests: Testing procedures shall be as specified hereinafter for the respective kind of piping. Hydrostatic pressure for pressure test shall be 50 percent in excess of the maximum working pressure of the system, but shall be not less than 100 psi and shall be held for a minimum of one hour. Prior to the pressure test, that portion of the water line being treated shall be filled with water for a soaking period of not less than 24 hours. Hydrostatic pressure for leakage test for all systems shall be the maximum working pressure of the system, except as otherwise specified hereinafter. Leakage test may be performed at the same time and at the same test pressure as the pressure test. Pipe,

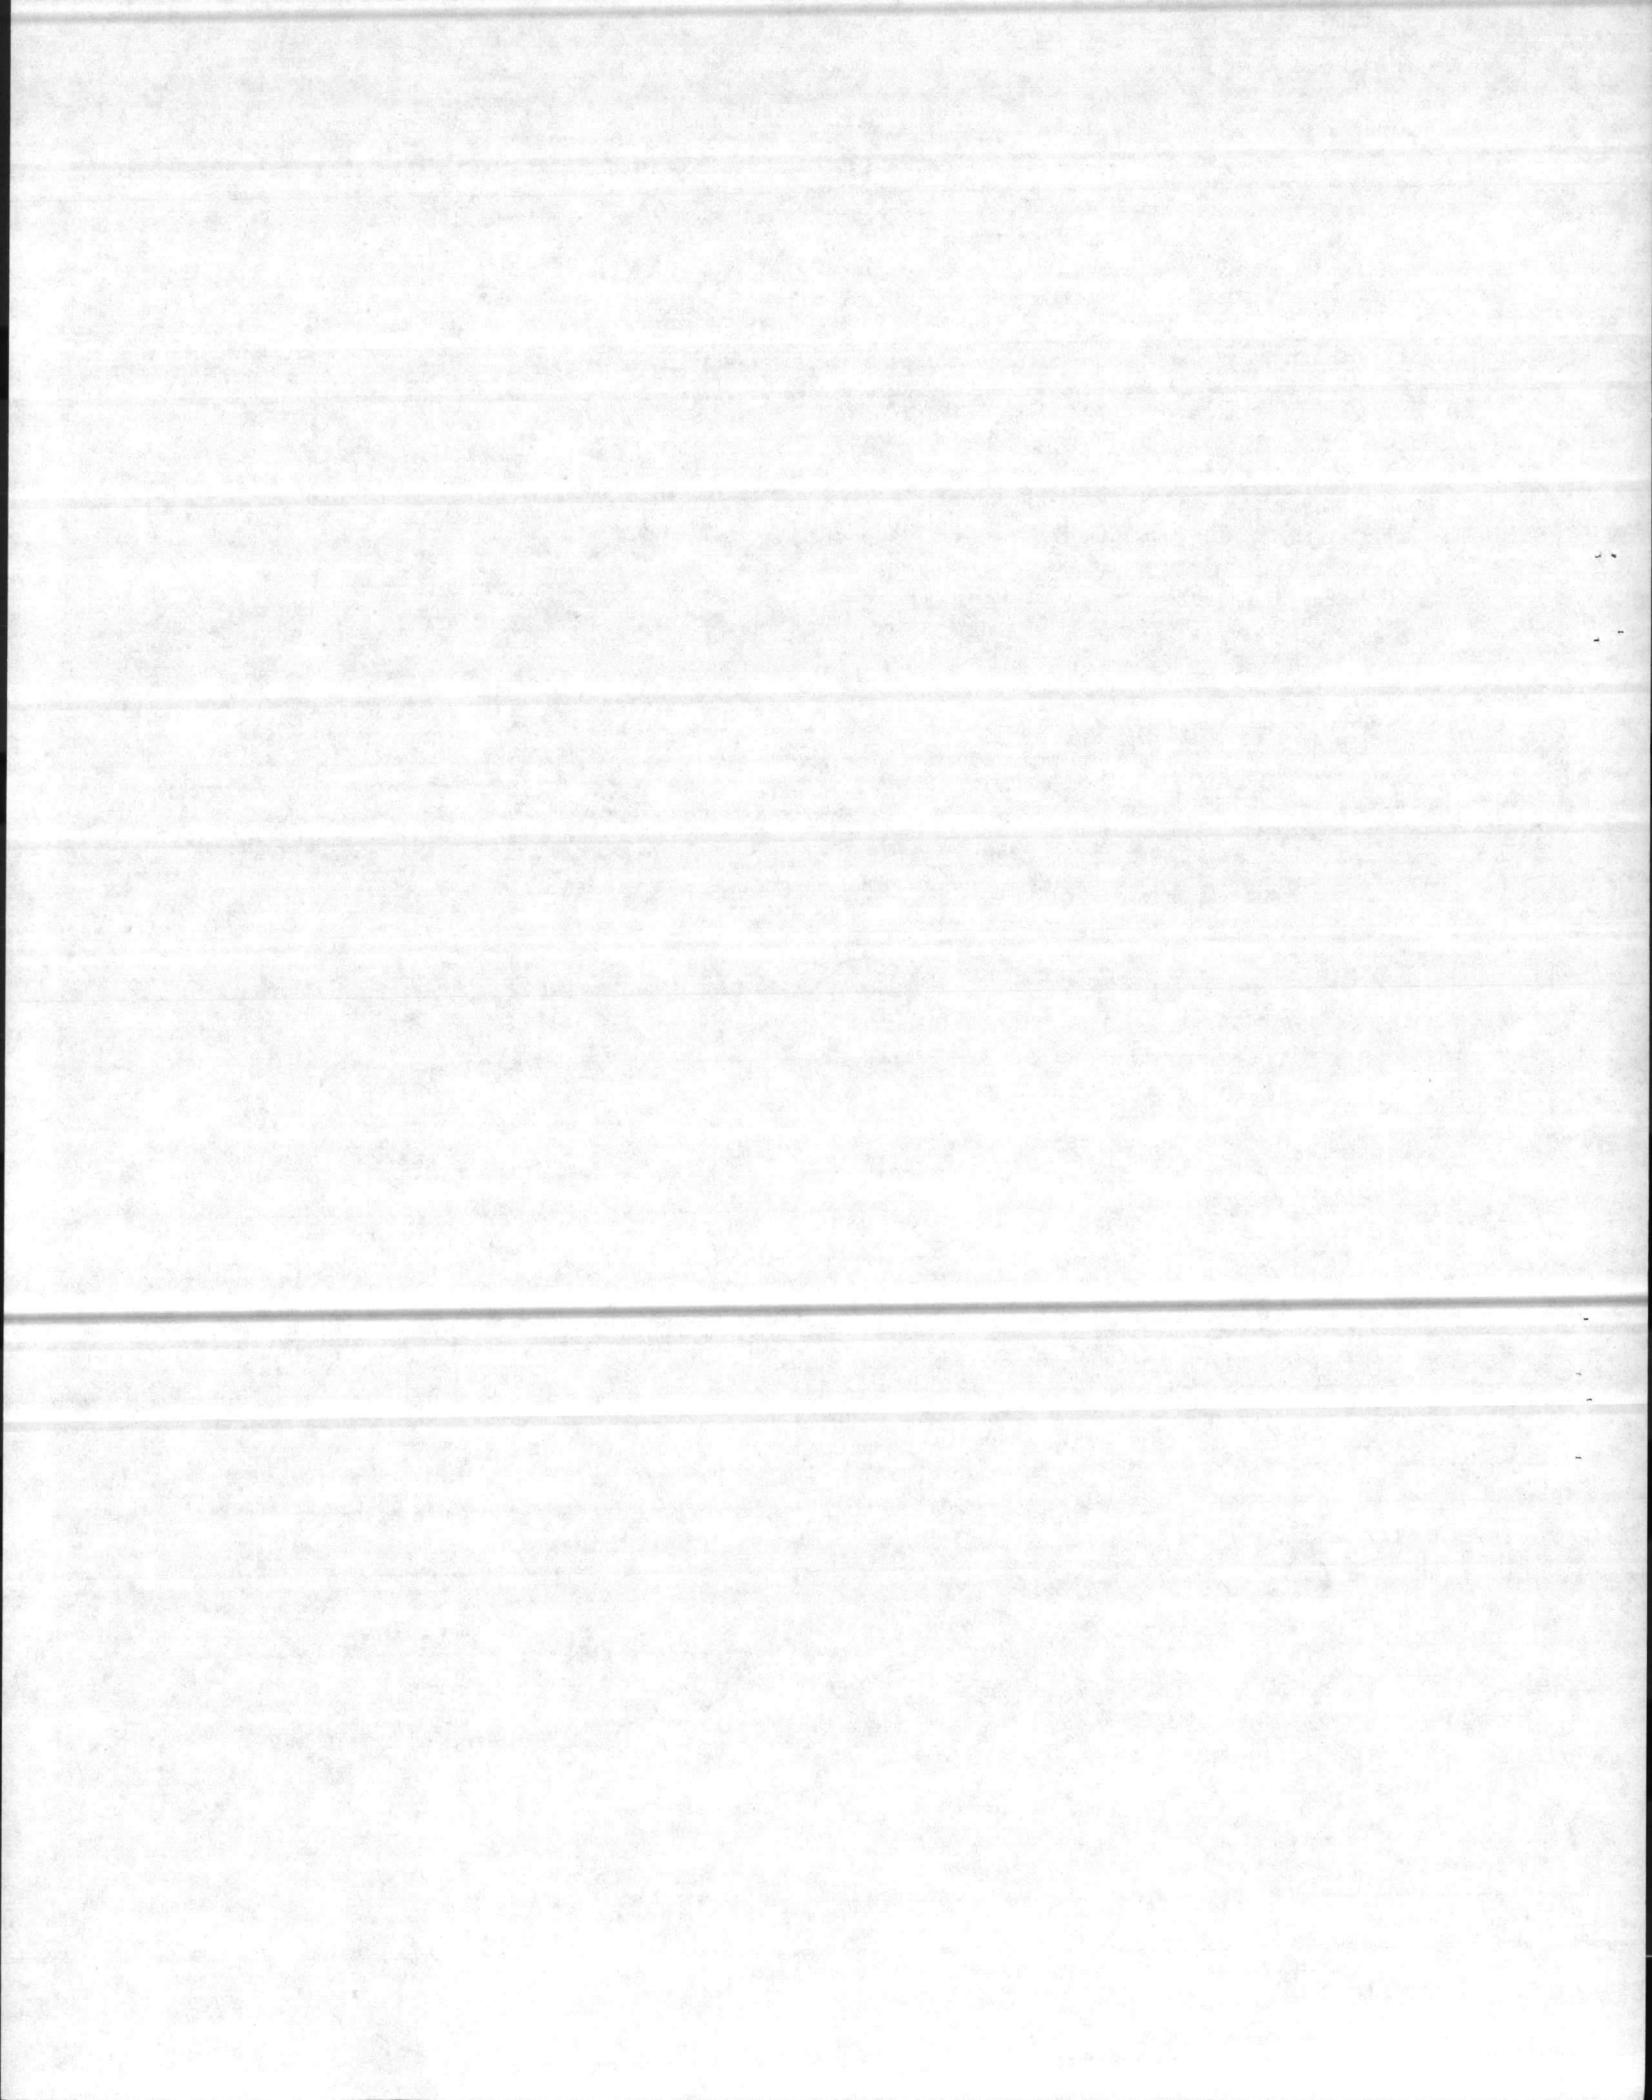


joints, valves and fittings in the test section shall be examined. Equipment shall be tested in operation to demonstrate compliance with specification requirements. Each control valve shall be fully opened and closed under water pressure. Appliances, water and equipment for testing shall be furnished by the Contractor at his own expense, and the systems tested until proved satisfactory. The Contractor shall submit a certificate similar to that specified in NFPA 24 with a request for a formal inspection at least two working days prior to the date the inspection is to take place. At this inspection, any or all of the required tests shall be repeated as required.


9.2.1 Asbestos-cement Pipelines shall be tested in accordance with the applicable provisions of AWWA C 603, except as otherwise specified hereinbefore.

9.2.2 Testing of cast-iron pipelines and copper tubing lines shall be in accordance with AWWA C 600, except as specified otherwise herein. The amount of leakage on lines with push-on or mechanical joints shall not exceed the amounts given in AWWA C 600. No leakage will be allowed at flanged or soldered joints.


10. FIELD PAINTING: After installation, all exposed surfaces of aboveground cast gray and ductile iron pipe and fittings and valves shall be field painted. Damages to shop applied coatings shall be touched up before application of field paint. Paint shall be applied to clean, dry surfaces only. Where more than one coat of paint is specified the first coat shall be allowed to dry thoroughly before application of the second coat. Cast gray and ductile iron pipe and fittings shall receive a coal tar base coating conforming to MIL-C-18480, applied to a minimum dry film thickness of 30 mils. Cast gray and ductile iron valves shall receive two coats of paint of the same type as factory applied paint; each coat shall be applied to a dry film thickness of not less than 1.0 mil.

---o0o---

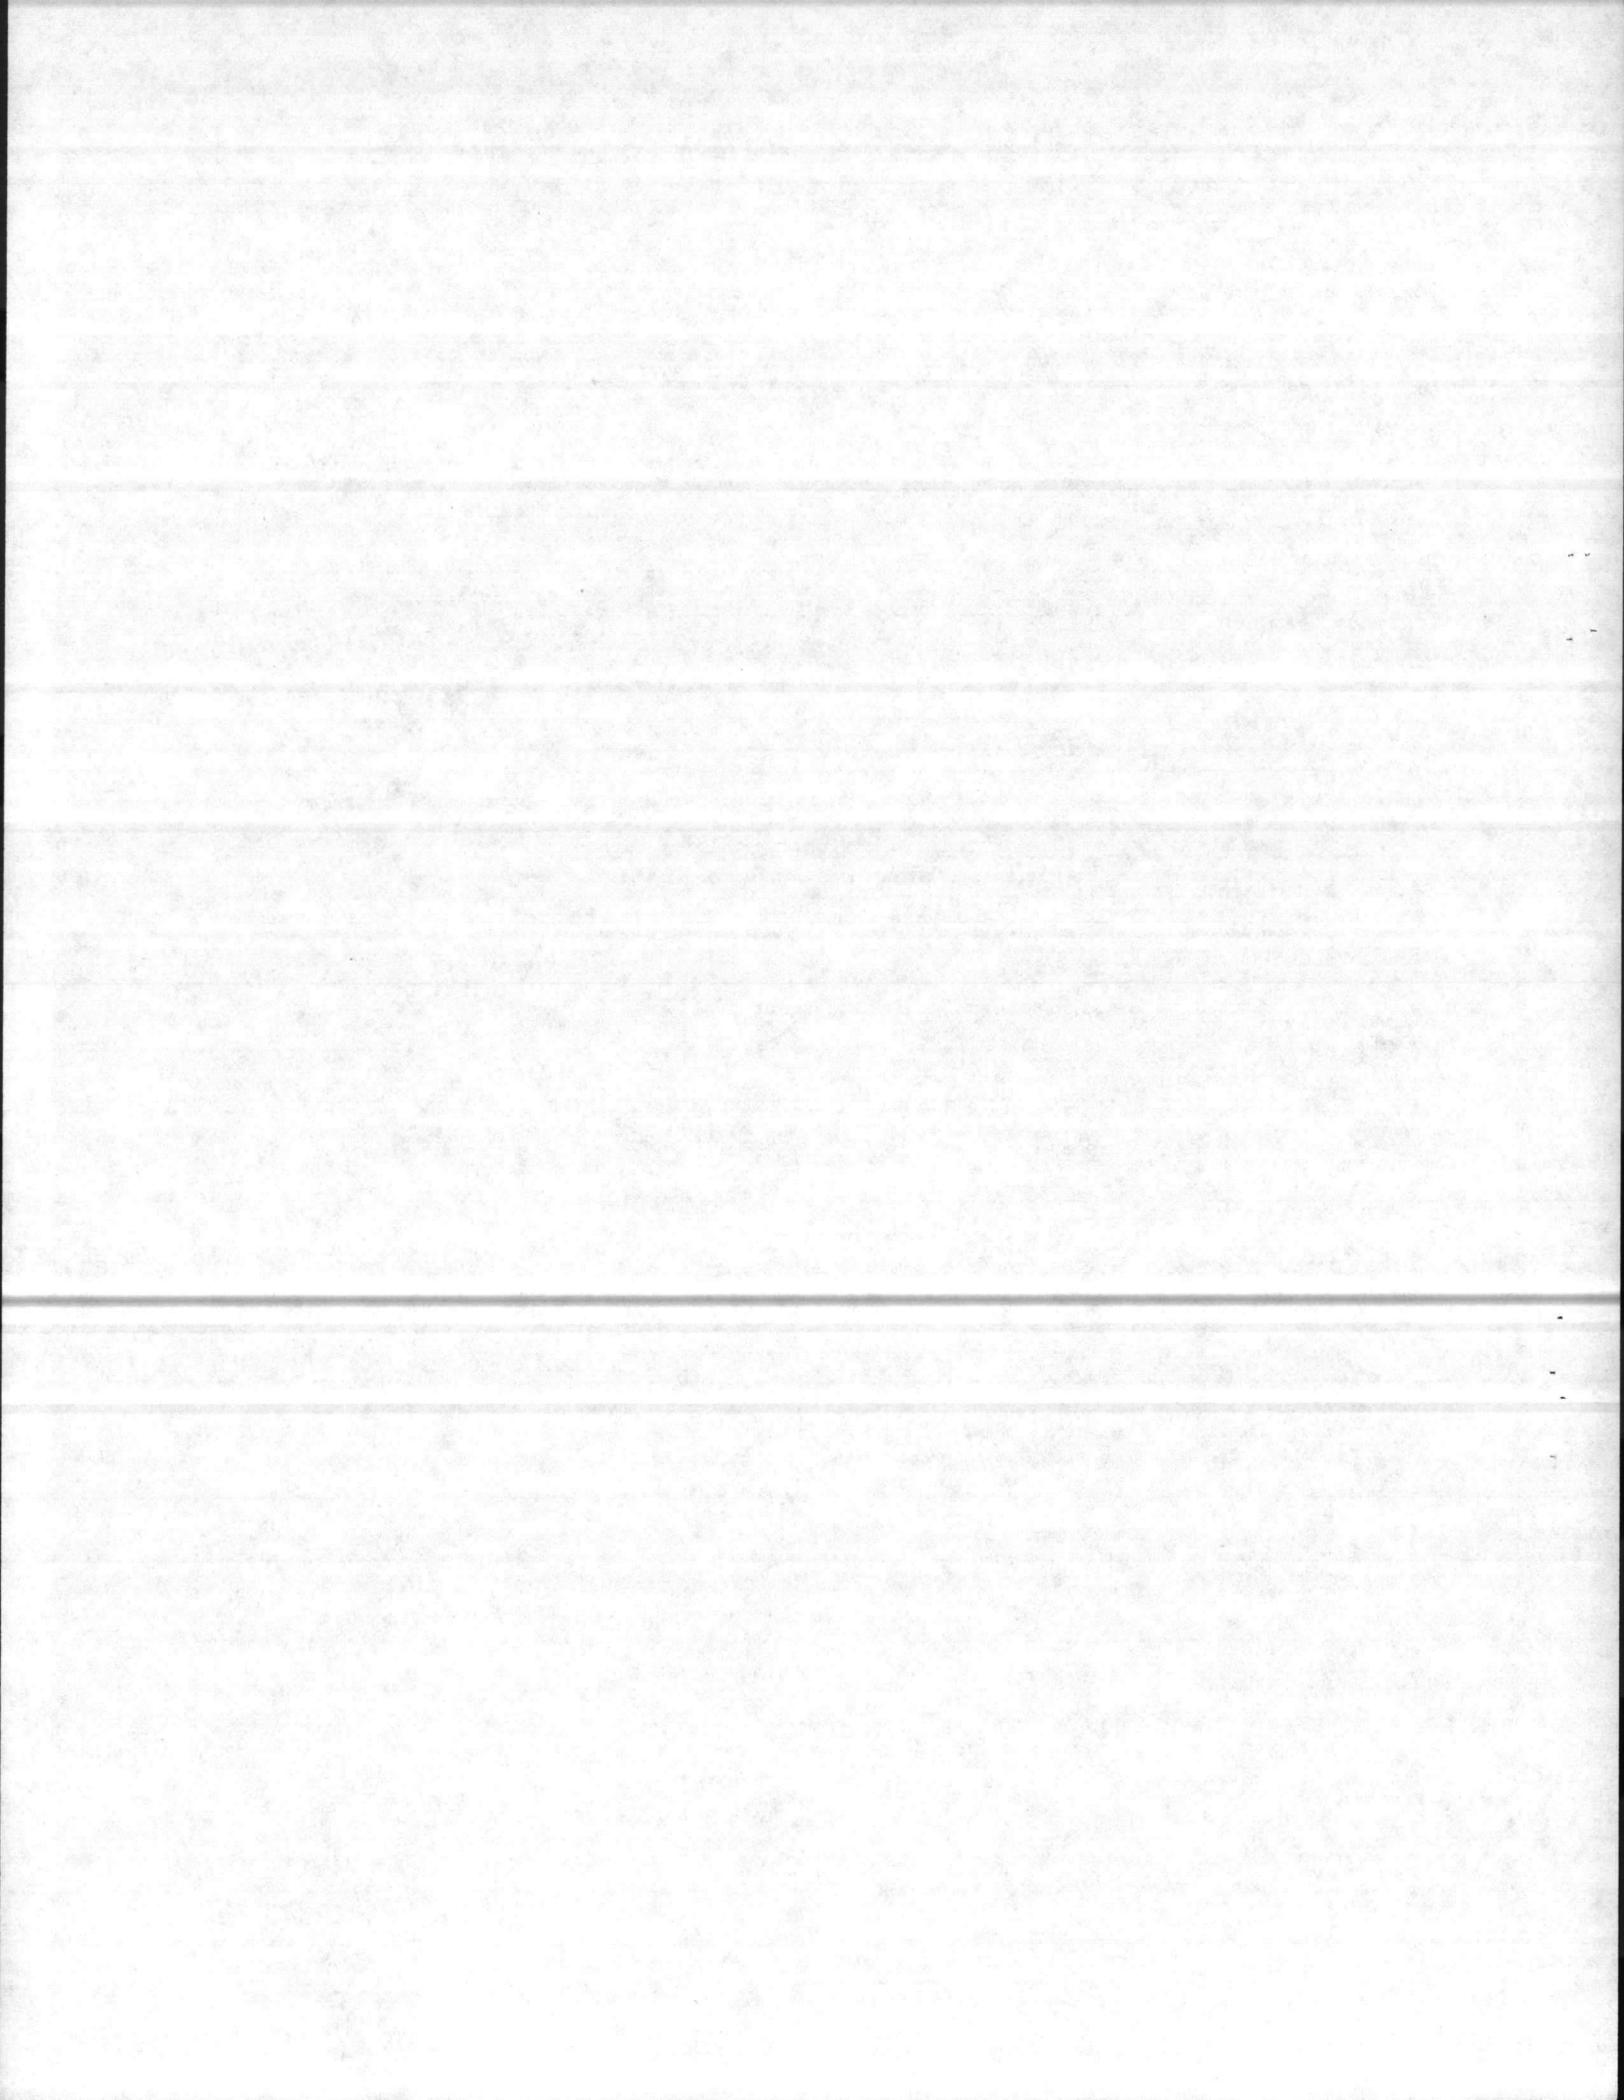


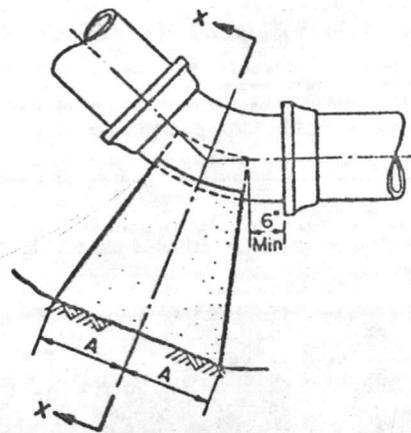


PLAN
BENDS

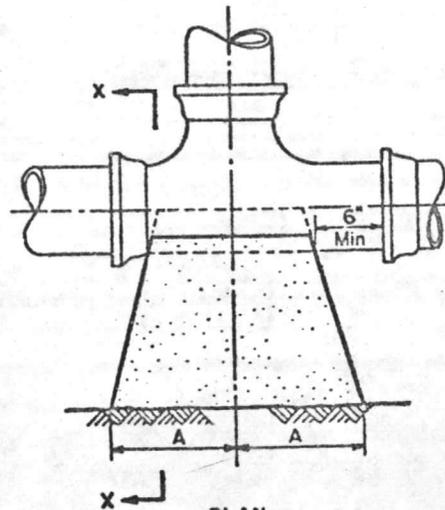

PLAN
TEES

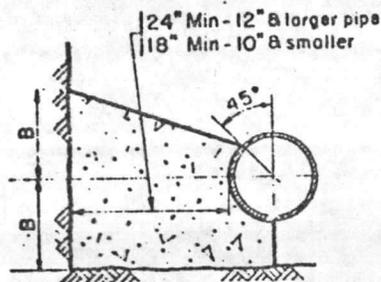

SECTION X-X
BENDS & TEES




PLAN & ELEVATION
PLUGS

SIZE	1/4 BENDS		1/8 BENDS		1/16 BENDS		TEES		PLUGS	
	A	B	A	B	A	B	A	B	C	D
6"	16"	10"	9"	10"	6"	8"	10"	12"	10"	21"
8"	22"	13"	12"	13"	8"	10"	13"	16"	12"	29"
10"	26"	17"	14"	17"	10"	13"	16"	20"	14"	36"
12"	29"	21"	16"	21"	11"	16"	18"	24"	16"	41"
14"	35"	24"	19"	24"	12"	20"	22"	27"	18"	48"
16"	38"	27"	21"	27"	12"	24"	24"	30"	20"	54"

NOTE: Based on 100 p.s.i. static pressure plus A.W.W.A. water hammer
All bearing surfaces to be carried to undisturbed ground

**STANDARD THRUST BLOCKS
FOR WATER MAINS**

LANTDIV PLATE WD-1

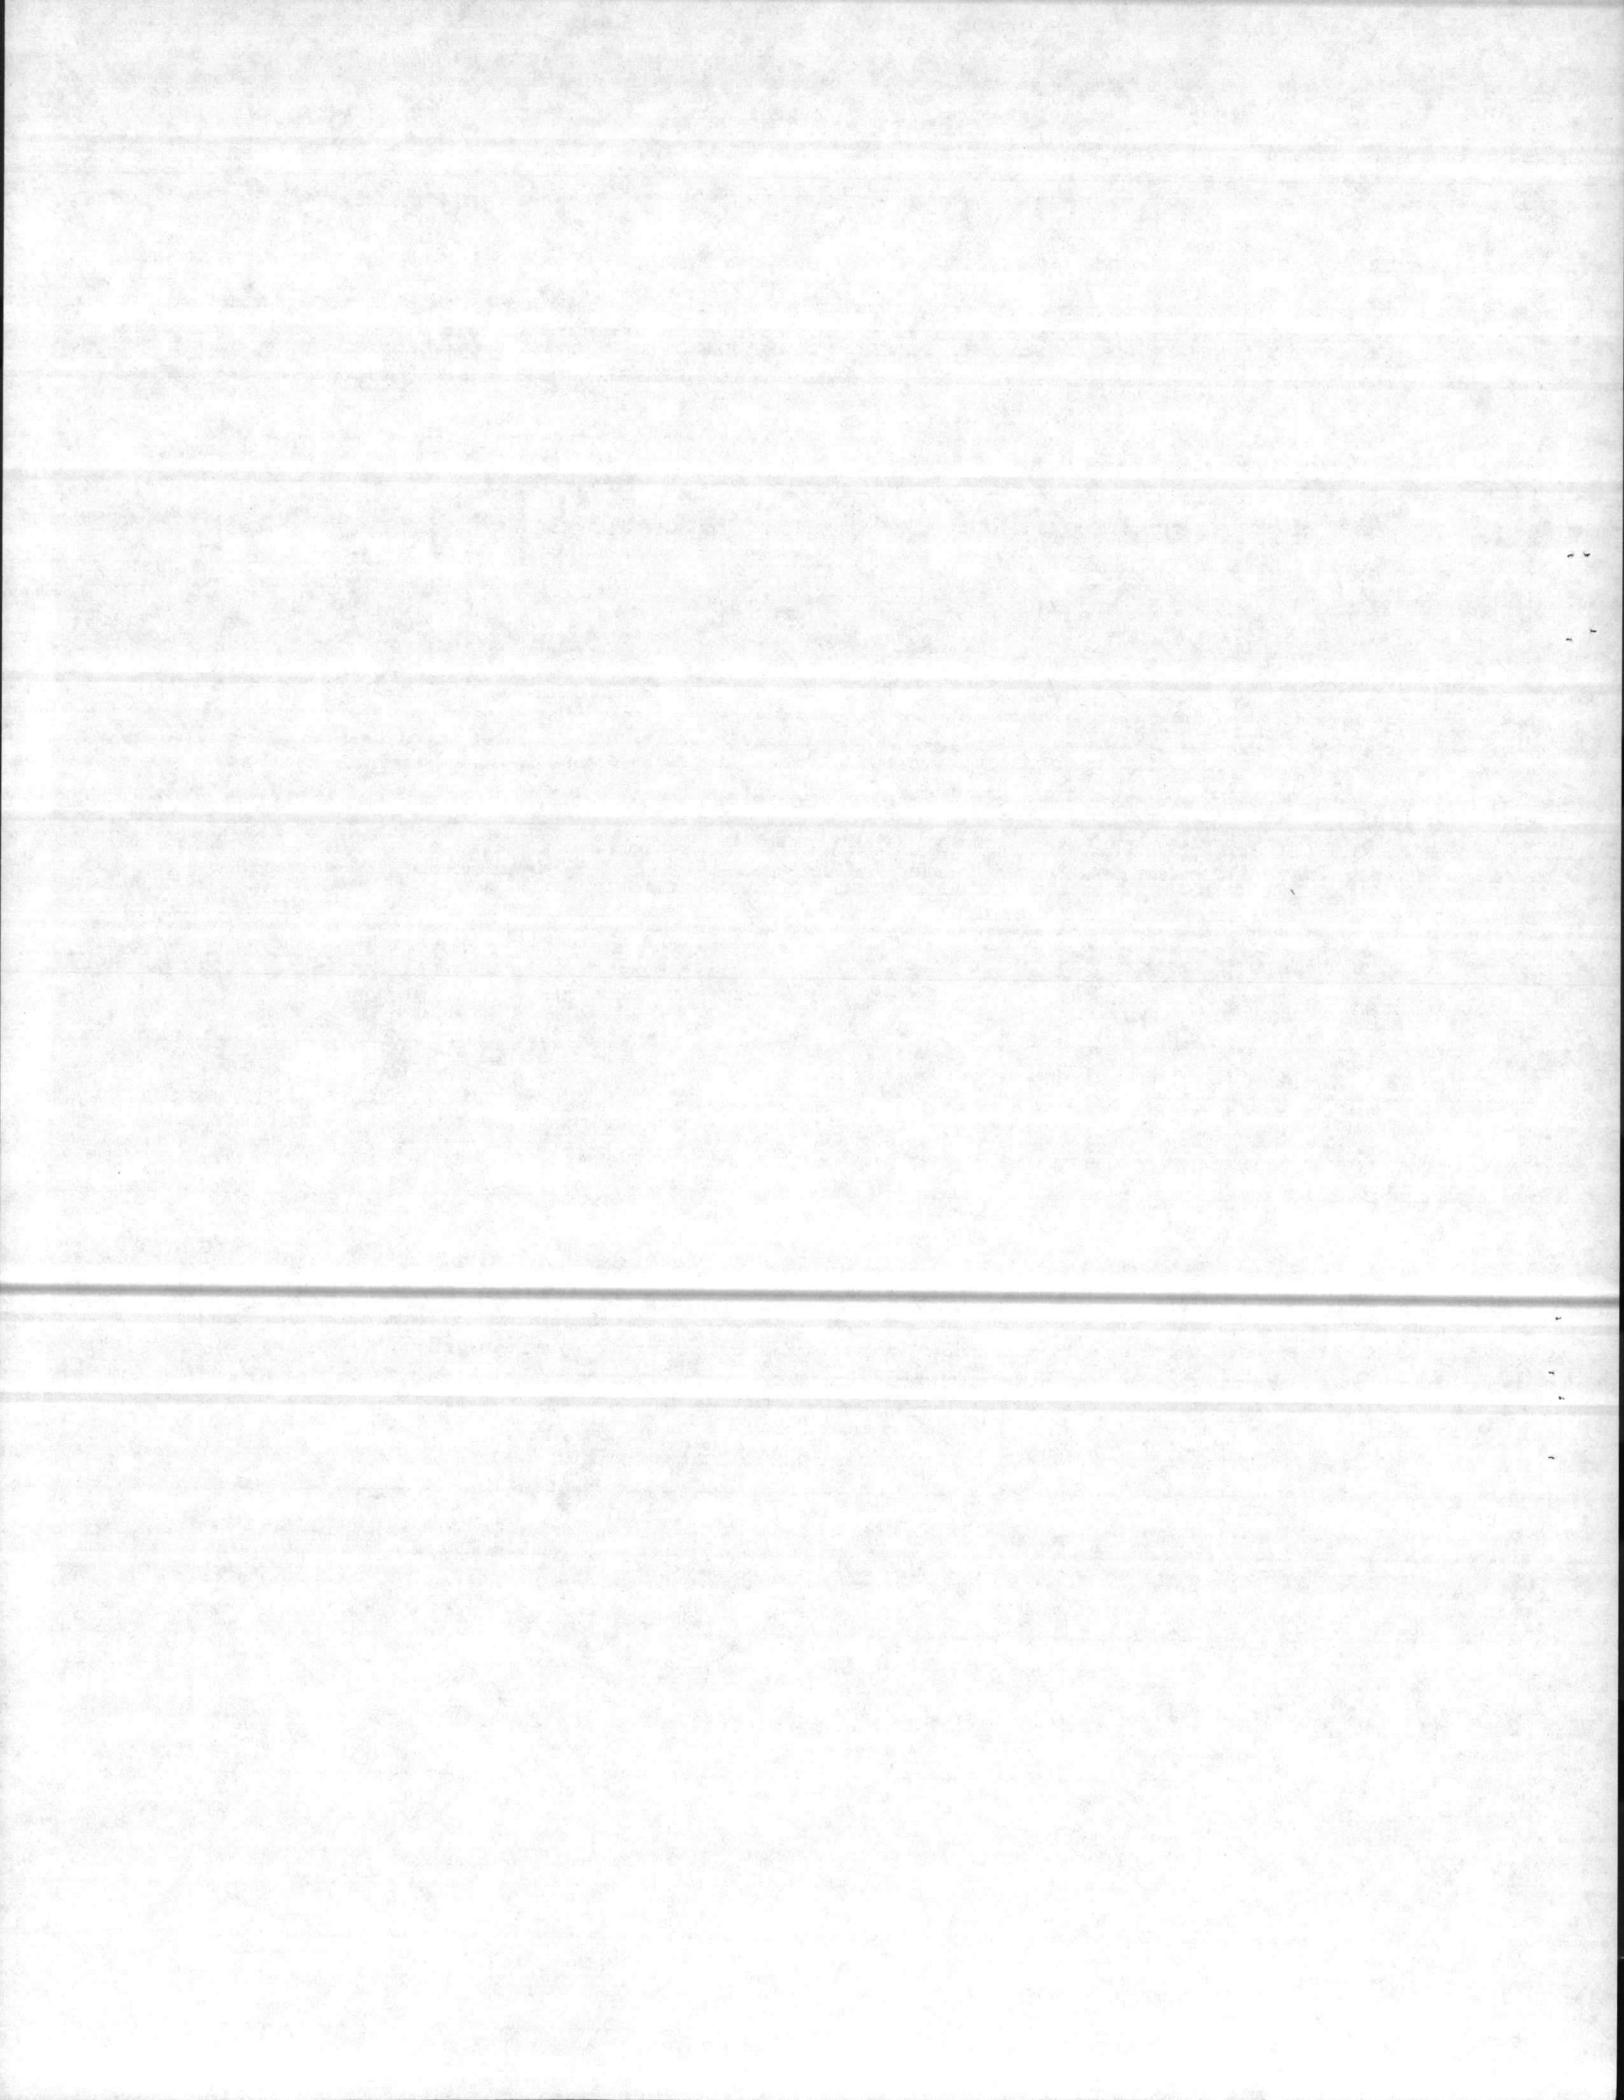

SECTION 15840. DUCTWORK

1. APPLICABLE PUBLICATIONS; The following publications of the issues listed below, but referred to elsewhere by basic designation only, form a part of this specification to the extent indicated by the references there-to (where a number is suffixed to the specification number, it denotes the effective amendment to the specification):

Federal Specifications.

RR-W-365(1) Wire fabric (insect screening).

American Society for Testing and Materials (ASTM).

A525-73 Steel sheet, zinc-coated (galvanized) by the hot dip process.

Sheet Metal and Air-Conditioning Contractors' Nat'l. Association (SMACNA).

Section 1-1969 Low velocity duct construction.


2. DUCTWORK shall be sheet metal.

2.1 Sheet Metal Ductwork shall be provided in a neat workmanlike manner, and shall be constructed of zinc-coated sheet steel conforming to ASTM A525, coating designation G-50, except as specified otherwise. Ducts and accessories shall be constructed, braced, reinforced and installed in accordance with SMACNA low velocity duct manual. All rectangular ducts shall be cross-braced. Duct supports shall be not less than 1/8-inch by 1-inch zinc-coated flat bar. Unless otherwise indicated, all elbows shall have a center line radius not less than 1-1/2 times the width of the duct. All ducts shall be true to the dimensions indicated, and shall be straight and smooth on the inside with neatly finished joints.

2.2 Hardware cloth shall conform to RR-W-365, 1/4 x 1/4 mesh, galvanized after welding.

3. CLEANING: All equipment, ductwork, etc. shall be cleaned thoroughly and in accordance with the best practice.

4. Verification of dimensions: The Contractor shall be responsible for the coordination and proper relation of his work to the building structure and to the work of all trades. The Contractor shall visit the premises and thoroughly familiarize himself with all dimensions in the field, and to advise the Contracting Officer of any discrepancy before performing any work.

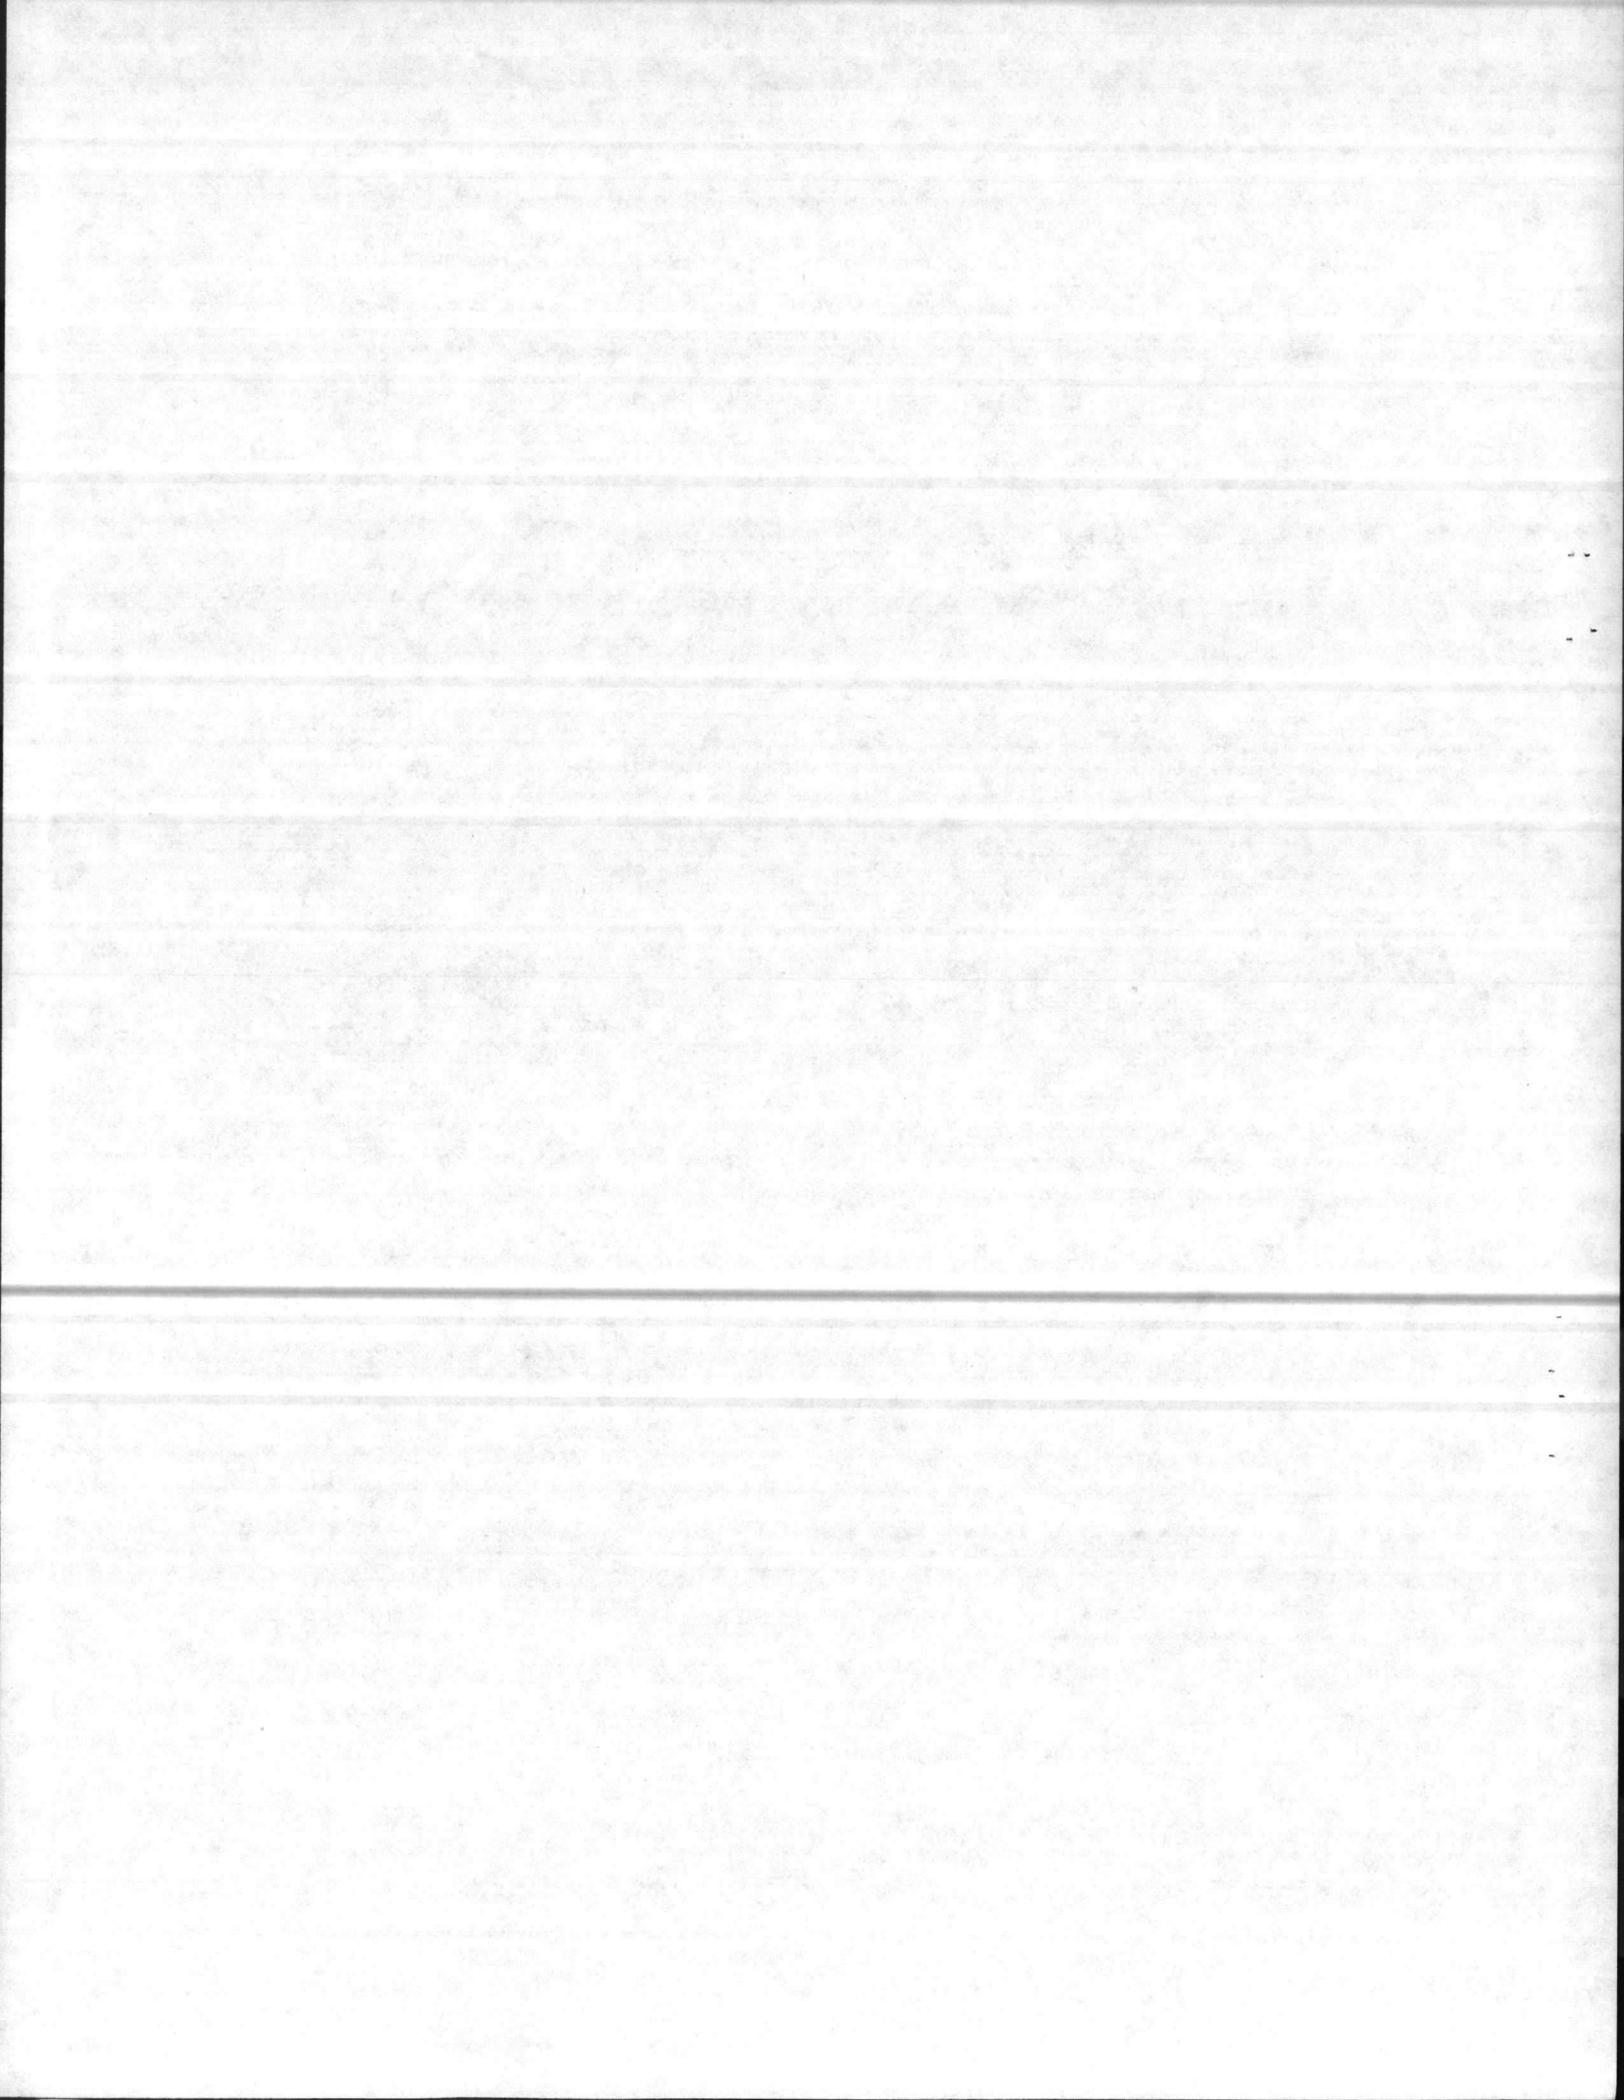

SECTION 16300

ELECTRICAL DISTRIBUTION, EXTERIOR

1. APPLICABLE DOCUMENTS: The following specifications and standards of the issues listed below (including the amendments, addenda, revisions, and errata designated), but referred to hereinafter by basic designation only, form a part of this specification to the extent required by the references thereto:

1.1 Federal Specifications:

QQ-W-343D	Wire, Electrical (Uninsulated).
SS-S-00210	Sealing Compound, Preformed Plastic, For Expansion Joints and Pipe Joints.
TT-C-490B	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-489F (Int. AM-1)	Enamel; Alkyd, Gloss (For Exterior and Interior Surfaces).
TT-E-496B(2)	Enamel, Heat Resisting (400°F); Black.
TT-P-645	Primer, Paint, Zinc Chromate, Alkyd Type.
TT-W-5711	Wood Preservation: Treating Practices.

1.2 Military Specifications:

MIL-B-7883B	Brazing of Steels, Copper, Copper Alloys, and Nickel Alloys.
MIL-C-18480A(3)	Coating Compound, Bituminous Solvent, Coal Tar Base.
MIL-I-15126F(2)	Insulation Tape, Electrical, Pressure Sensitive Adhesive and Pressure Sensitive Thermosetting Adhesive.
MIL-H-55053B SUP 1A	Hardware, Pole Line, With Supplement.
MIL-P-15328C(1)	Primer, Pretreatment (Formula No. 117 For Metals).

1.3 U. S. Department of Agriculture, Rural Electrification Administration Standards (REA):


PE-39 Filled Telephone Cable. 1976.

1.4 LANTDIV Pole Plates (Dated 3-75) Title


16-0-3	Pole Line Material List
16-18	Guy
16-19	Span Guy

1.5 LANTDIV Underground Plates (Dated 2-74) Title

3 Standard handholes-electrical (for unpaved areas).

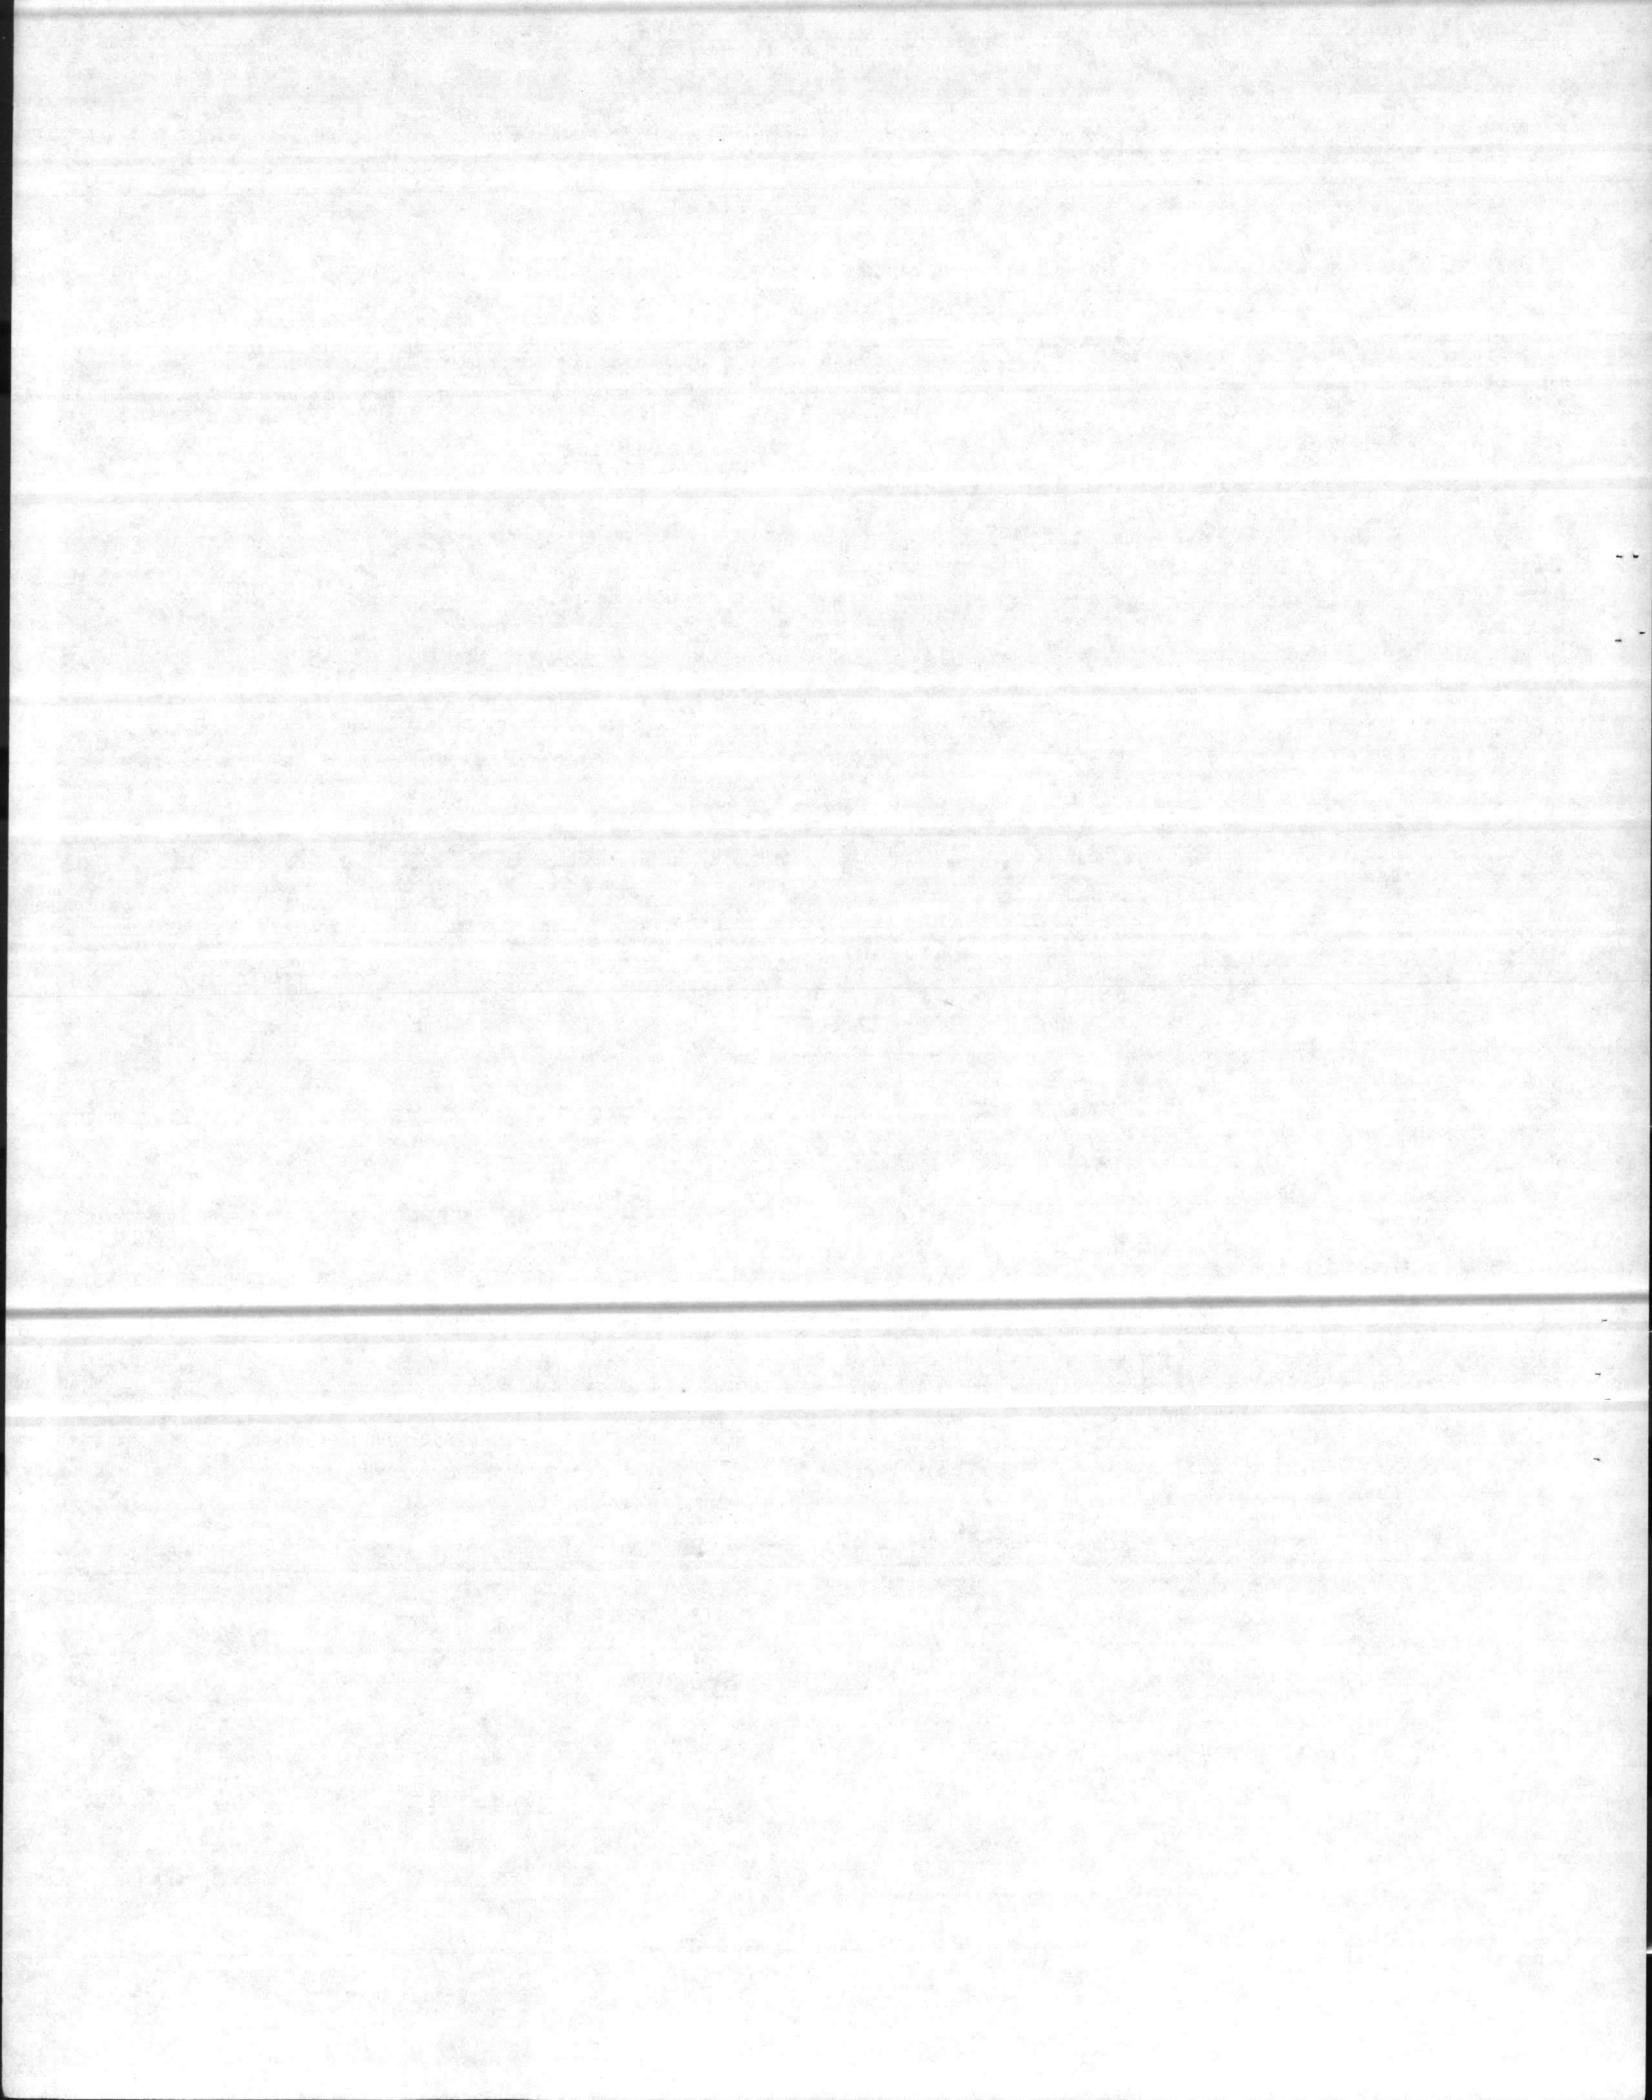

- 1.6 Association of Edison Illuminating Companies Specifications
(AEIC):
- 5-74 Specification For Polyethylene and Cross-Linked
Polyethylene Insulated Shielded Power Cables
Rated 5 through 69KV; 4th Edition.
- 1.7 American Society for Testing and Materials Specifications
(ASTM):
- C309-72 Liquid Membrane Forming Compounds For Curing Concrete.
- 1.8 Institute of Electrical and Electronics Engineers Standard
(IEEE):
- 48-1975 High-Voltage Alternating-Current Cable Terminations,
Standard Test Procedures and Requirements.
- 1.9 Insulated Power Cable Engineers Association Standards (IPCEA):
- S-66-524-1971 Cross Linked Thermosetting Polyethylene Insulated
(R JUN. 76) Wire and Cable for the Transmission and Distribution
of Electrical Energy.
- 1.10 National Electrical Manufacturers Association Standards (NEMA):
- LA 1-1976 Lightning Arrester.
SG 2-1975 High Voltage Fuses.
- 1.11 National Fire Protection Association (NFPA):
- 70-1975 National Electrical Code.
- 1.12 Underwriters' Laboratories, Inc. Standards (UL):
- 1 Flexible Steel Conduit, 1971 (R. SEP 72)
467 Grounding and Bonding Equipment, 1967 (R. OCT 72)
510 Insulating Tape, 1971.
514 Outlet Boxes and Fittings, 1969 (R. APR 72)
- 1.13 American National Standards Institute Standards (ANSI):
- C2-1973 National Electrical Safety Code.
C29.1 to C29.7 Wet Process Porcelain Insulators.
incl. - 1961
C80.1-1966 Rigid Steel Conduit, Zinc Coated.
(R. 1971)
L14.184-1965 Breaking Load and Elongation of Textile Fabrics
(R. 1971) (ASTM D1682)
05.1-1972 Specifications and Dimensions for Wood Poles.
Z35.1-1972 Specification for Accident Prevention Signs.

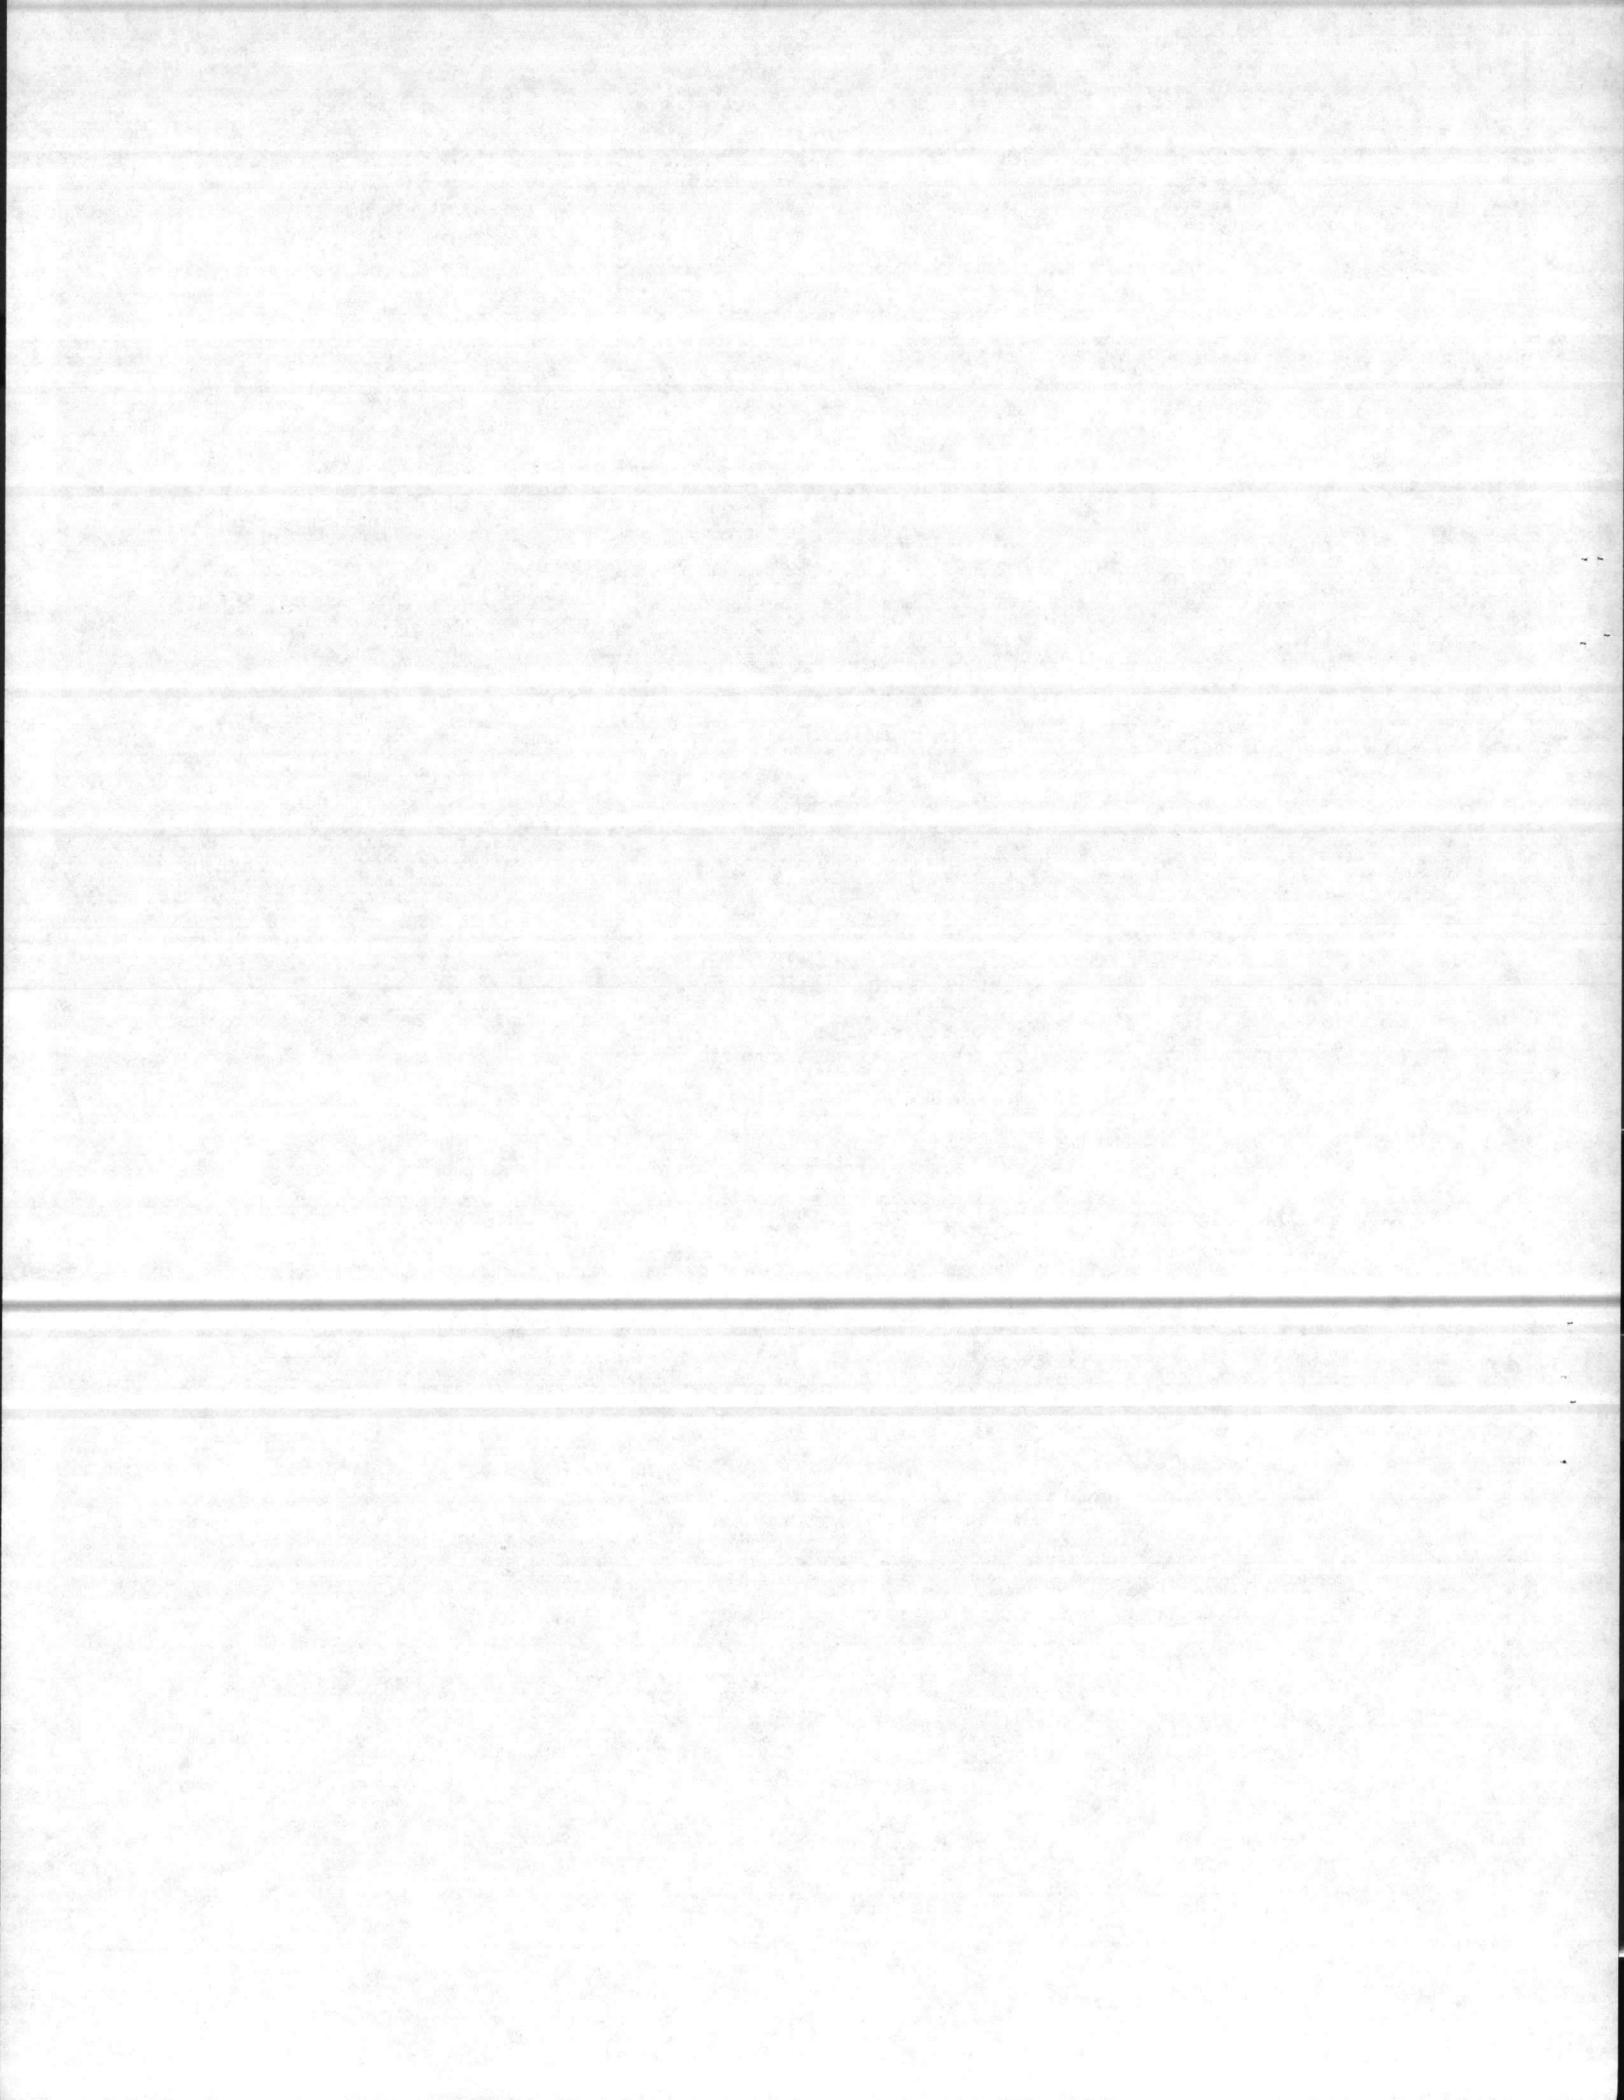

1.14 American Wood Preservers' Association (AWPA):

Book of Standards (Current Edition).

1.15 American Concrete Institute (ACI):

ACI-318-71 Building Code Requirement for Reinforced Concrete,
including 1974 Supplement.

1.16 American Association of State Highway and Transportation
Officials (AASHTO):

Standard Specifications for Highway Bridges, 11th Edition, 1973.

2. QUALITY CONTROL: All field tests to determine conformance with
the specified requirements shall be performed in the presence of the
Contracting Officer.

3. SUBMITTALS:


3.1 Shop drawings (SD) and catalog data (CD) for the following
items shall be submitted to and approved by the Contracting Officer
prior to the delivery of these items to the project site. The drawings
and data shall show materials, finish and all pertinent details.

Lightning Arresters (CD)	Terminators (CD)
Guys and Anchors (CD)	Fuses (CD)
High Voltage Cable (CD)	Handholes (SD)
Transformer (complete with switch, circuit breaker and enclosure) (SD,CD)	Splices (CD)

3.2 Manufacturer's Certifications shall be submitted to the Contracting
Officer for the following items prior to the delivery of these items to
the project site. Certifications shall indicate complete compliance
with specification requirements.

Conduit, Metal and Flexible	Wood Pole and Hardware
Conduit Fittings	Insulator
Wires and Cable, 600 Volt and Less	Tapes
	Ground Rods

3.3 Materials Tests and Test Reports: The testing requirements
for materials incorporated in referenced documents will be waived provided
the manufacturer submits notarized certificates stating that previously
manufactured materials have been tested by recognized laboratories, that
such materials meet testing requirements specified, and that the materials
furnished for this project are of the same type, quality, manufacture
and make as that tested. Copies of the test reports need not be submitted
except as specifically requested by the Contracting Officer.

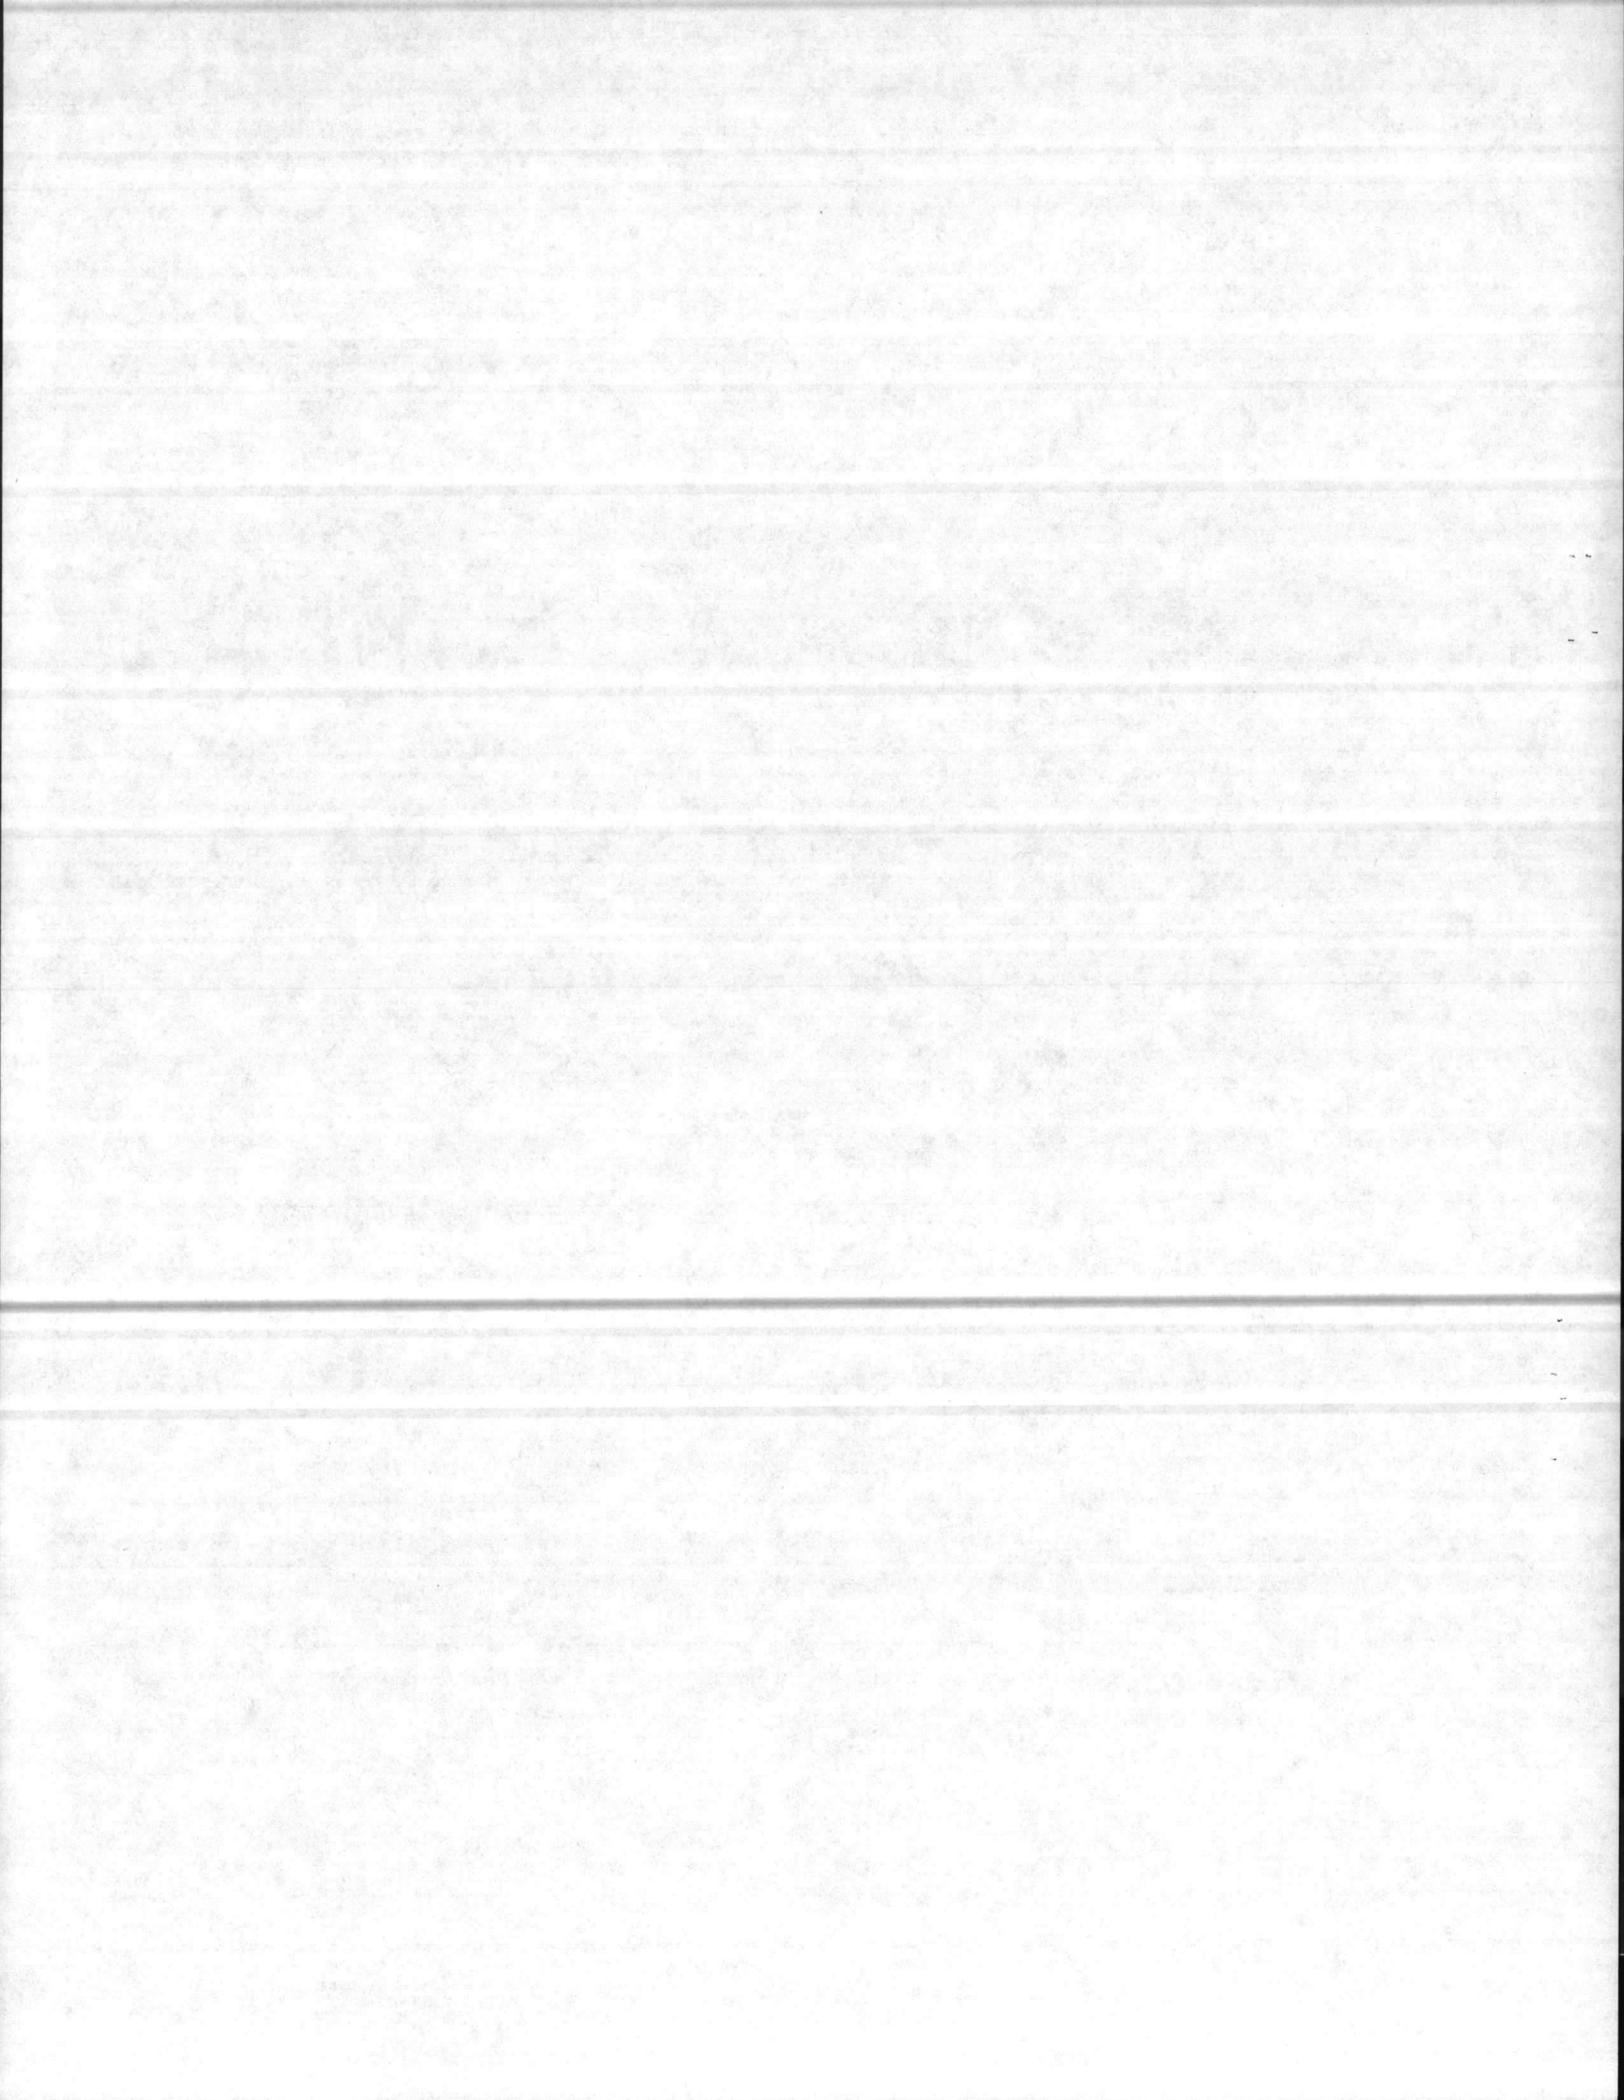

3.4 Sample Certificate: The notarized certificate shall not contain statements that could be interpreted to imply that the proposed material does not meet all requirements for the specified material, i.e.; "as good as"; "achieve the same end use and results as materials formulated in compliance with the specified material"; "exceed or equal service and performance for specified material". The certificate should be simple and should state only that the proposed material meets the requirements for the specified material.

SAMPLE CERTIFICATE

The manufacturer hereby certifies that previously manufactured materials have been tested by recognized laboratories, that the tested material is of the same type, quality, manufacture and formulation as that furnished for this project, and that the tested material meets all the requirements of the following specifications:

SPECIFIED MATERIAL

C-150-74

TESTED MATERIAL

John Doe Company
Portland Cement


SIGNATURE AND TITLE

NOTARY SEAL

4. PRODUCT REQUIREMENTS:

4.1 Products: Unless otherwise indicated, the materials and equipment to be provided under this specification shall be products of manufacturers regularly engaged in the production of such equipment and shall be the manufacturer's latest design. The products shall conform to the applicable standards of UL and NEMA, unless specified otherwise. All items of the same type or ratings shall be identical. This shall be further understood to include products with accessories indicated.

4.2 Product Handling: Material arriving on job site shall be stored in such a manner as to keep material free of rust and dirt and so as to keep material properly aligned and true to shape. Rusty, dirty or misaligned material shall be rejected. Electrical conduit shall be stored to provide protection from the weather and accidental damage. Cables shall be sealed, stored and handled carefully to avoid damage to the outer covering or insulation and damage from moisture and weather. Adequate protection shall be required at all times for electrical equipment and accessories until installed and accepted.

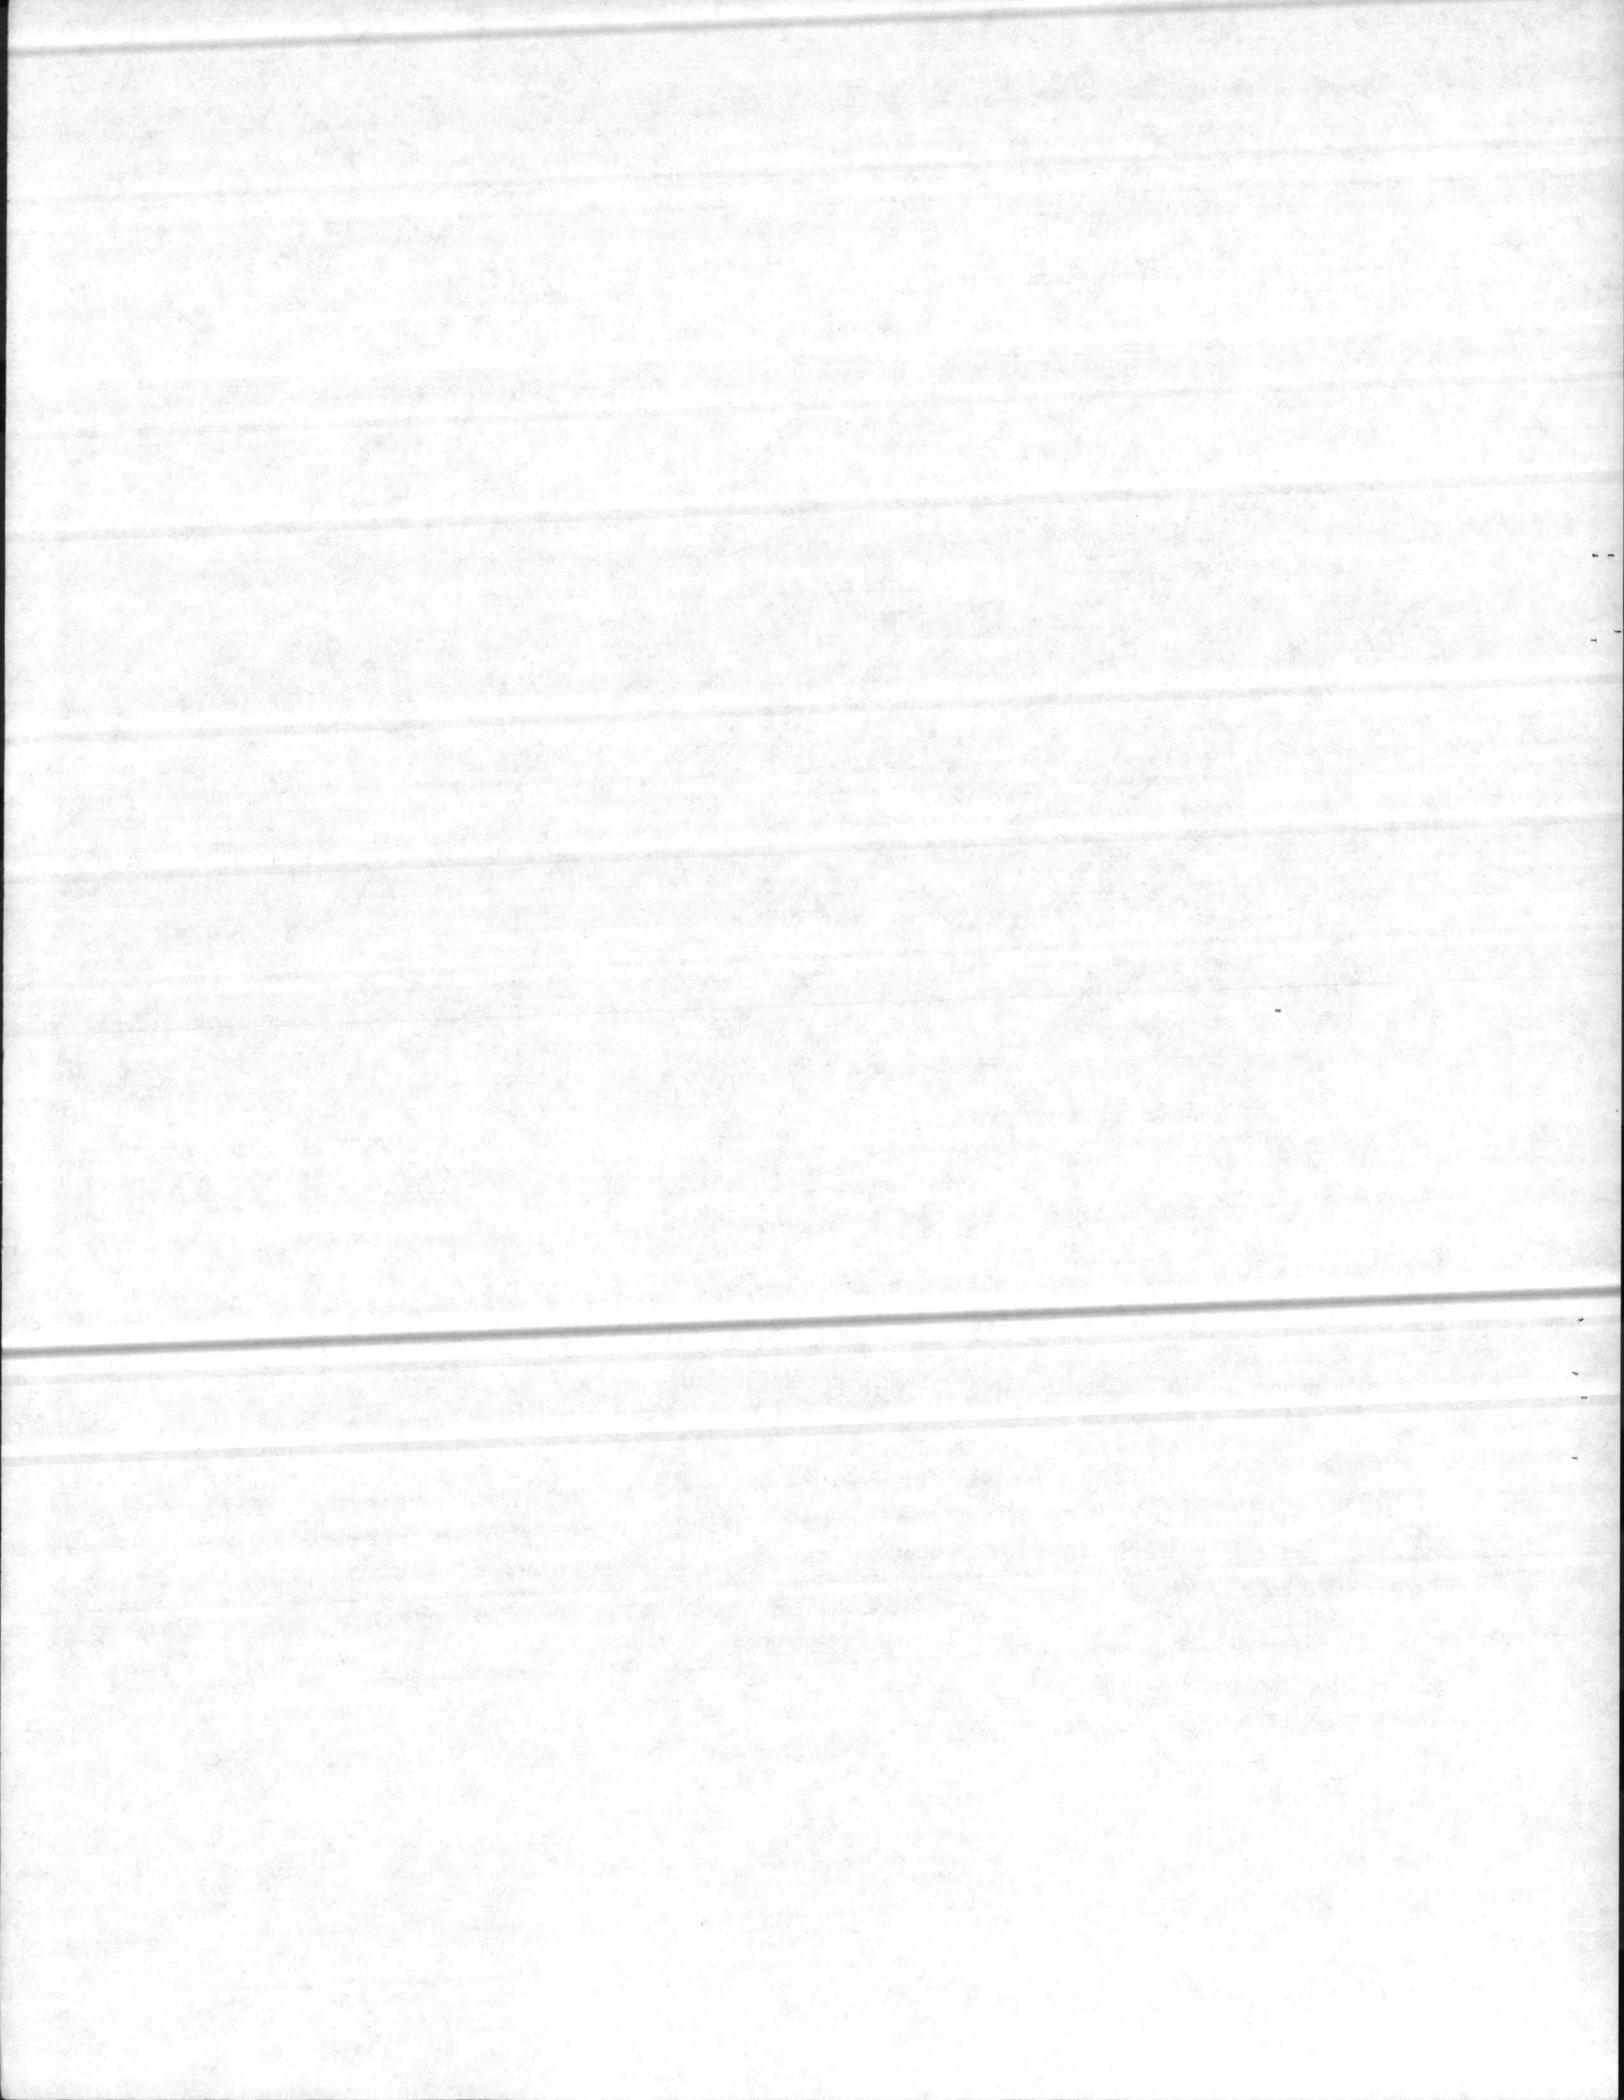

5. GENERAL REQUIREMENTS:

5.1 Description of Service: The building service shall be underground.

5.1.1 Underground Service:

Connections of the underground service to the service switch, panelboard or load center is included in Section: INTERIOR ELECTRICAL SYSTEMS. Ends of the Underground conduit shall be protected by threaded metal caps until connections are made.

5.1.2 Electrical Characteristics: Electrical characteristics for this project shall be 12470 volts primary, three phase 3 wire 60 hertz and 208/120 volts secondary, three phase.

5.1.3 Unusual Service Conditions: All items furnished under this section shall be specifically suitable for the following unusual service conditions:

(1) Ambient Temperature: 100°F.


(2) Other Service Conditions: Humid Salt Laden Air.

5.2 Service Interruptions: Where interruption of existing service is necessary, the Contracting Officer shall be notified in writing at least 10 days in advance. The interruption shall not be made unless authorized. The outage shall be as short a duration as possible and will take place at a time that will least interfere with normal station activities. The Government shall not be responsible for premium time to perform the work scheduled during the outage.

5.3 Nameplates: Major components of equipment shall have manufacturer's name, address, catalog number, model, style, or type on a plate securely and conspicuously attached to each item of equipment. Nameplates for electrical apparatus shall conform to NEMA standards.

5.4 Defective Equipment: Defective equipment or equipment damaged in the course of installation or test shall be replaced or repaired in a manner meeting with the approval of the Contracting Officer.

5.5 Prevention of Corrosion: Metallic materials shall be protected against corrosion. Outdoor equipment shall be given a rust inhibiting treatment and standard finish by the manufacturer. Aluminum shall not be used in contact with the earth, and where connected to dissimilar metal, shall be protected by approved fittings and treatment. Steel conduits installed underground shall be coated with an approved asphaltic paint, plastic coating, or shall be wrapped with a single layer of a pressure sensitive plastic tape, half lapped.

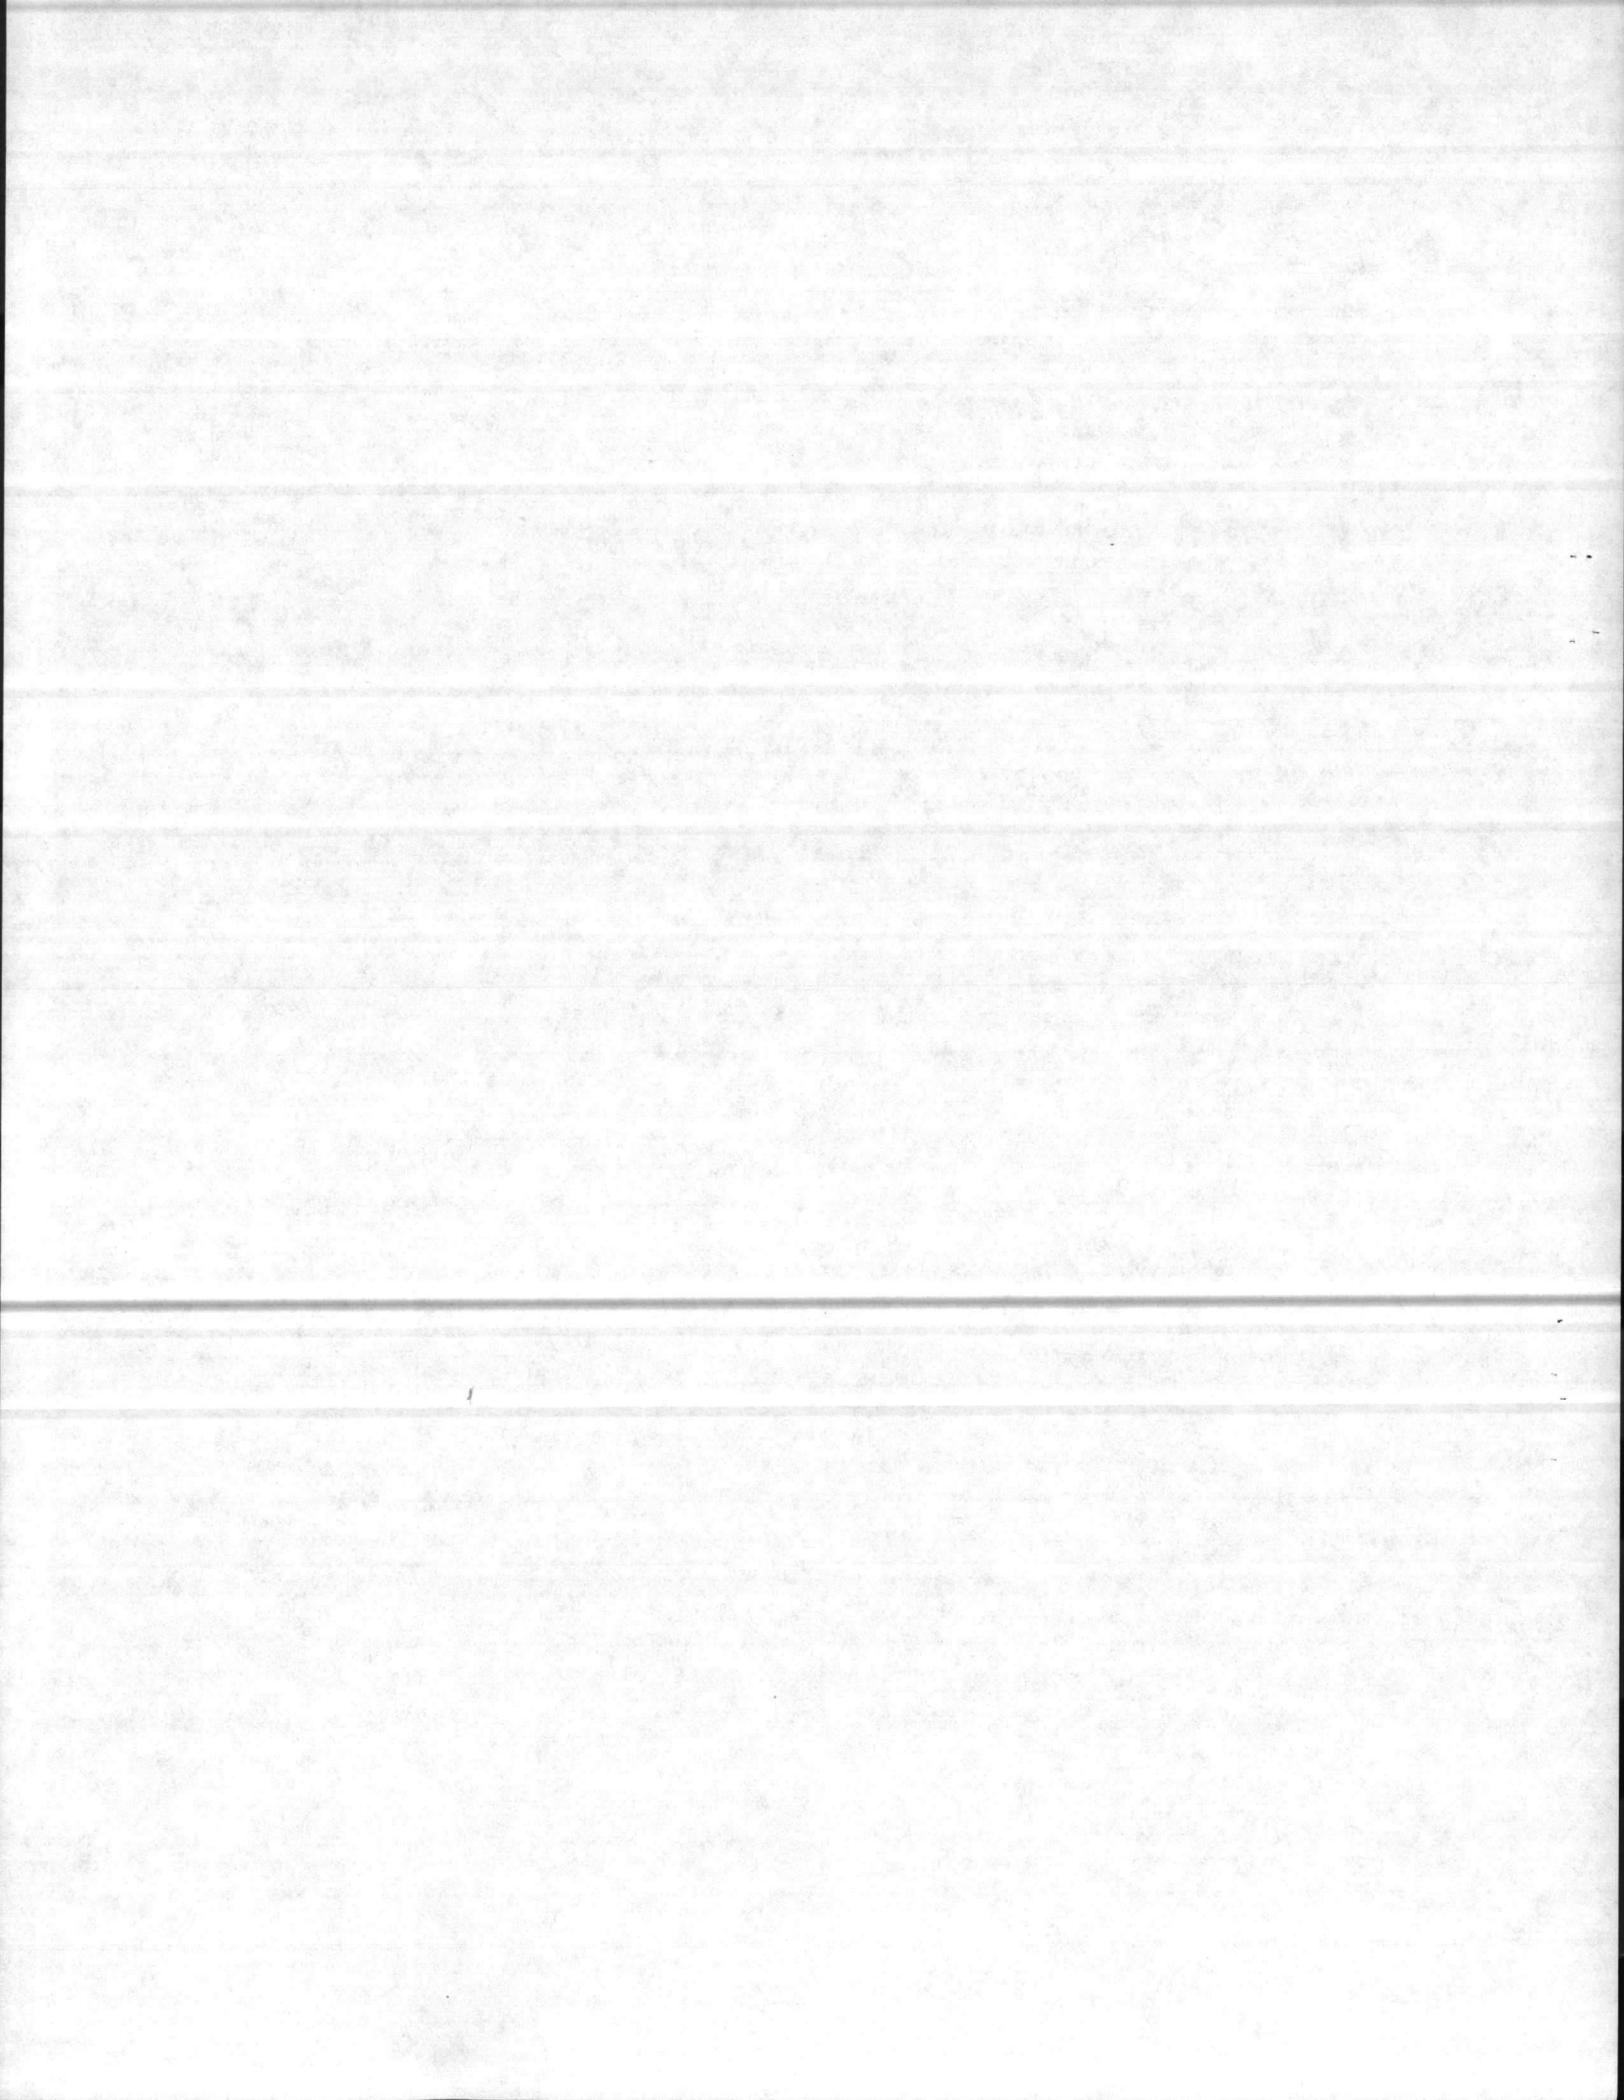

5.6 Warning Signs: Warning signs for electrical equipment and enclosures shall be provided for the fence, railing, or room enclosing electrical equipment such as substations, transformers, and switchgear having a nominal rating of 500 volts and above; and for the enclosure of metal-enclosed equipment, not so guarded or segregated. Signs shall conform to ANSI Standard Z35.1, shall be of metal, and shall have the legend "DANGER HIGH VOLTAGE" in two lines of letters of nominal 3 inch height. The signs shall be of such number and position as to be readable from all accessible sides, and shall be not more than 30 feet apart.


6. MATERIALS, EQUIPMENT, AND ASSEMBLIES:

6.1 Electrical Tapes: Tapes used for electrical insulation and other purposes in wire and cable splices, terminations, repairs and miscellaneous purposes shall be UL listed and UL approved for the specific application.

6.2 Calking Compound: Compound for the sealing of conduits, ducts, pipes, and sleeves shall be of a putty like consistency workable with the hands at temperatures as low as 35 degrees F, shall not slump at a temperature of 300 degrees F, and shall not harden materially when exposed to air. The compound shall readily calk or adhere to clean surfaces of the materials with which it is designed to be used. The compound shall have no injurious effects upon the hands of workmen or upon the materials.

6.3 Terminator: Porcelain Insulator, (for solid insulated, nonmetallic jacketed cable): The terminator as specified herein shall be provided for terminating single conductor, or the single conductors of multiconductor solid insulated, nonmetallic jacketed type cables. The terminator shall be the product of one manufacturer who shall furnish all components in the form of a kit, including complete instructions which shall be followed for assembly and installation, and suitable for the type of material of the cable terminated. The terminator shall conform to IEEE standard No. 48 for class 1 terminations. It shall be required that the terminator assembled with the cable shall not exhume any insulation filler compound or material under test or in service. The terminator shall consist of a porcelain insulator, top cap cable connector, aerial lug, metal body and supporting bracket, sealed cable entrance, and internal stress relief device for shielded cable, and insulating filler compound or material. Separate parts of copper or copper alloy shall not be used in contact with aluminum or aluminum alloy parts in the construction and installation of the terminator.

6.4 Cast Epoxy Resin Type Termination: The termination as specified herein shall be provided for terminating single conductor, or the single conductors of multiconductor, solid insulated, nonmetallic jacketed type cables for service voltage up to 15kv outdoor and 15kv indoor. The termination shall conform to IEEE No. 48 for class 1 terminations and

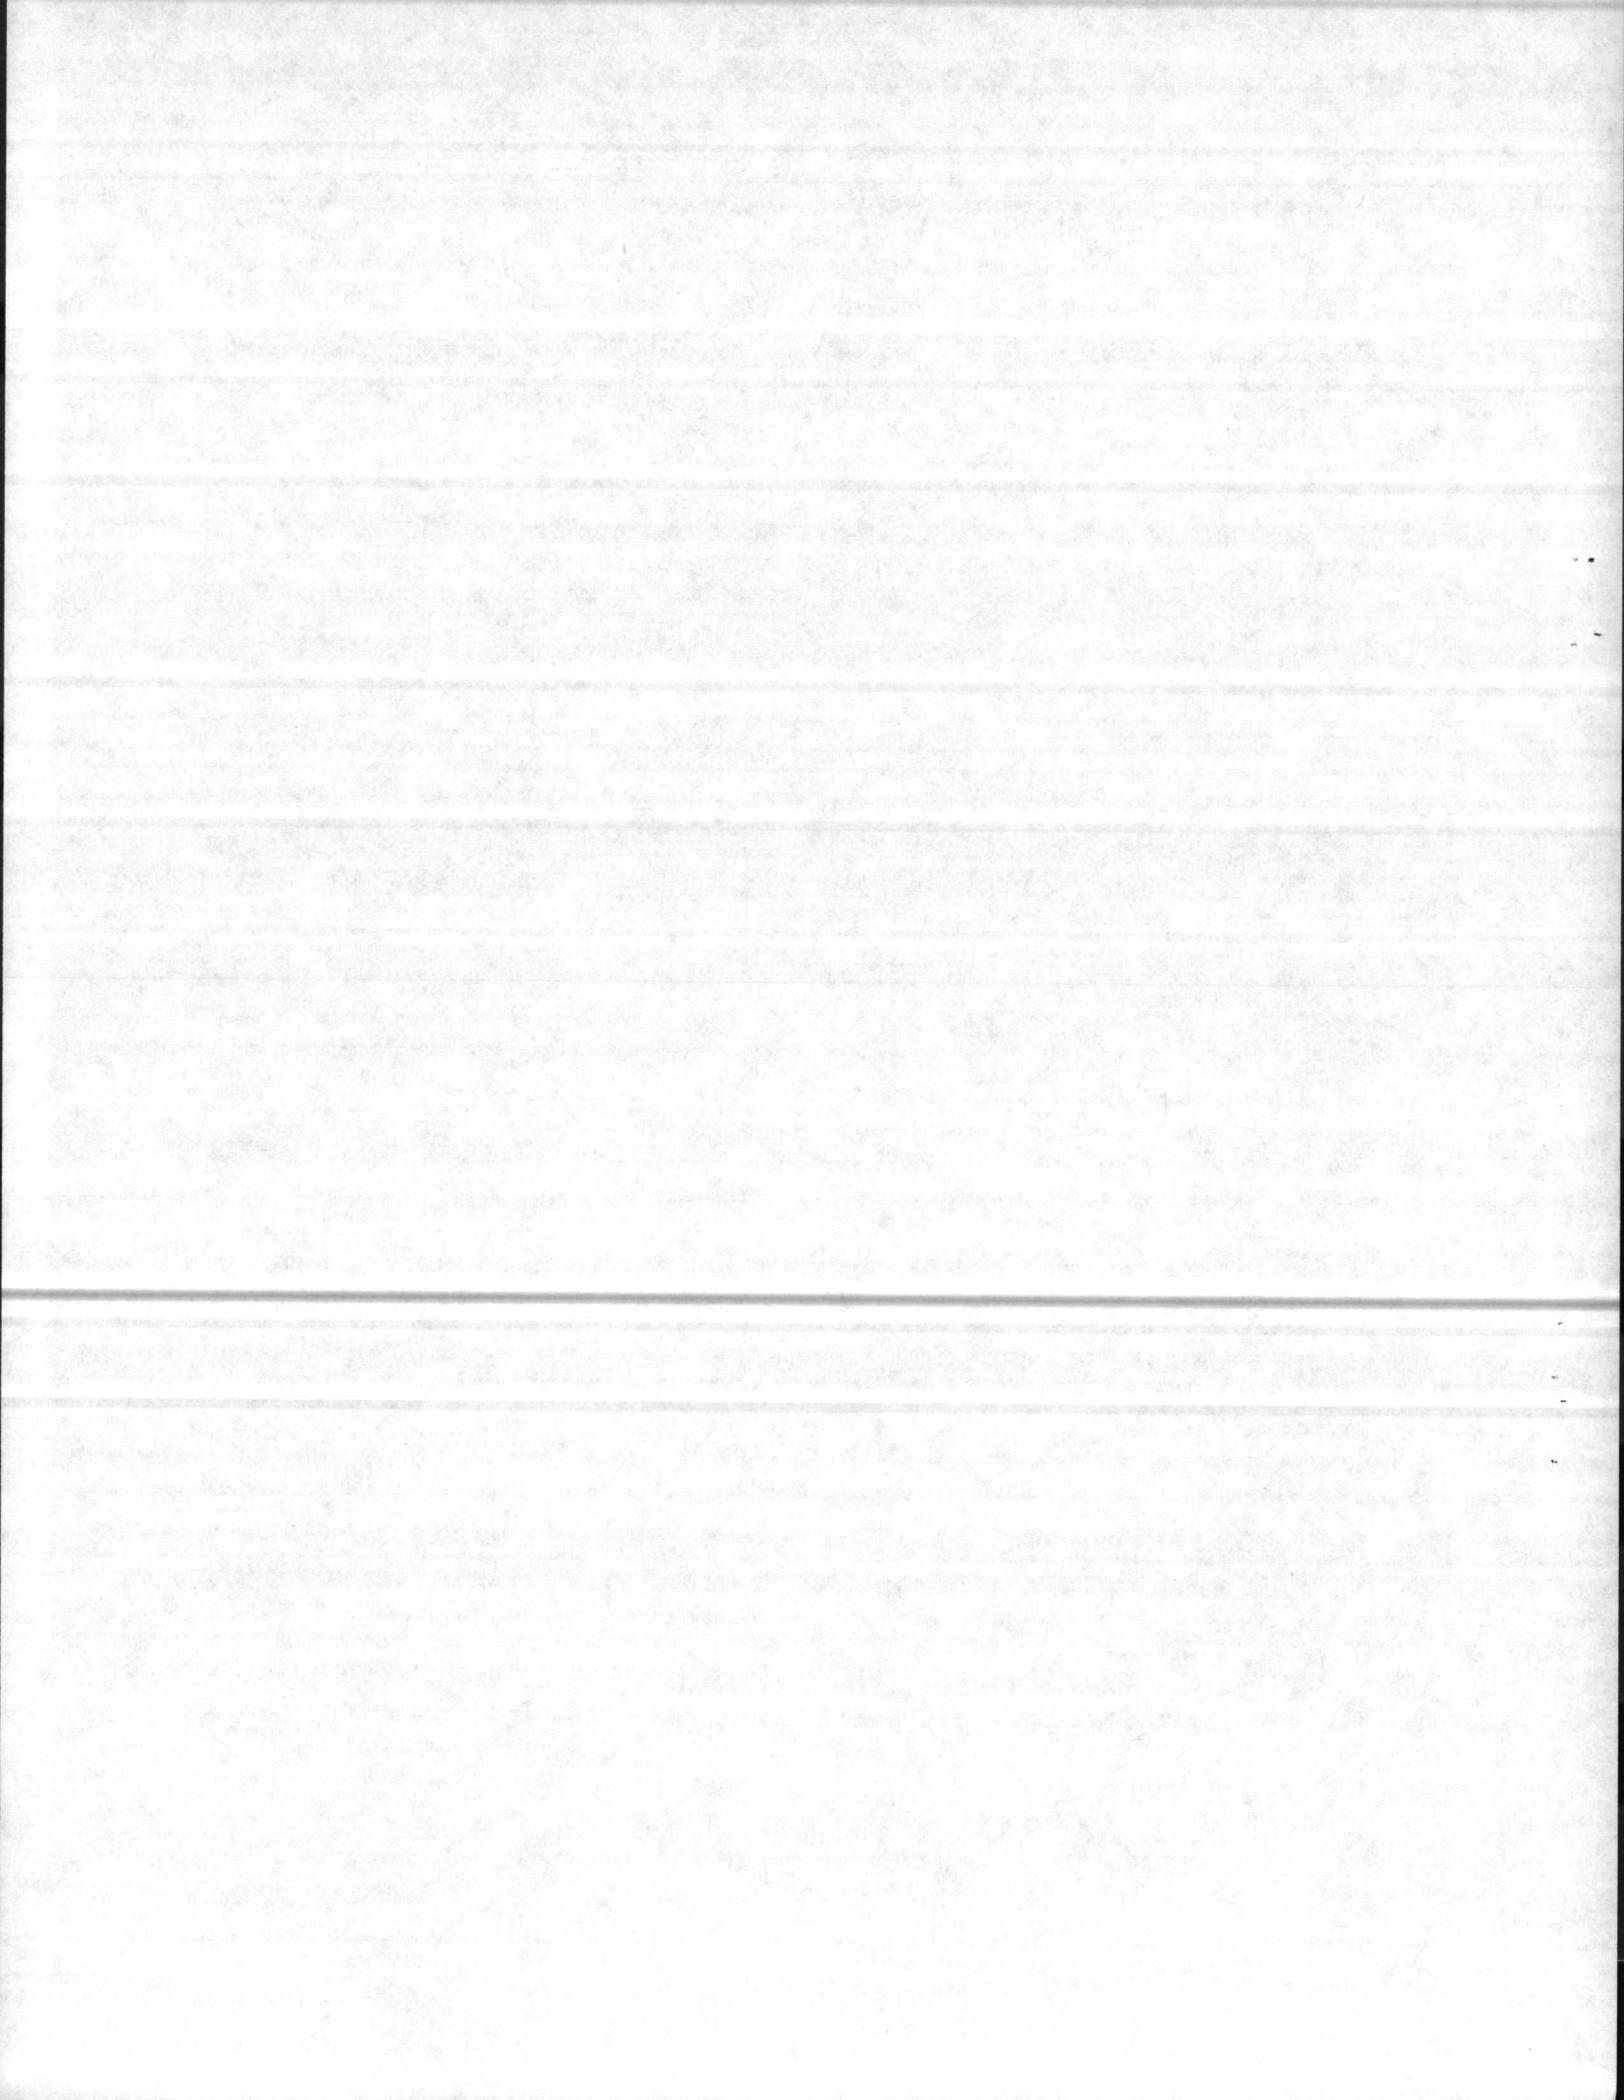

shall be the product of one manufacturer who shall furnish all components in the form of a kit including complete instructions which shall be followed for fabrication and installation, and which shall be compatible and suitable for the type and material of the cable terminated. The termination shall consist of free flowing epoxy resin material molded about the insulated conductor and conductor end at the lug or solder seal. The component materials shall be in packaged form ready for mixing without opening or removing from the package. Terminations for shielded conductors shall include taped or preformed stress cones or devices, with a shield ground connection brought out through the insulation and covering, and grounded at installation. Terminations exposed to the weather shall include rain shields of the wet process porcelain type; rain shields used with shielded cable shall protect the upper end of the stress device.


6.5 Terminator, modular, molded rubber type: The terminator as specified herein shall be provided for terminating single conductor, or the single conductor of multiconductor, solid insulated, nonmetallic jacketed type cables for service voltage up to 35kv outdoor. The terminator shall be the product of one manufacturer who shall furnish all components in the form of a kit, including complete instructions which shall be followed for assembly and installation, suitable for the type and materials of the cable terminated. The terminator shall conform to IEEE No. 48 for class 1 terminations. The terminator shall consist of a stress cone, ground clamp, nontracking rubber skirts, crimp-on connector, rubber cap, and aerial lug. Separate parts of copper or copper alloy shall not be used in contact with aluminum or aluminum alloy parts in the construction and installation of the terminator.

6.6 Metal Conduit, Fittings and Accessories:

6.6.1 Rigid Metal Conduit: Unless indicated or specified otherwise, rigid metal conduit shall be of zinc coated rigid steel. Rigid steel conduit shall conform to ANSI C80.1. Except where indicated or specified otherwise, rigid metal conduit installed underground shall be encased in concrete as specified for underground duct lines. Bushings shall be provided on each end of conduit sleeves which pass through cable vault walls and roofs.

6.6.2 Flexible Metal Conduit: Flexible conduit shall conform to UL-1.

6.6.3 Fittings, Boxes, Covers and Outlets: Fittings and accessories for rigid metallic conduit and flexible steel conduit shall conform to UL 467 and UL 514, as applicable and shall meet the following requirements: Fittings, boxes, covers and outlets for use in outdoor work and in exposed indoor work, shall be cast or malleable iron or cast aluminum, and shall have threaded hubs. Iron or steel fittings, except bar hangers, shall be cadmium or zinc coated. Junction boxes shall conform to UL

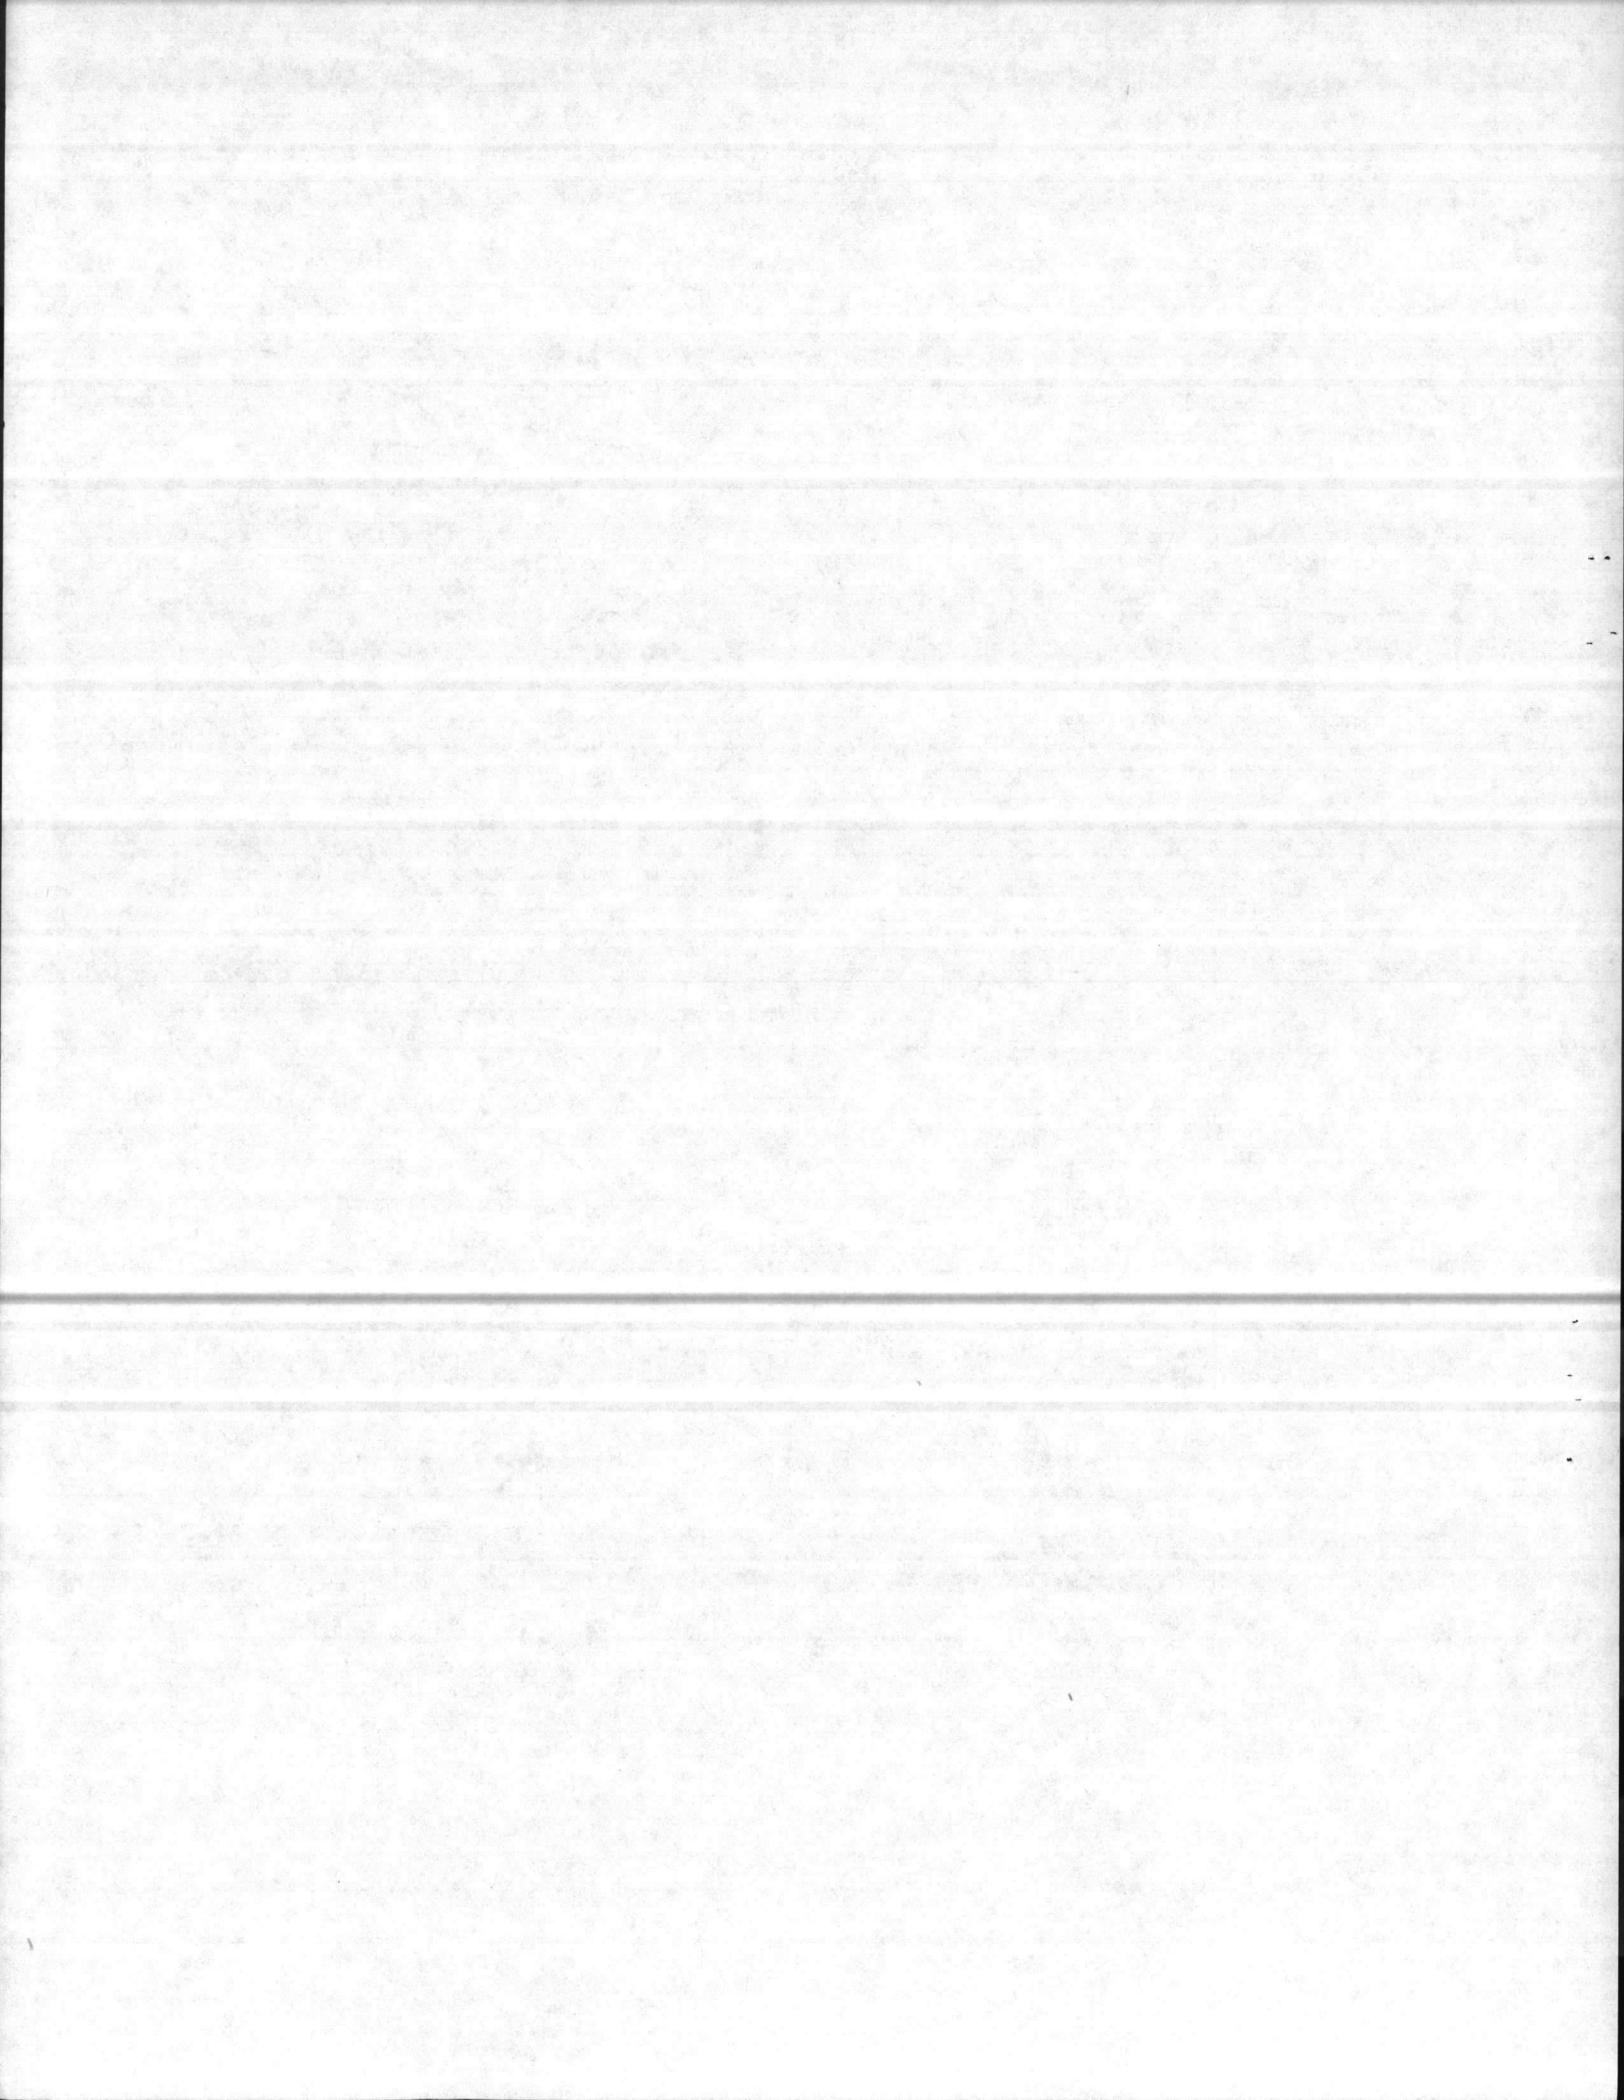

514. Each box shall have the volume required by the National Electrical Code for the number of conductors enclosed in the box and shall meet the requirements of the National Electrical Code for installation of boxes and fittings. Cast metal conduit outlets and entrance caps shall conform to UL 514 and shall be cadmium or zinc coated if of ferrous metal.

6.6.4 Exposed Conduits: All exposed conduits, including pole risers and elbows for stub ups shall be hot dipped galvanized rigid steel conduit.

6.7 Wires and Cables: Conductor sizes are expressed in American Wire Gage (AWG) or in circular mils. Unless otherwise noted, conductor and conduit sizes indicated are for copper conductors. Insulated aluminum or copper clad aluminum conductors may be used in lieu of insulated copper conductors only on conductors rated 600 volts or less and in sizes No. 4 AWG and larger. All conductors No. 6 AWG and smaller shall be copper. All grounding conductors shall be copper. If aluminum or copper clad aluminum conductors are used, the conductors shall have equivalent copper conductor current carrying capacity and the conduit sizes shall be increased to provide the maximum conduit fill in accordance with the National Electrical Code. If aluminum conductors are used, Contractor shall use particular care in making up joints and terminations. Surface oxides shall be removed by cleaning with a wire brush or emery cloth. Joint compound shall be used for connecting aluminum to aluminum.


6.7.1 Connectors and Terminals: Connectors and terminals shall be designed and approved for use with the associated conductor material, and shall provide a uniform compression over the entire contact surface. Solderless terminal lugs shall be used on all stranded conductors. For connecting aluminum to copper, connectors shall be the circumferentially compressed, metallurgically bonded type.

6.7.2 Underground cabling and equipment shall conform to the respective specifications and other requirements specified herein:

(1) Grounding conductors shall be No. 6 AWG copper for grounding cable sheaths, cable shields, conduit, and equipment and No. 4 AWG copper for grounding lightning arresters to ground rods for ground systems as shown.

(2) Neutral conductors shall have type TW insulation.

(3) Cable for 12.47 KV distribution system shall be cross linked thermosetting polyethylene insulated cable conforming to IPCEA S-66-524, as applicable and AEIC No. 5-74. Cable shall be single conductor, employing concentric, Class B stranded copper conductor. Cable shall have conductor and insulation shielding. Insulation shielding shall be metal wire type consisting of a concentric serving of wires according to IPCEA S-66-524. Cable shall be rated 15kv with insulation

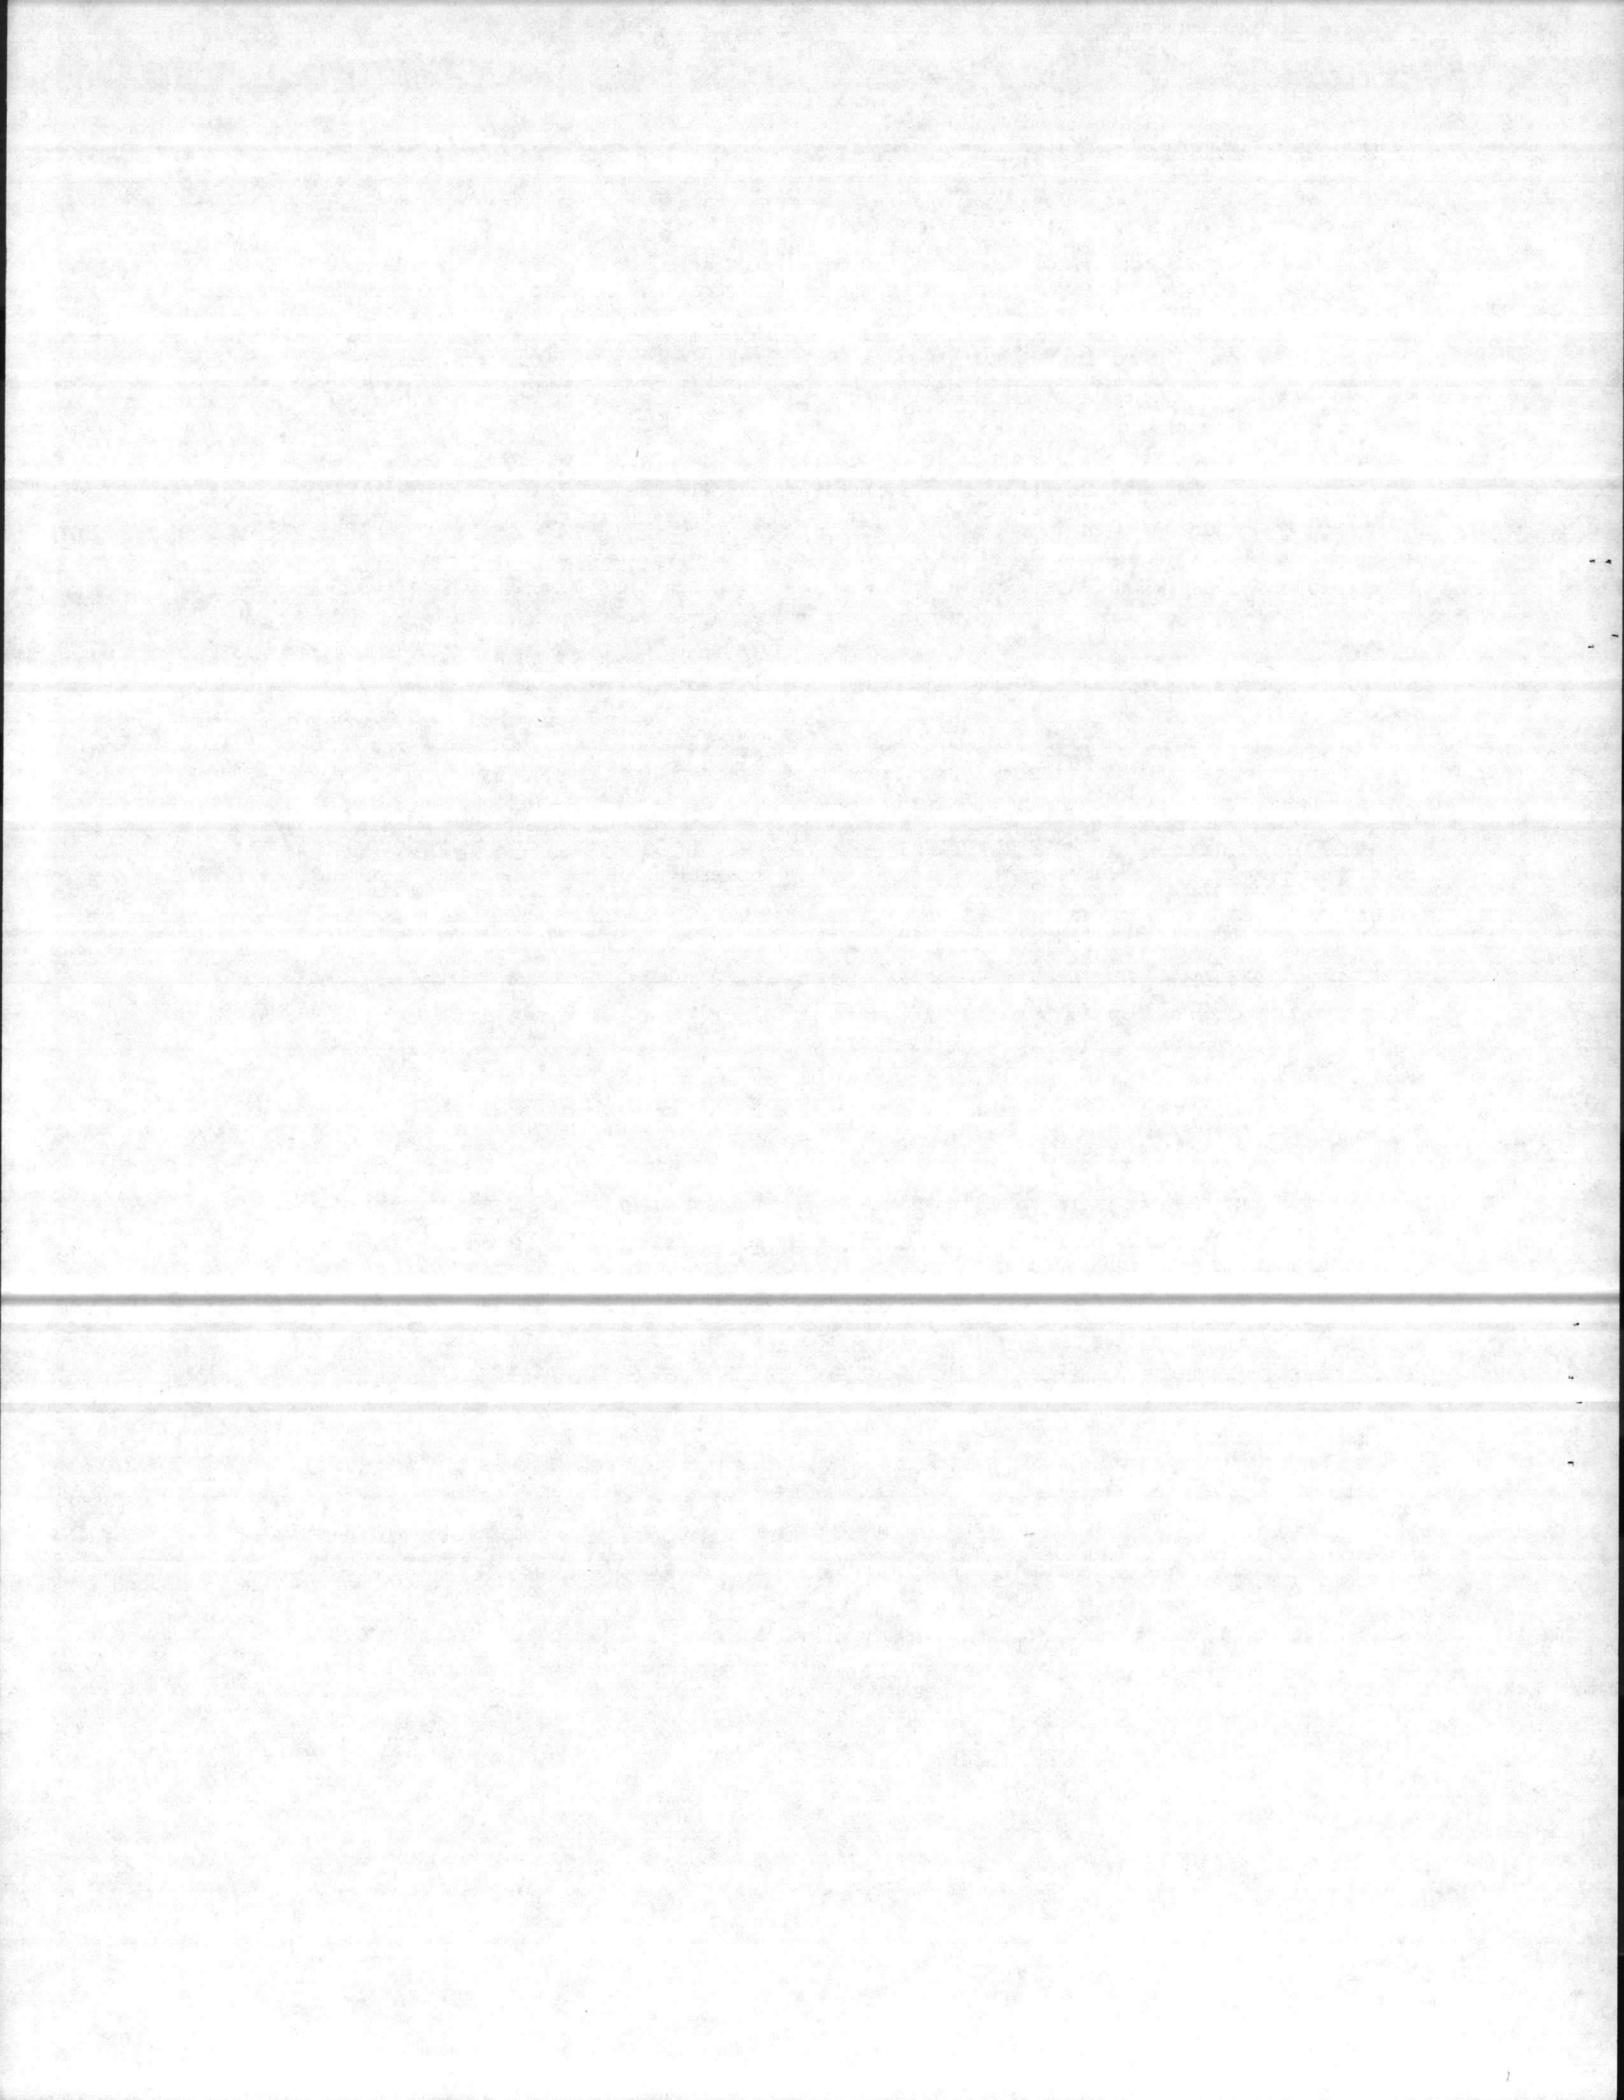

and jacket thickness of 220 and 80 MILS, respectively. Cable shall have a polyvinyl chloride jacket. Contractor shall be responsible for determining the cable cutting lengths. Lengths shown on the drawings are for estimating purposes only. Conductor size shall be as indicated.

(4) All circuits 600 volts and less, including service entrances, shall be served by type USE cable, rated 600 volts, unless otherwise indicated or specified. Conductors shall be copper or aluminum or copper clad aluminum of equivalent ampacity. Conductor size and number of conductors in each cable shall be as indicated. Cable shall be color coded. Conductor identification shall be provided within each enclosure where a tap, splice or termination is made. Conductor identification shall be by color coded insulated conductors, plastic coated self sticking printed markers, colored nylon cable ties and plates or heat shrink type sleeves. Control circuit terminations shall be properly identified.

Colors to be used in coding shall be:

208 VOLT SYSTEM

Neutral - White
Phase A - Black
Phase B - Red
Phase C - Blue
Grounding Conductor - Green

6.7.3 Bare copper wire for grounding, bonding and other uses, when not specified otherwise, shall conform to specification QQ-W-343.

6.7.4 Control Cable: Cable shall conform to REA PE-39, except as specified otherwise, and shall consist of the number of pairs indicated.


(a) Cable Construction:

(1) Conductors: The individual conductors shall be No. 19 stranded copper, insulated with polyethylene or polypropylene to a minimum thickness of 0.015 inch. Each pair shall be twisted one turn every 6 inches for an average 6 inches per twist in any 10 foot length of cable. Defective pair shall not be allowed.

(2) Inner Jacket; The pair core shall be covered by a polyethylene or polypropylene jacket with a minimum thickness of 0.040 inch.

(3) Shield: A shield applied longitudinally with overlap shall be provided over the inner jacket consisting of either 0.010 ± 0.0008 inch fully annealed solid copper or 0.006 ± 0.0005 inch copper-clad stainless steel.

(4) Outer Jacket: The outer jacket shall be either PVC, polyethylene or polypropylene with a minimum thickness of 90 mils.

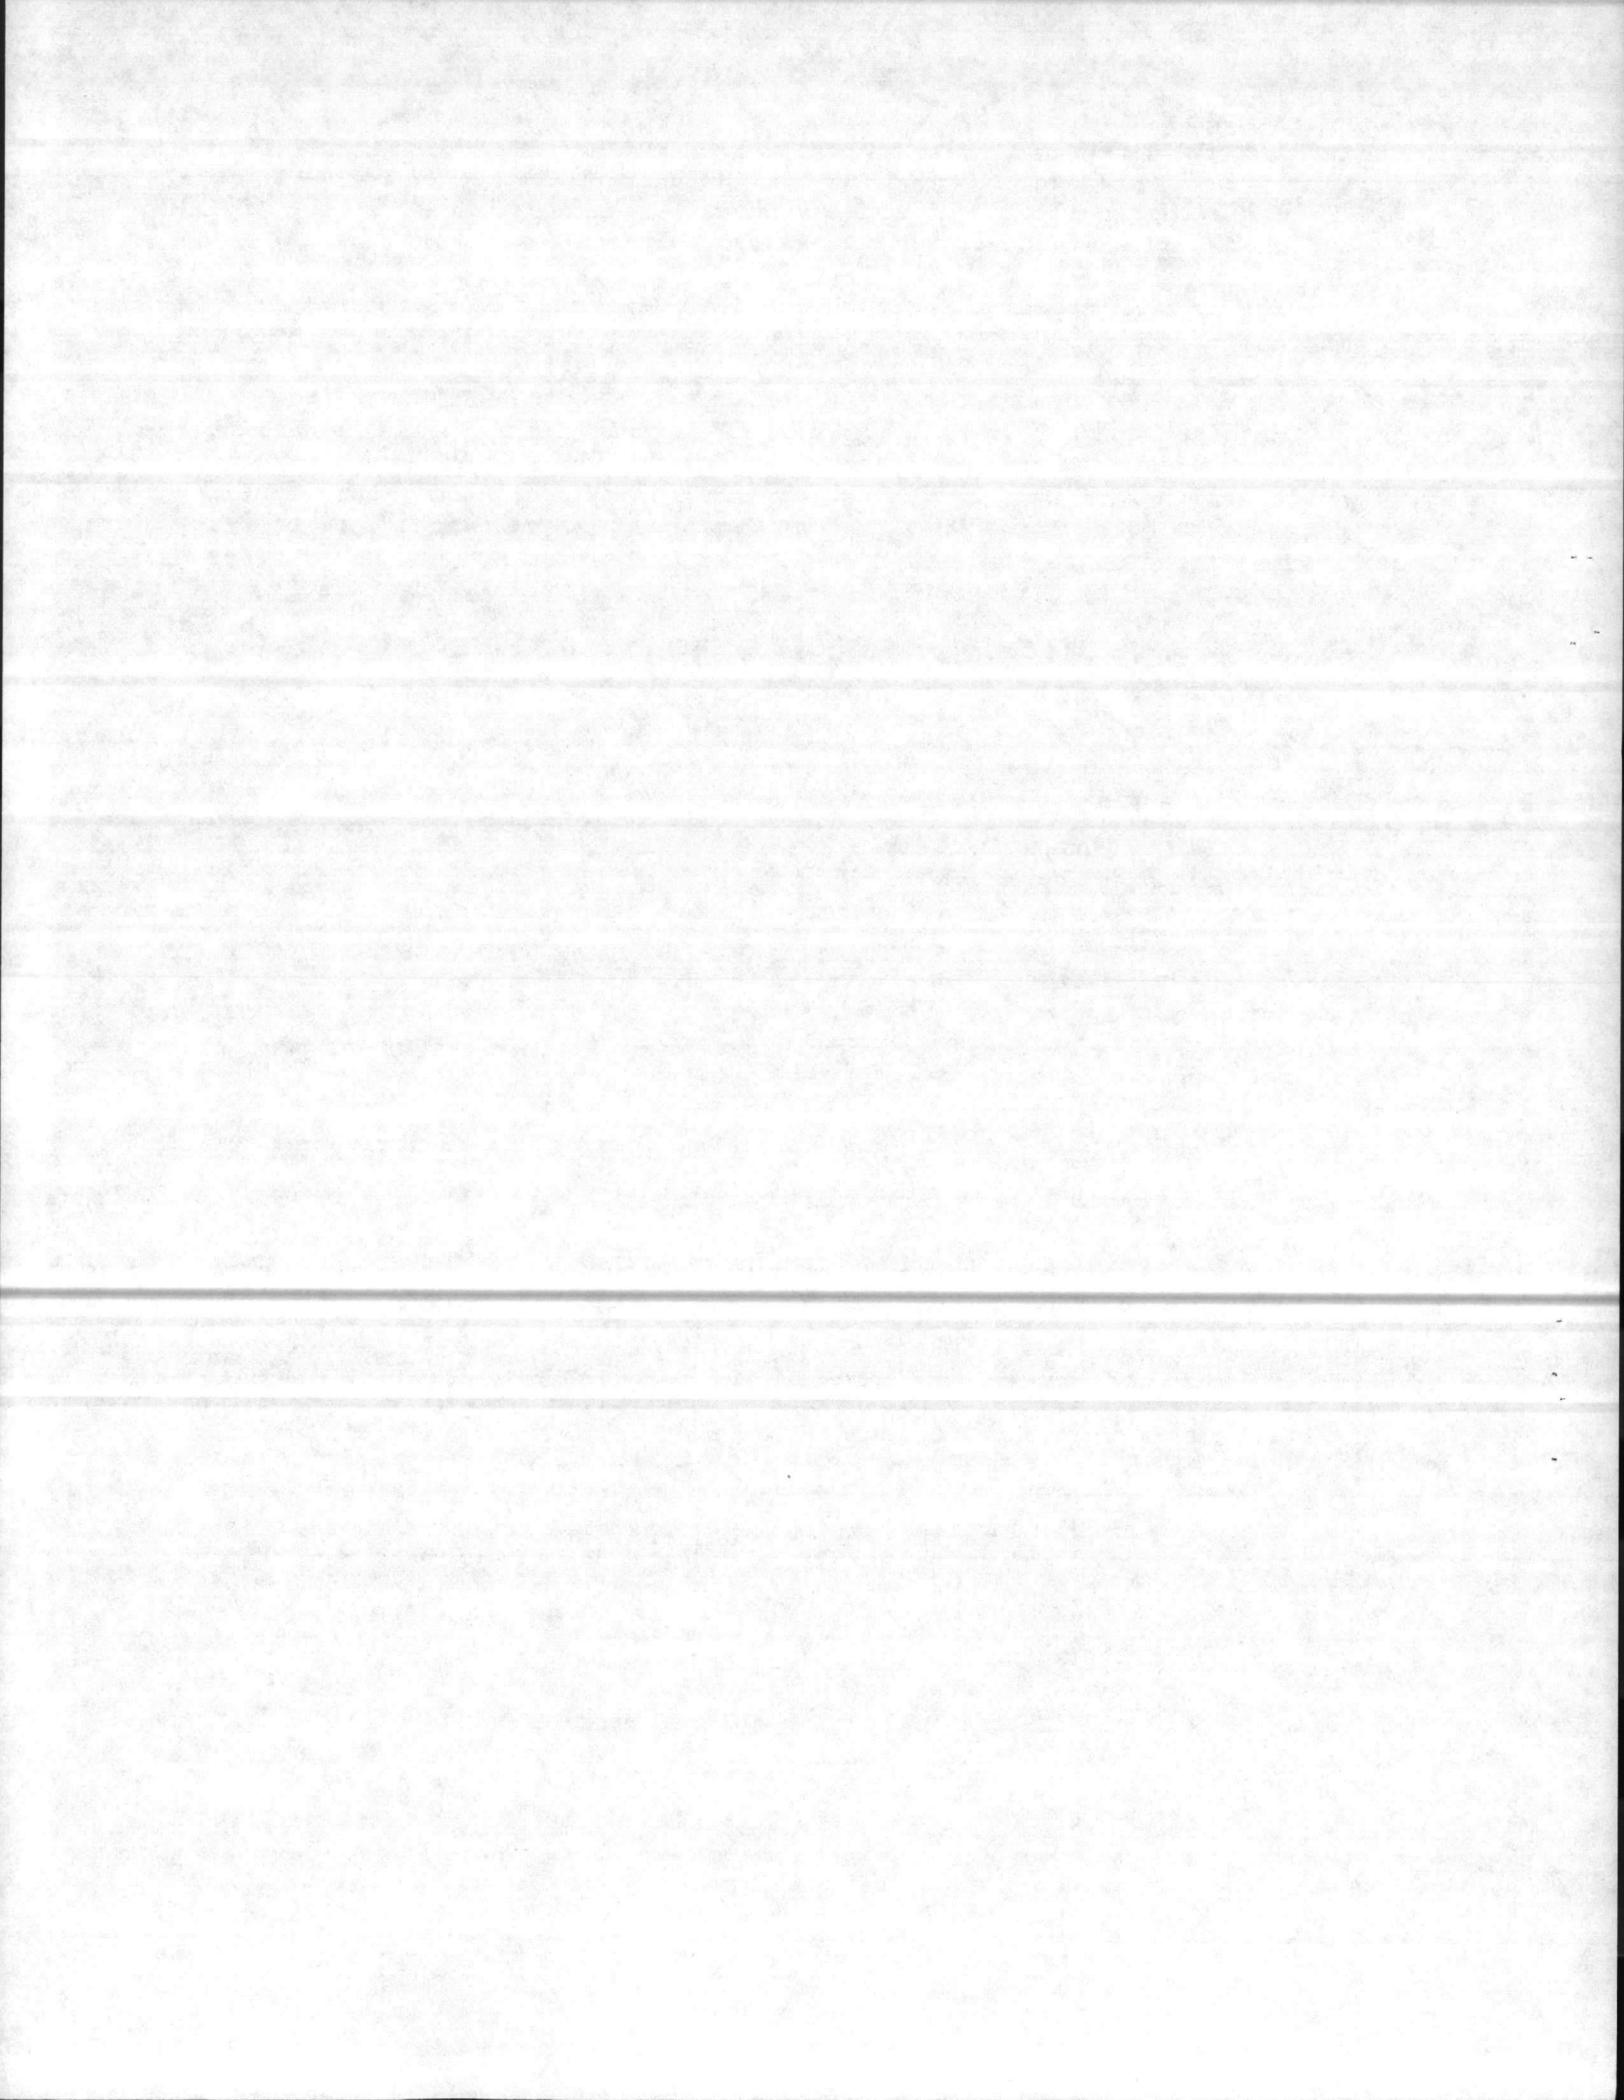

(b) Cable Properties:

(1) Dielectric Strength:

Conductor to conductor - 6000 volts DC minimum for 3 seconds.
Conductor to ground - 20000 volts DC minimum for 3 seconds.

(2) Mutual Capacitance - average value not greater than 0.02 micro-farads per 1000 feet.

(3) Weight of Cable - approximate value: not greater than 300 pounds per 1000 feet.

(4) Crosstalk attenuation - between the sets of pairs in the cable: 35 decibels minimum.

(5) Waterproofing. Cable shall be filled with an approved insulating and waterproofing jelly or foam which shall not liquify or separate below 200 degrees F (93 degrees C).


(c) Test and Certification: Cable shall be tested and an electrical test report shall be submitted to the Contracting Officer. The tests and report format shall be in accordance with REA PE-39. Manufacturer's certification shall be submitted to the Contracting Officer certifying that the cables are capable of being submerged in ground or in water, in the temperature range of 32 to 170 degrees F (0 to 77 degrees C), for a period of 5 years with less than 10 percent change in insulation resistivity and dielectric hysteresis.

6.7.5 Wires and cables for locations and uses not specified above shall be suitable for the purpose and in accordance with the National Electrical Code.

6.8 Wood Poles and Hardware:

6.8.1 Poles shall be Southern Yellow Pine or Douglas Fir, length and class as indicated, conforming to ANSI 05.1, machine trimmed to a smooth surface, and free of crooks or sweeps exceeding 1 inch per 10 feet of pole length. Pole shall be bored, galled and roofed before treatment. Plastic pole caps shall be added after treatment. Plastic caps shall have sealing rings raised to a height of 1/4 inch. They shall be filled to the top of the sealing ring with elastigum. Four tabs shall extend below the main body of the cap for nailing to the pole. One 1-1/4 inch aluminum nail shall be driven through each tab. No nails or holes shall be permitted on top of pole. Poles shall be pressure treated with Chromated Copper Arsenate (CCA) or Ammoniacal Copper Arsenite (ACA) in accordance with TT-W-571 and the American Wood Preserver's Association Book of Standards, Standard C4.

6.8.2 Wood Crossarm: Wood crossarm shall be solid type and shall conform to REA No. DT-5B (electric) and PE-16 (telephone). Crossarms shall be pressure treated with Chromated Copper Arsenate (CCA) or Ammonica Copper Arsenite (ACA)

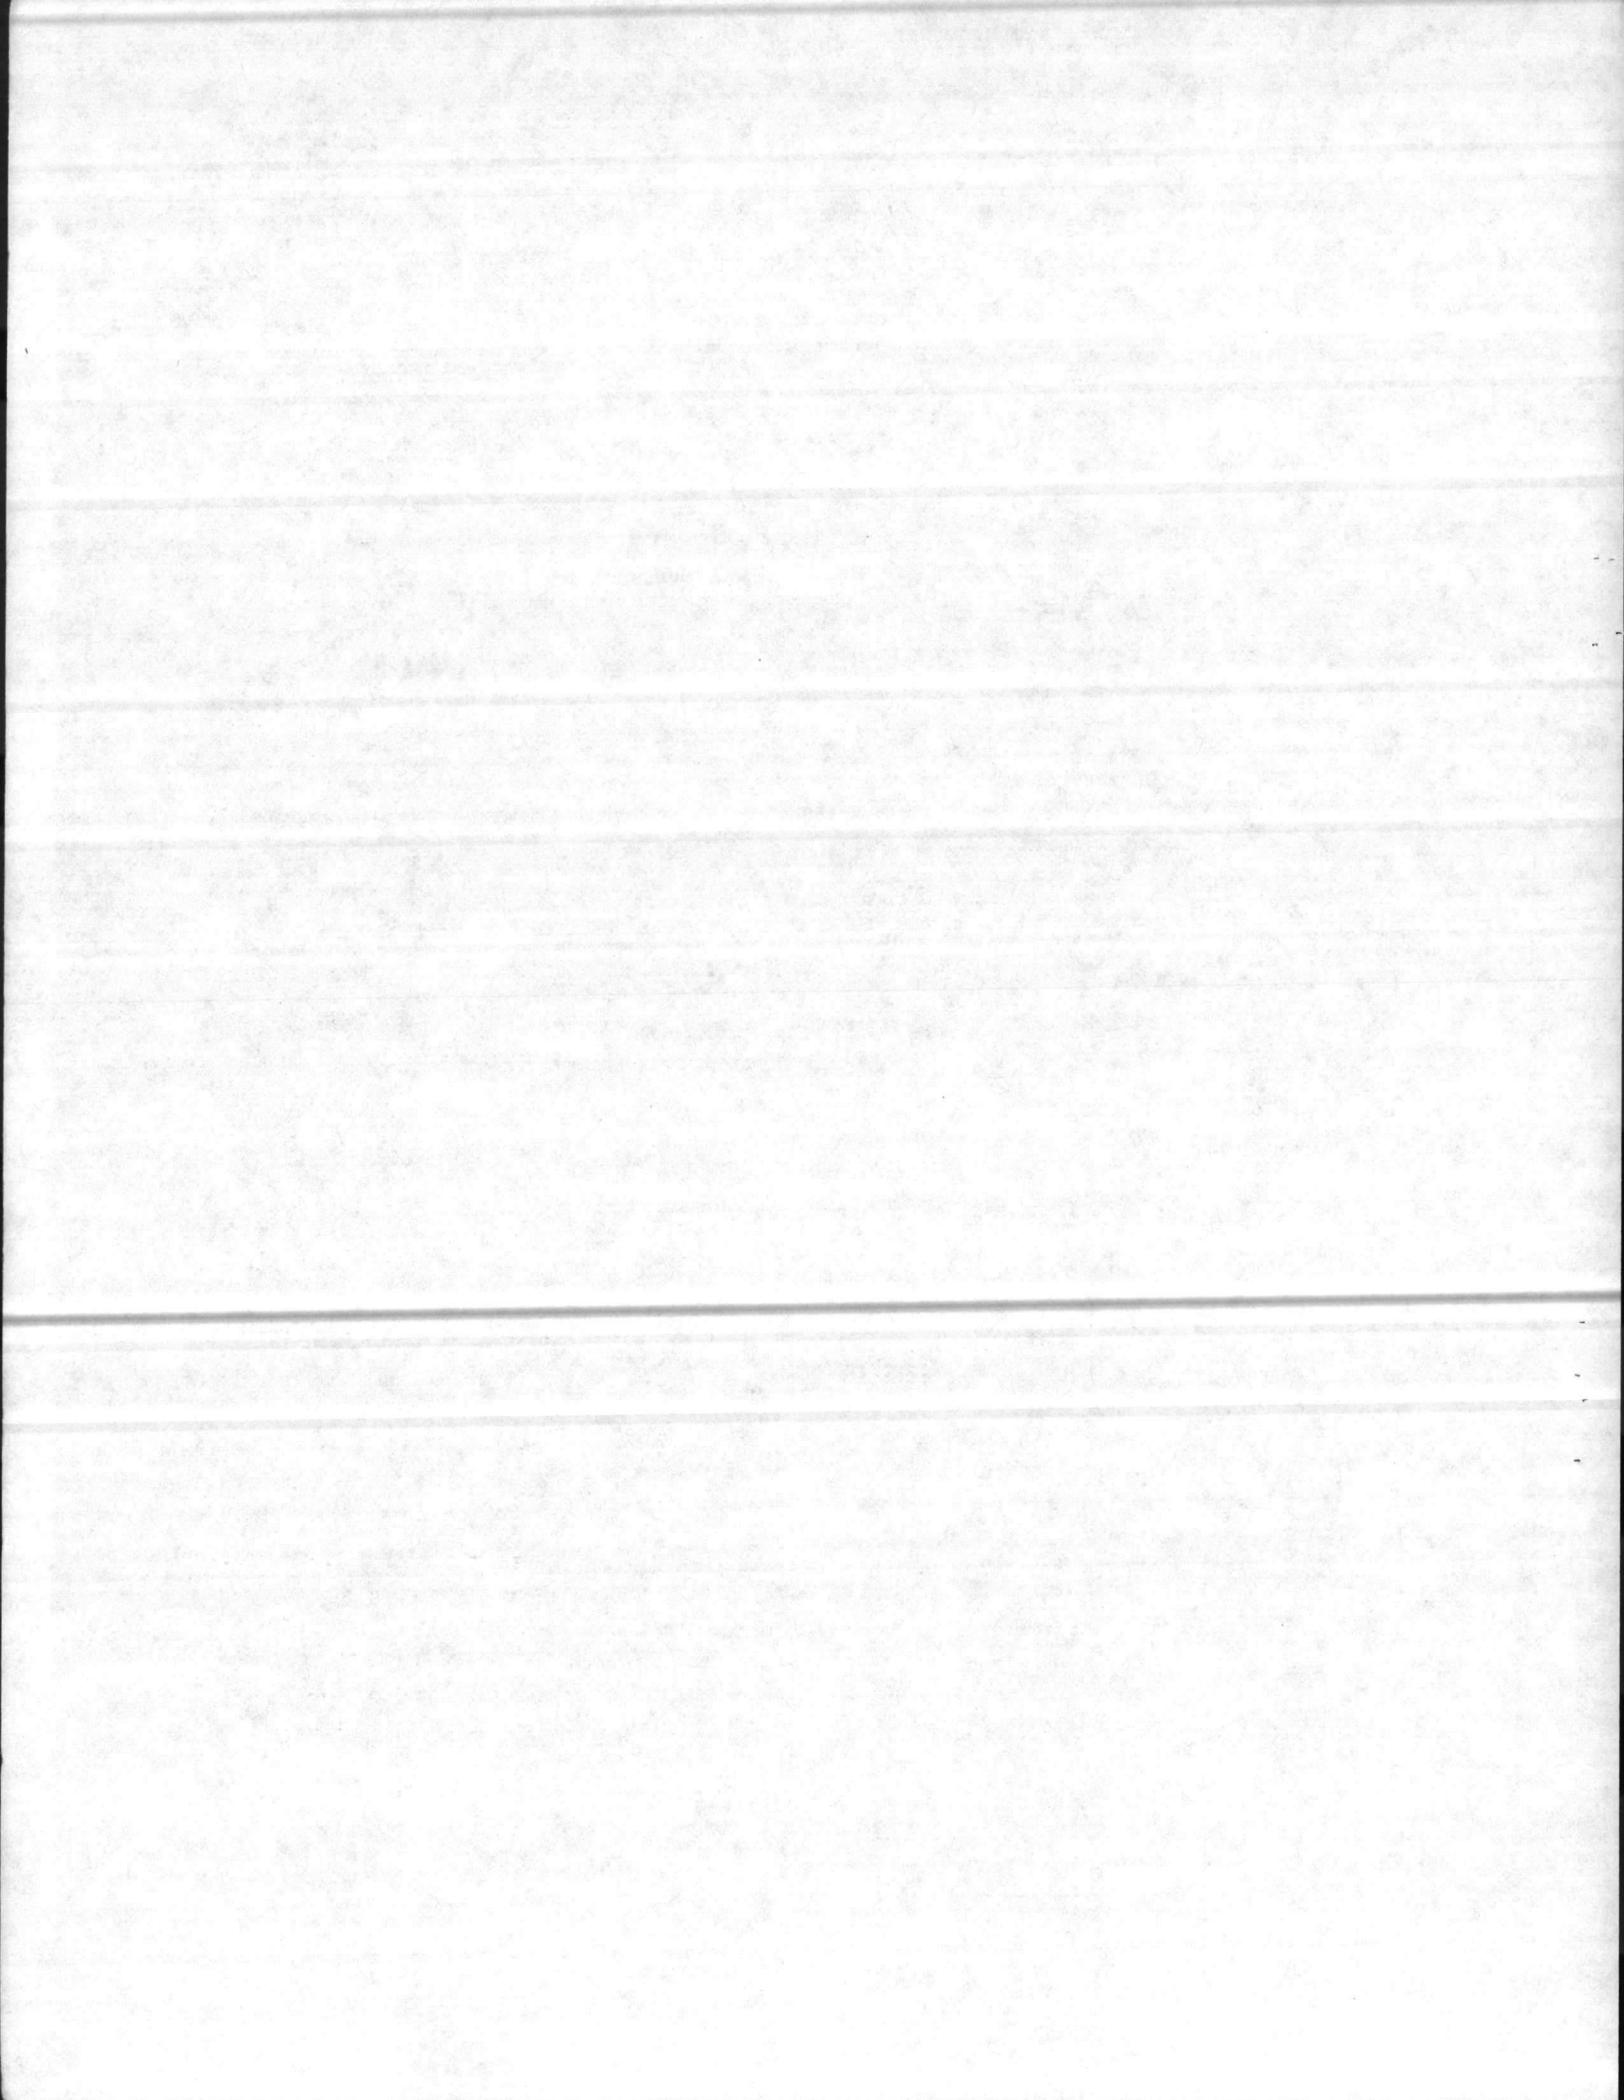

Treatment shall be in accordance with AWPB Book of Standards, Standard C25. Crossarm braces shall be EEI standard, steel of the type, size and span as indicated.

6.8.3 Hardware shall be of standard type manufactured for pole line construction. Miscellaneous steel hardware, including bolts, washers, locknuts, eye nuts, guy attachments, guy clamps, etc. shall conform to MIL-H-55053, shall be hot dip galvanized, and shall be capable of withstanding the maximum loading imposed thereon with the appropriate safety factors as specified by the National Electrical Safety Code for grade "B" construction in the medium Loading District.

6.8.4 Metal pins shall be zinc coated forged steel with lead thread height to suit the insulator provided, but not less than 4-1/2 inches high by 5/8 inch diameter. Shoulder shall be not less than 2 inch diameter, designed to distribute load uniformly to the crossarm. Shank shall be not less than 5/8 inch diameter by 5-3/4 inch length, equipped with 2 inch square washer, nut, and locknut, and shall project not less than 1/8 inch nor more than 2 inches beyond locknut. Zinc coated, broad base corner pins shall be used where indicated.

6.8.5 Insulators: Insulators for line wires having a potential of 600 volts or less shall be of porcelain or glass. Porcelain line insulators shall conform to ANSI Standards C29.2 to C29.7 inclusive, and shall be the type that will not cause interference to radio receiving equipment. Insulators for various uses shall have ratings not lower than the classes indicated in the following table:

Minimum rating of insulators in terms of class


<u>Service</u>	<u>Pin</u>	<u>Line post</u>	<u>Suspension</u>
5,000V. and below	55-3	-	52-2

Insulators for use on secondary distribution system shall conform to ANSI C29.3. For conductors smaller than No. 4/0, insulators shall not be smaller than class 53-2.

6.8.6 Storage and Handling of Poles: Poles held in storage for more than 2 weeks shall be stored in accordance with ANSI O5.1. The handling of poles shall be in accordance with ANSI O5.1, except that pointed tools capable of producing indentations more than 1 inch in depth shall not be used.

6.9 Ground Rods:

6.9.1 Copper Clad Steel Ground Rods: Rods shall be rolled to a commercially round shape from a welded copper clad steel manufactured by the molten-welding process or by the electro-formed process (molecularly bonded). They shall have an ultimate tensile strength of 75,000 pounds per square inch (psi) and an elastic limit of 49,000 psi. The rods shall be not less than 3/4 inch in diameter by 10 feet in length and shall have a hard, clean, smooth, continuous copper surface and the proportion of copper shall be uniform throughout the length of the rod.

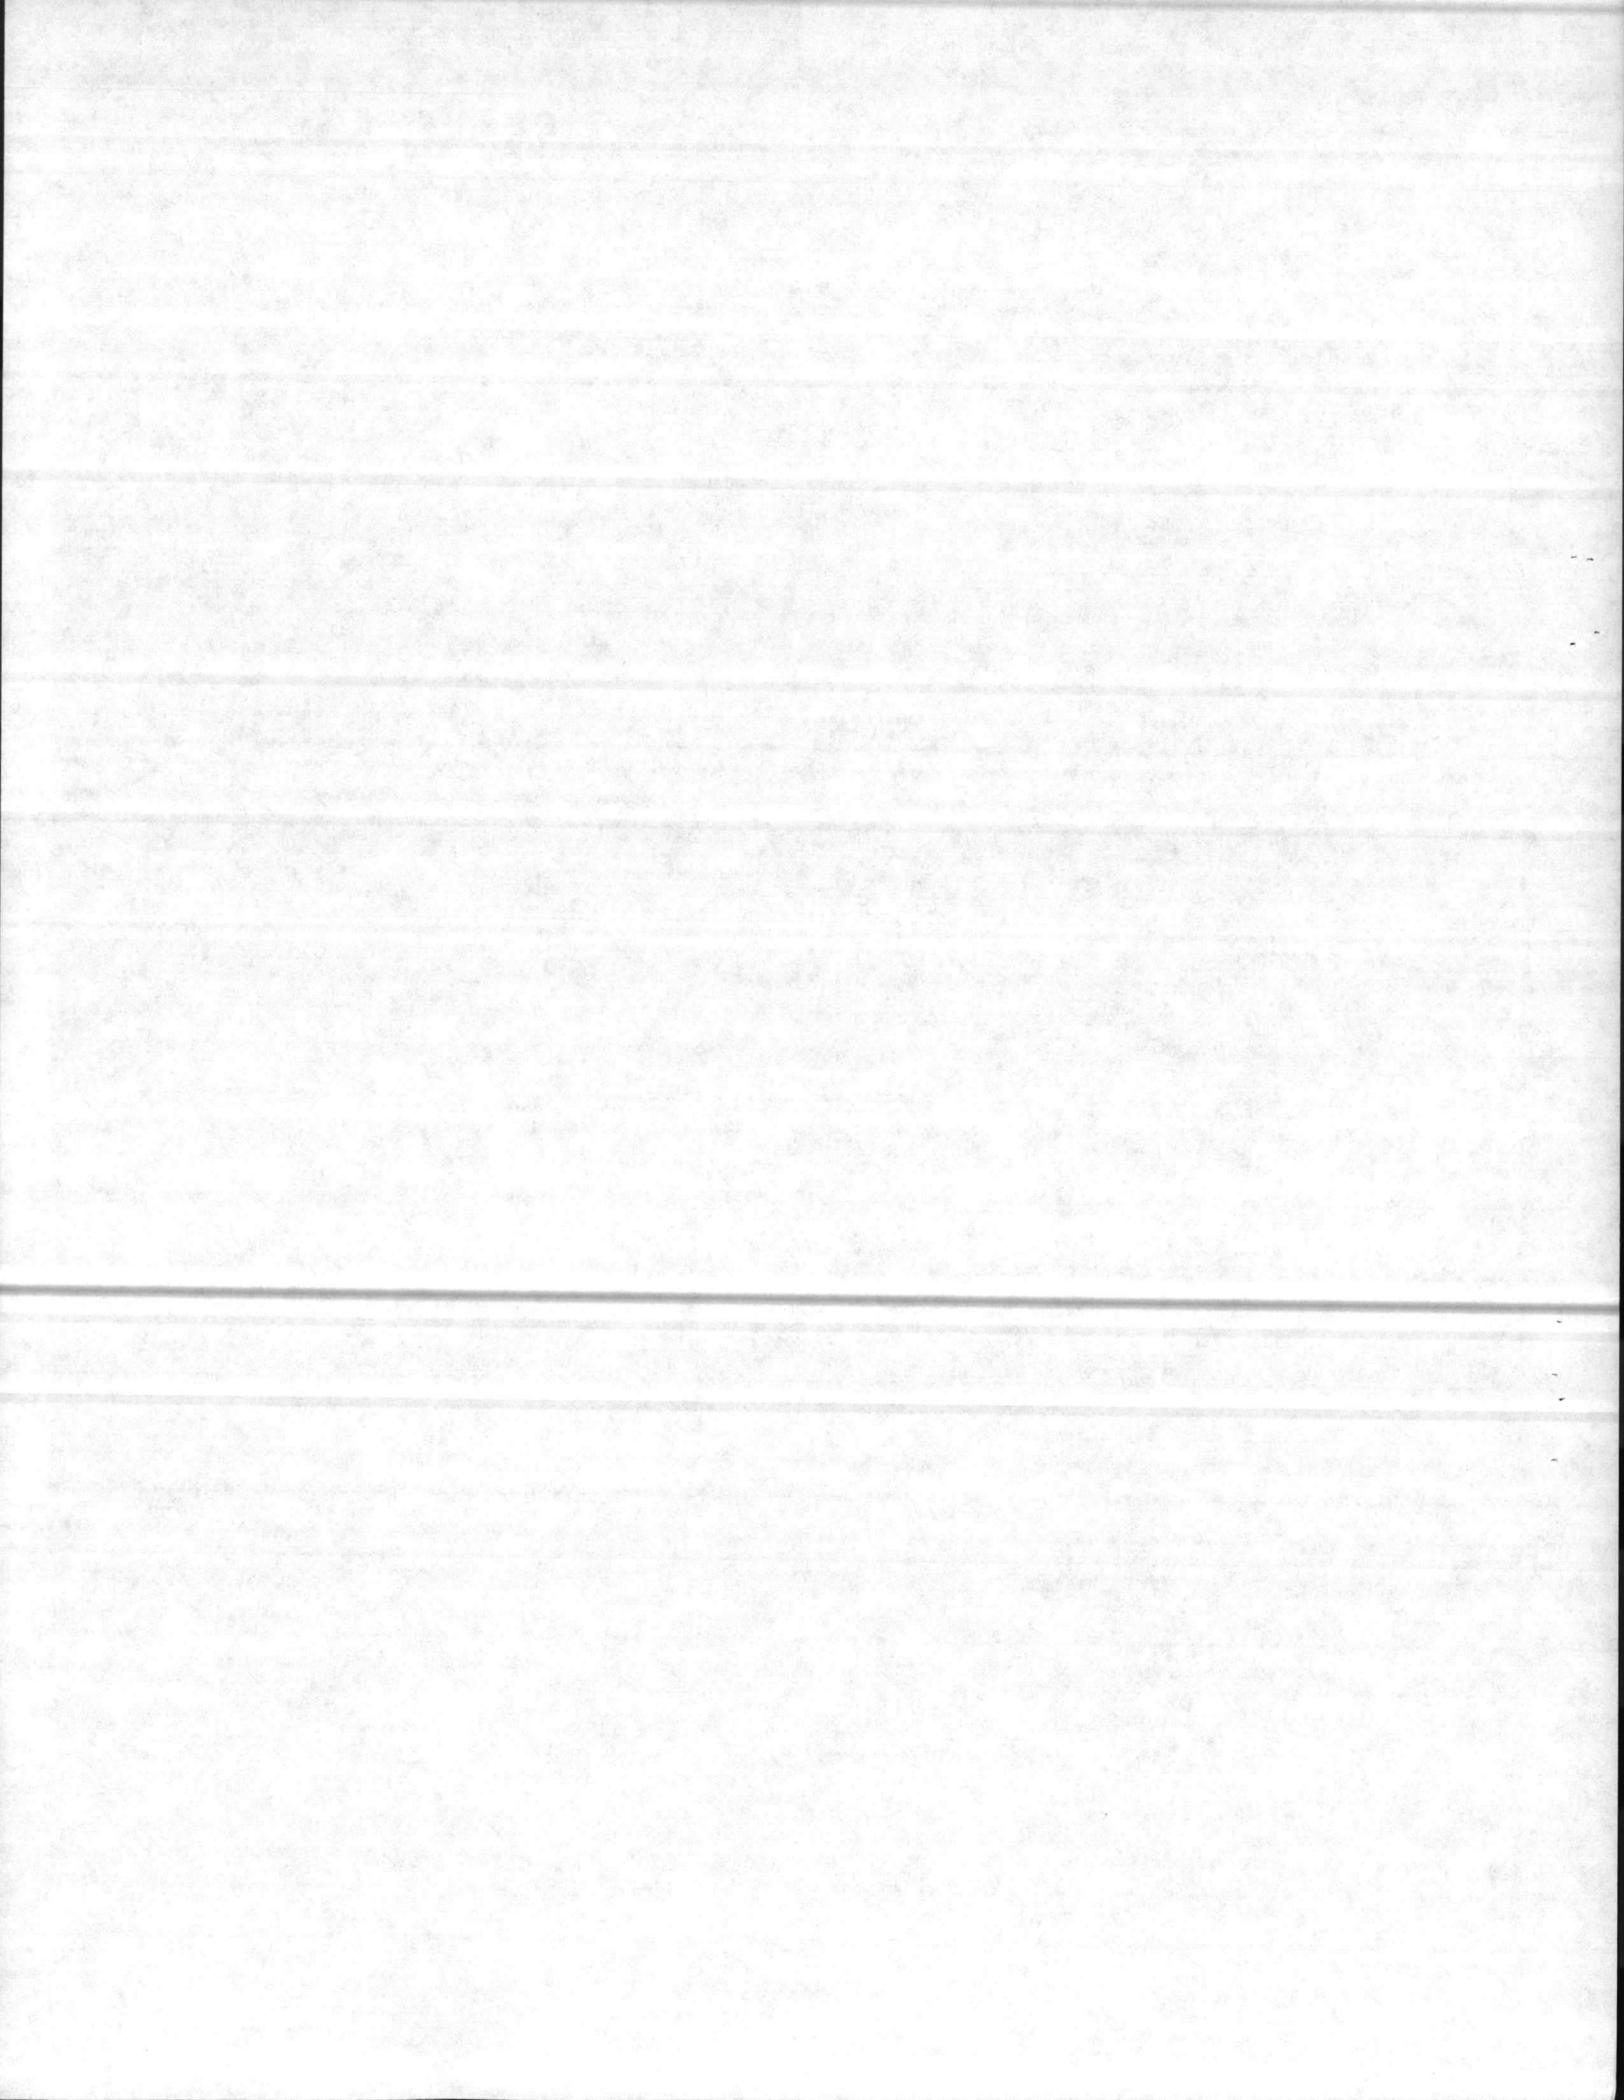

The copper shall have a minimum wall thickness of 0.013 inch at any point on the rod. Each ground rod shall be die-stamped near the top with the name or trademark of the manufacturer and the length of the rod in feet.

6.10 Lightning Arresters: Distribution valve type 600 volt arresters shall conform to NEMA LA-1, shall be designed for outdoor service, and shall be equipped with suitable mounting brackets for the applicable method of mounting.


6.11 Guys and Anchors:

6.11.1 Guy strand shall be high strength, 1/2 inch in diameter, 7 strand, electrolytic or hot-dip galvanized steel with a minimum breaking strength of 7400 pounds.

6.11.2 Anchors and anchor rods shall be hot-dip galvanized. Anchor rods shall be designed for attachment to the anchors with which they are to be used.

(1) Swamp type anchors shall be used where required by the Contracting Officer and shall be of equivalent rating to other specified anchors.

(2) Screw type anchors shall be 10 inches in diameter with a minimum rating by the manufacturer of not less than 7000 pounds in "loose-dry" soil. The rods for screw anchors shall be at least 8 feet long and 3/4 inch in diameter, with a thimble-eye for attachment of the guy cable.

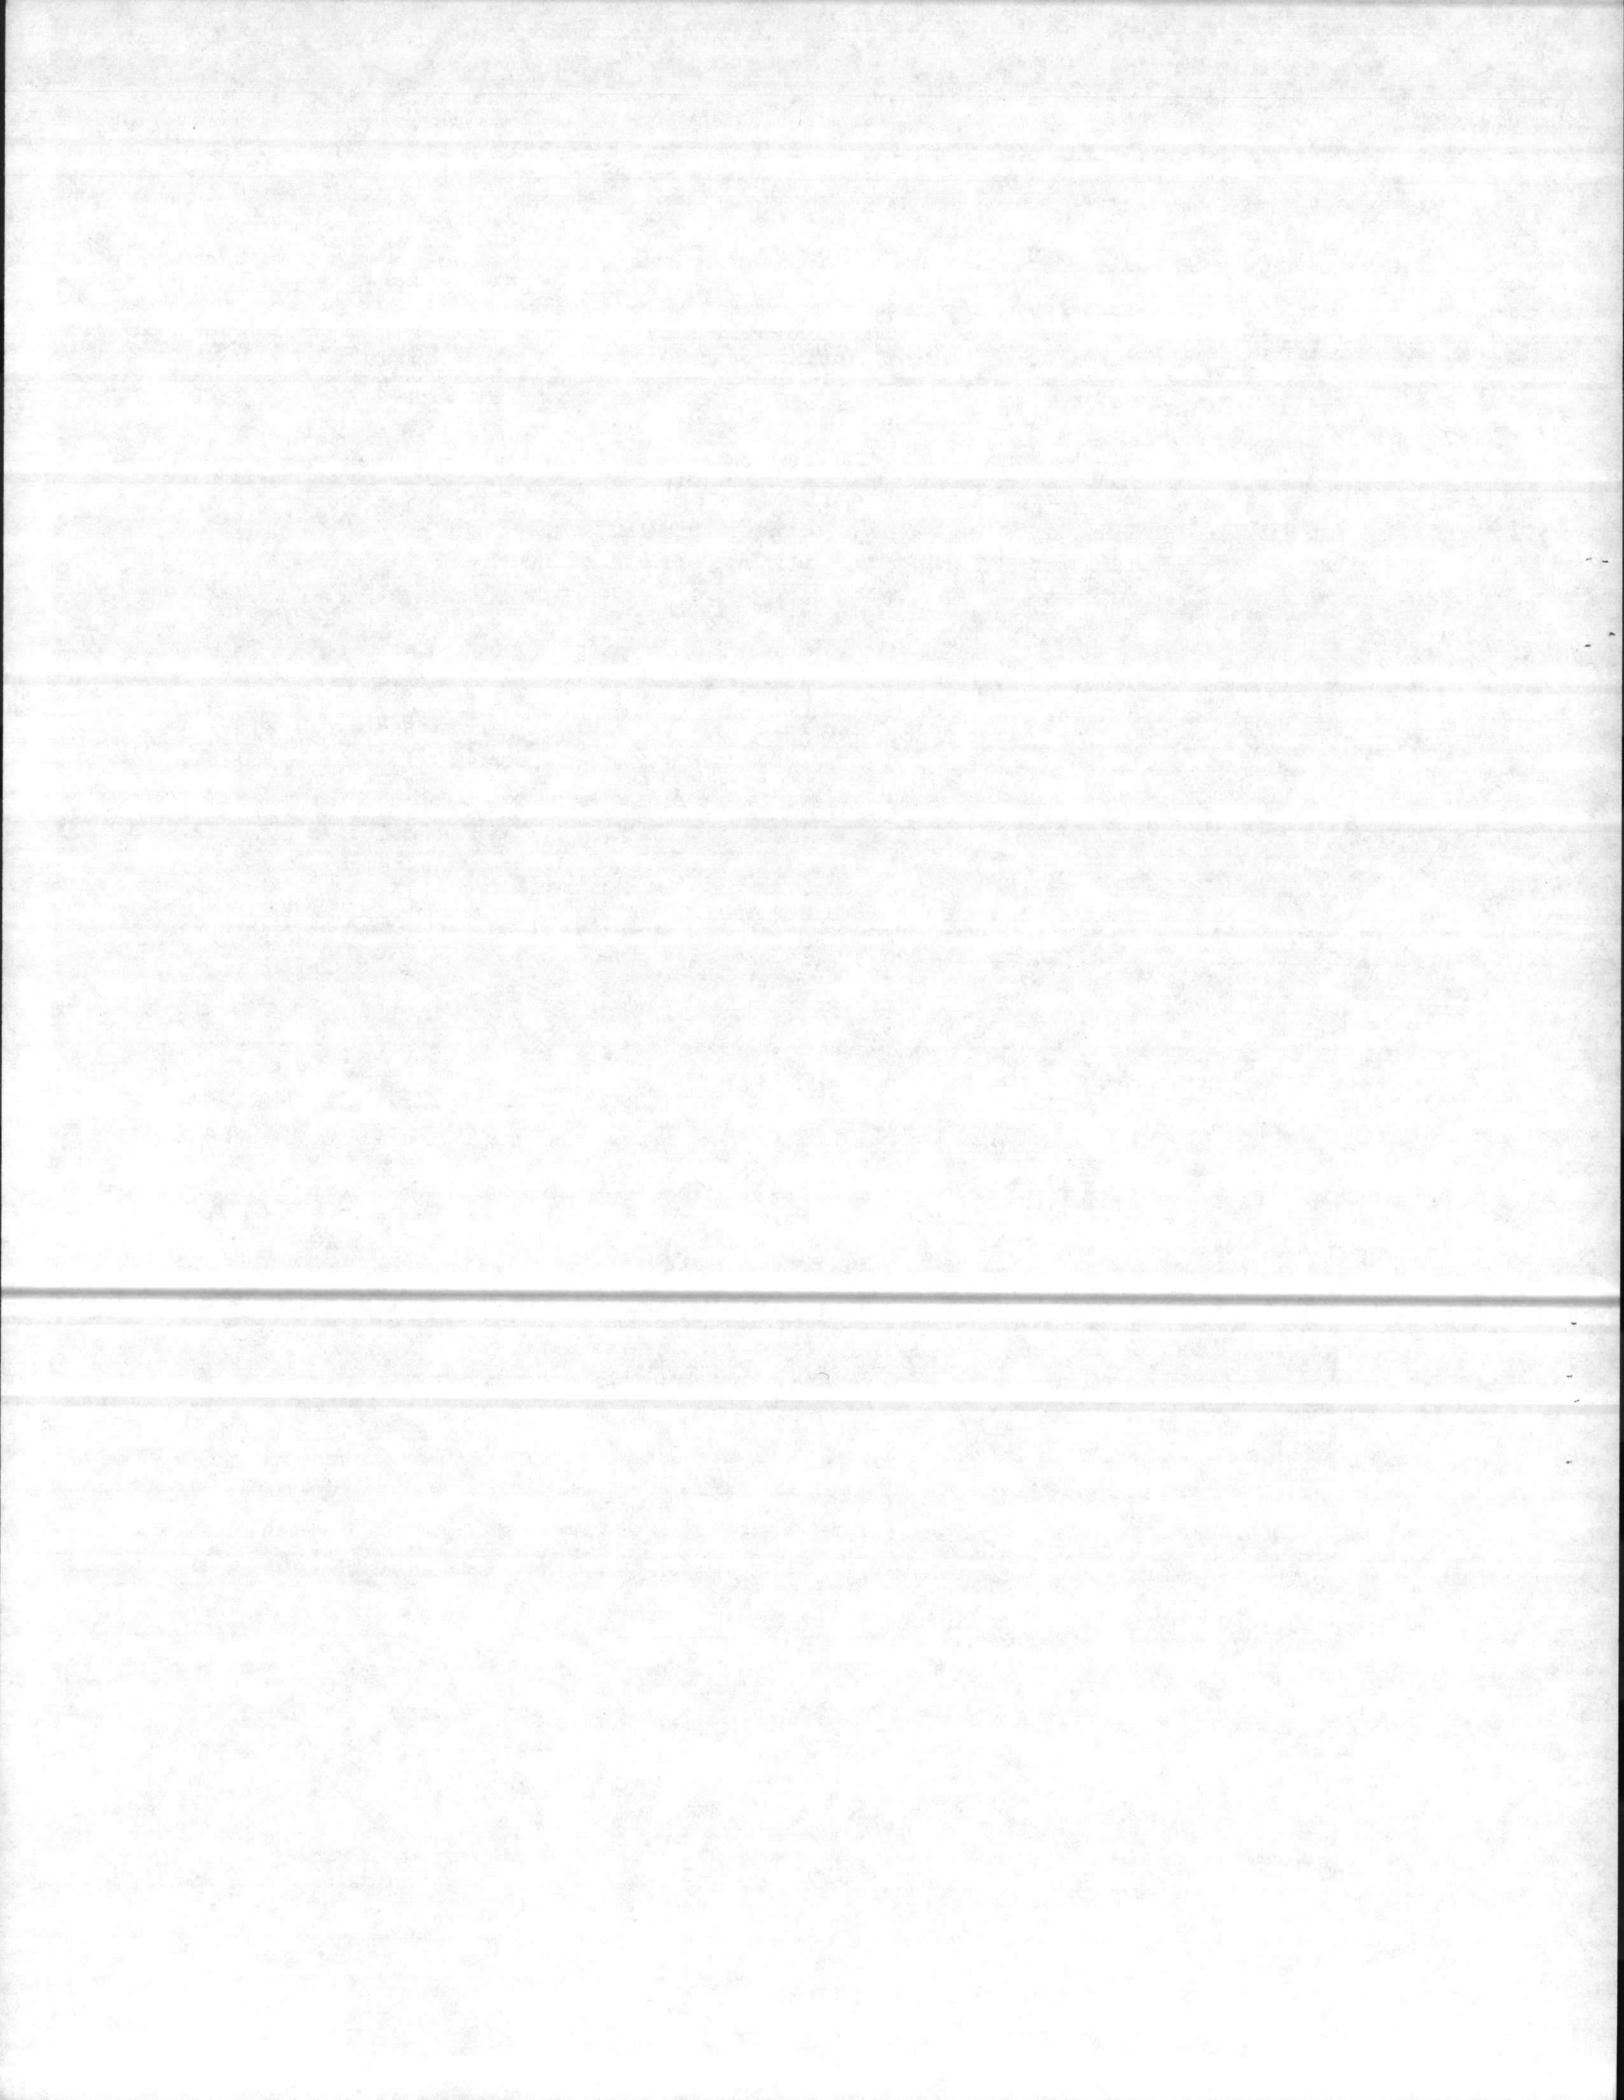


7. INSTALLATION:

7.1 General Requirements: Electrical installations shall conform to the National Electrical Safety Code, the National Electrical Code, and to the requirements specified herein.

7.2 Installation of Underground Systems:

7.2.1 Cables buried directly in earth: The cables shall be buried directly in earth in trenches, except that under railroad tracks, paved areas, and roadways the cables shall be installed in conduit. Ducts shall have adequate drainage. Trenches in which the cables are placed shall be excavated by hand or with mechanical trenching equipment, shall have a minimum depth of 24 inches below grade for under 600 volts, and 30 inches to the top of cables for over 600 volts, shall be not less than 6 inches wide, and shall be in straight lines between cable connections except as otherwise necessary. Cable plows shall be used only when specified. Bends in trenches shall have a radius of not less than 36 inches. Where two or more cables are laid parallel in the same trench, they shall be spaced laterally not less than 3 inches apart. When rock is encountered, it shall be removed to a depth of not less than 3 inches below the cables's depth and the space filled with sand or clean earth free from particles that would be retained on a 1/2-inch sieve. Cables shall be unreeled in place at the bottom of the trench; they shall not be unreeled and pulled into the trench from one end. Cables crossing other cables or metal piping shall be separated from the other cables or pipe by not less than 3 inches of well tamped earth. Bends in cables shall have an inner radius of not less than 12 times the cable diameter. Horizontal slack of approximately 3 feet shall be left in the ground on each end of cable runs, on each side of connection boxes, and at all points where connections are brought above ground. Where cable is brought above ground, additional slack shall be left to make necessary connections.

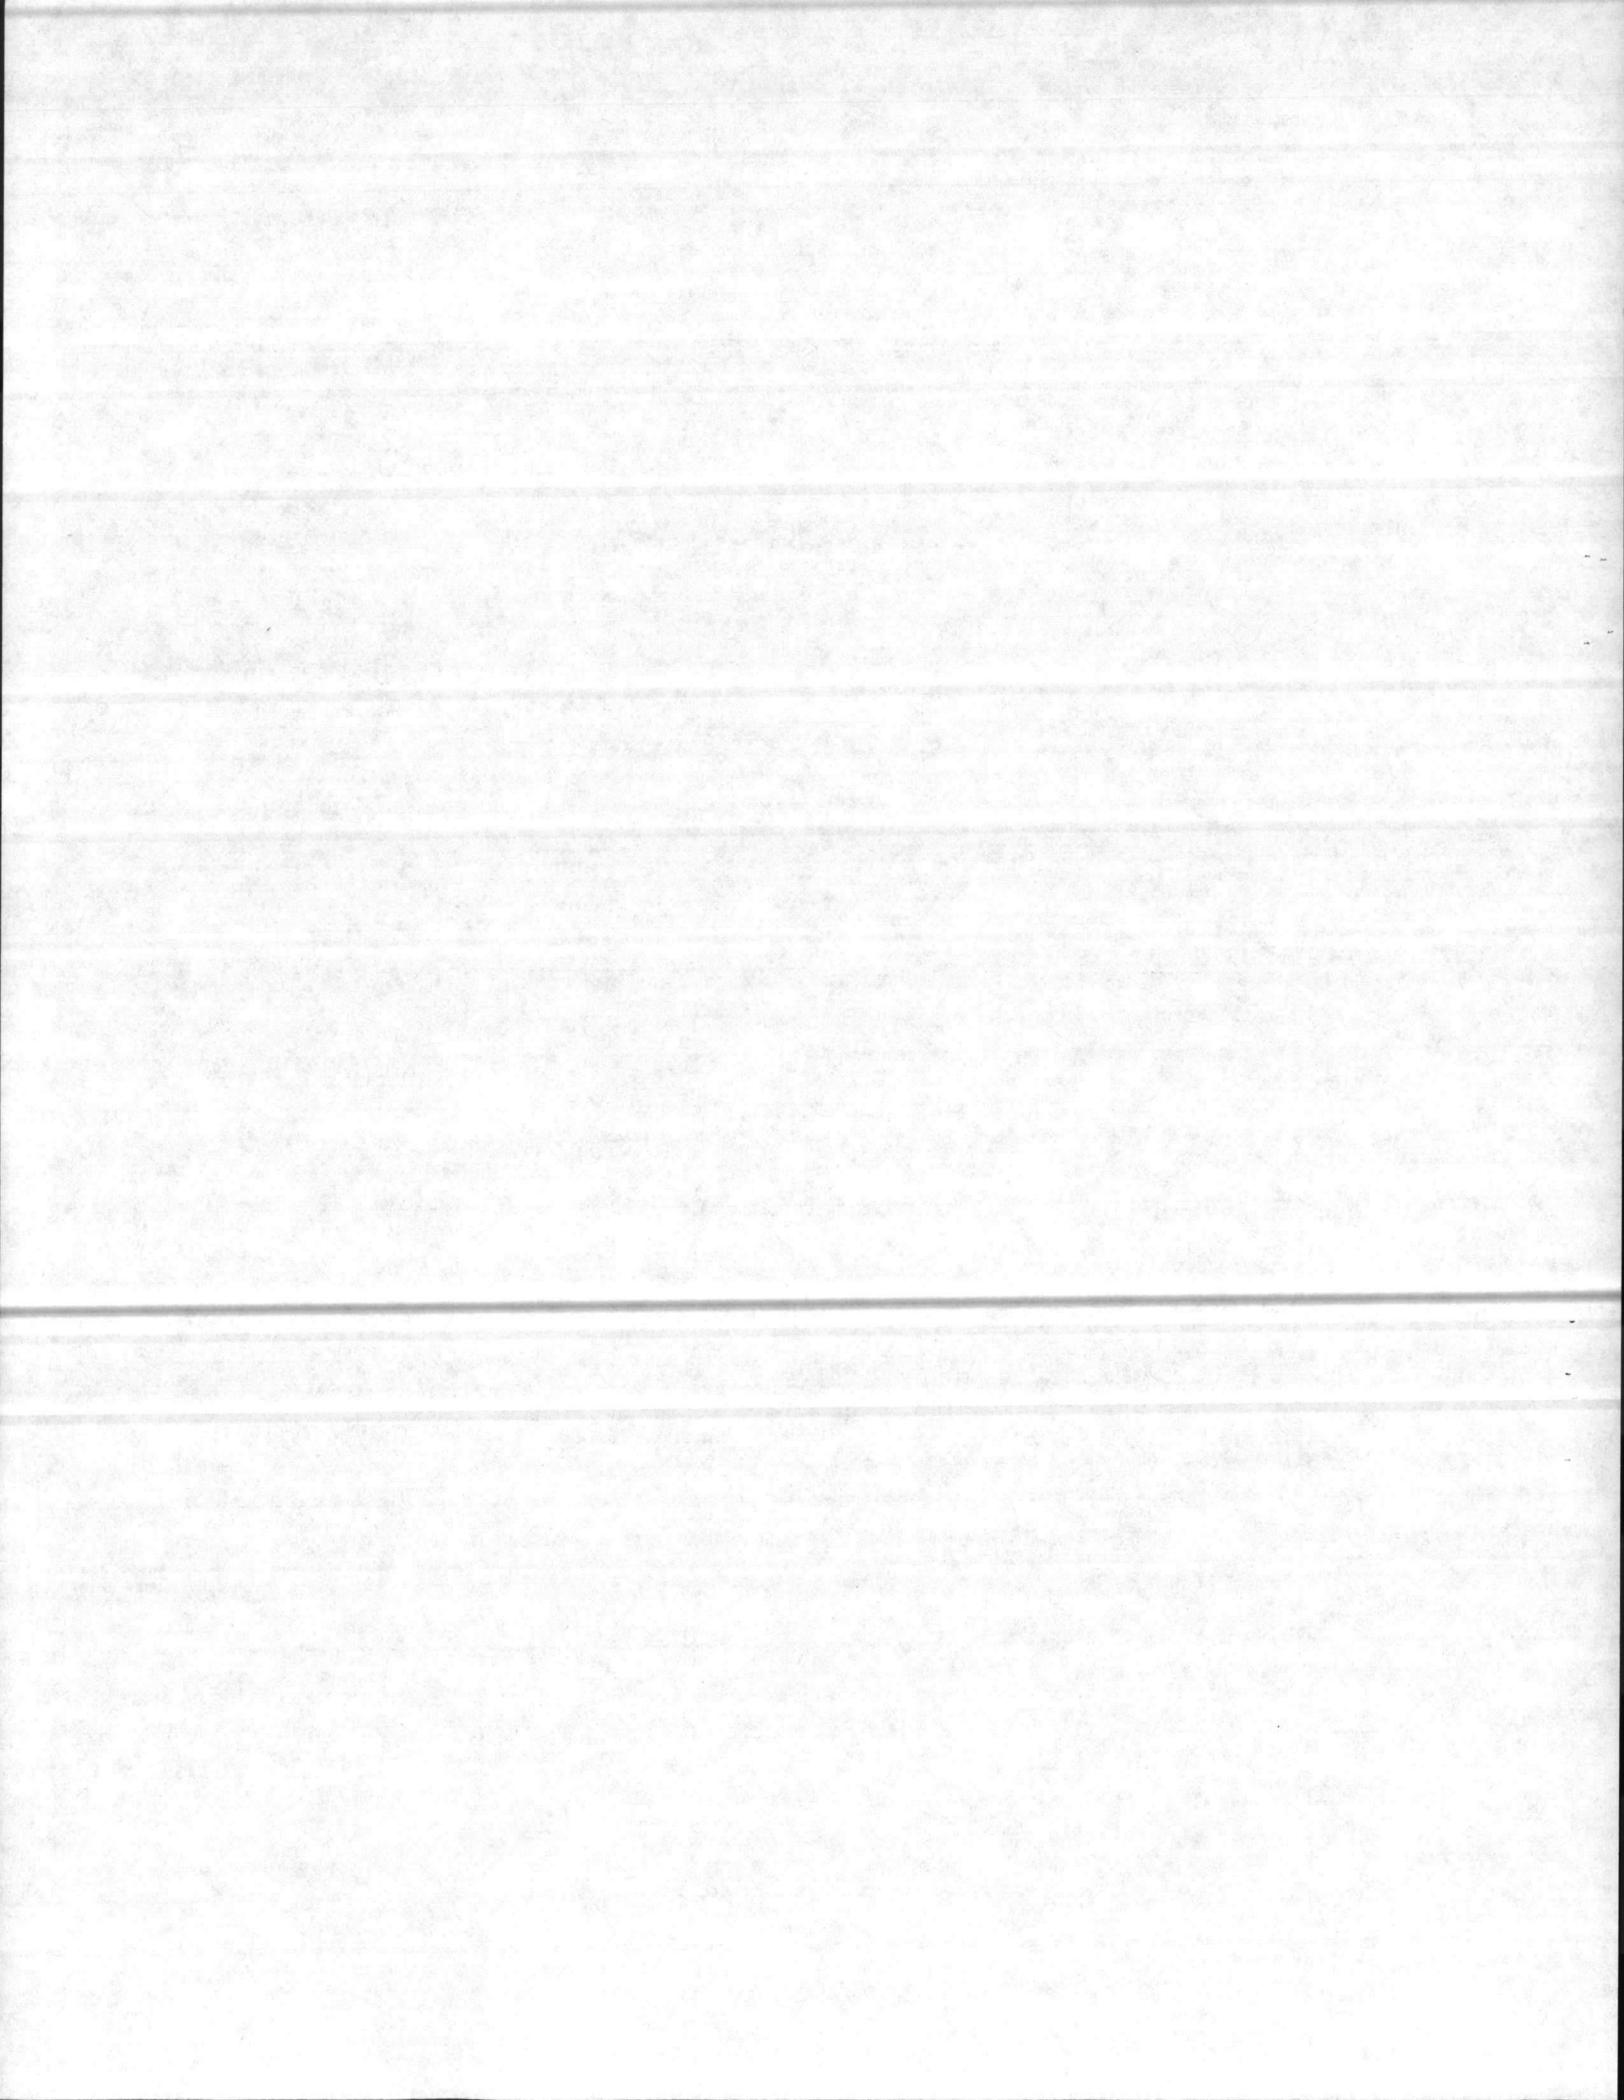

7.2.2 Soil poisoning of direct burial cable trenches:

(1) One of the following insecticides, prepared as an emulsion with water in the concentration indicated, shall be used for soil poisoning treatment of direct burial cable trenches:

- a. Aldrin, 0.5 percent
- b. Chlordane, 1.0 percent
- c. Dieldrin, 0.5 percent
- d. Heptachlor, 0.5 percent

(2) The soil poison treatment shall be applied in accordance with precautions on the insecticide label and in the following manner:


- a. The insecticide water emulsion shall be applied uniformly to the bottom of the trench, immediately prior to laying the cable, at a rate of one gallon per five linear feet of the trench.
- b. After laying the cable and overlaying with the first layer of earth or sand as hereinafter specified, apply the insecticide uniformly at a rate of 2 gallons per five linear feet of the trench prior to compacting the earth or sand. After the insecticide application fill the trench and recondition the surface as required.

7.2.3

THIS PARAGRAPH NOT USED

7.2.4 Underground Conduit for Service Feeders: Underground conduit for service feeders into buildings shall be rigid steel from the service equipment to a point five feet beyond the building and projections thereof and, when not extended beyond this point, the ends of the conduit shall be protected by threaded metal caps; the threads shall be coated with graphite grease or other suitable coating. The underground portion of the conduit shall be encased in a concrete envelope having a wall thickness of not less than three inches and shall be buried as specified for underground ducts encased in concrete. Conduit ends and turnups shall be sealed, to prevent moisture from entering, with calking compound as hereinbefore specified.

7.2.5 Underground Conduit Without Concrete Encasement: Where indicated, conduits shall be installed underground without concrete encasement. Conduits shall be rigid steel and shall be field coated with a coal tar base conforming to MIL-C-18480, 30 mils thick.

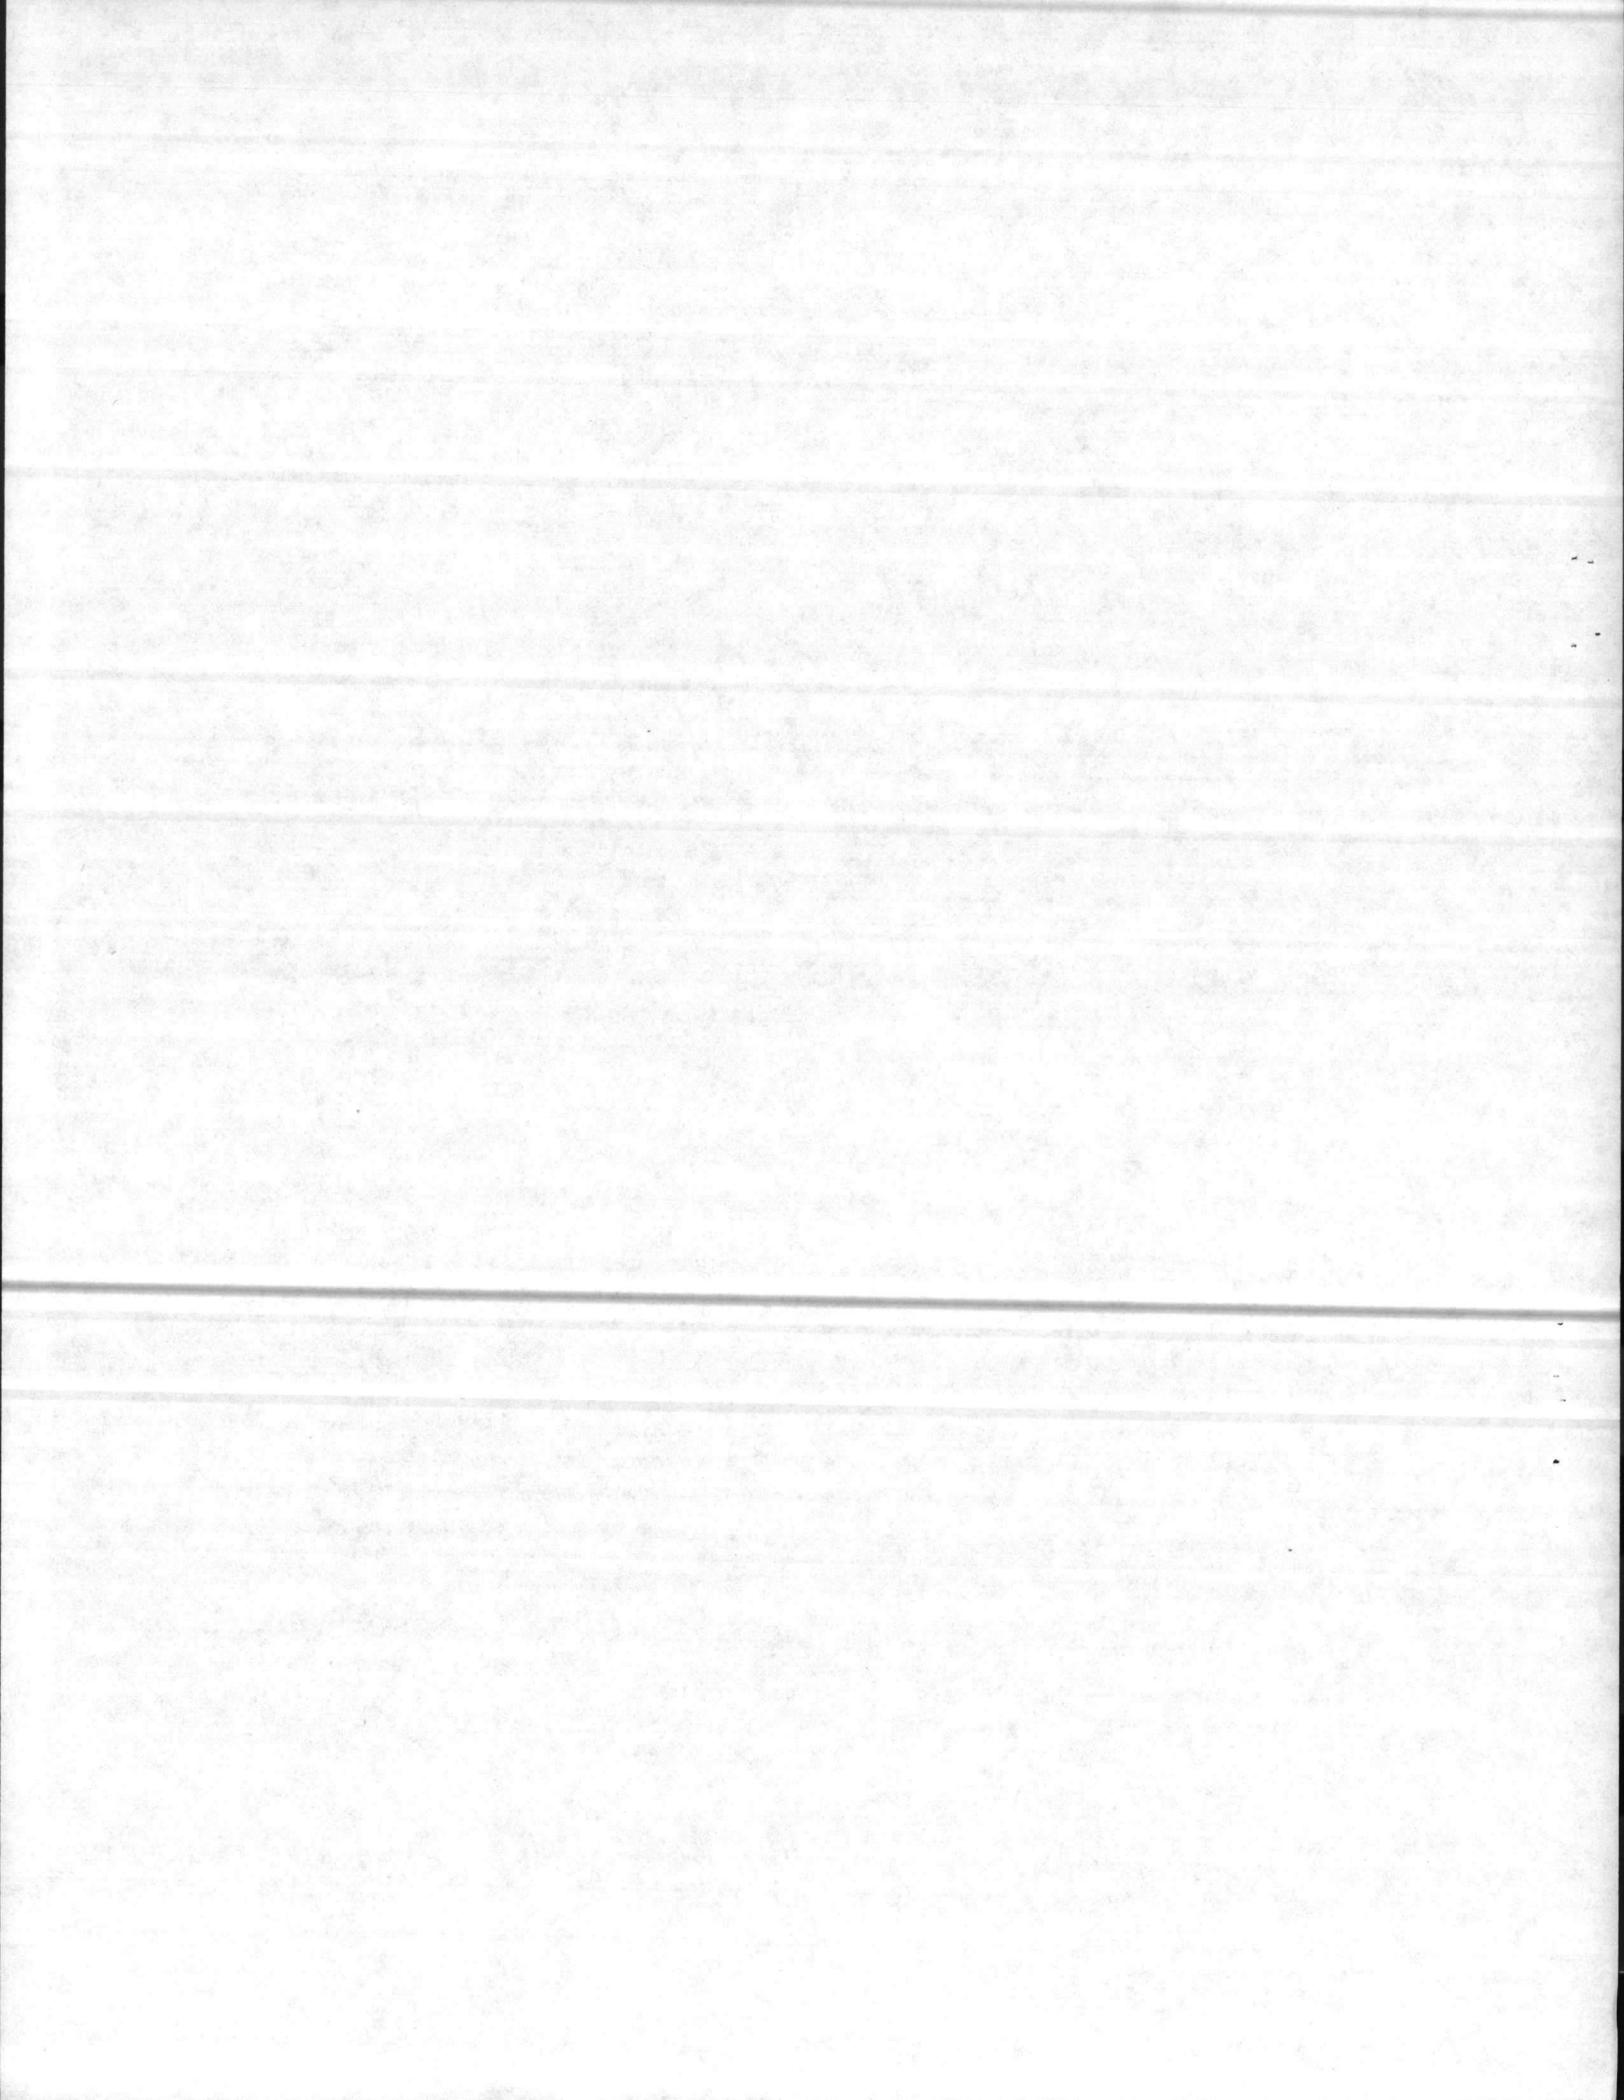


7.2.5.1 The top of conduits shall be not less than 24 inches below grade, and the conduit shall have a minimum slope of 3 inches in each 100 feet away from buildings and toward necessary drainage points, and shall run in straight lines except where a change of direction is necessary. Joints in conduit runs shall be staggered not less than 6 inches in rows and tiers. As each conduit run is completed, a testing mandrel not less than 12 inches long with a diameter 1/4 inch less than the inside diameter of the conduit shall be drawn through, after which a brush with stiff bristles shall be drawn through until the conduit is clear of all particles of earth, sand or gravel; conduit plugs shall then be immediately installed. There shall be not less than 3 inches clearance from the conduit to each side of the trench. The bottom of trenches shall be graded carefully and shall be smooth; where rock, soft spots, and/or sharp edged materials are encountered, the bottom shall be excavated for an additional 3 inches and filled and tamped level with the original bottom with sand or earth free from particles that would be retained on a 1/2-inch sieve.

7.2.6 Construction of Handholes:

7.2.6.1 Workmanship: Handholes shall be poured in place or may be of precast construction as specified hereinafter. Horizontal concrete surfaces of floors shall have a smooth trowel finish. Concrete shall be cured by applying 2 coats of white pigmented membrane forming-curing compound in strict accordance with the manufacturer's printed instructions, except that precast concrete may be steam cured. Curing compound shall conform to ASTM C309. Handholes shall be standard type 2 according to LANTDIV Underground plate NO. 3. Duct entrances and windows shall be located near the corners of handholes to facilitate cable racking. Covers shall fit the frames without undue play. Steel and iron shall be formed to shape and size with sharp lines and angles. Castings shall be free from warp and blow holes that may impair their strength or appearance. Exposed metal shall have a smooth finish and sharp lines and arrises. Provide all necessary lugs, rabbets and brackets. Set pulling-in irons and other built-in items in place before depositing concrete. The words "electric" and "telephone" shall be cast in the top face of all power and telephone manhole covers, respectively.

7.2.6.2 Optional precast concrete construction: In lieu of poured-in-place concrete handholes, the Contractor may, at his option, provide precast concrete structures, subject to the requirements specified below. Precast units shall be the product of a manufacturer regularly engaged in the manufacture of precast concrete products, including precast manholes.

(1) General: Precast concrete manholes and handholes shall have the same accessories and facilities as required for poured-in-place manholes and handholes. Likewise, they shall have plan area and clear heights not less than those of poured-in-place manholes and handholes. Concrete materials and methods of construction shall be the same as for poured-in-place concrete construction, as modified herein.

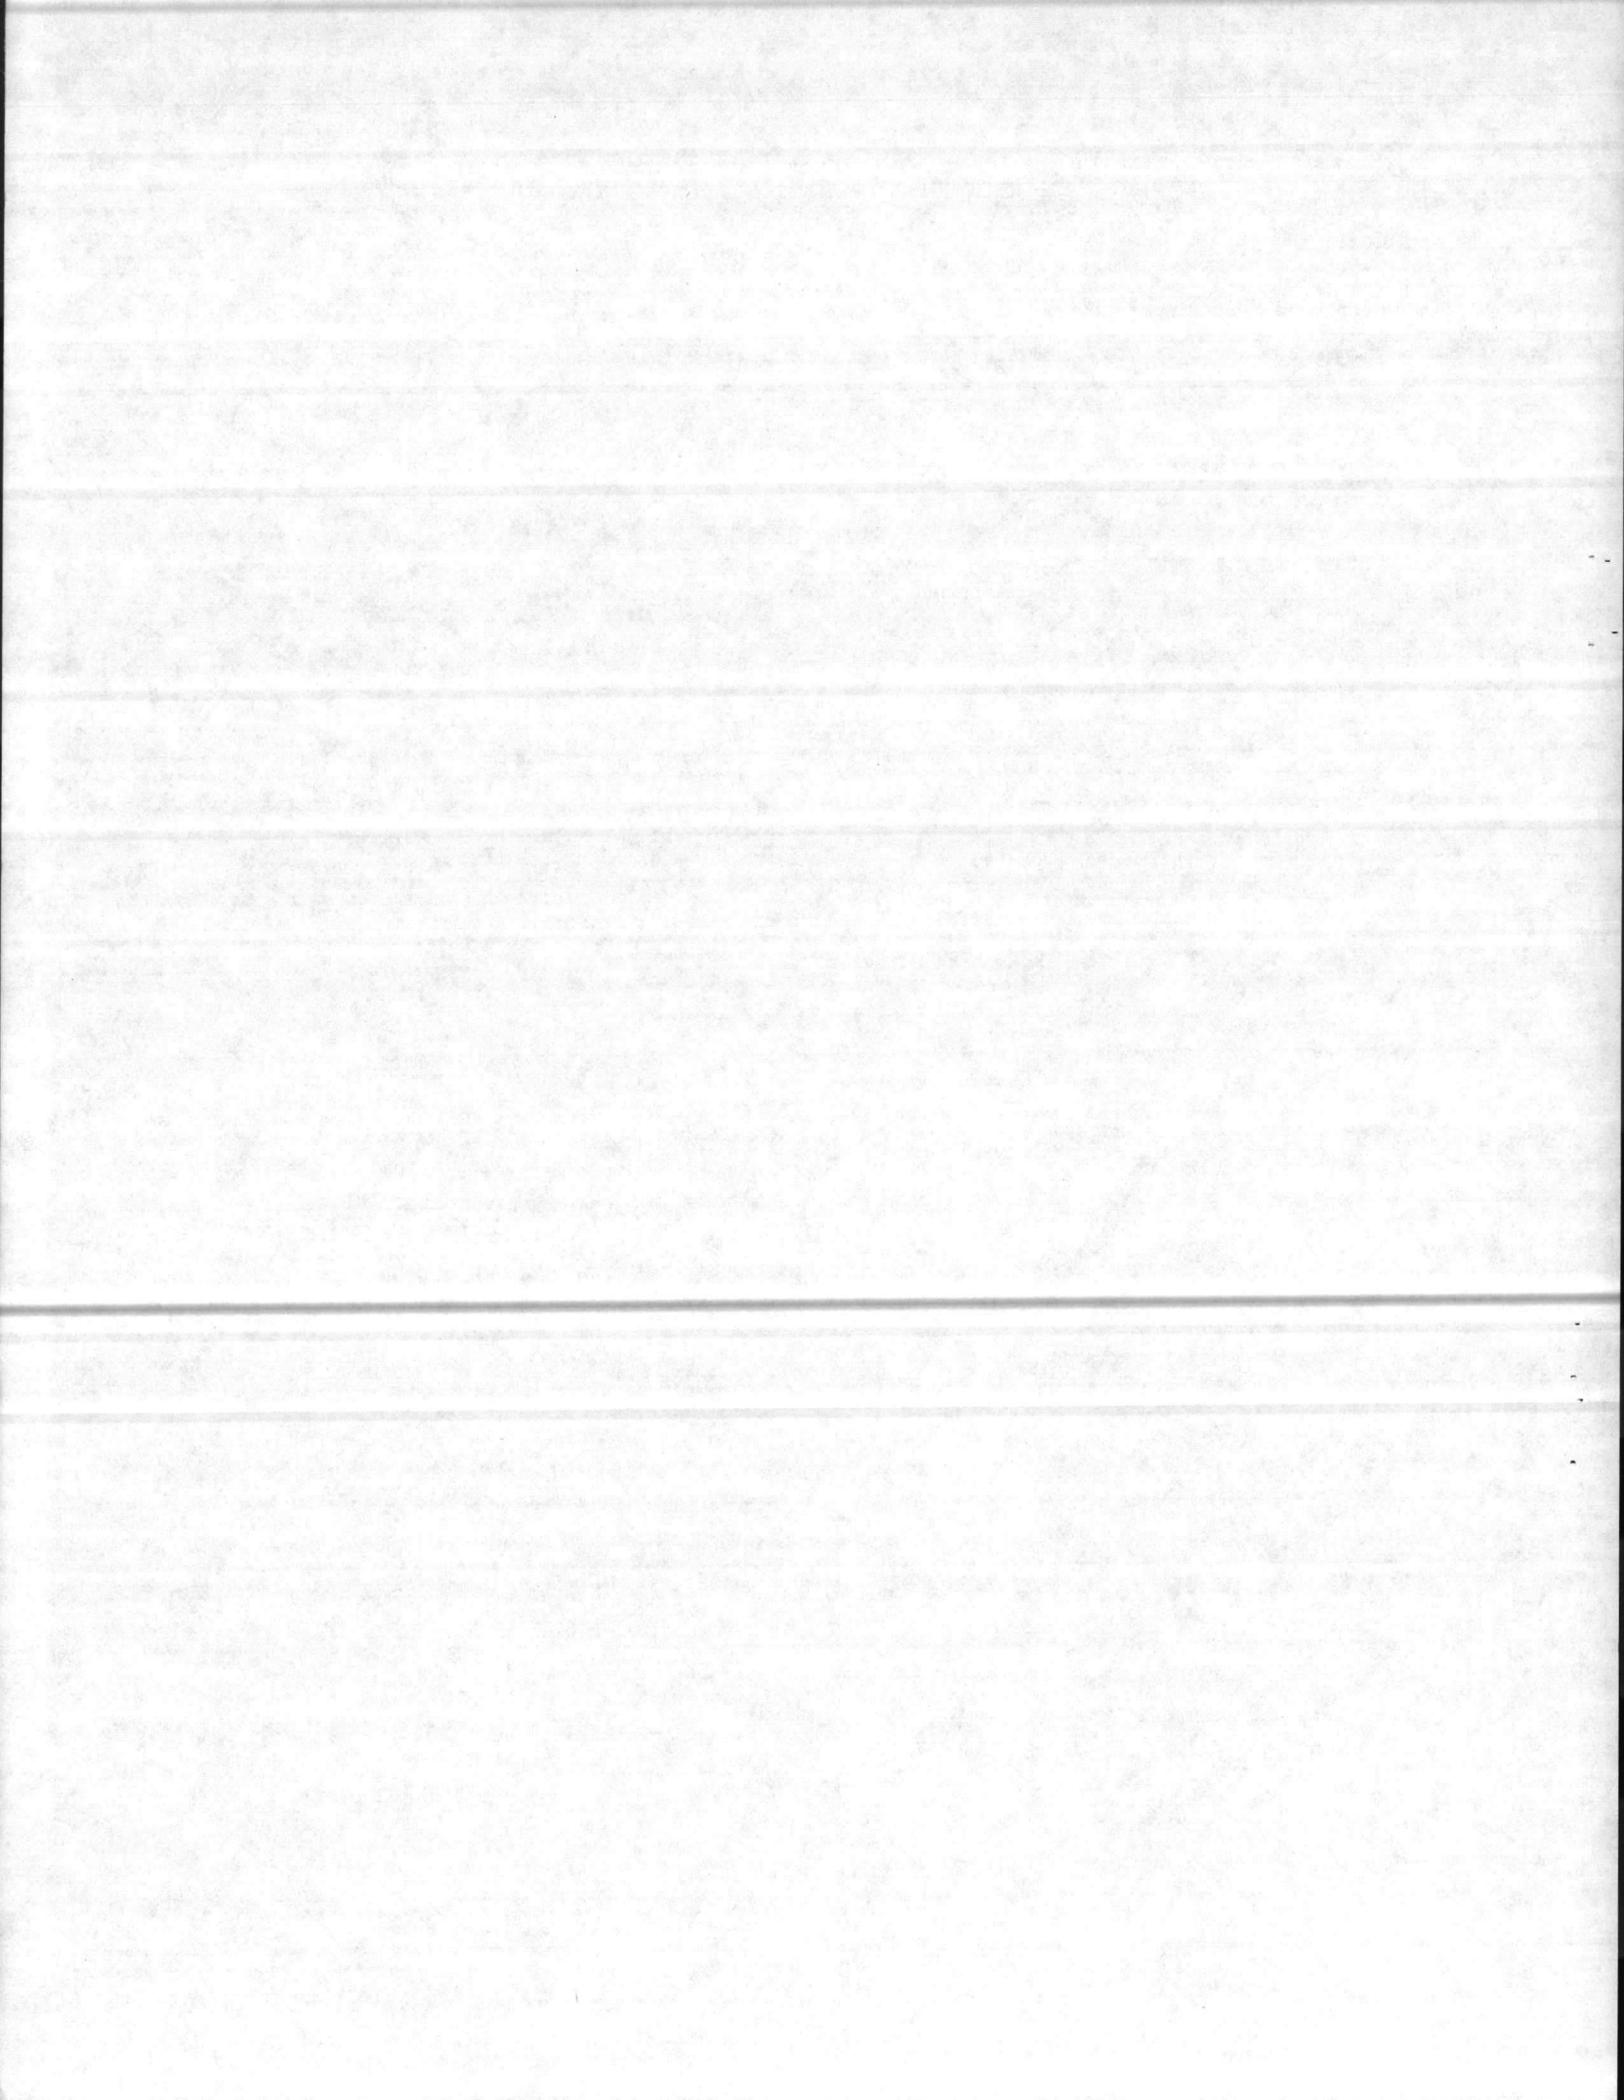


Concrete for precast work shall have an ultimate 28-day compressive strength of not less than 4000 pounds per square inch. Manholes and handholes may be precast to the design and details shown for poured-in-place construction, precast monolithically and placed as a unit; or, they may be of assembled sections, designed and produced by the manufacturer in accordance with the requirements specified. All structures shall be identified with the manufacturer's name embedded in, or otherwise permanently attached to, an interior wall face.

(2) Design for assembled units: Precast structures shall be designed in accordance with the AASHTO "Specifications for Highway Bridges"; concrete and reinforcing shall be designed in accordance with ACI Code 318. Tops and walls of structures shall be designed for AASHTO standard H20 highway loading, with 30 percent loading added for impact, and with design load being that which produces maximum shear and moment. All dead and live loads, as well as impact loading, shall be considered in design. Walls shall be designed to withstand all soil pressures, taking into consideration the soil to be encountered and ground water level present at the site, and assuming that the H20 design vehicle will operate on surfaces adjacent to the structure. Ground water level shall be assumed to be three feet below ground surface unless a higher water table is indicated in the boring logs. Design shall also take into consideration stresses induced in handling units. Lifting devices shall be provided for properly handling units. Calculations and shop drawings shall be submitted covering the design and manufacture of precast units, and shall bear the seal of a registered professional engineer.

(3) Joints: Mating edges of precast components shall be provided with tongue and grooved joints. Joints shall be designed to firmly interlock adjoining components and to provide waterproof junctions. Joints shall be sealed watertight using preformed plastic strip conforming to SS-S-00210. Sealing material shall be installed in strict accordance with the sealant manufacturer's printed instructions. Provisions shall be made for waterproofing cable entrances into structures, and at manhole covers in the top slab.

(4) Installation: Assembly and installation of precast components shall follow the printed instructions and recommendations of the manufacturer of the units. Precast manholes and handholes shall be installed on a level bed of well-compacted gravel or crushed stone, well-graded from the one-inch sieve to the No. 4 sieve. Drain sumps shall be provided for precast structures as required for poured-in-place structures.

7.2.6.3 Earth Work: Excavation for manholes and handholes shall be to depths indicated and of whatever substance encountered. Excavated materials not required or suitable for backfill shall be removed from the project site. Provide sheeting and shoring as necessary for protection of work and safety of personnel. Remove water from excavation by pumping

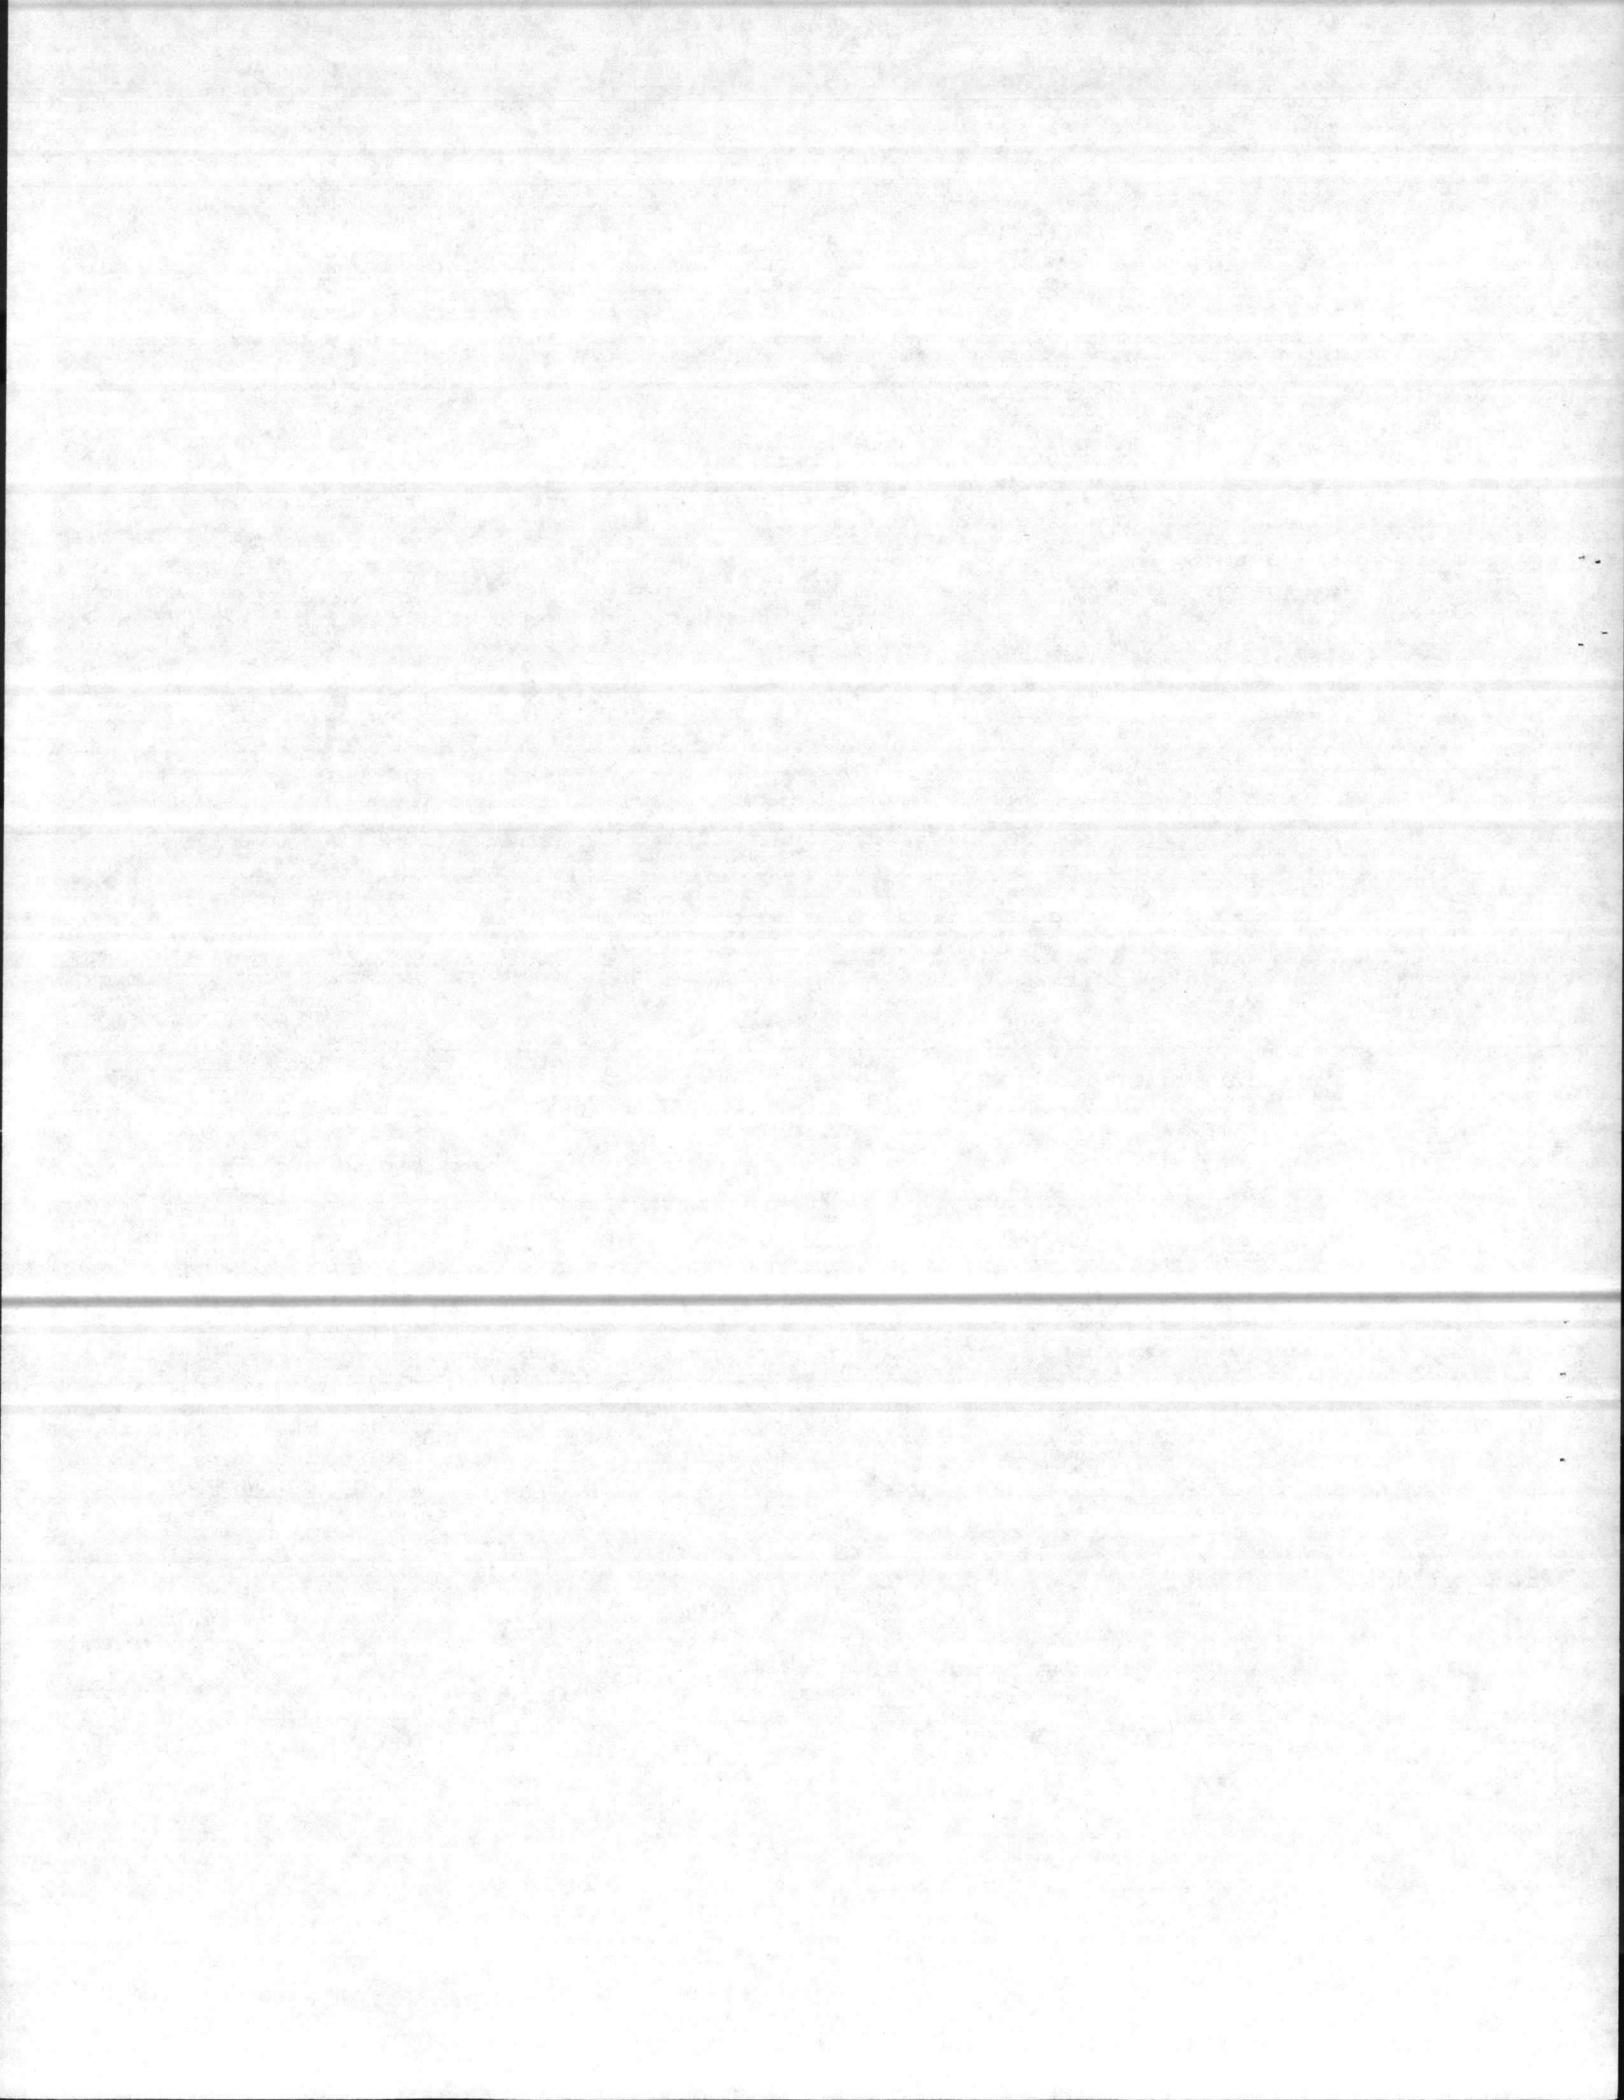


or other approved method. Backfilling around structures shall consist of earth, loam, sand-clay, or sand and gravel, free from large clods of earth or stones over 1-inch in size. Approved backfill materials shall be placed symmetrically on all sides in loose layers not more than 9-inches deep. Each layer shall be moistened, if necessary, and compacted with mechanical or hand tampers.

7.2.6.4 Field Painting: After installation, cast-iron frames, covers and gratings not buried in masonry shall be cleaned to the bare metal of mortar, rust, grease, dirt and other deleterious materials and given a coat of bituminous paint. Steel frames not buried in masonry and steel covers shall be cleaned of mortar, dirt and grease by an approved blasting process. Surfaces that cannot be cleaned satisfactorily by blasting shall be cleaned to bare metal by wire brushing or other mechanical means. Surfaces contaminated with rust, dirt, oil, grease, or other contaminants shall be washed with solvents until thoroughly clean. Immediately after cleaning, surfaces shall be coated with a coat of pretreatment coating conforming to Specification MIL-P-15328 or be given a crystalline phosphate coating conforming to Specification TT-C-490, Method I. As soon as practicable after the pretreatment coating has dried, treated surfaces shall be primed with a coat of zinc chromate primer conforming to Specification TT-P-645 and one coat of synthetic gloss enamel conforming to Specification TT-E-489.

7.2.7 Fireproofing of Cables in Manholes, Handholes and Vaults: All wire and cables which will carry current at 2200 volts and above in manholes, handholes, and vaults shall be fireproofed (arc-proofed) as hereinafter specified herein. Lead-sheathed or other metallic-sheathed or metallic armored cables without a nonmetallic protective covering over the sheath or armor shall be tape-wrapped prior to application of the fireproofing (arc-proofing). The wrap shall be in the form of two tightly applied half-lapped layers of a pressure-sensitive 10-mil thick plastic tape and shall extend not less than 1 inch into the ducts. Irregularities of the cable, such as at splices, shall be evened out with insulation putty.

(1) Procedure: Strips of fireproofing (arc-proofing) tape approximately 1/16 inch thick by 3 inches wide shall be wrapped tightly around each cable spirally in one half-lapped wrapping, or in two butt-jointed wrappings with the second wrapping covering the joints in the first. The tape shall be applied with the coated side toward the cable and shall extend one inch into the ducts. To prevent unraveling, the fireproofing (arc-proofing) tape shall be random wrapped with tape conforming to type GFT of Specification MIL-I-15126. The fireproofing (arc-proofing) tape shall consist of a flexible, conformable fabric having one side coated with a flame retardant, flexible, polymeric coating and/or a chlorinated elastomer. The tape shall be not less than 0.050 inch thick and shall weigh not less than 2.5 pounds per square yard. The tape shall be noncorrosive to cable sheath, shall be self-extinguishing, and shall not support combustion. The tape shall not

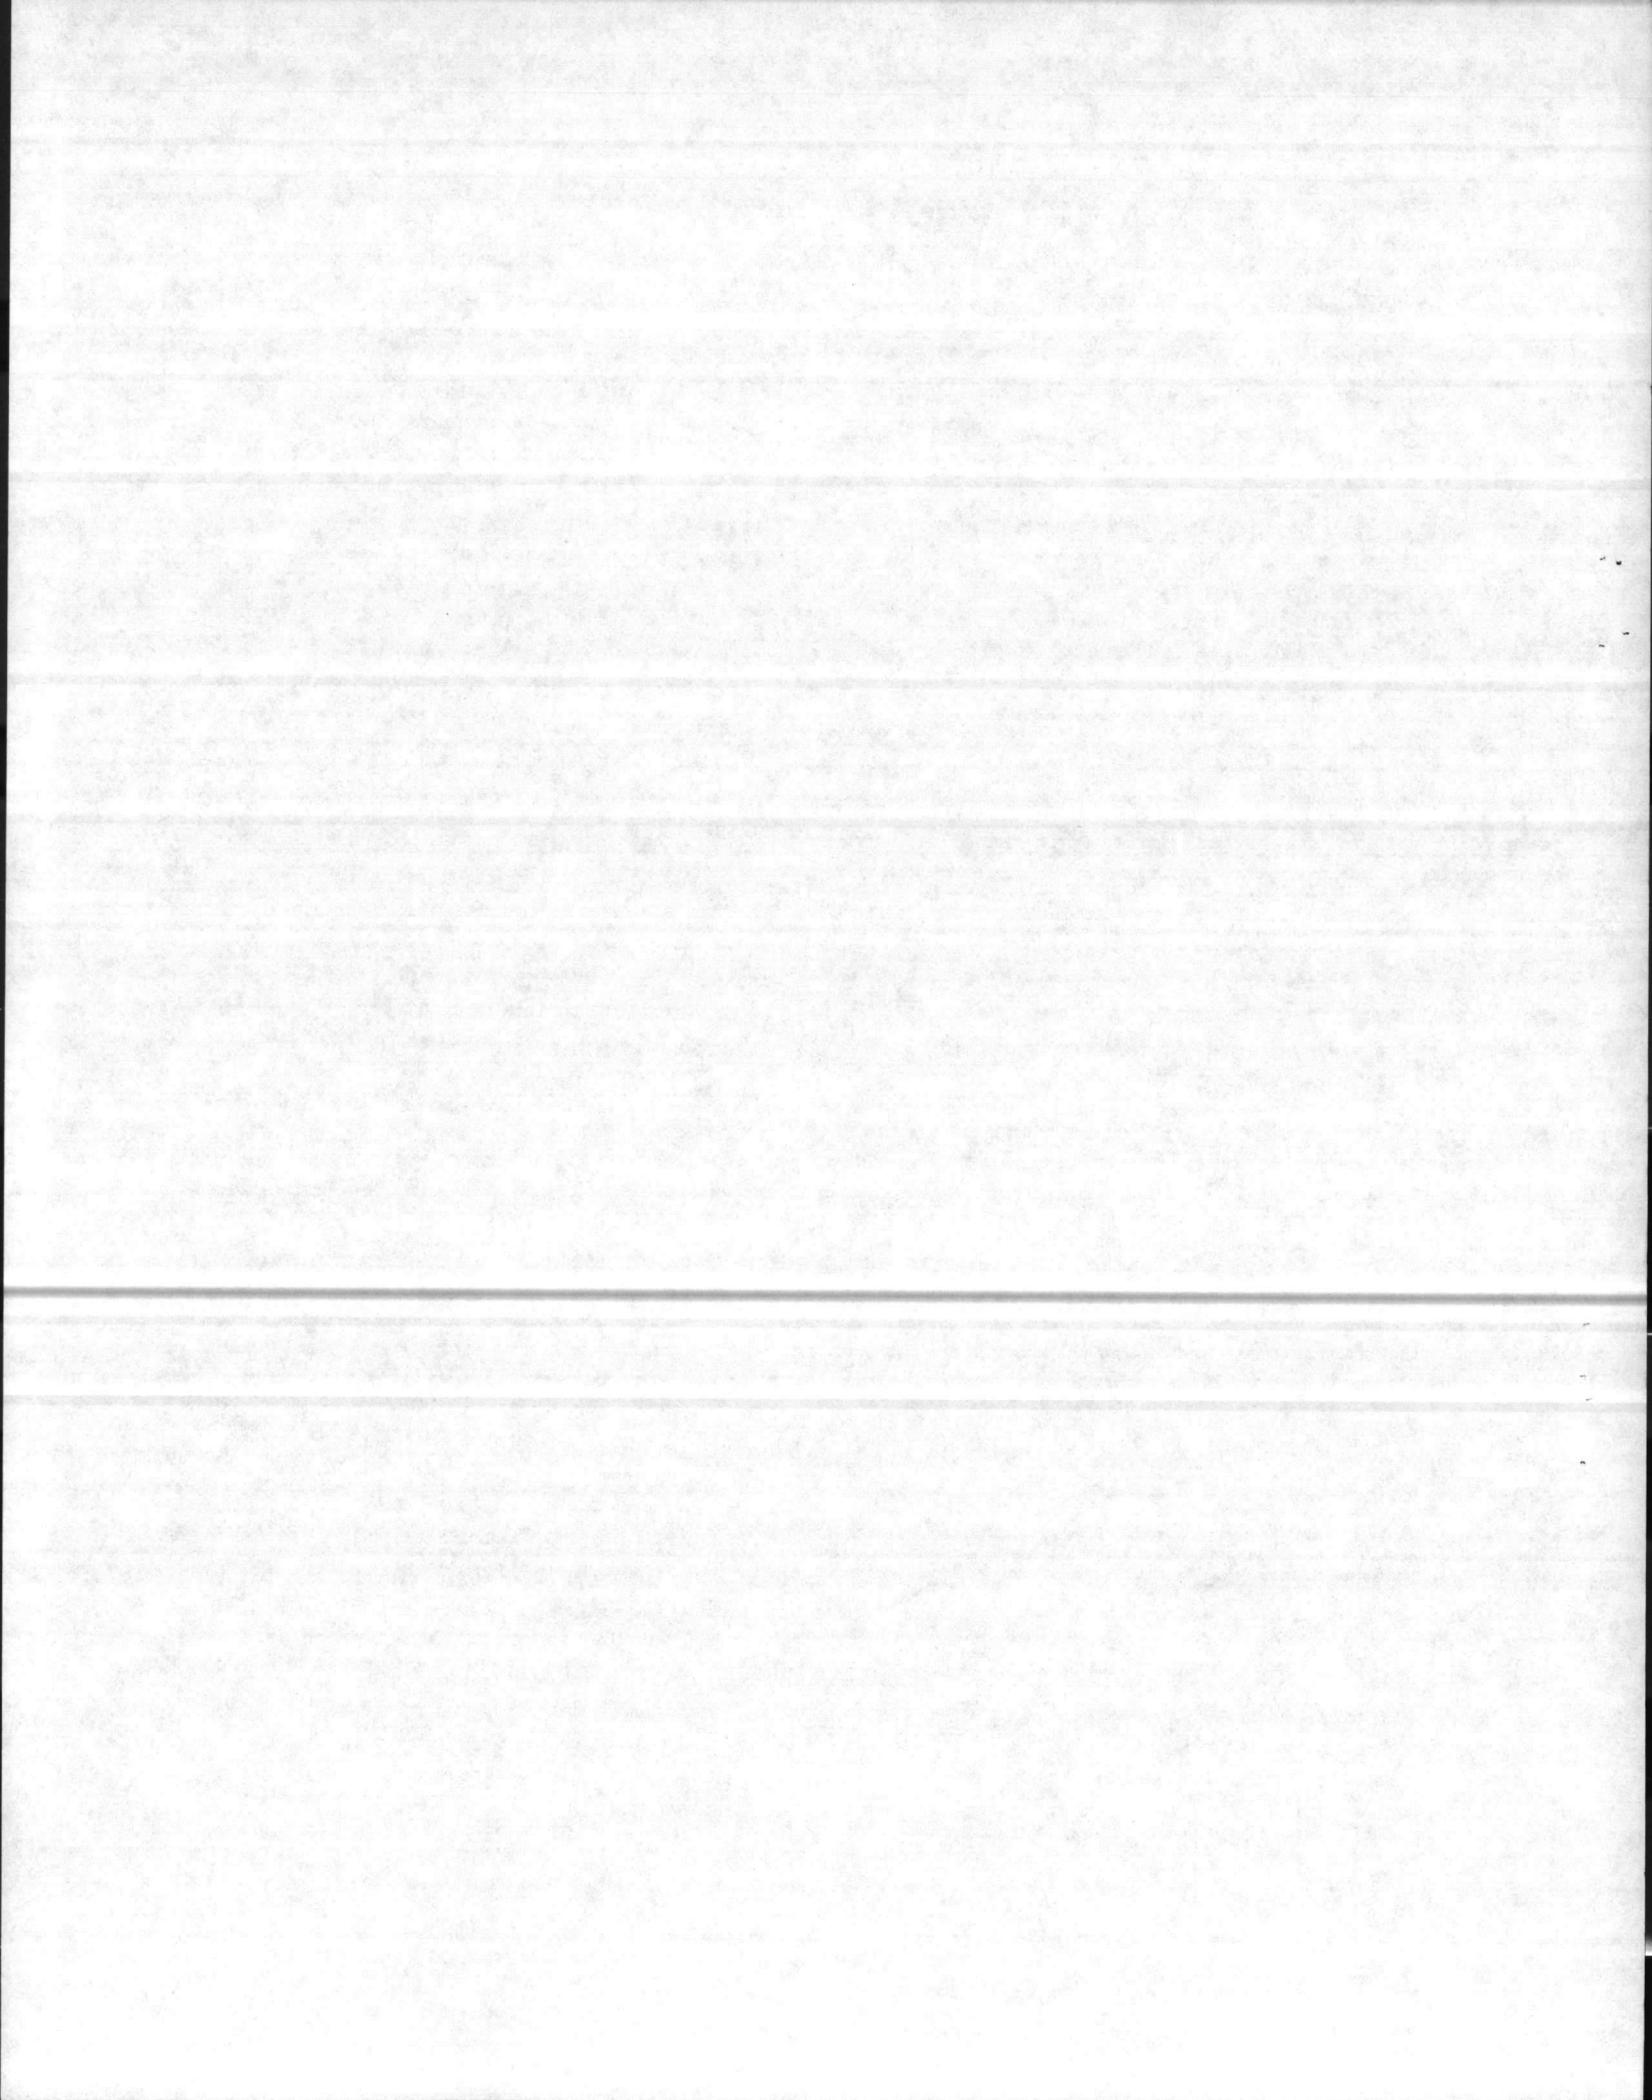


deteriorate when subjected to oil, water, gases, salt water, sewage, and fungus. The tensile strength of the tape shall be not less than 40 pounds per inch width, and when tested under ANSI Standard LI4.184 cut strip method, the tape shall retain 65 percent of its original tensile strength for the following tests for 168 hours for each requirement: (1) Immersion in distilled water, (2) Immersion in 3 percent salt water, (3) Exposure to ultra-violet light (30 watt germicidal lamp), (4) Exposure to sunlight (Type S-1 sun lamp), and (5) Exposure to concentrated sewage. The completed installation of fireproofing (arc-proofing) shall be capable of withstanding a 200-ampere arc for 30 seconds when tested as specified hereinafter.

7.2.8 Identification Slabs (markers): Slab markers shall be provided for direct buried cable at each 300 foot interval, at each change of direction and over each splice. Also slab markers shall be provided over the ends of ducts or conduits which are installed under paved areas and roadways. Identification slabs shall be of concrete approximately 20 inches square by 6 inches thick and shall be set flat in the ground so that the top surface projects not less than 3/4 inch, nor more than 1-1/4 inches above ground. The concrete shall have a compressive strength of not less than 2500 psi as hereinbefore specified and have a smooth troweled finish on exposed surface. An identifying legend such as "cable," "duct," "splice," or other applicable designation shall be inscribed on the top surface before the concrete hardens. Circuit identification symbols shall also be inscribed on identification slabs as directed. The letters and/or figures shall be approximately 2 inches high and the grooves shall be approximately 1/4 inch in width and depth. The identification slabs shall be installed so that the nearest side is 12 inches, horizontally, from the cable, splice, conduit, or duct; the inscription on the top shall include an arrow indicating the nearest side.

7.2.9 Backfilling: Backfilling shall be in layers not more than 8 inches deep and shall be thoroughly tamped. The first layer shall be earth or sand, free from particles that would be retained on a 1/4-inch sieve and extending not less than 3 inches above the top of the cables. The succeeding layers shall be excavated material having stones no larger than would pass through a 4-inch ring. The backfill may be moistened. The backfill shall be level with the adjacent surface except that in sodded areas a space equal to the thickness of the sod shall be left.

7.2.10 Reconditioning of Surface: The surface disturbed during the installation of duct or cable shall be restored to its original elevation and condition. Sod or topsoil shall be preserved carefully and replaced after the backfilling is completed. Sod that is damaged shall be replaced by sod of a quality equal to that removed. Where the surface is disturbed in a newly seeded area, the restored surface shall be re-seeded with the same quantity and formula of seed as that used in the original seeding.

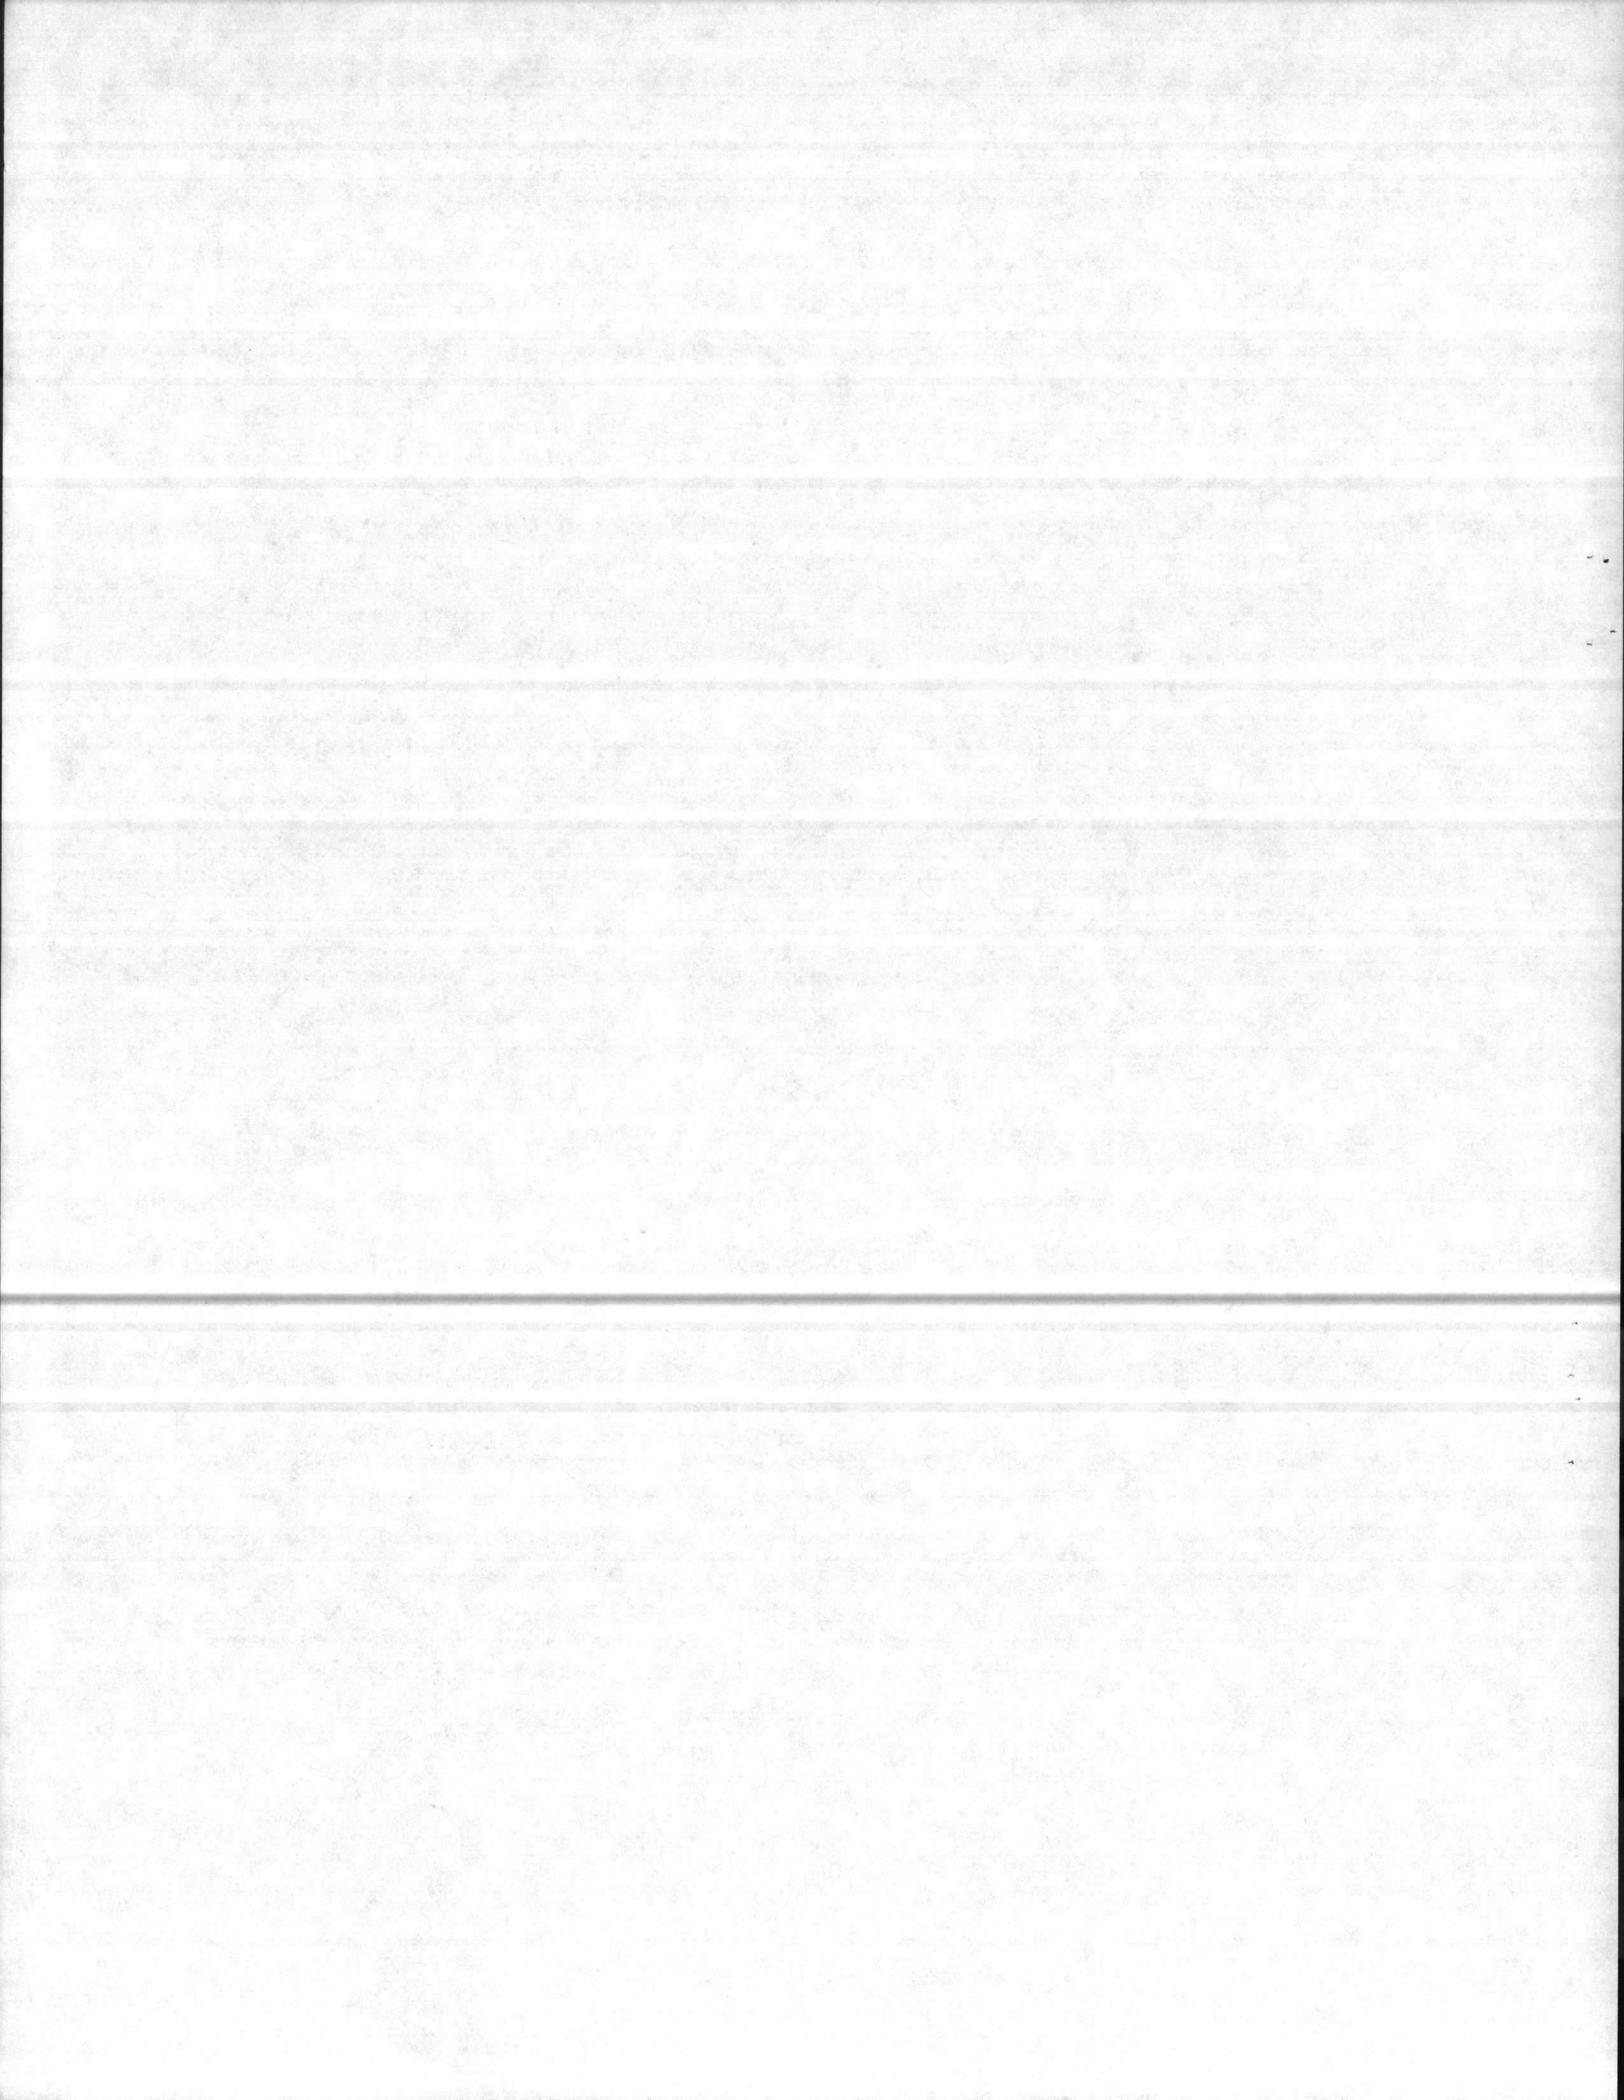

7.2.11 Special conditions: During the construction of all duct lines located in streets, the streets must be kept open to traffic. The Contractor shall plan and execute his work to meet this condition. At locations where duct lines cross railroad tracks and the work requires closing of the tracks, the Contractor must secure permission from the Contracting Officer for each track closure.

7.3 Installation of Overhead Systems:


7.3.1 Overhead Pole Lines: Overhead pole lines shall conform to the requirements of the National Electrical Safety Code for grade "B" construction, medium loading and as further specified herein. All streets, alleys, roads, and drives shall be considered "Public." Pole configurations shall be as indicated, conforming to LANTDIV Pole Plates, Nos. 16-18, 16-19.

7.3.2 Pole Setting: In normal firm ground, minimum pole setting depths shall be as listed in the following table. Poles in straight runs shall be in a straight line. Adjacent poles shall be with gains facing in opposite directions. Every second pole shall have crossarms facing in same direction. Poles shall be set to maintain as even a grade as practicable. When the average ground run is level, consecutive poles shall not vary more than 5 feet in height. When ground is uneven, poles differing in length shall be kept to a minimum by locating poles to avoid the highest and lowest ground points. If it becomes necessary to shorten a pole, a piece shall be sawed off the top and the shortened end of the pole given an application of hot preservative. Holes shall be dug large enough to permit the proper use of tampers to the full depth of the hole. Backfill shall be placed in the hole in 6-inch maximum layers, and thoroughly tamped. Surplus earth shall be placed around the pole in a conical shape and packed tightly to drain water away.

7.3.2.1 Table of Pole-Setting Depths:

Length Overall (feet)	Setting Depth, Minimum (feet and inches)	
	Straight Lines	Curves, Corners, and Points of Extra Strain
35	6-0	6-0

7.3.3 Guys and Anchors: Guys shall be installed on corner poles at points of change in line direction, at ends of lines, and on adjacent brace poles at railroad and main highway crossings. Strain insulators shall be attached to guys by means of 3-bolt guy clamps, wire rope clips, or preformed gripping devices. Guy anchors shall be installed with anchor rods in direct line with the guy and load to be supported. Anchors shall be located at a distance from the base of the pole at least 1/2 the height of the guy attachment.

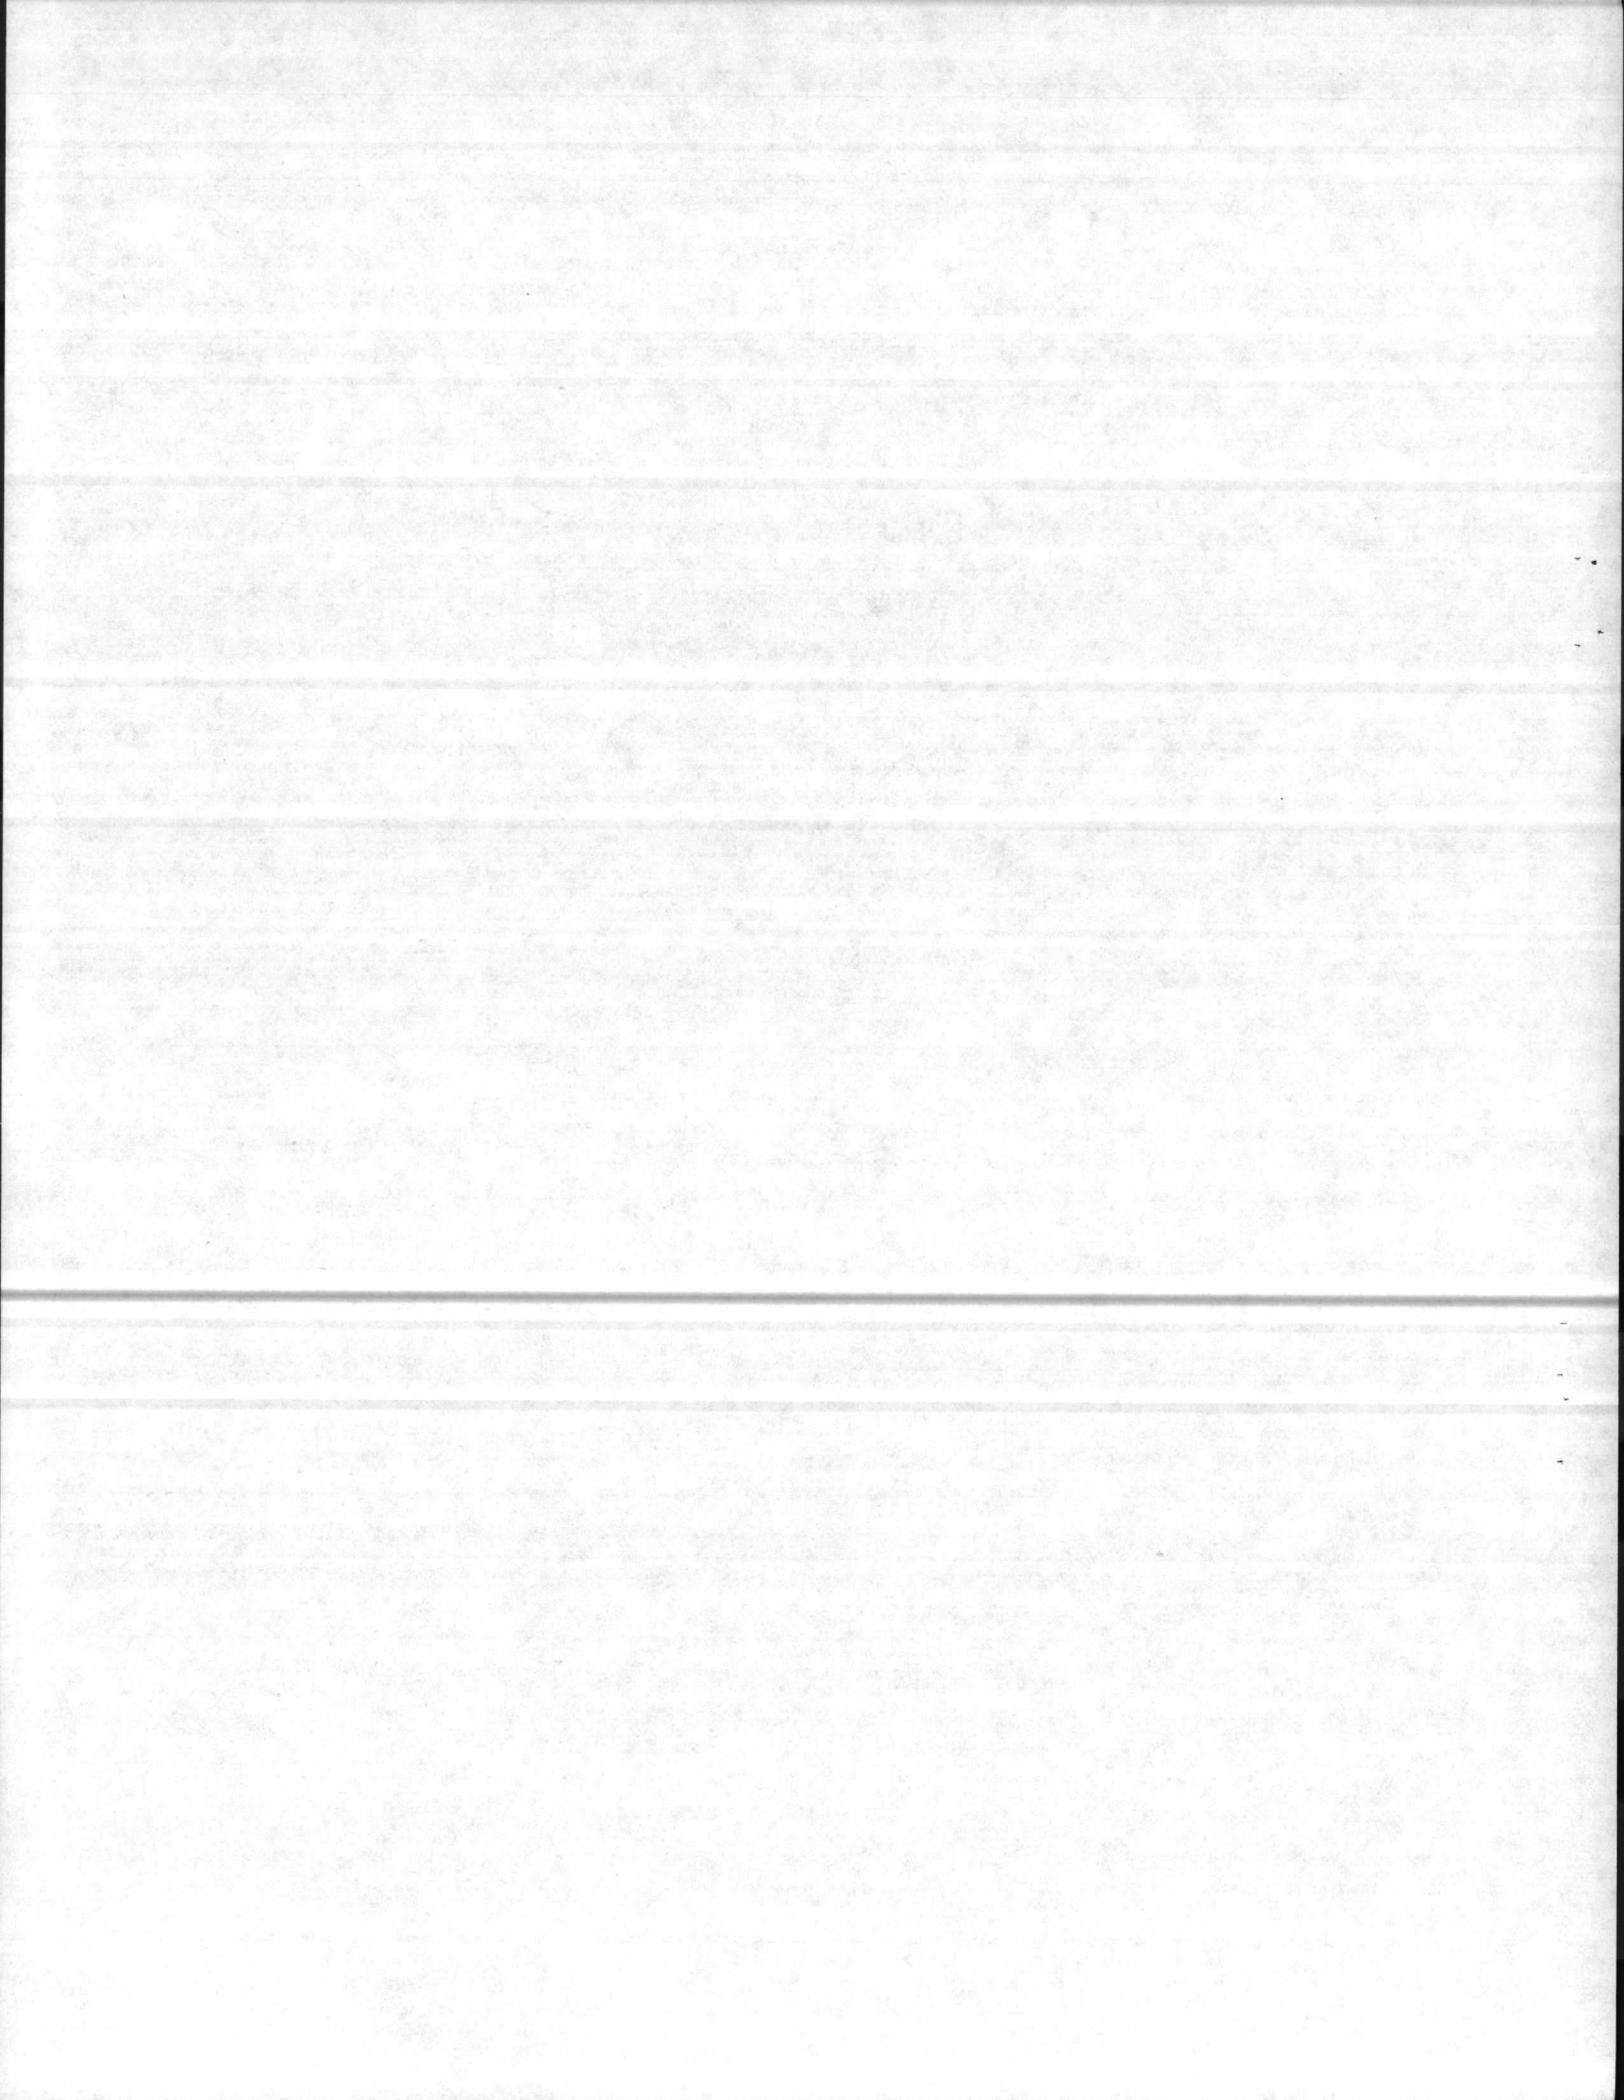


7.3.4 Circuit Protective Apparatus: Pole-type lightning arresters shall be provided where indicated. The devices shall be coordinated with the system to which they are connected.

7.3.5 Cable Risers on Poles: Cable risers on poles, other than grounding conductors, shall be installed in conduit. The conduit for cable risers shall be encased in concrete to a point 6 inches above finished grade. The conduit shall be of the rigid metal type as hereinbefore specified. Conduit shall be secured to the pole by means of suitable clamps or straps spaced not over 4 feet apart.

7.4 Splices in Wires and Cables: All splices shall be in accessible locations. Tapes shall be as specified hereinbefore. Metallic shield or armor, where used, shall be made continuous by soldering or brazing the same kind of metal to the original shield or armor on each side of the splice. In handholes splices in shielded cable shall include a shield ground connection brought out through the jacket in a watertight manner; this connection shall be grounded in the installation of the splice. The Contractor shall use particular care in making up joints and terminations in aluminum conductors. Surface oxides shall be removed by cleaning with a wire brush or emery cloth. Joint compound shall be used on conductors and U.L. listed solid aluminum connectors shall be used for connecting aluminum to aluminum. When connecting aluminum to copper, connectors specifically designed for this purpose shall be used. Splices in insulated power and lighting cables for service exceeding 600 volts and in telephone cables shall be made by splicers having not less than three years experience in splicing such cables; the Contractor shall furnish satisfactory evidence of such experience as specified hereinbefore.

7.4.1 Splices in Insulated Power and Lightning Wires and Cables Without Metallic Sheath: Conductors shall be joined securely both mechanically and electrically by one of the following methods: (1) twisting the conductors together and soldering, (2) twisting the conductors and forming a "Western Union" joint, (3) Exothermic weld process, or (4) by the use of solderless connectors. Insulating tapes, hotmolded composition covers, or other approved equivalent, having an insulation value equivalent to the conductor insulation may be used for splices in cables rated 600 volts and below. Splices in rubber- or cross-linked polyethylene-insulated, neoprene- or cross-linked polyethylene-jacketed wires and cables shall be the cast type, watertight taped type, tape-over-cast type, vulcanized type, or other approved type as indicated or specified. The work shall be in accordance with the recommendations of the manufacturer of the wires, cables, and/or splicing materials. All splices shall be suitable for the rated insulation level of the cable.

(1) Epoxy cast-type splice: The insulation shall be provided by means of a molded casting process employing a thermosetting epoxy resin insulating material. The resin material shall be applied by a gravity poured method or by a pressure injected method. The component materials of the resin insulation shall be in a packaged form ready for convenient mixing without removing from the package. The gravity poured method shall not be used for splices in shielded cable.

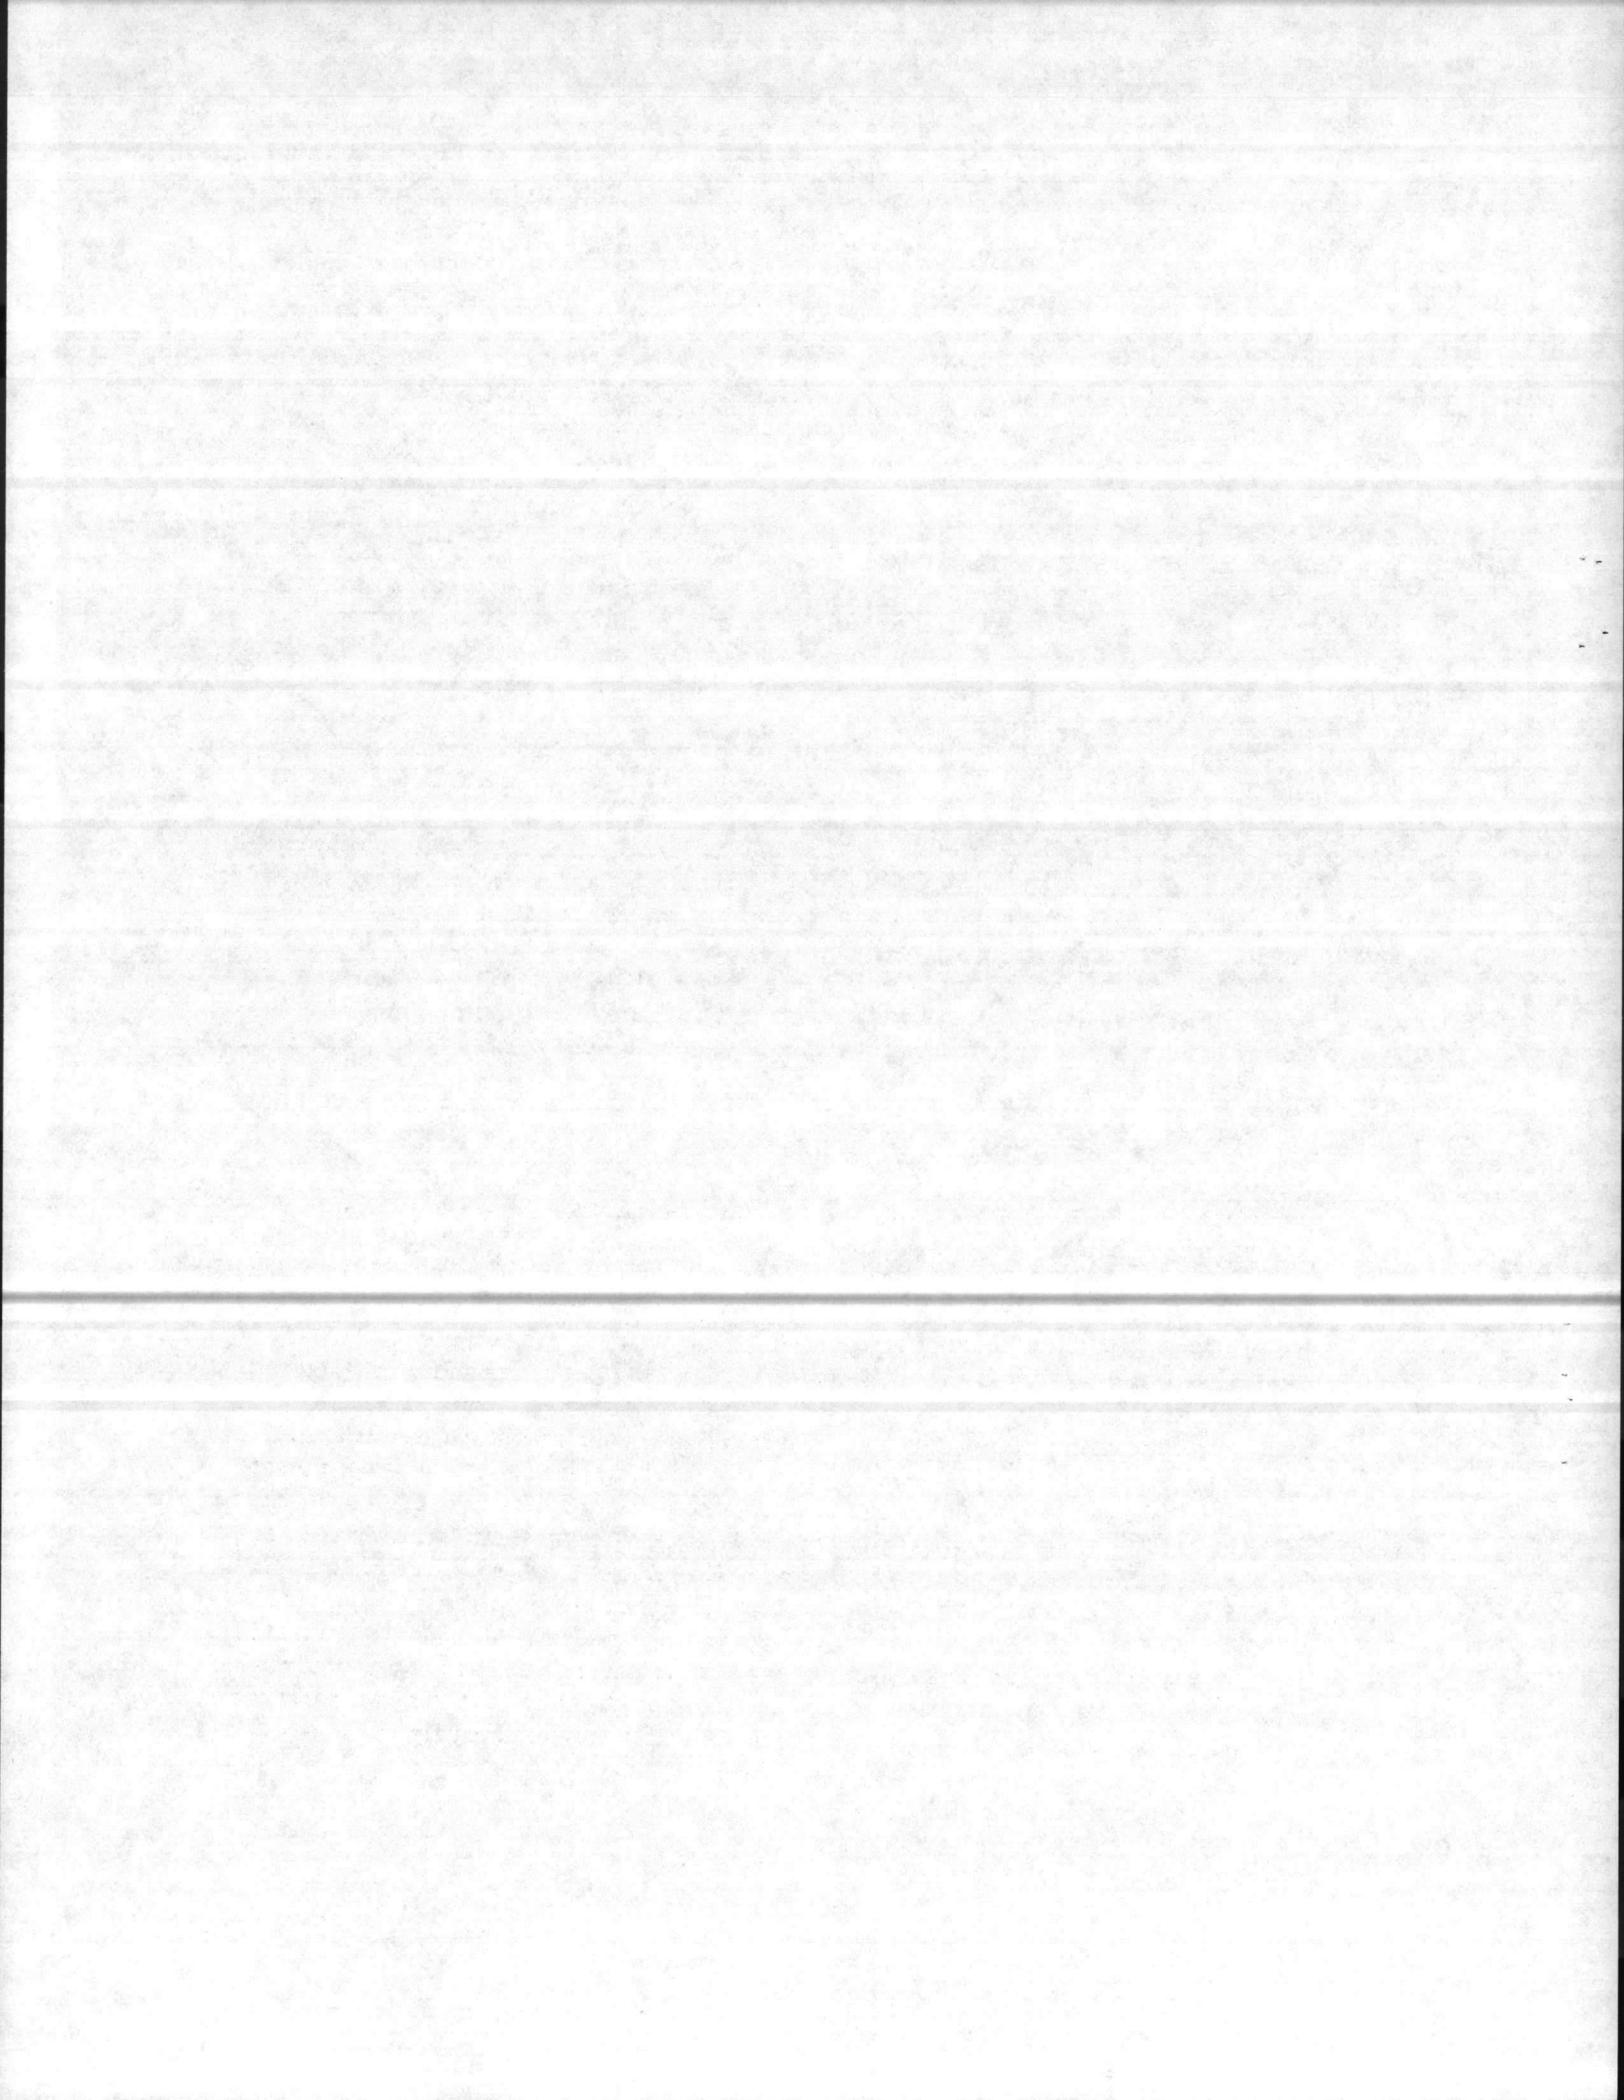

(2) EPR cast-type splice: The insulation shall be provided by means of a molded casting process employing an ethylene propylene rubber (EPR) splicing compound which results in an inseparable bond between the splicing material and the cable insulation. The molding process shall include injection of the molding material into the mold so as to insure void free splices.


(3) Watertight Taped Type Splice: The splice shall consist of an approved connector, self-fusing tape (splicing compound), self-bonding semi-conducting tape, tinned copper shielding tape or braid, and plastic tape.

(4) Tape-Overcast Type Splice: This splice shall be as specified hereinbefore for the watertight taped type, overcast with an epoxy resin construction as specified hereinbefore for the cast type, pressure method. This splice shall be suitable for the rated voltage of the cable, to a limit of 15 kv.

(5) Vulcanized Type Splice: The vulcanizing process shall be a heat-pressure process of an approved type and employing materials and equipment suitable for the type and voltage of cables for which it is used. Materials used in the splicing process shall be fully and permanently compatible with materials in the cables. This splice shall be suitable for the rated voltage of the cable, to a limit of 5 kv.

7.4.2 Grounding of Shields in Splices of Power Cables: In handholes the splicing of shielded power cables shall include the grounding of the shielding tape. Wires connecting the shields to the ground rod shall be trained toward the sides in such manner as not to be in the way of maintenance personnel.

7.5 Termination of Insulated Power and Lighting Cables: All insulated power and lighting cables shall be properly terminated. Terminations shall be made by adequately trained personnel, using methods and materials suitable for the work as necessary and as specified hereinafter, and in accordance with the recommendations of the manufacturer of the cable and/or terminating materials or kit. Such recommendations, accompanied by suitable detail drawings, shall be submitted to the Contracting Officer for approval. Terminations of cable for service exceeding 600 volts shall be made by personnel having not less than 3 years experience as a licensed electrician, including adequate experience in the splicing or terminating of high-voltage insulated cable; the experience shall be certified and approved by the Contracting Officer. Terminations and/or terminating devices shall be capable of withstanding the tests specified for the cable installations, and for service exceeding 600 volts, shall be rated in accordance with, and be capable of withstanding test voltages in accordance with IEEE standard No. 48, as applicable. Terminations of single- and multi-conductor cables shall include the securing and sealing

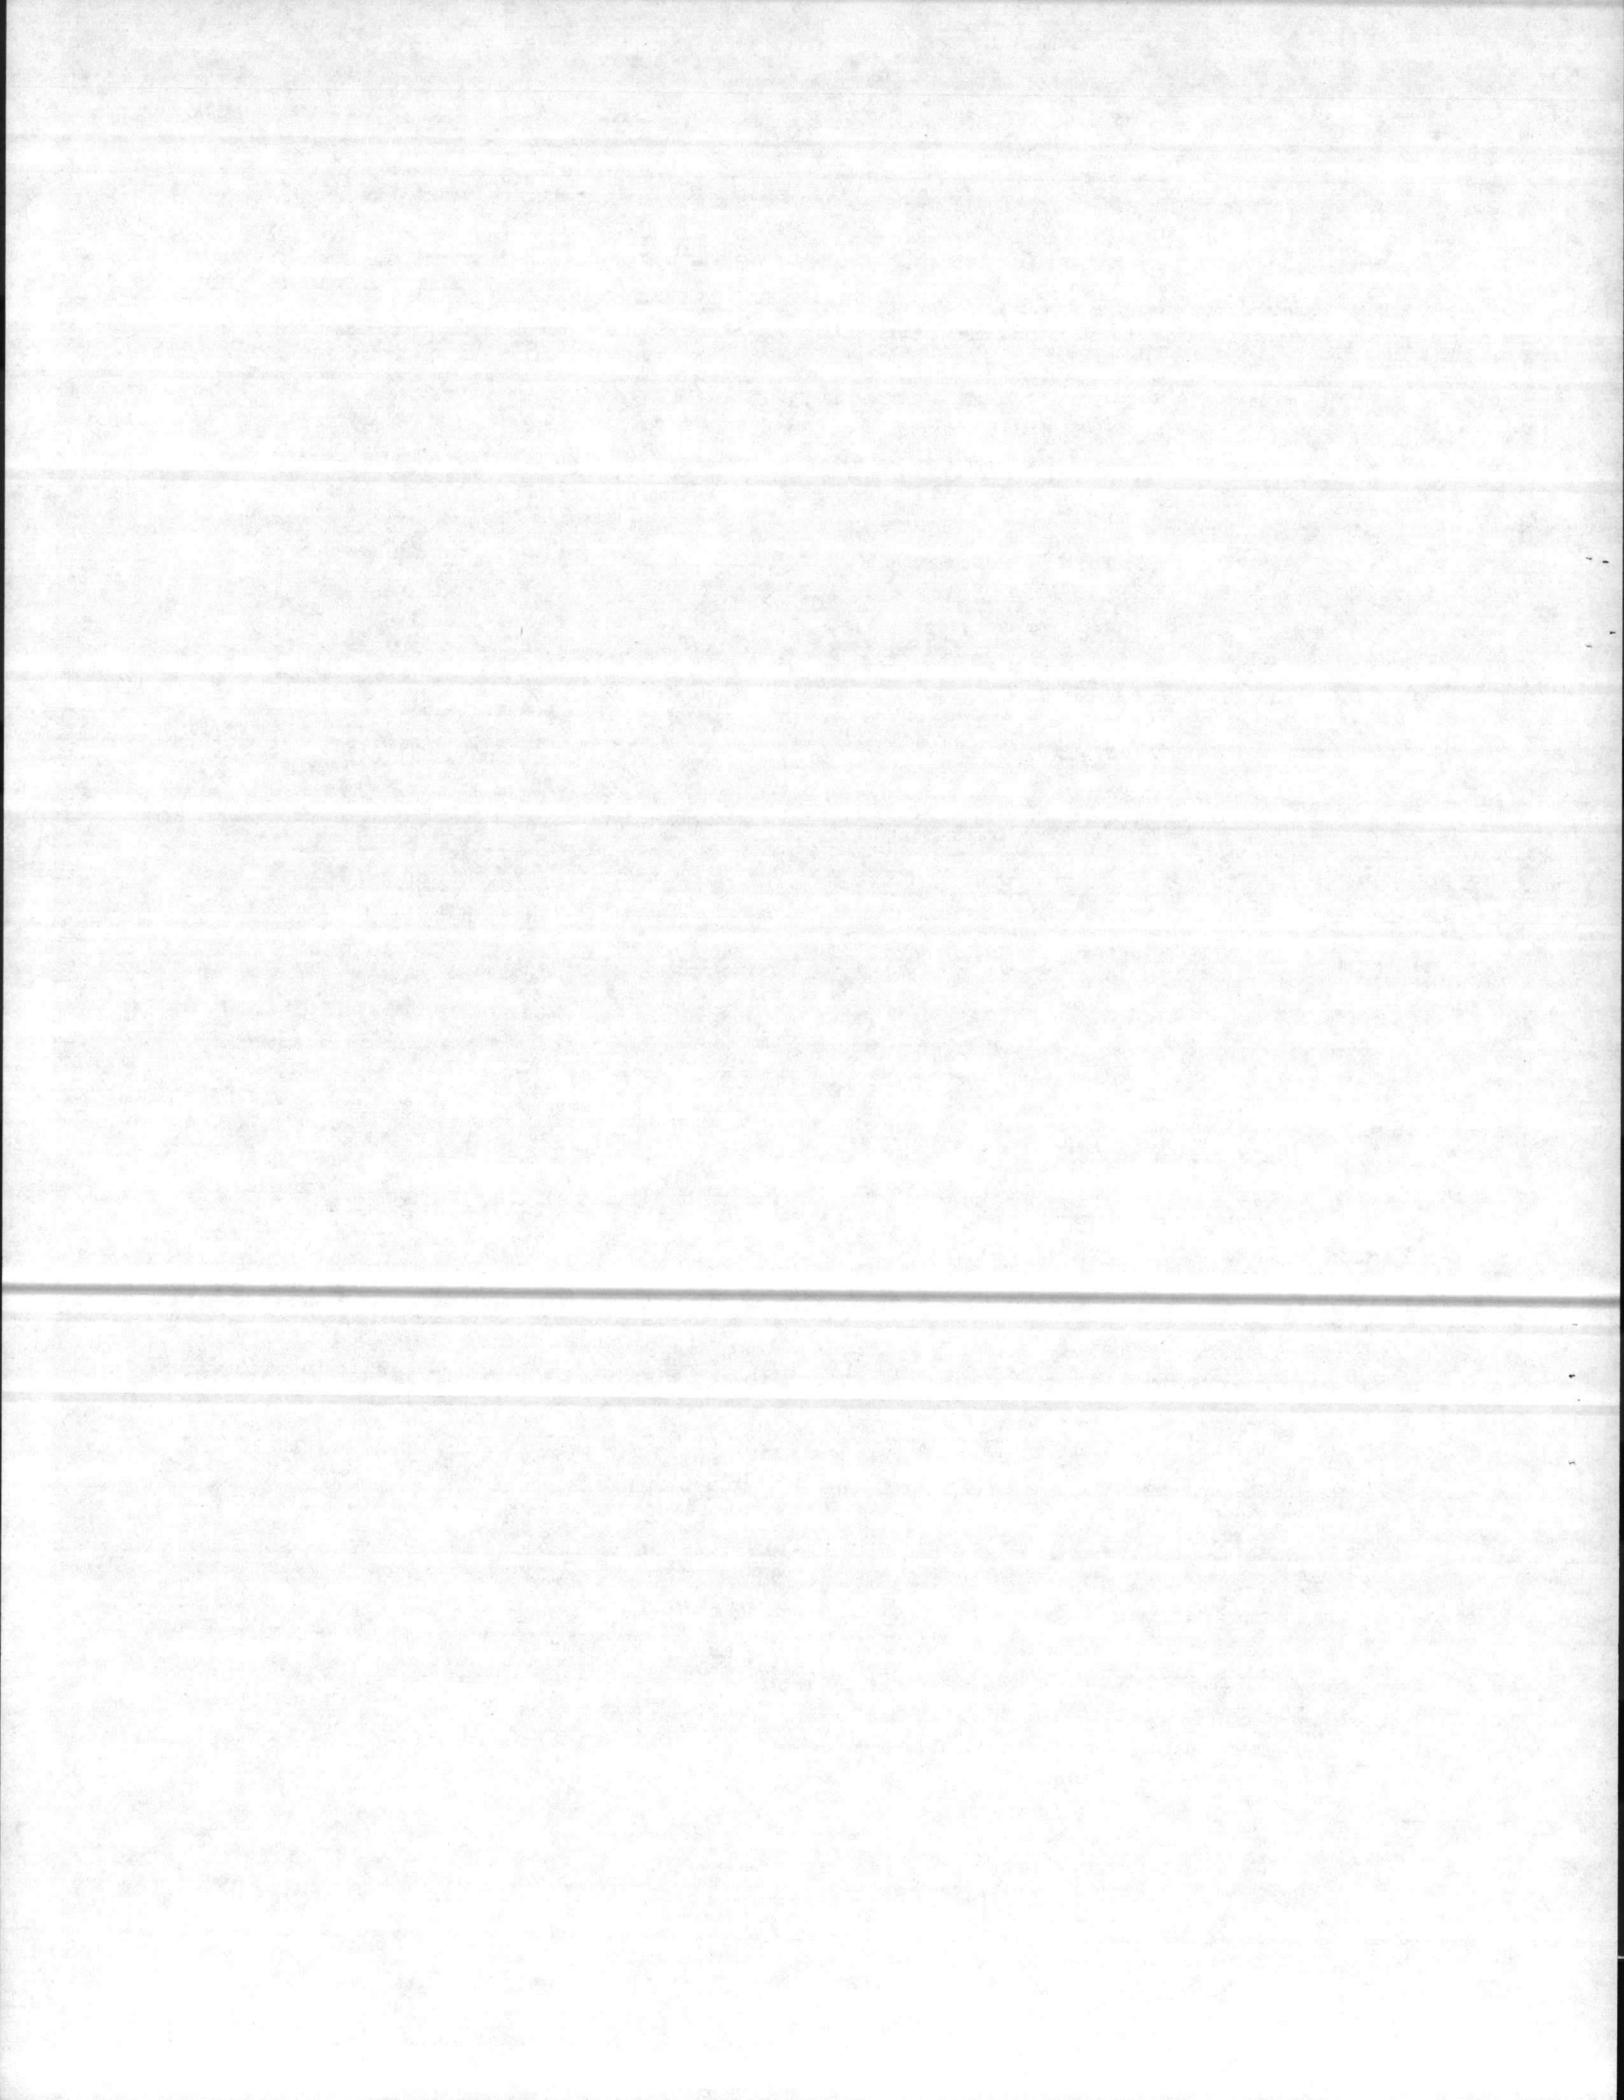

of the sheath and insulation of the cable conductors, stress relief and grounding of cable shields of shielded cable, and grounding of neutral conductors, metallic sheaths, and armor. Cables and cable terminations shall be adequately supported so as to avoid any excessive strain on the termination and the conductor connection.


7.6 Grounding: Grounding shall be in accordance with the National Electrical Code and the National Electrical Safety Code except that grounds and grounding systems shall have a resistance to solid earth ground not exceeding the following values:

	<u>Ohms</u>
For grounding pad mounted transformers without protective fences (or transclosure with its components)	5
For grounds in handholes	10
For grounding other metal enclosures of primary voltage electrical and electrically operated equipment	10
For lightning arrester grounds on pole line distribution systems	10
For grounding secondary distribution systems (neutral) non-current carrying metal parts associated with distribution systems	25
For grounds not covered above	25

When work in addition to that indicated and specified is directed, in order to obtain the specified resistance to ground, the provisions of the contract respecting an adjustment for changed conditions shall apply.

7.6.1 Ground Rods: Approved copper-alloy clamp shall be brazed to the upper end of ground rods, and ground wires shall be securely attached thereto by means of a bolted connection. Ground rods shall be driven to a depth of not less than 11 feet and shall have diameters sufficient to permit driving to necessary depth without being damaged, but in no case shall the diameter be less than hereinbefore specified.

7.6.2 Welded or Brazed Connections: Joints in grounding conductors and mats shall be welded or brazed. The welding or brazing processes shall not in any way cause the parts joined to be damaged or weakened and shall join all strands. The welding process shall be an exothermic type, and the completed connection or joint shall be equal or larger in size than the conductors joined. The brazing process shall be in accordance with MIL-B-7883.

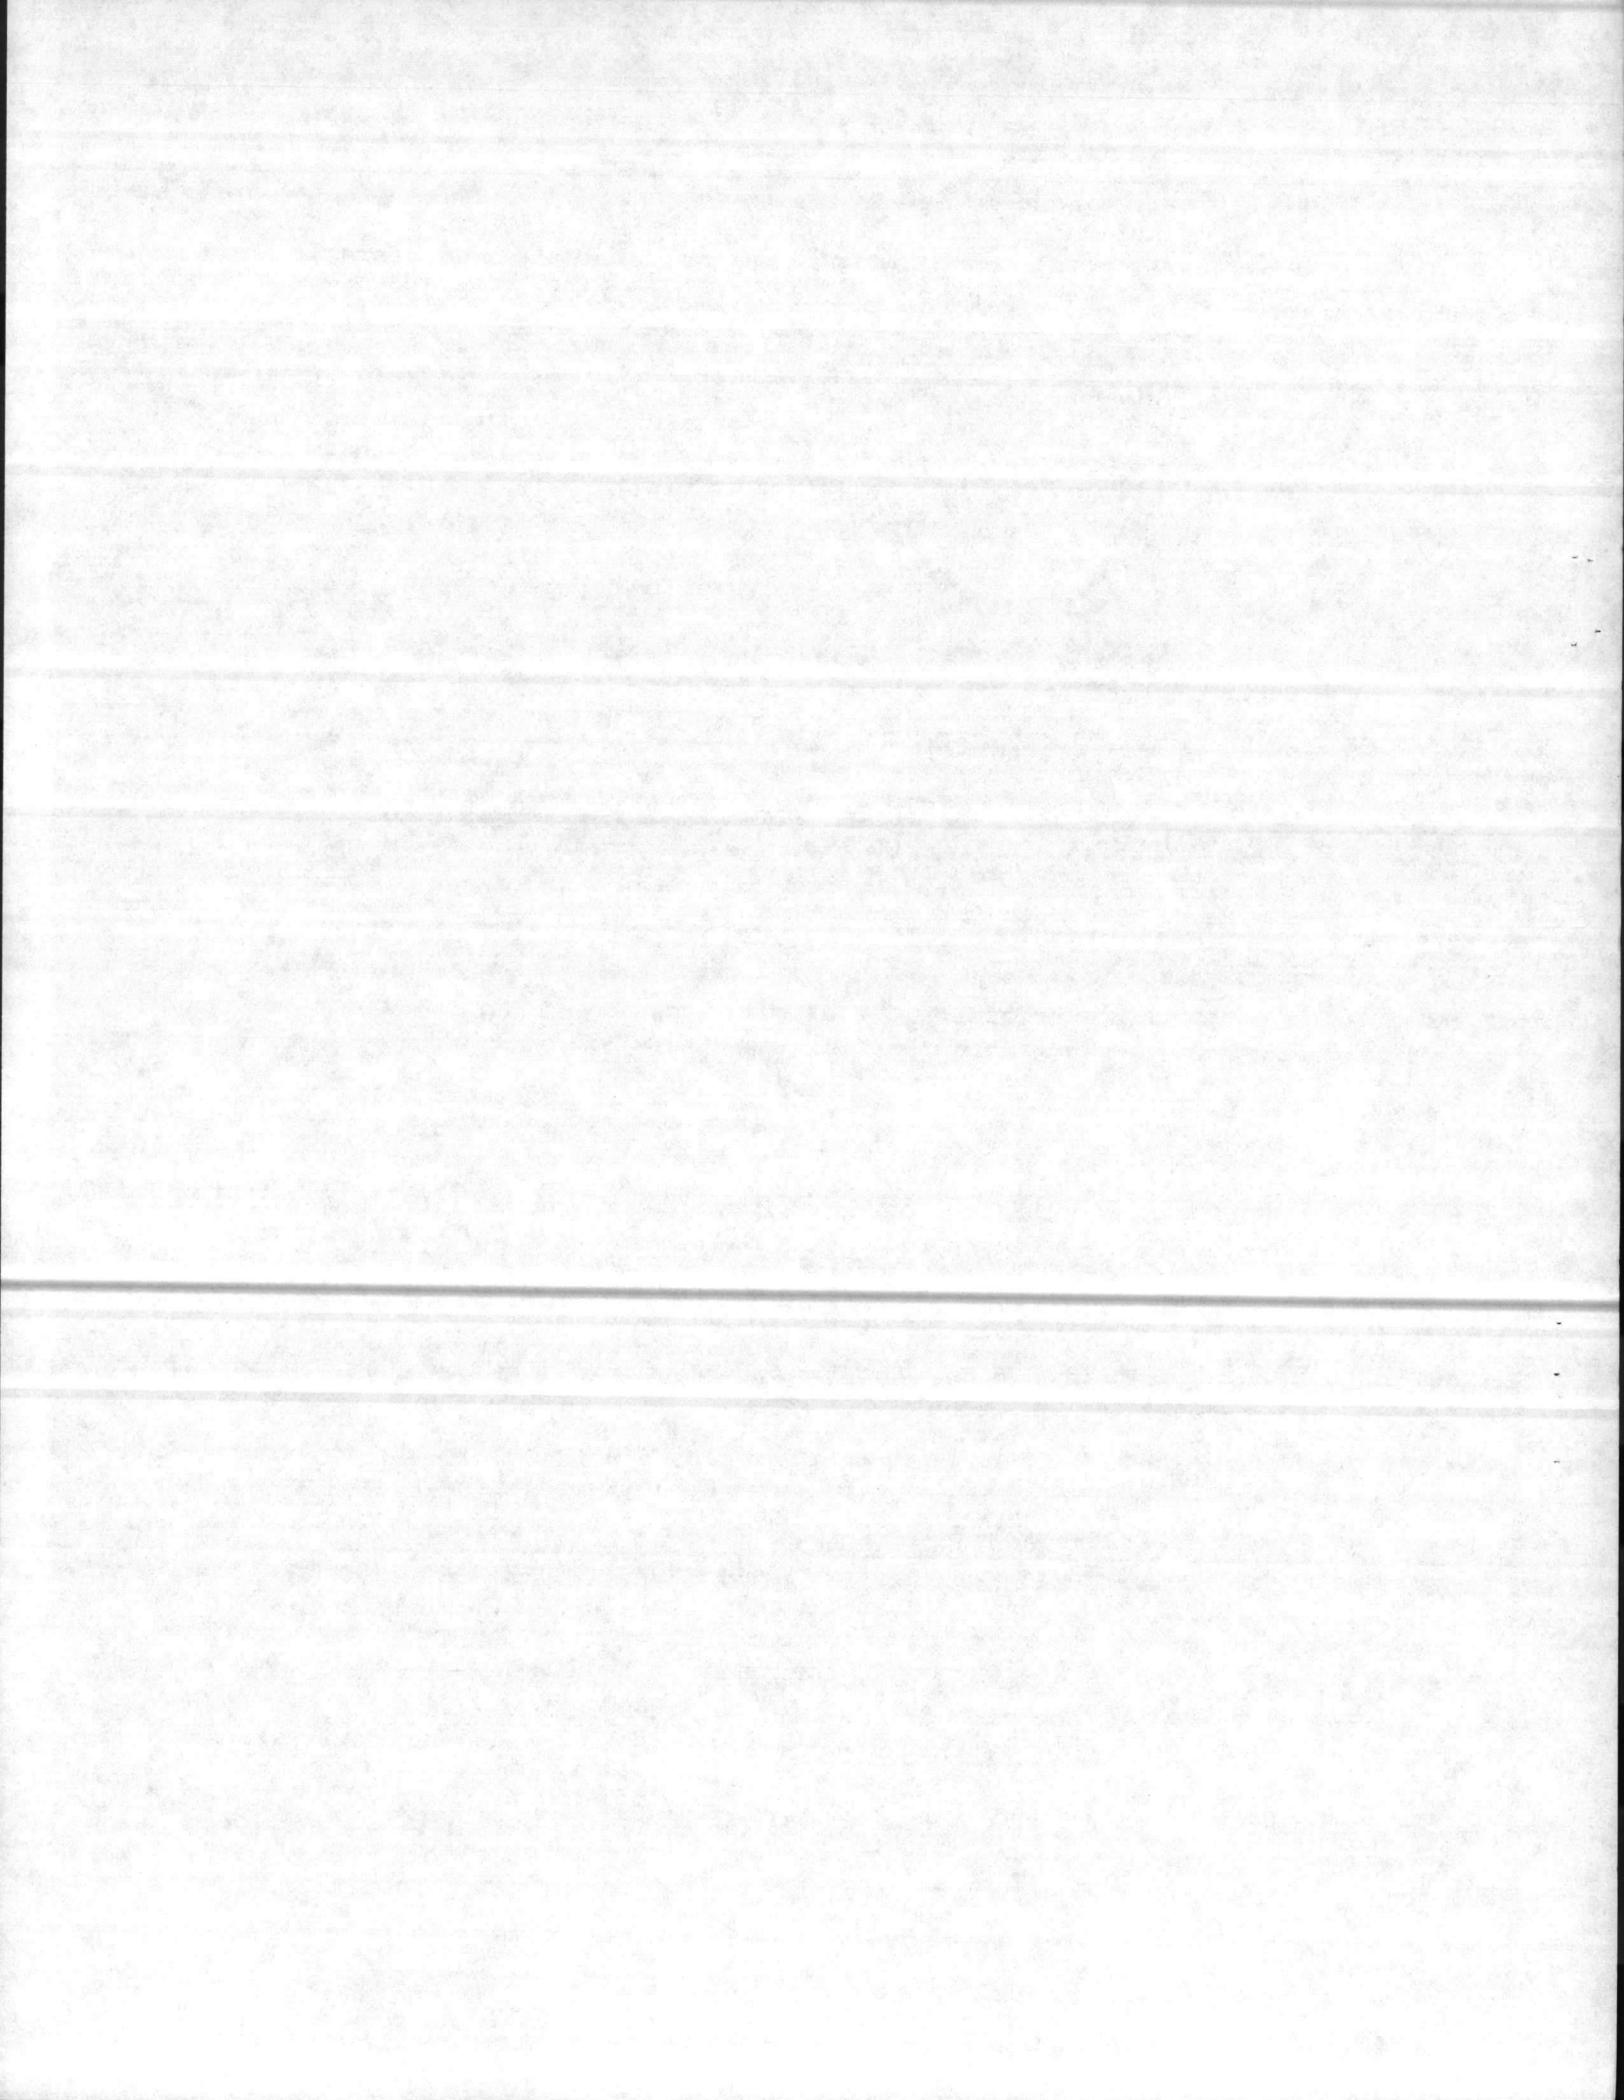

7.6.3 Ground Cable Crossing Expansion Joints: Ground cables crossing expansion joints or similar separations in structures and pavements shall be protected from damage by means of suitable approved devices or methods of installation which will provide the necessary slack in the cable across the joint to permit movement. Stranded or other approved flexible copper cable run or jumper shall be used across such separations.

7.6.4 Grounding and Bonding Equipment: Grounding and bonding equipment, except as indicated or specified otherwise shall conform to UL publication No. 467.


7.8 Installation of Transformers, Switchgear and Substations shall be as indicated and specified hereinbefore.

8. FIELD TESTS: The Contractor shall provide all labor, equipment and incidentals required for testing, except that the Government will provide electric power required for the tests. All defective material and workmanship disclosed as the result of the tests given herein shall be corrected by the Contractor at no cost to the Government. The Contractor shall show by demonstration in service that all circuits and devices are in good operating condition. Tests shall be such that each item of control equipment will function not less than five times.

8.1 Insulation resistance test for systems 600 volts and less: After all wiring is completed and connected ready for operation, but prior to placing systems in service and before any branch circuit breakers are closed, insulation resistance tests shall be made in all feeder and subfeeder circuits. The insulation resistance between conductors and between each conductor and ground shall be measured. Measurements shall be made with an instrument capable of making measurements at an applied potential of 500 volts. Readings shall be taken after the voltage has been applied for a minimum of one minute. The minimum insulation resistance for circuits of No. 12 AWG conductors shall be 1,000,000 ohms. For circuits of No. 10 AWG or larger conductors, a resistance based on the allowable ampacity of the conductor as fixed by NFPA 70 shall be as follows:

25 through 50 amperes	250,000 ohms
51 through 100 amperes	100,000 ohms
101 through 200 amperes	50,000 ohms


8.2 High voltage cable tests: After installation and before placing in service, cables shall be given a field acceptance test performed by a representative of the Contractor. Prior to testing, the cables shall be disconnected from all equipment. The test procedure shall be in accordance with AEIC and/or IPCEA. Field acceptance test voltage will be 64 Kilo volts DC for 15 minutes. Subsequent acceptance tests, required because of failure of cable to pass the initial test, will be performed at the Contractor's expense.

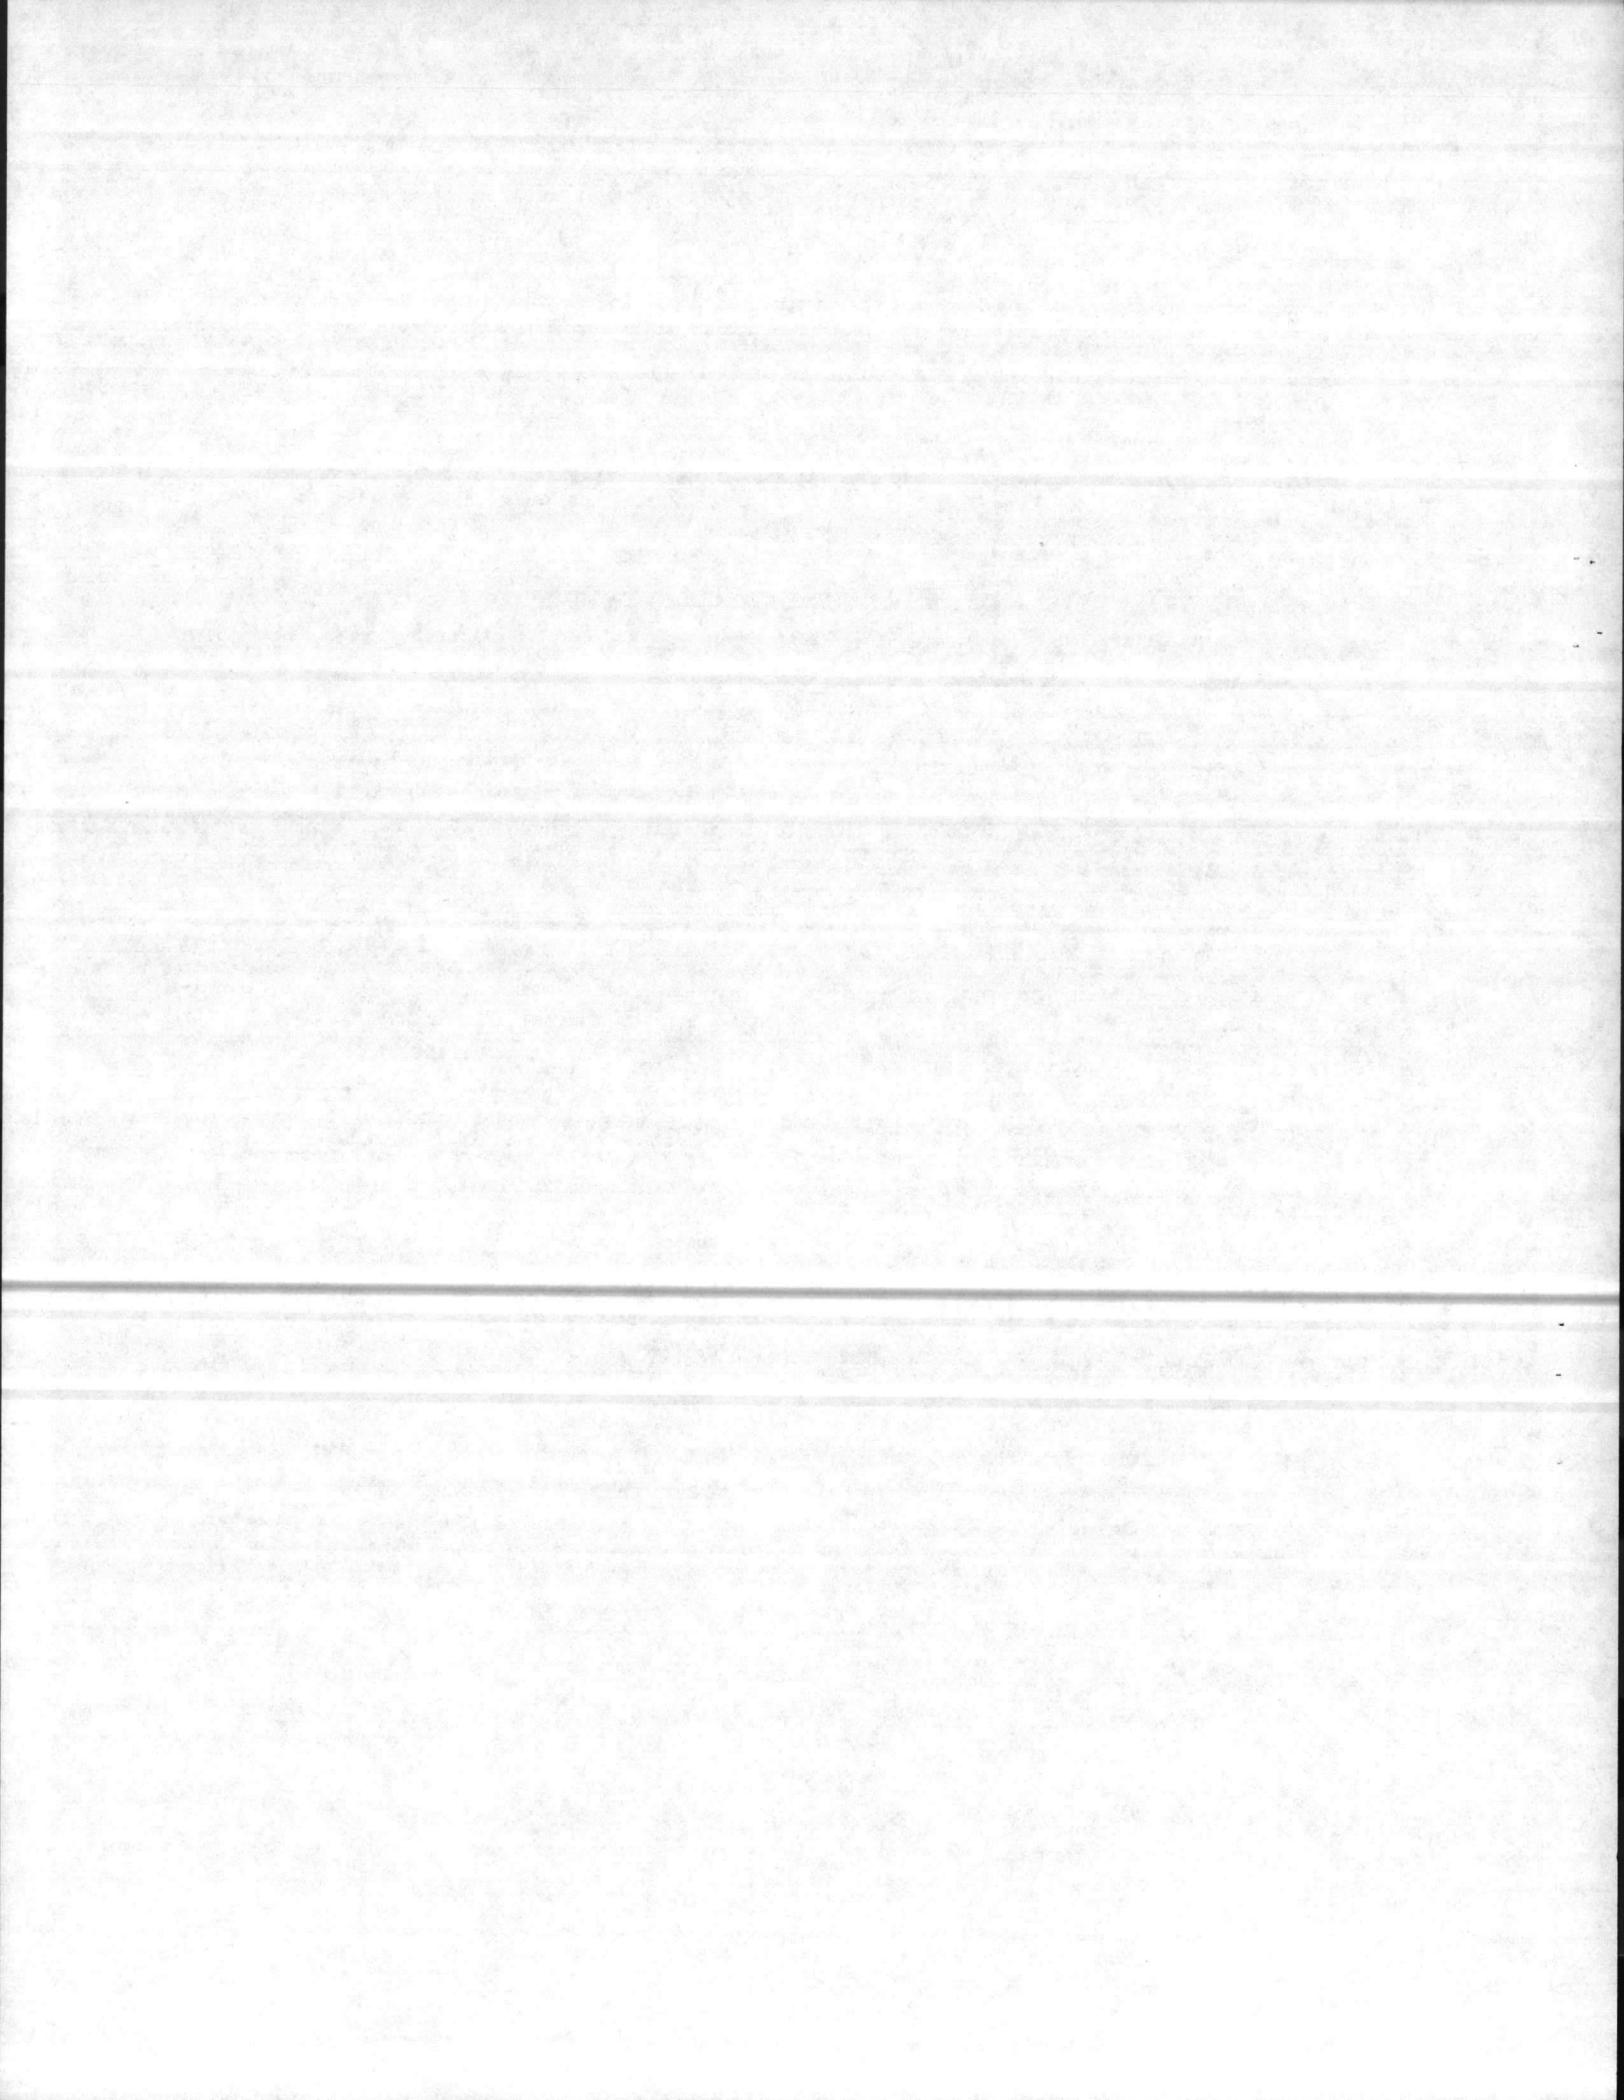

8.3 Arc-Proofing Test: The capability of fireproofing (arc-proofing) of withstanding a 200-ampere arc for 30 seconds shall be determined by tests made on a sample assembly consisting of a 3-inch diameter lead tube fireproofed (arc-proofed) as specified above. The lead tube shall have a wall thickness of 1/8 inch. The sample assembly shall be tested at three different points. At each point the testing shall consist of an arc current magnetically blown against the test assembly until melting occurs at the point of arc contact. The arc shall be struck between two 7/8-inch electrodes located one inch from the sample assemble. (Note: The electrodes must be squared off after each test run. Failure to do this will result in a weak arc which will extinguish easily.) The arc current shall be between 195 and 210 amperes at 40 volts DC. For each of the three tests, the fireproofing (arc-proofing) shall prevent the arc current from melting the lead tube for at least 25 seconds at any one point and for an average of 30 seconds for the three points. In lieu of the tests indicated herein, manufacturer's certification that his product will successfully meet the requirements of the specification may be submitted to the Contracting Officer for approval.

8.4 Ground Resistance Tests: Grounding system shall be tested to assure continuity and compliance with the requirement that ground resistances not exceed the values hereinbefore specified. Ground resistance measurements of each ground rod shall be taken and certified by the Contractor. Upon completion of the project, the Contractor shall submit in writing to the Contracting Officer, the measured ground resistance of each ground rod and grounding system, indicating the location of the rod and grounding system, as well as the resistance and soil conditions at the time the measurements were made. Ground resistance measurements shall be made in normally dry weather, not less than 48 hours after rainfall, and with the ground under test isolated from other grounds. Ground resistance shall also be measured for each piece of equipment to the ground electrode.

---o0o---

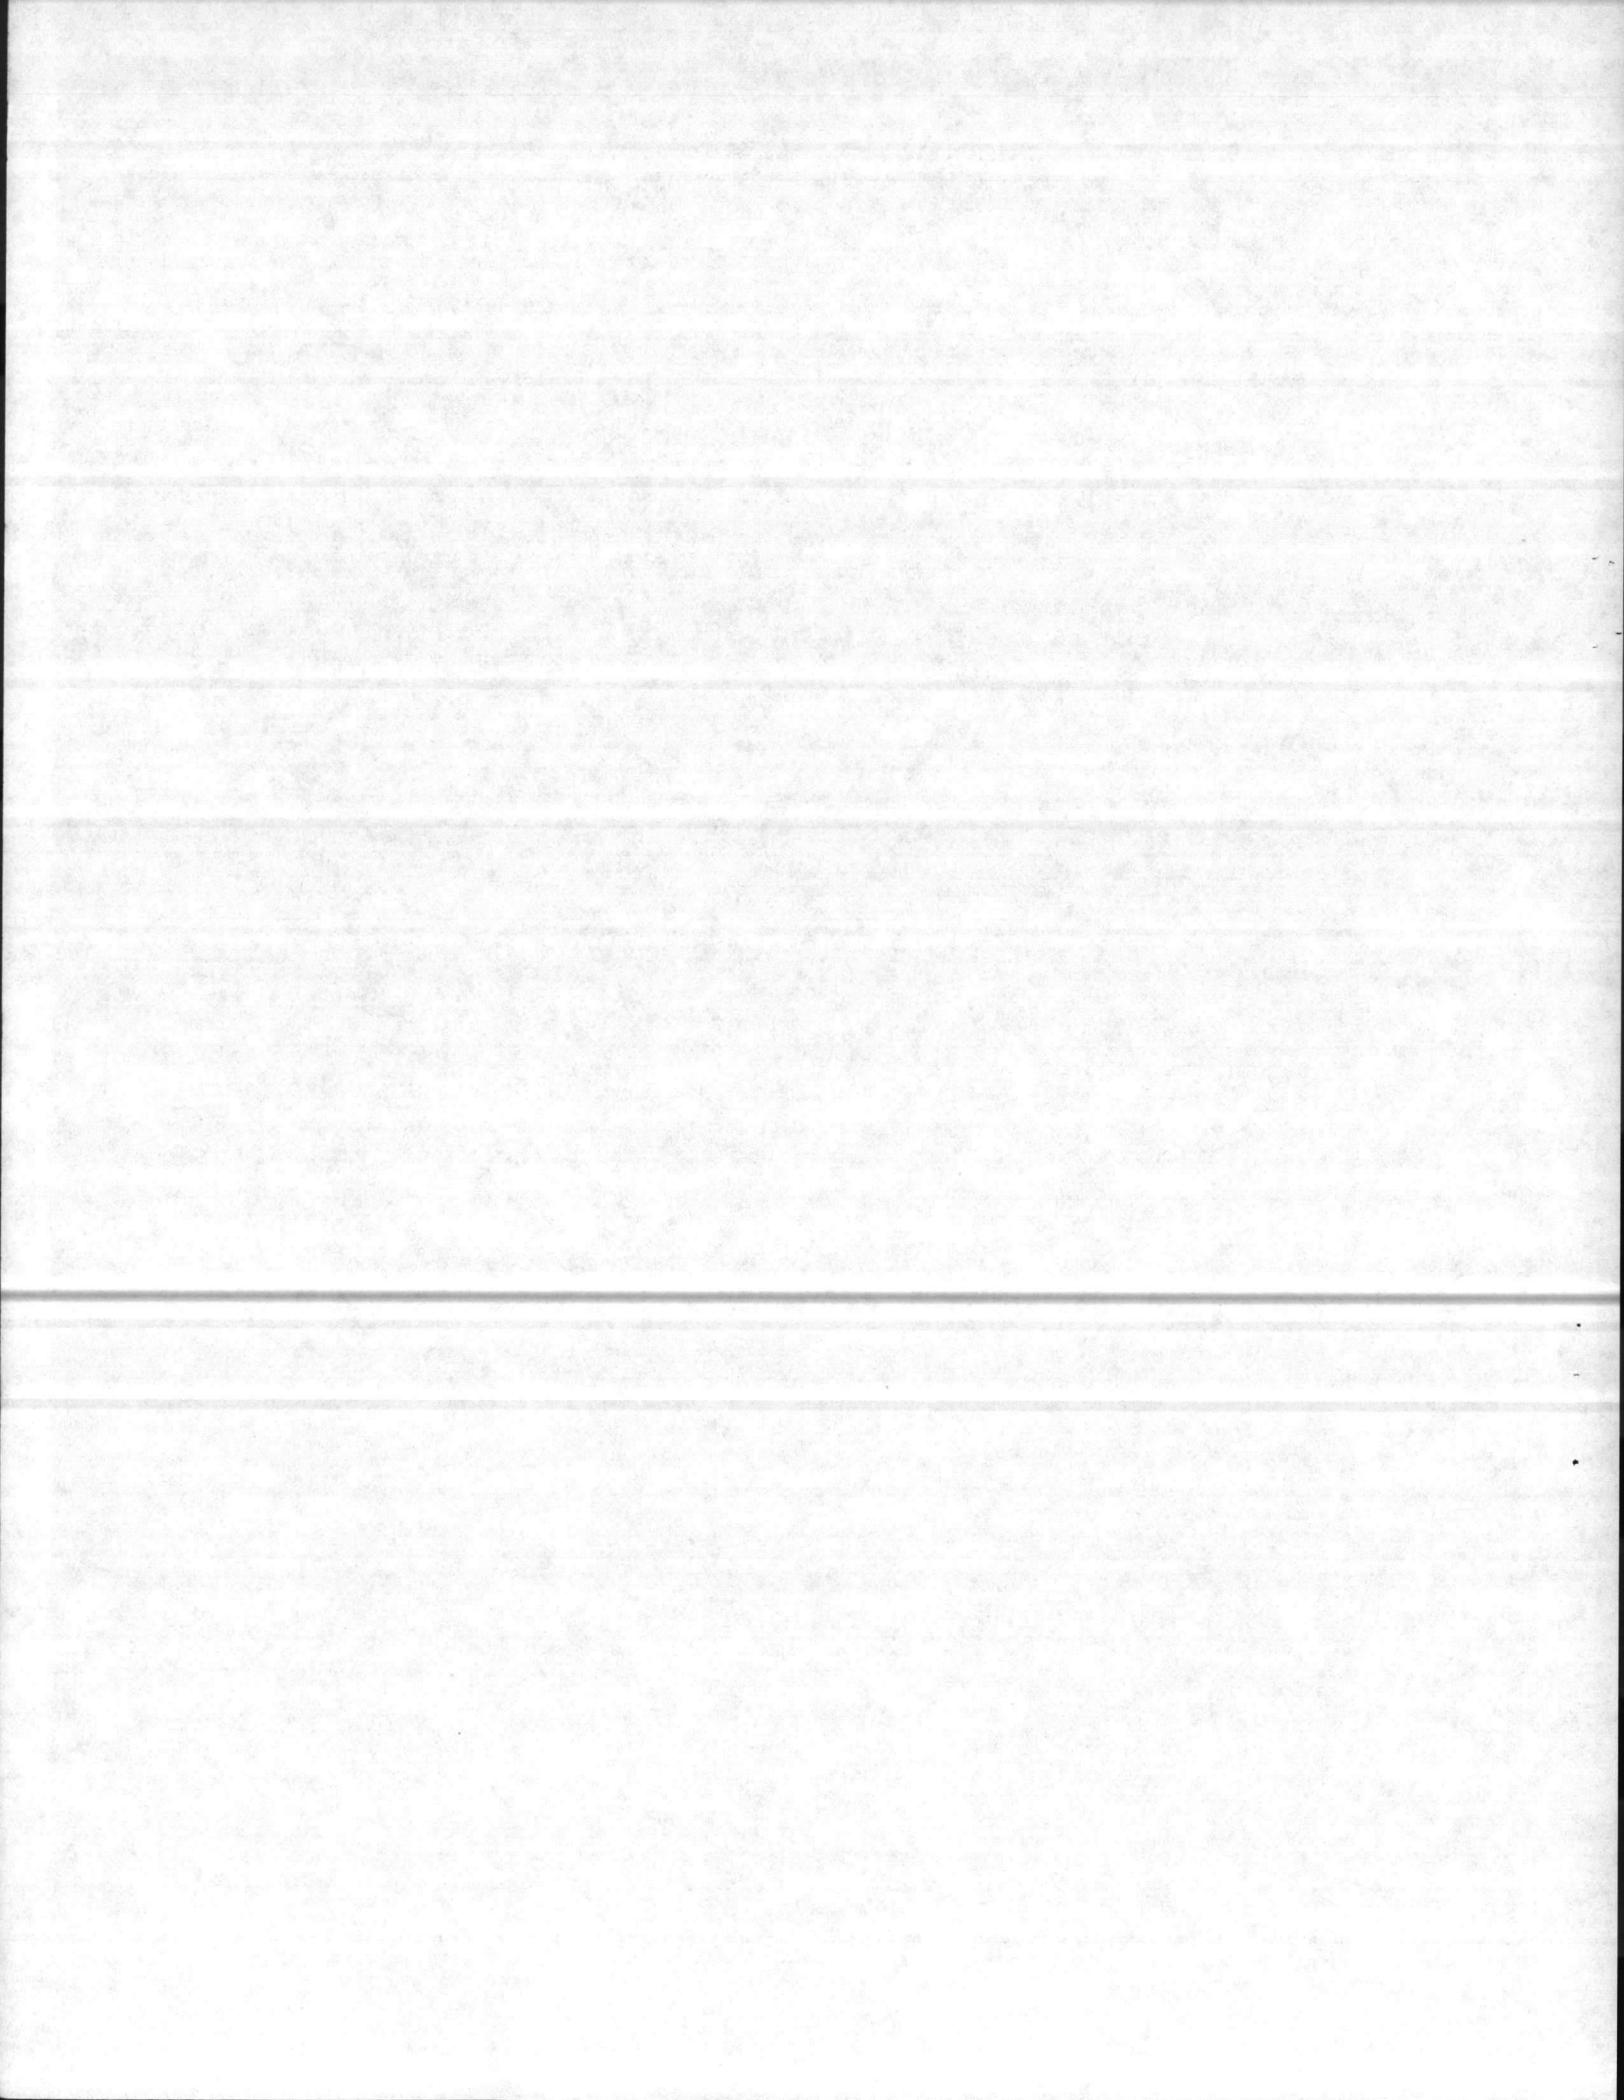

POLE LINE MATERIAL LIST


- ① Flat steel brace (two pieces)
- ② Machine bolt, 3/8" x length needed with washer, nut & lockwasher
- ③ 8' wood crossarm
- ④ Machine bolt, 5/8" x length needed with washer, nut & lockwasher
- ⑤ Timber connector
- ⑥ Lagscrew
- ⑦ Angle steel brace (two pieces)
- ⑧ Machine bolt, 1/2" x length needed, with washer, nut & lockwasher
- ⑨ Dead end box
- ⑩ Steel pin
- ⑪ Pin insulator
- ⑫ Grid gain, used only when there is no pole gain
- ⑬ Angle steel brace (one piece)
- ⑭ 10' wood crossarm
- ⑮ 5/8" eye nut
- ⑯ 5/8" eye bolt, length as needed, with washer, nut & lockwasher
- ⑰ Extension link
- ⑱ Bell type suspension insulator
- ⑲ Strain clamp
- ⑳ Steel angle pin
- ㉑ Cluster mounting bracket, steel
- ㉒ Transformer grounding connection
- ㉓ Stirrup
- ㉔ Secondary lead support bracket
- ㉕ Adapter plate for cluster mounting
- ㉖ Clevis bracket for spool insulator
- ㉗ Spool insulator
- ㉘ U bolt clamp for deadends only
- ㉙ Preformed guy grip, size as required.
- ㉚ Guy hook
- ㉛ Guy strain insulator
- ㉜ Guy wire, size as specified
- ㉝ #4 WP Cu. ground wire
- ㉞ Ground clamp, size as required
- ㉟ Plastic to steel adapter, size as required
- ㊱ Plastic bend, size as required
- ㊲ Insulated bushing
- ㊳ Perforated strapping, 1 1/2" wide
- ㊴ Hot line clamp
- ㊵ Fused cutout, as specified
- ㊶ Lightning arrester, as specified
- ㊷ Pole top pin
- ㊸ Crossarm angle pin
- ㊹ Angle pole top pin
- ㊺ WP cu, size as specified
- ㊻ Tri-mount bracket
- ㊼ Terminator, Porcelain Housed
- ㊽ Mounting bracket
- ㊾ Cable Grip Hangar
- ㊿ Hose clamp

LANTDIV PLATE

16-0-3

(1 of 2)

3-75

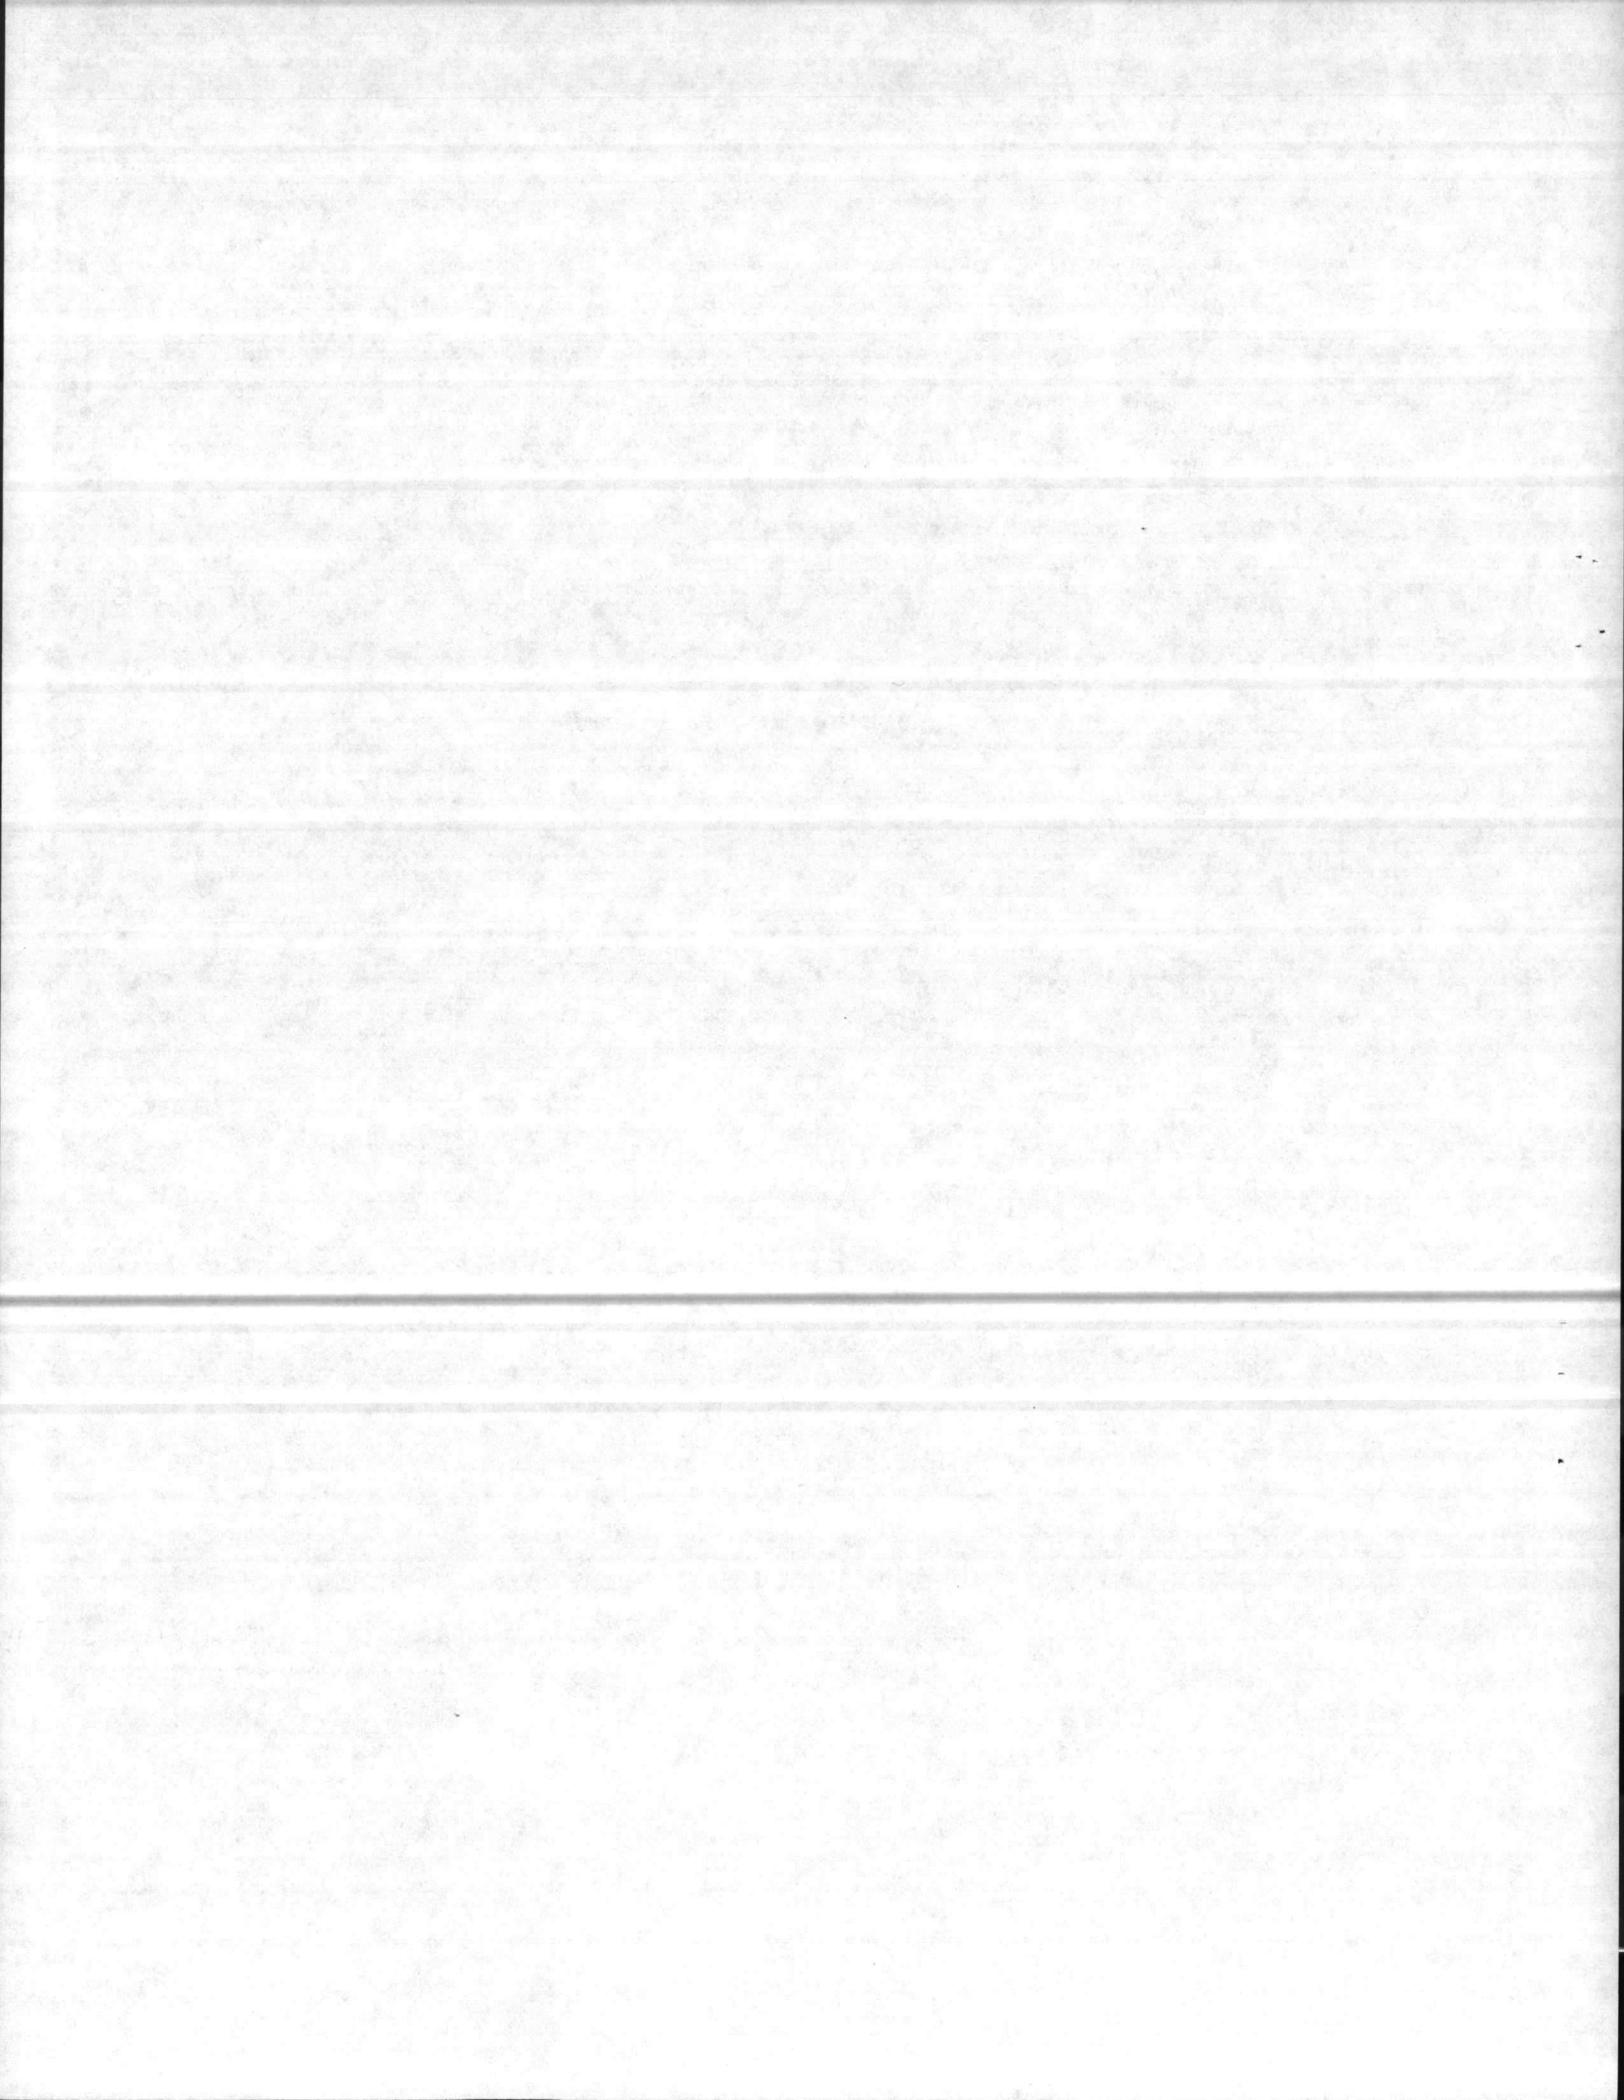


- 51 — Stud, 3/4" x 1 3/4"
- 52 — Line Post Insulator
- 53 — Triple Insulator Bracket
- 54 — Angle Clamp
- 55 — Insulator, Line Post Clamp
- 56 — 4' Crossarm
- 57 — Crossarm Gain Bracket
- 58 — Pulley Bracket
- 59 — Wedge Clamp
- 60 — Midspan Service Clamp
- 61 — Stud, 7"
- 62 — Saddle, Angle
- 63 — Saddle, Crossarm
- 64 — Fitting, Pole Top


LANTDIV PLATE

16-0-3

(2 of 2)

3-75

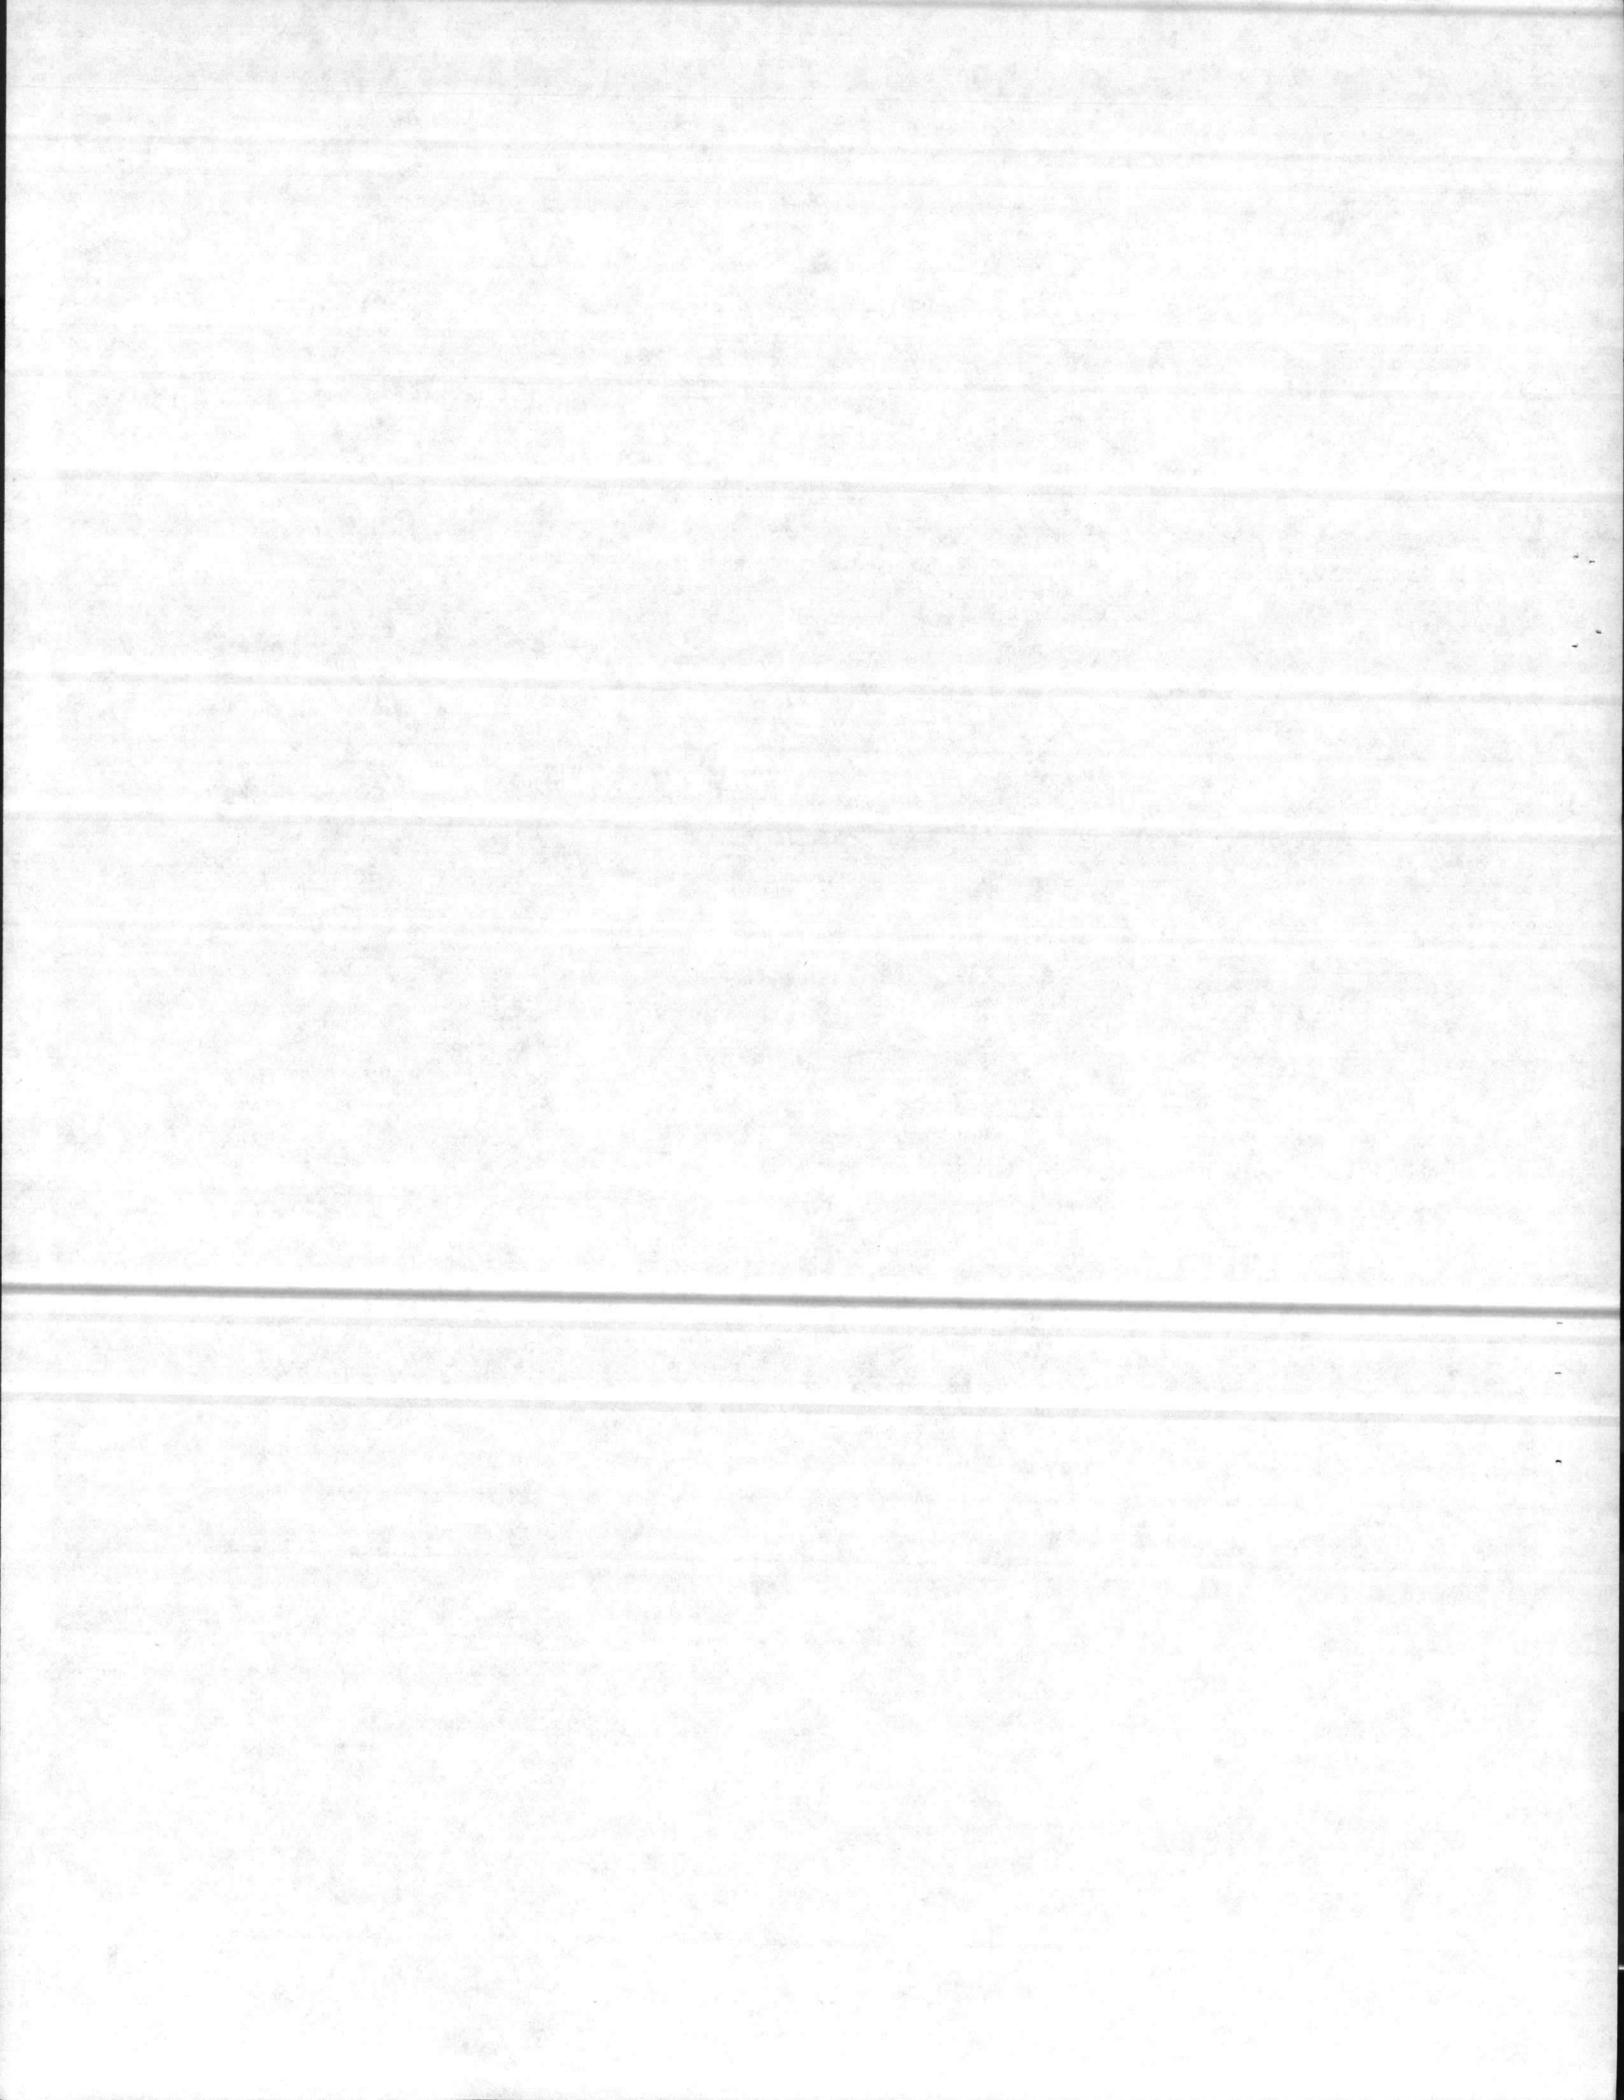


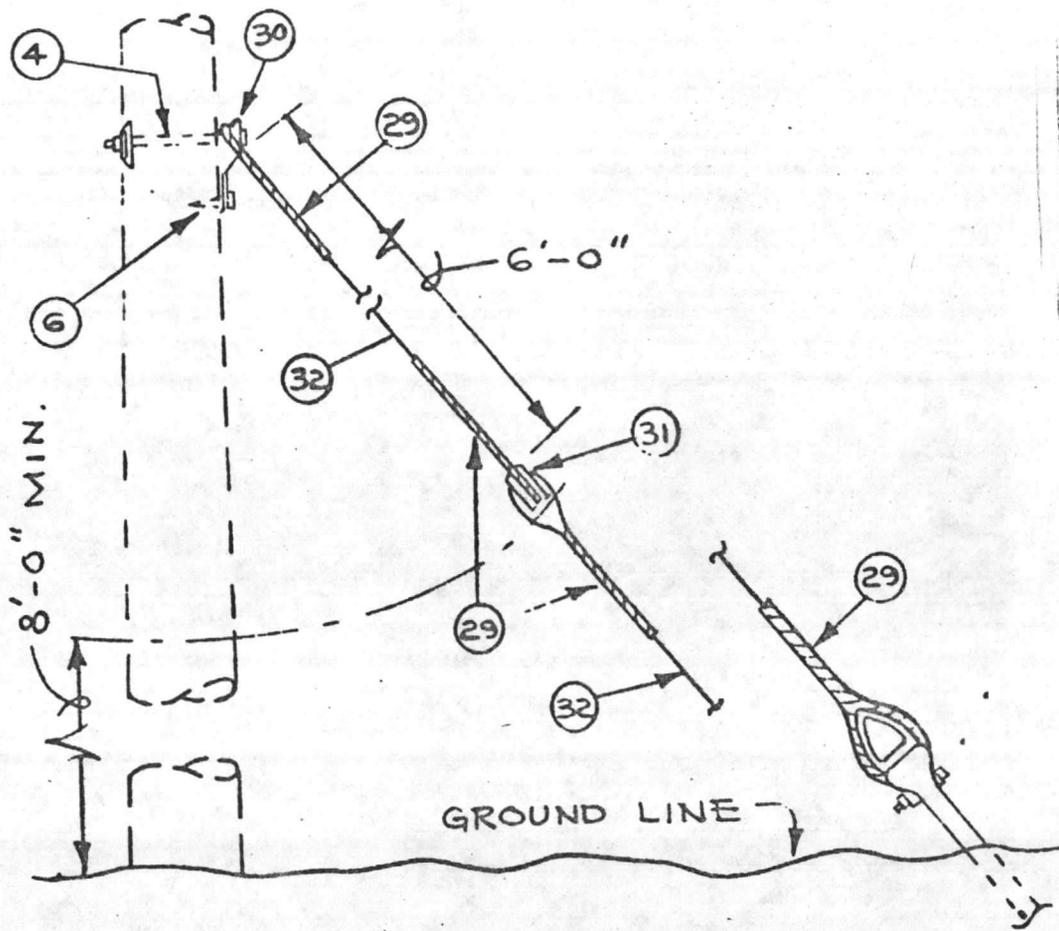


GUY
(SIZE AS SPECIFIED)

LANTDIV PLATE 16-18

3-75

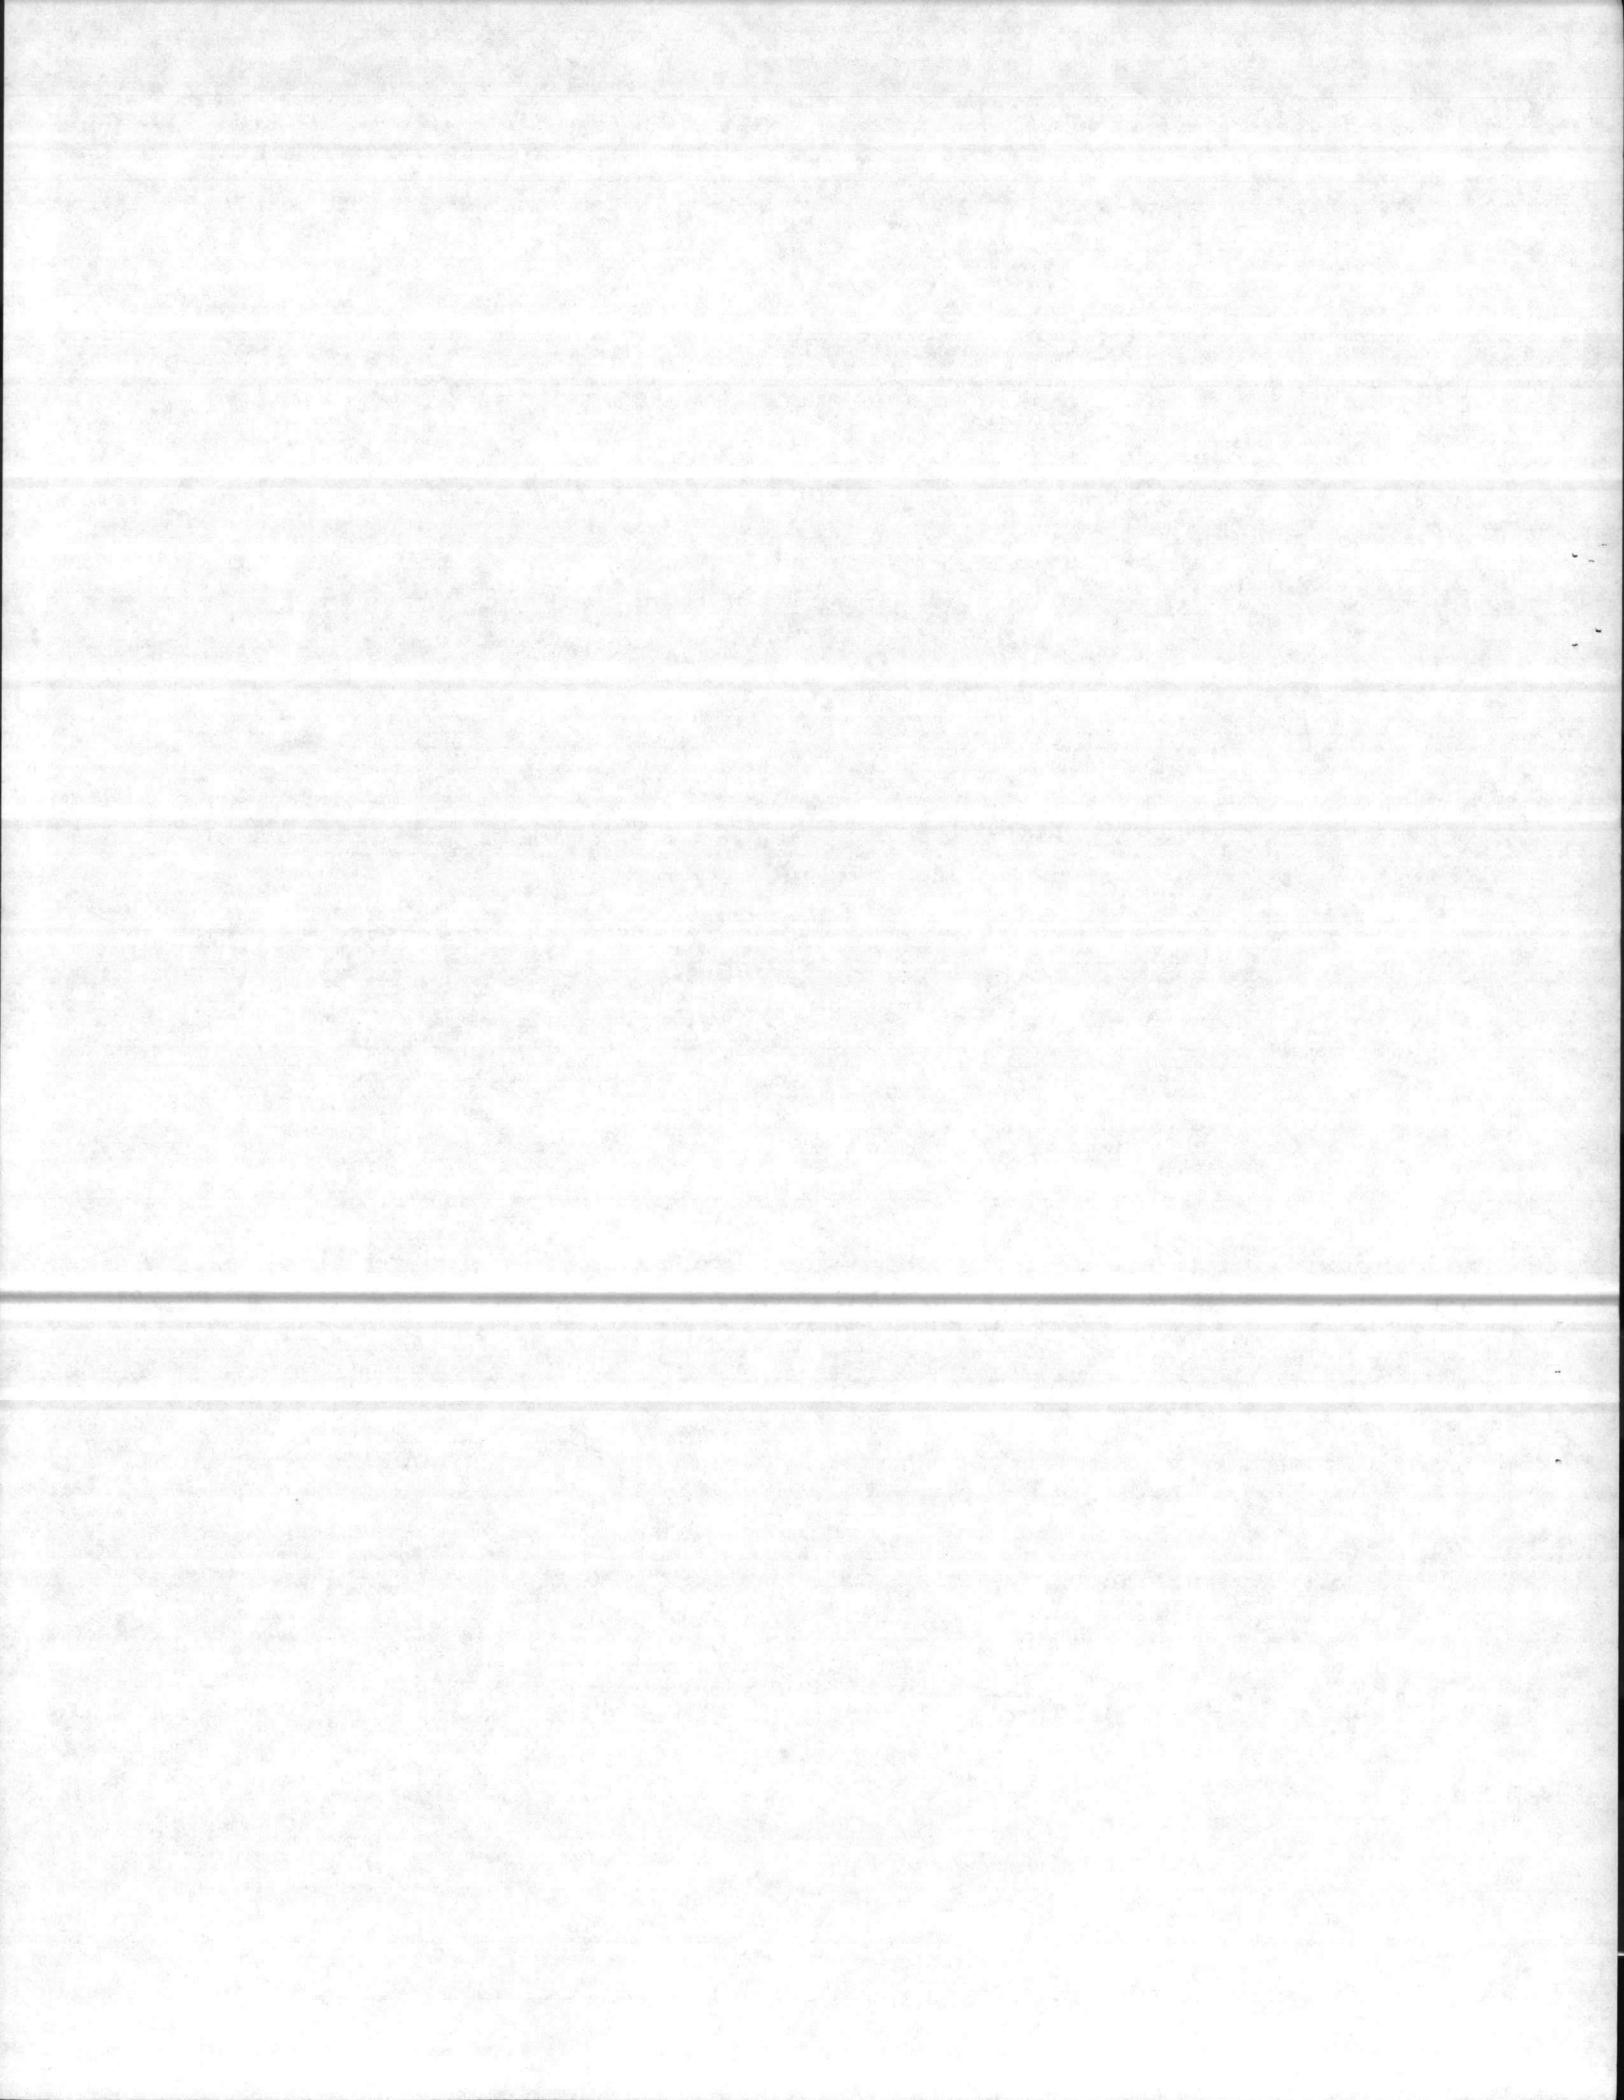

POSITION OF
CROSSARM GUYING,
REPLACE WHERE
EXISTING

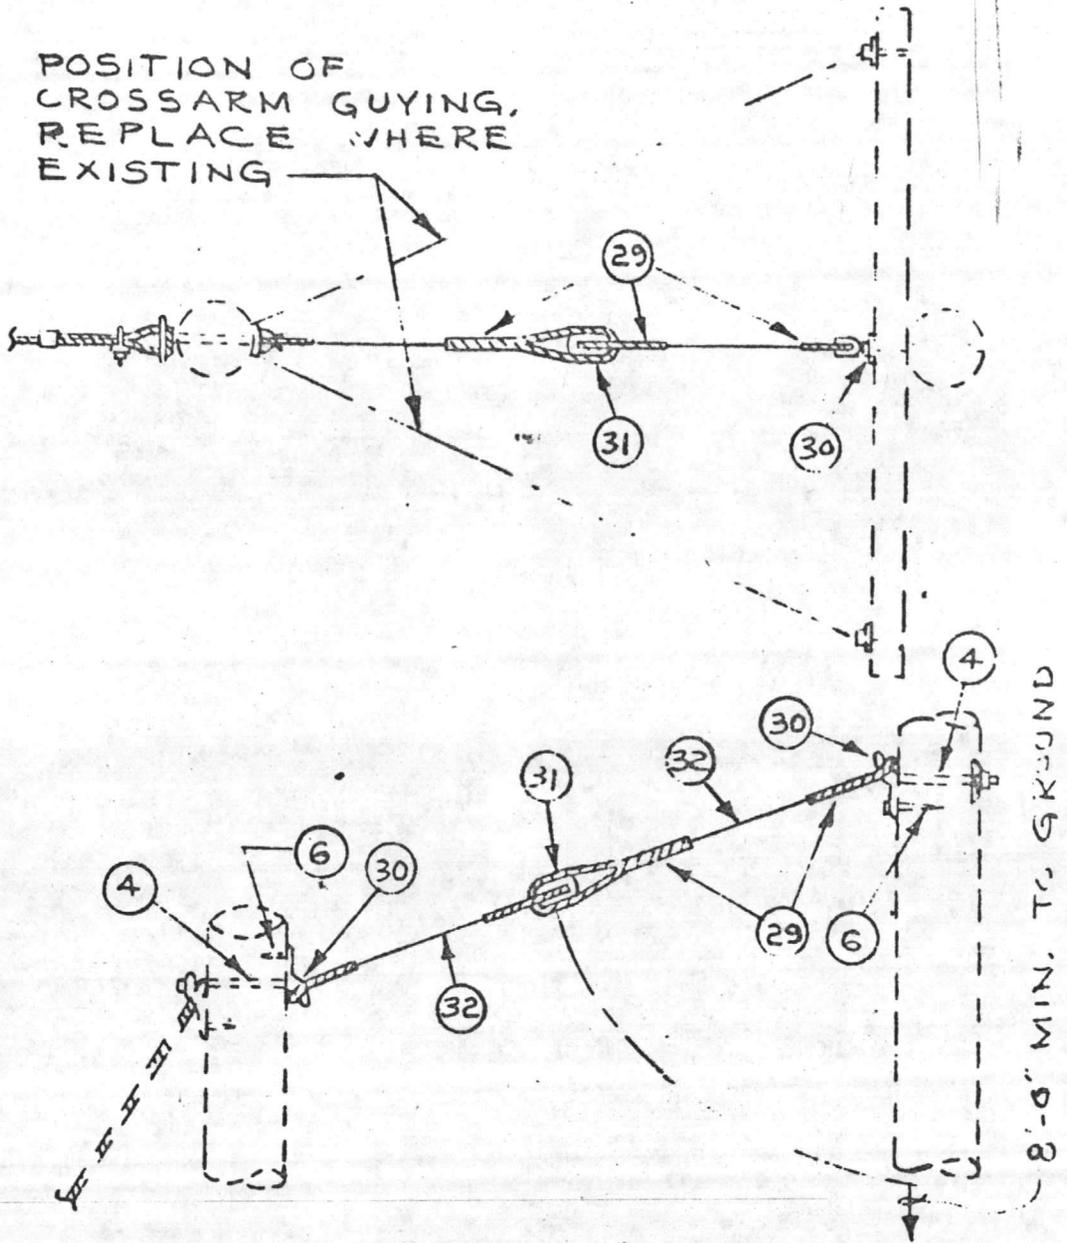



SPAN GUY
(SIZE AS SPECIFIED)

LANTDIV PLATE 16-19


3-75

05-79-4476
16300 - 28

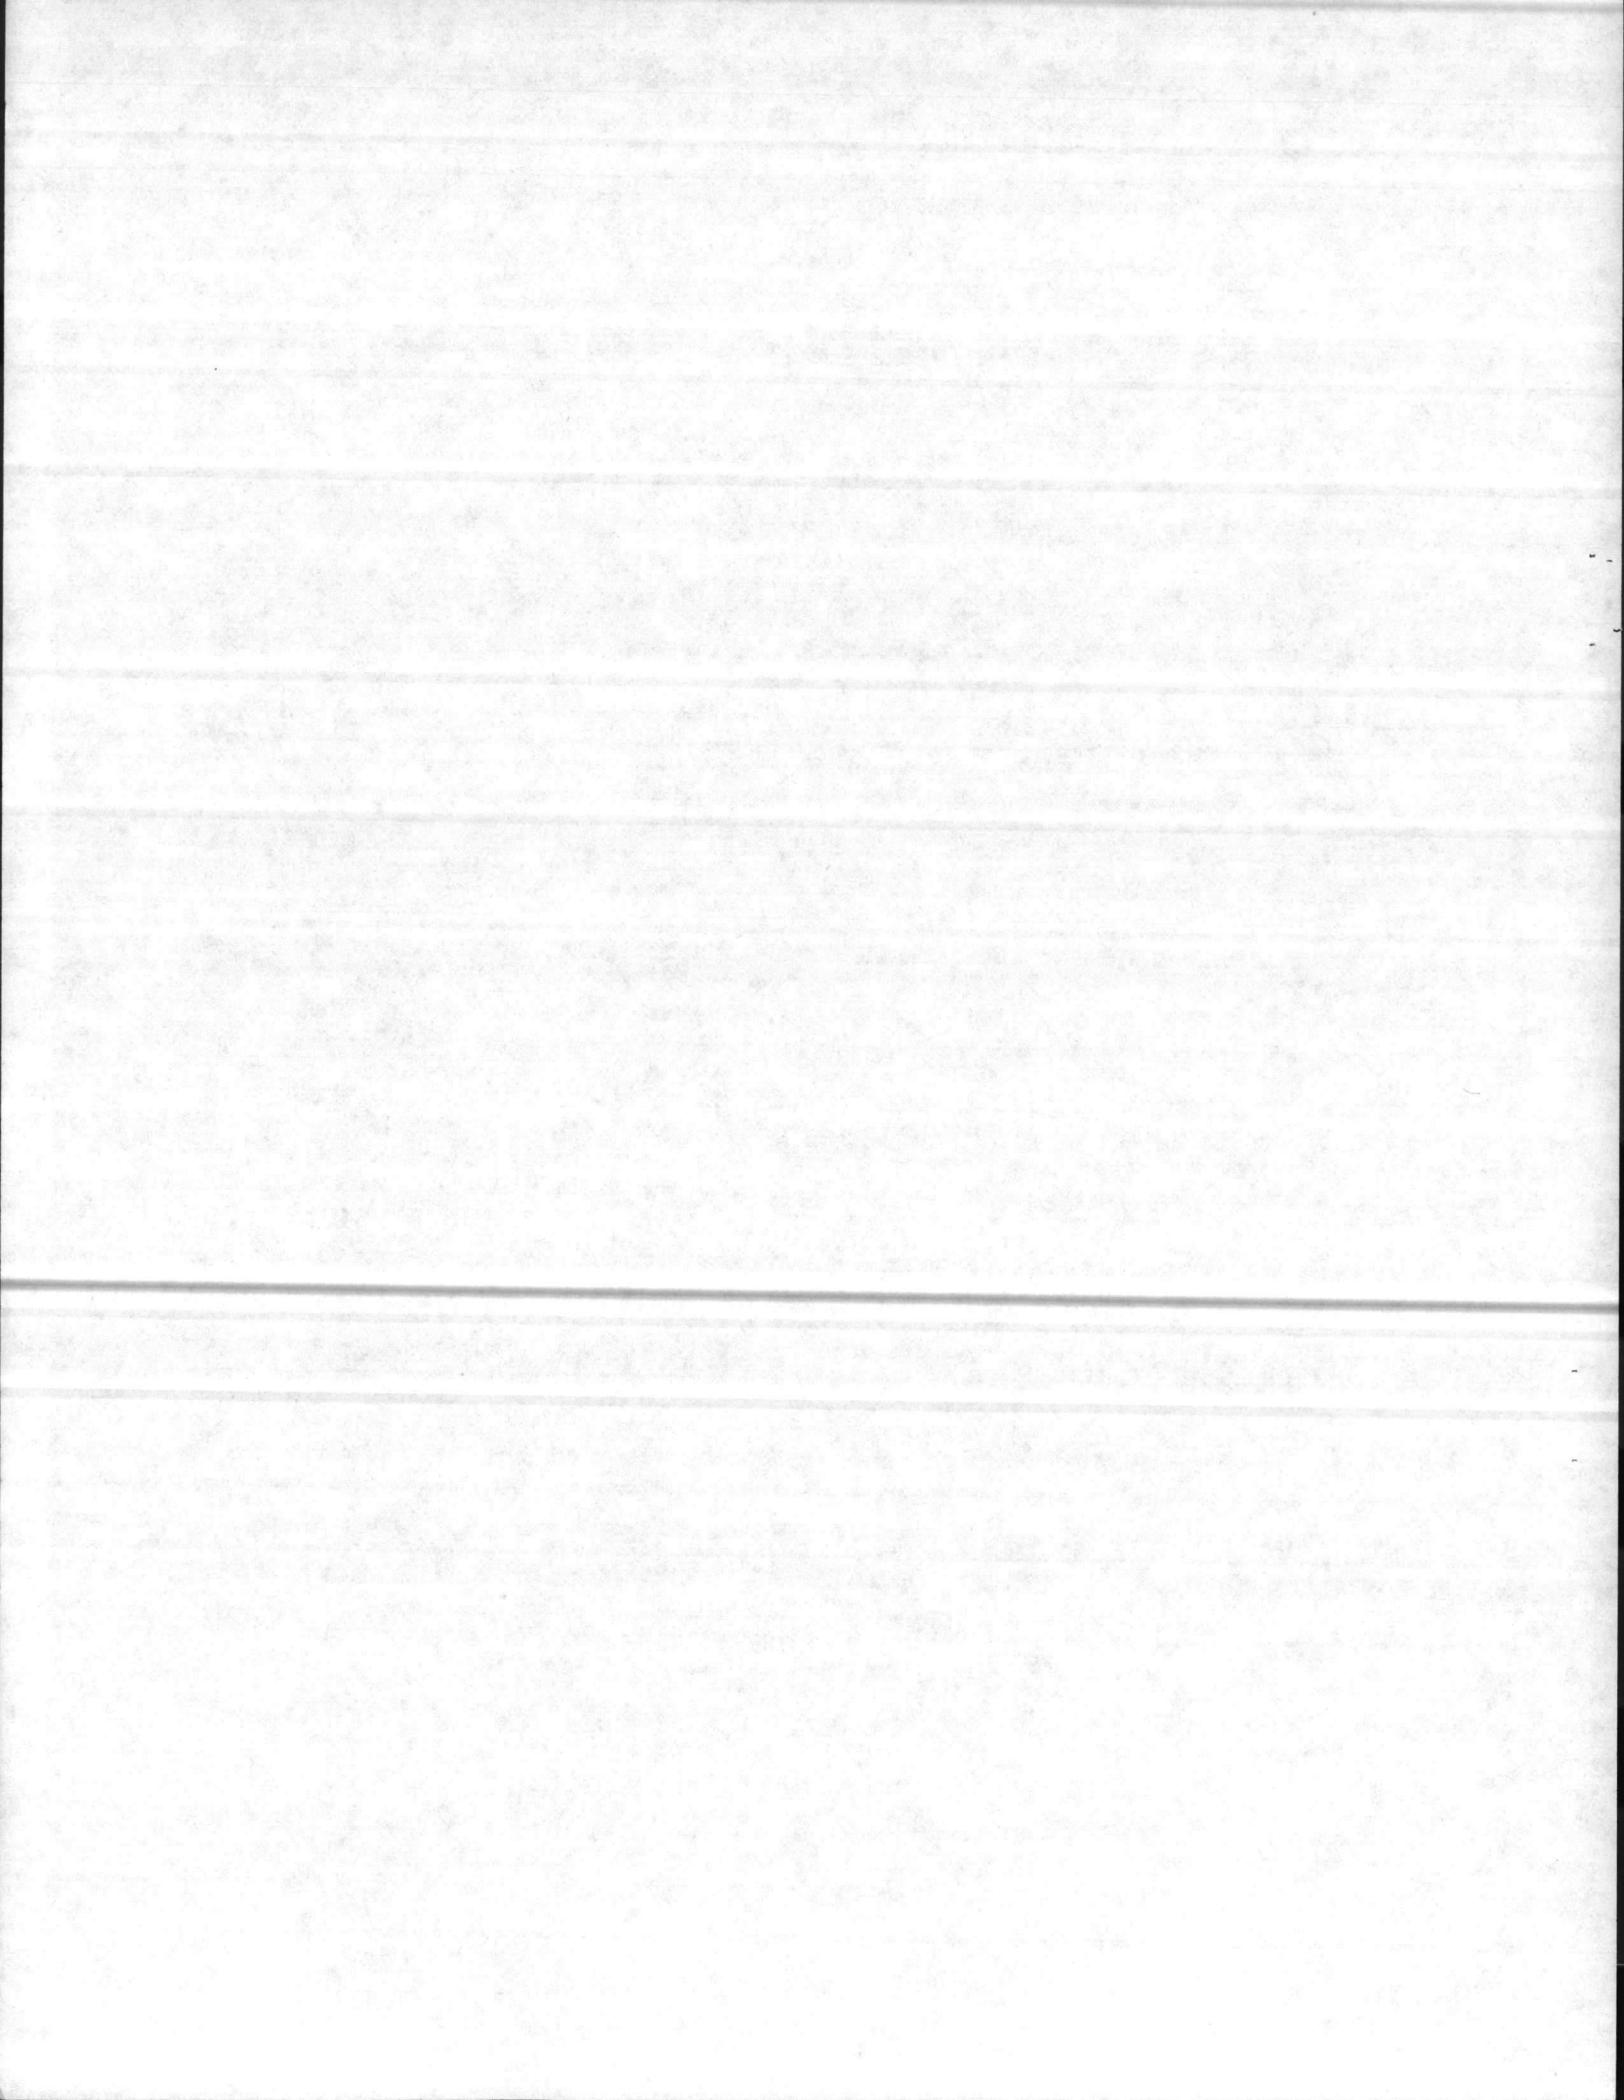


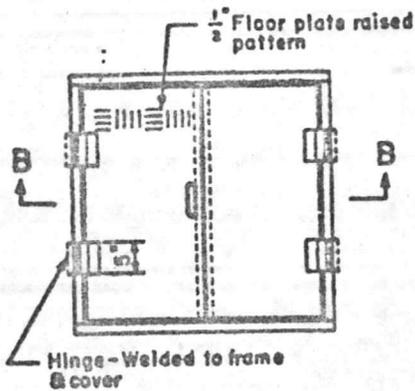


PLAN OF COVER

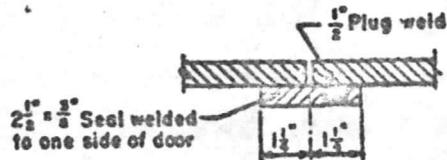


SEAL DETAIL

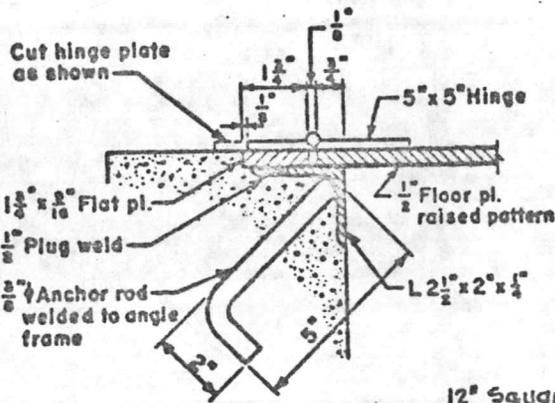


SECTION OF FRAME

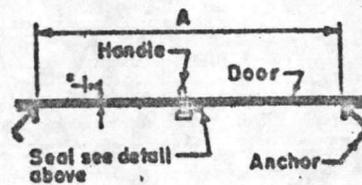

SECTION B-B

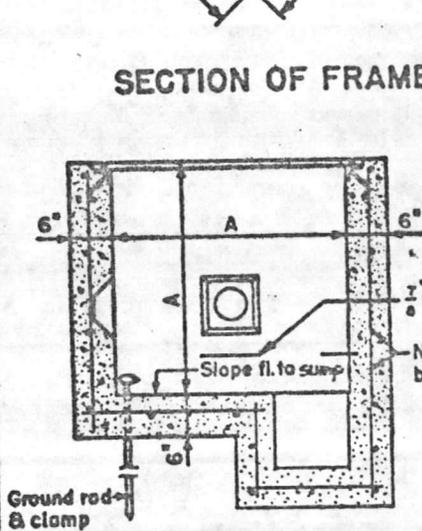

SECTION A-A

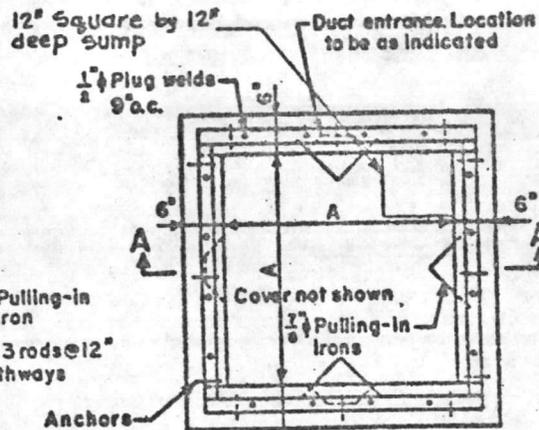

PLAN

HANDHOLE	A
Type 1	3'-0"
Type 2	4'-0"

NOTE: For details of cable racks, duct entrance, and pulling-in irons see LANTDIV UG PLATE NO. 1


STANDARD HANDHOLES

ELECTRICAL

NON-TRAFFIC

For unpaved areas

LANTDIV UNDERGROUND PLATE NO. 3

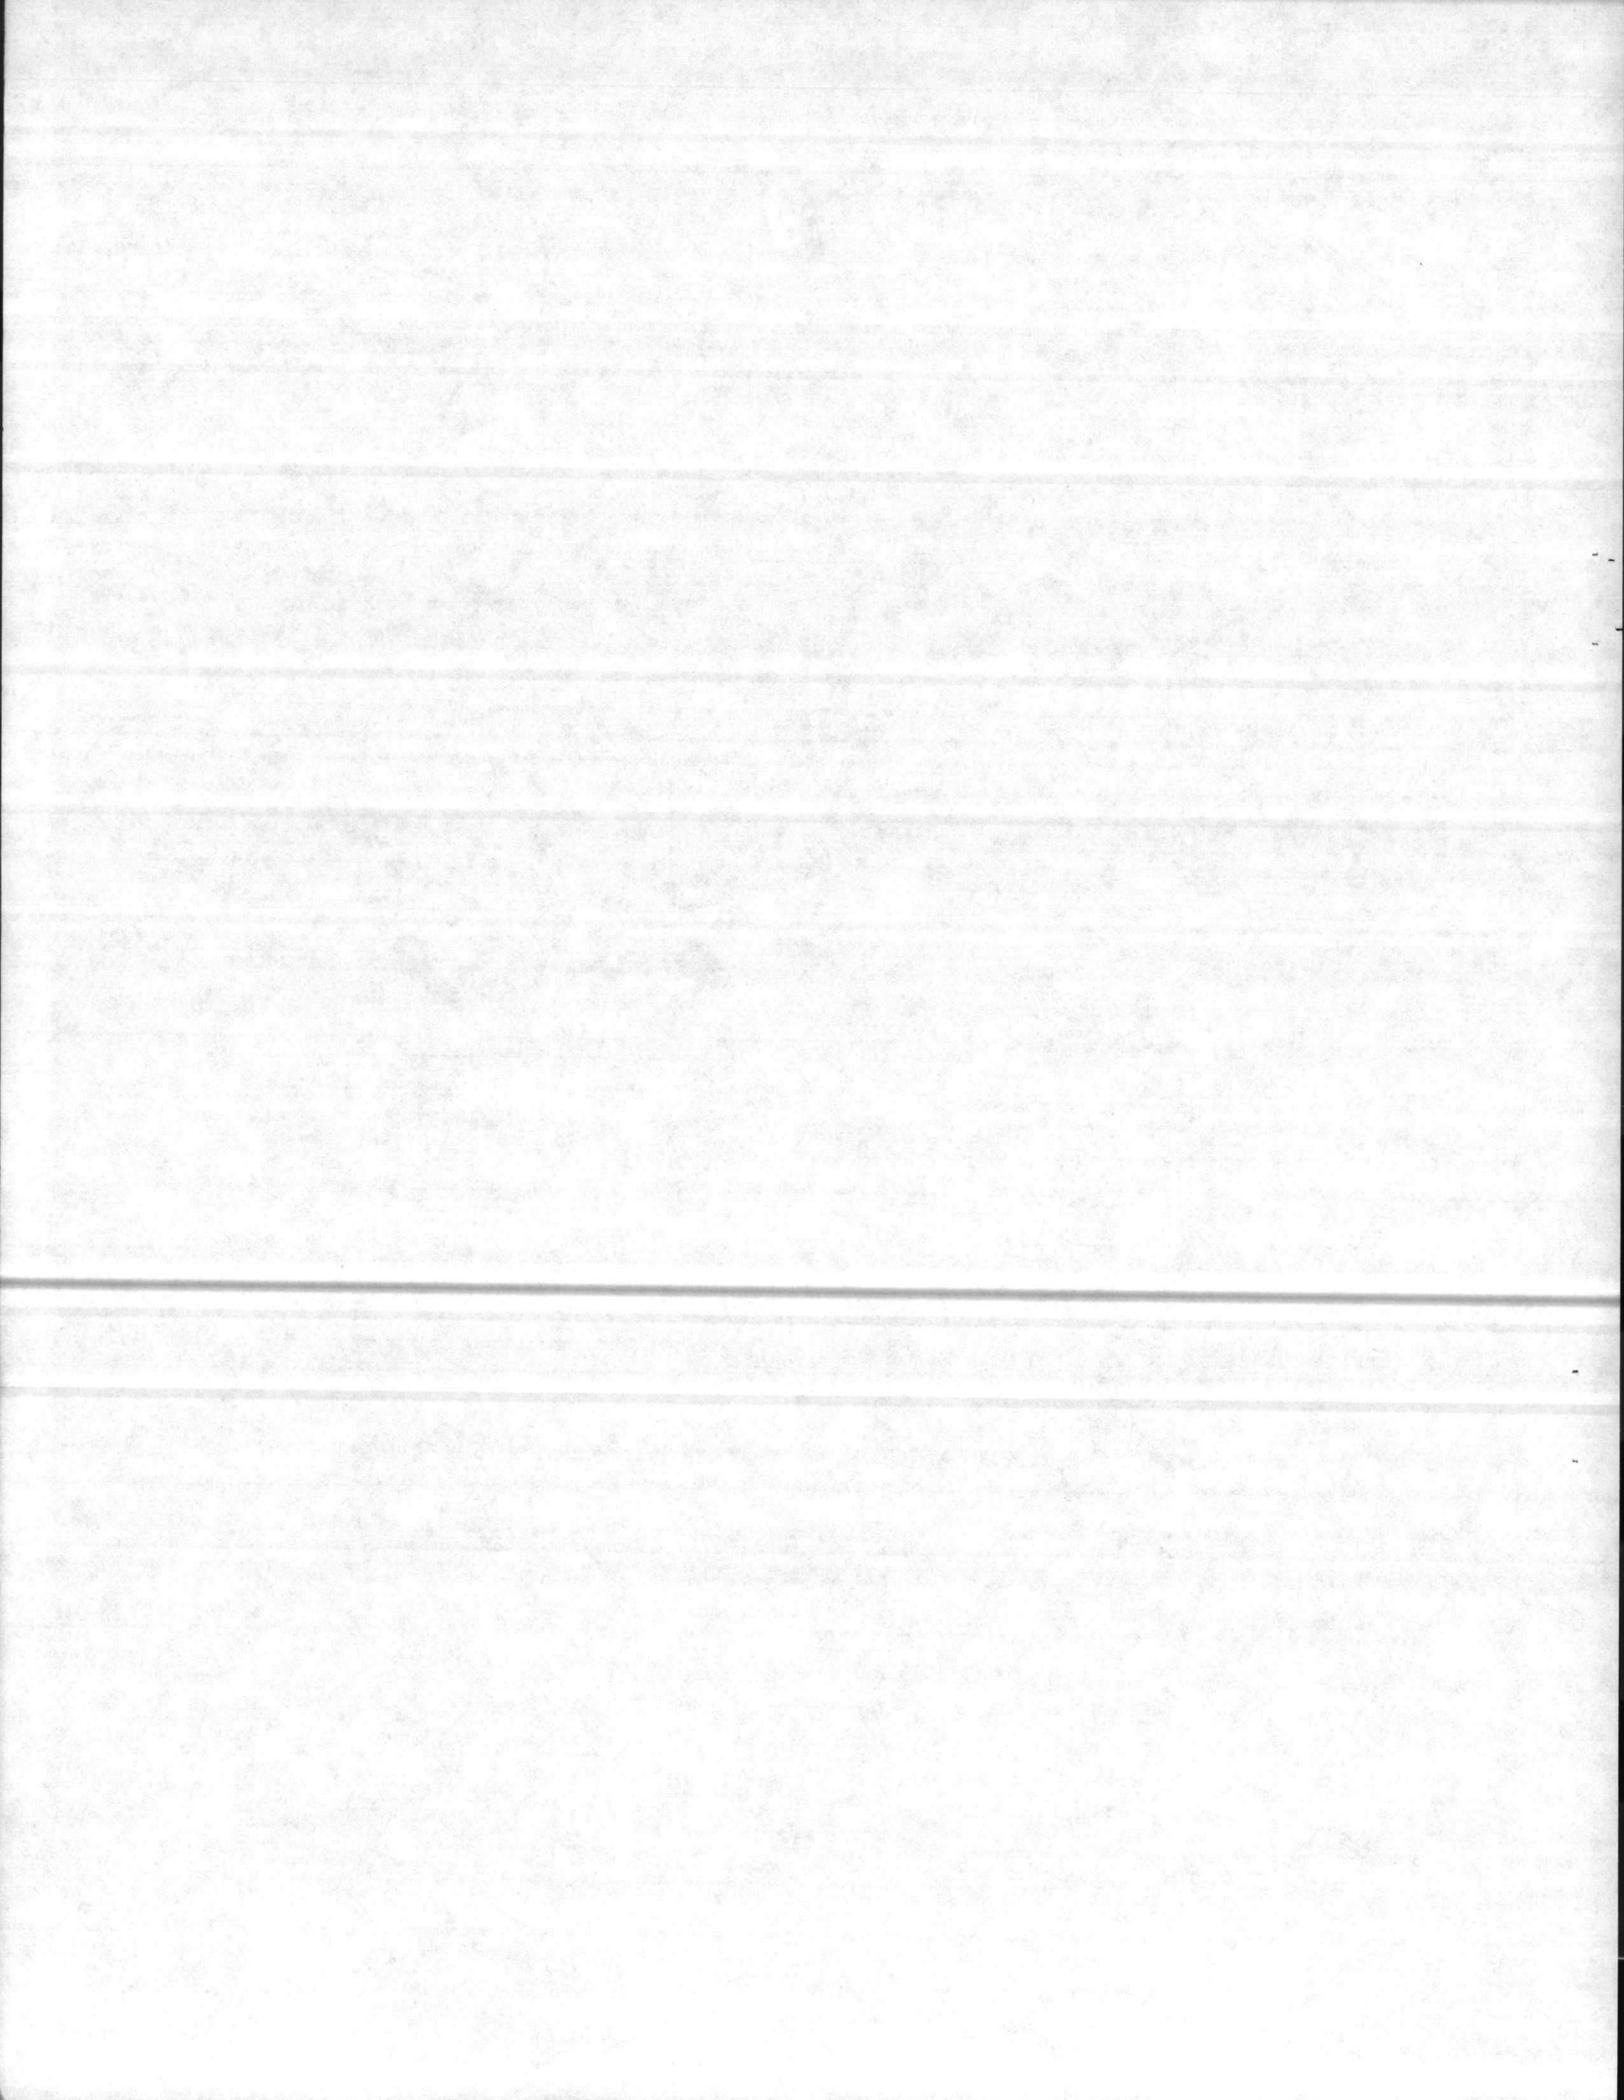

SECTION 16402
INTERIOR ELECTRICAL SYSTEMS

1. APPLICABLE PUBLICATIONS: The following publications of the issues listed below, but referred to thereafter by basic designation only, form a part of this specification to the extent indicated by the references thereto (where a number is suffixed to the specification number, it denotes the effective amendment to the specification):

1.1 Federal Specifications:

TT-E-489E	Enamel, Alkyd, Gloss, (for exterior and interior surfaces).
FF-D-645	Primer, Paint, Zinc-Chromate, Alkyd Type.
W-C-375B	Circuit Breaker, Molded Case, Branch Circuit and Service.
W-C-596D	Connector, Plug, Electrical; Connector, Receptacle, Electrical.
W-S-865C & Int Am 2	Switch, Box (Enclosed), Surface-mounted.

1.2 Military Specifications:

MIL-P-15328C(1)	Primer, Pretreatment (Formula No. 117 for Metals).
-----------------	--

1.3 LANIDIV Plates:


Light Fixtures Nos. 16-I-1	Dated 6-76
-------------------------------	------------

1.4 American National Standards Institute (ANSI):

C2-1973	National Electrical Safety Code.
C80.1-1966 (R 1971)	Rigid Steel Conduit, Zinc Coated.

1.5 National Electrical Manufacturers Association (NEMA):

ICS-1970(JUL 75)	Industrial Controls and Systems.
FU I-1966	Low Voltage Cartridge Fuses.
MG 1-1972(AUG 75)	Motors and Generators.

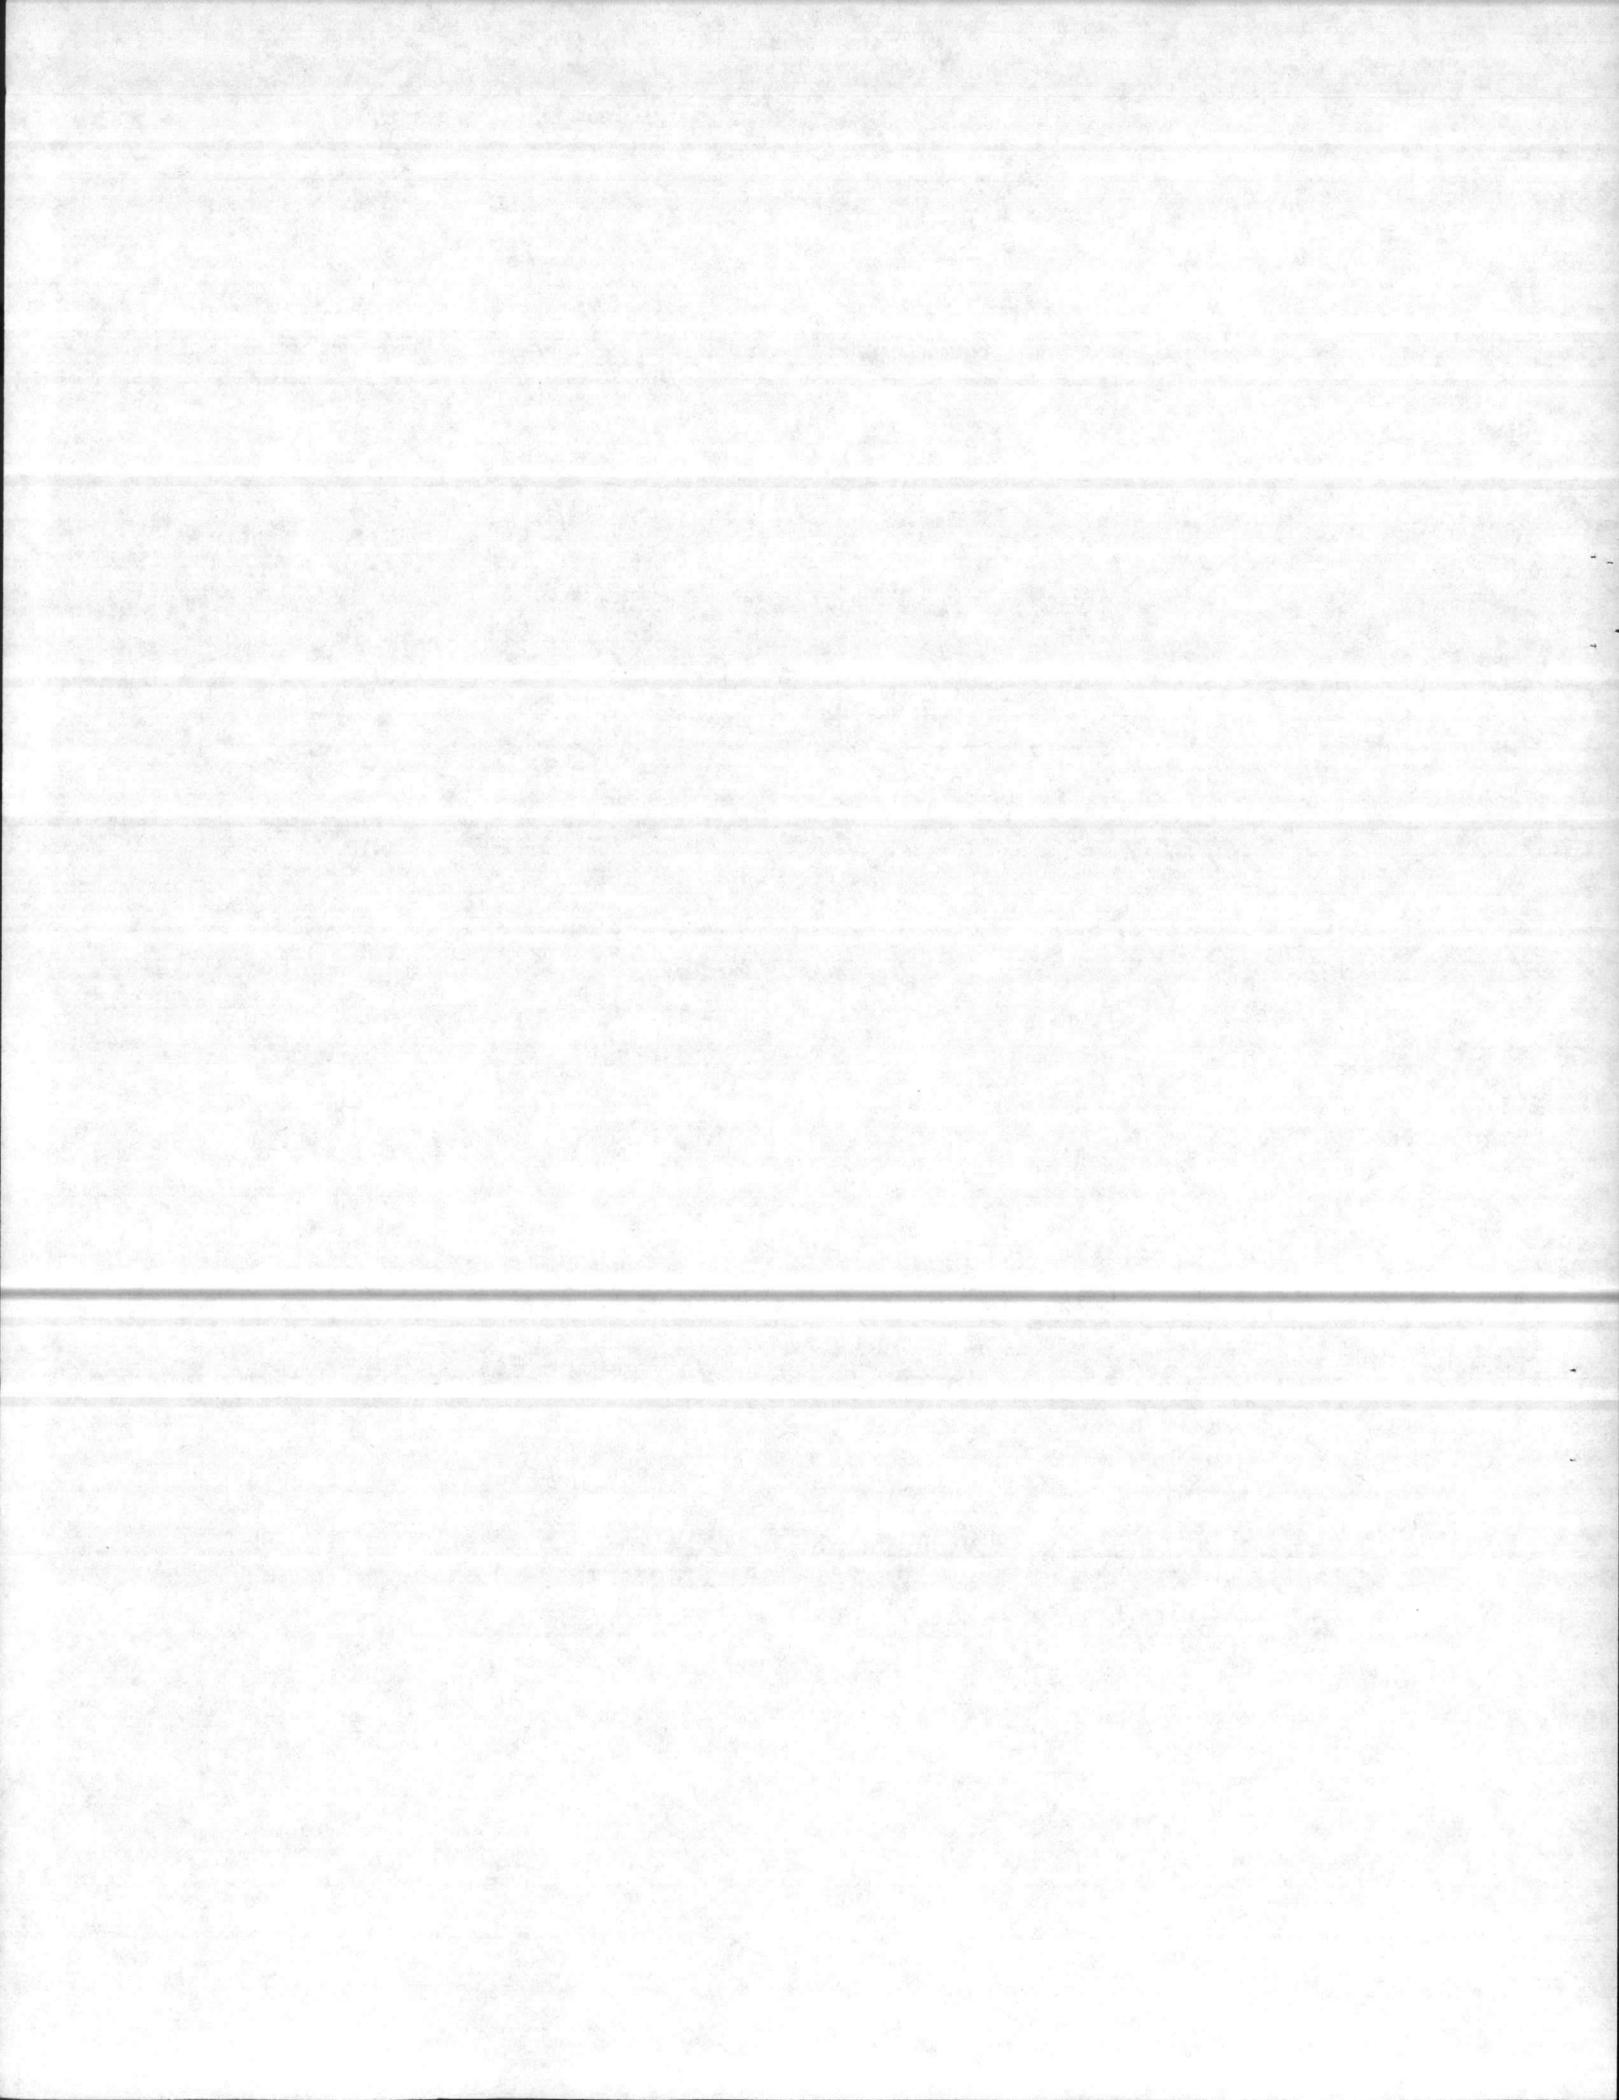

1.6 National Fire Protection Association (NFPA):

70-1975 National Electrical Code (NEC).

1.7 American Society for Testing and Materials (ASTM):

B 1-70 Hard Drawn Copper Wire.
B 8-72 Concentric-Lay Stranded Copper Conductors; Hard,
Medium-Hard, or Soft.

1.8 Underwriters' Laboratories, Inc. (UL):

1-1973(AUG 73) Flexible Steel Conduit.
20-1974 Snap Switches.
50-1970(JUN 74) Cabinets and Boxes.
57-1972(APR 74) Electric Lighting Fixtures.
67-1974(OCT 74) Panelboards.
83-1971(APR 74) Thermoplastic-Insulated Wires.
198-1971(AUG 72) Fuses.
467-1972(APR 74) Grounding and Bonding Equipment.
486-1969(DEC 73) Wire Connectors and Soldering Lugs.
510-1971(JUN 71) Insulating Tape.
514-1974(DEC 74) Outlet Boxes and Fittings.
719-1971(APR 74) Service-Entrance Cables.
869-1974(AUG 74) Service Equipment.


2. QUALITY CONTROL: All field tests to determine conformance with the specified requirements shall be performed in the presence of the Contracting Officer.

3. SUBMITTALS:

3.1 Shop drawings (SD) and catalog data (CD) for the following items shall be submitted to and approved by the Contracting Officer approved by the Contractor Quality Control Representative and submitted to the Contracting Officer for record purposes prior to the delivery of these items to the project site. The drawings and data shall show materials, finish and all pertinent details.

3.1.1 For Contracting Officer Approval:

Wireway (SD)	Panelboards (SD, CD)
Receptacles (CD)	Circuit Breakers (CD)
Conductors (CD)	Disconnect Switches (CD)
Fuses (CD)	Contactor (CD)
	Lighting Fixtures (CD)
Conduit Supports (CD)	

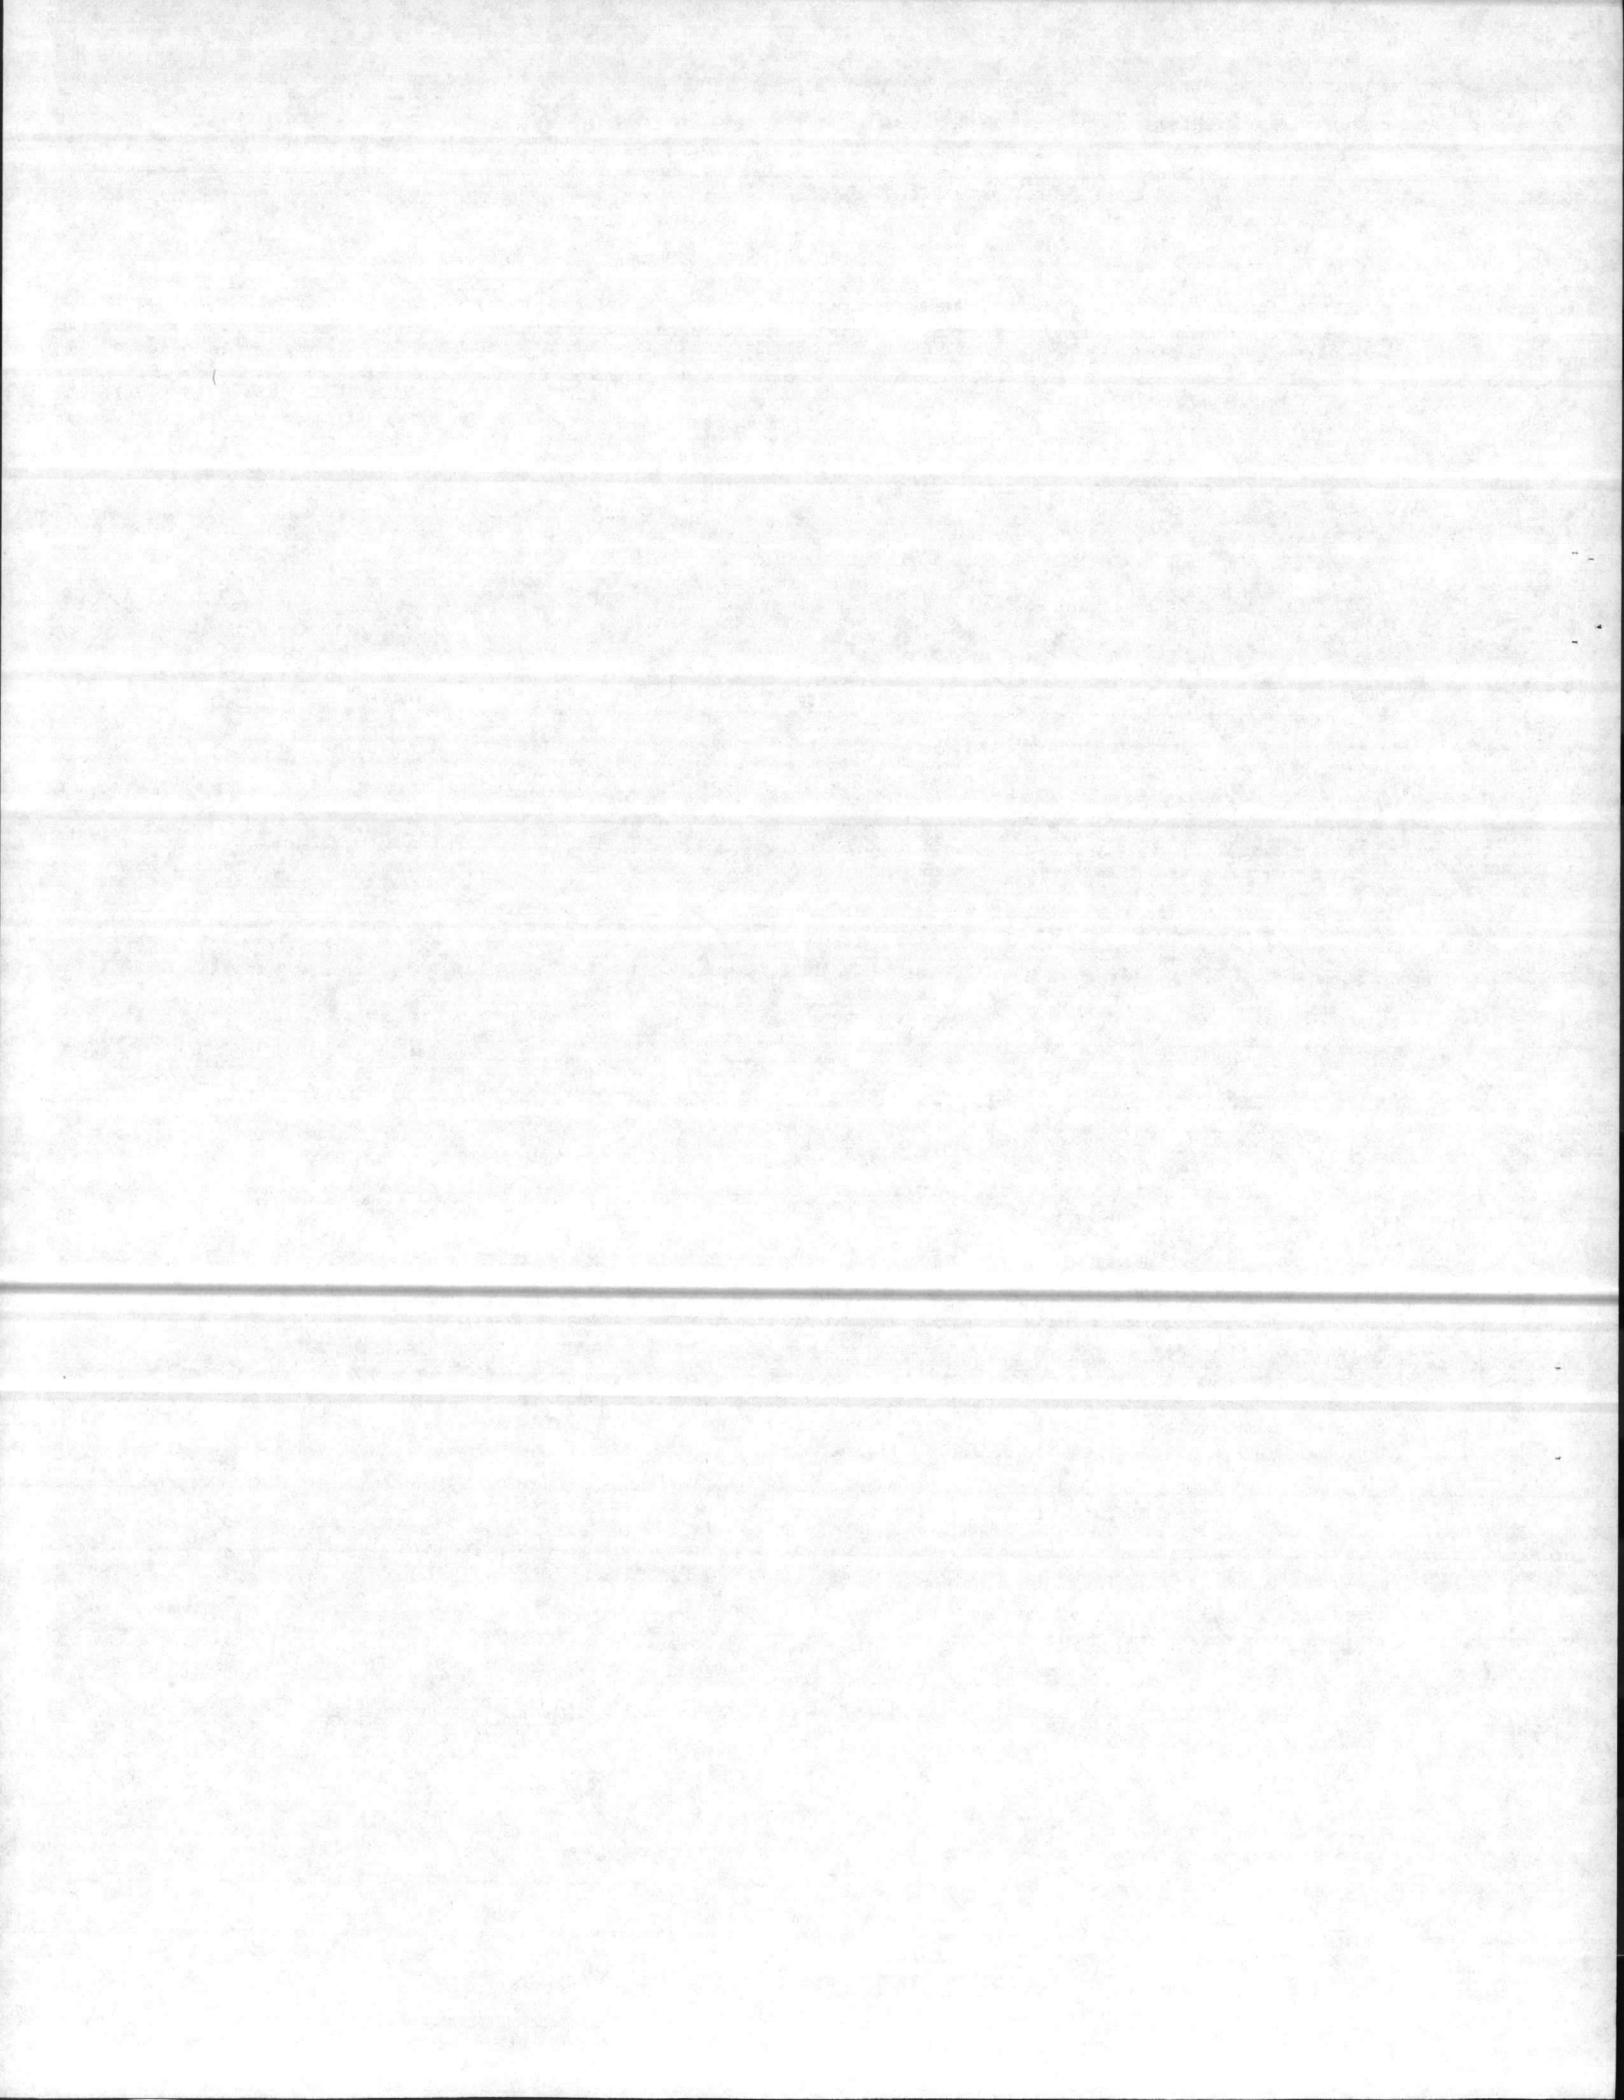

3.2 Manufacturer's Certifications shall be submitted to the Contracting Officer for the following items prior to the delivery of these items to the project site. Certifications shall indicate complete compliance with specification requirements.

Conduit
Conduit Fittings
Ground Rods


Boxes
Outlets
Cover and Device Plates

Toggle Switches
Tapes

3.3 Materials tests and test reports: The testing requirements for materials incorporated in referenced documents will be waived provided the manufacturer submits notarized certificates stating that previously manufactured materials have been tested by recognized laboratories, that such materials meet testing requirements specified, and that the materials furnished for this project are of the same type, quality, manufacture and make as that tested. Copies of the test reports need not be submitted except as specifically requested by the Contracting Officer.

4. GENERAL REQUIREMENTS: The work includes the provision of new interior electrical systems. Each system shall be complete and ready for operation according to the requirements specified herein. The contract drawings indicate the extent and general arrangement of equipment, fixtures, and conduit and wiring systems. If any departures are deemed necessary by the Contractor, details of such departures and the reasons therefor shall be submitted as soon as practicable and within 30 days after award of the contract to the Contracting Officer for approval. No such departure shall be made without prior written approval of the Contracting Officer. The Contractor shall be responsible for providing properly sized circuit breakers to serve equipment and motors furnished which differ from those specified or indicated. This shall be further understood to include branch circuit wiring, conduit, disconnect switches, etc., in accordance with the appropriate codes and specifications. The cost of providing this increased electrical service and related work shall be included under the applicable section under which the equipment and motors are being furnished. In each of the standards referred to herein, the advisory provisions shall be considered to be mandatory, as though the word, "shall" had been substituted for "should" wherever it appears. Reference in these standards to the "authority having jurisdiction", or words of similar meaning, shall be interpreted to mean the Contracting Officer.

4.1 Product Requirements: Unless otherwise indicated, the materials to be provided under this specification shall be the products of manufacturers regularly engaged in the production of such items and shall be the manufacturer's latest design. The products shall conform to the applicable standards of UL and NEMA, unless specified otherwise. All items of the same type or ratings shall be identical. This shall be further understood to include products with the accessories indicated. All equipment and materials shall be new unless indicated or specified otherwise. The

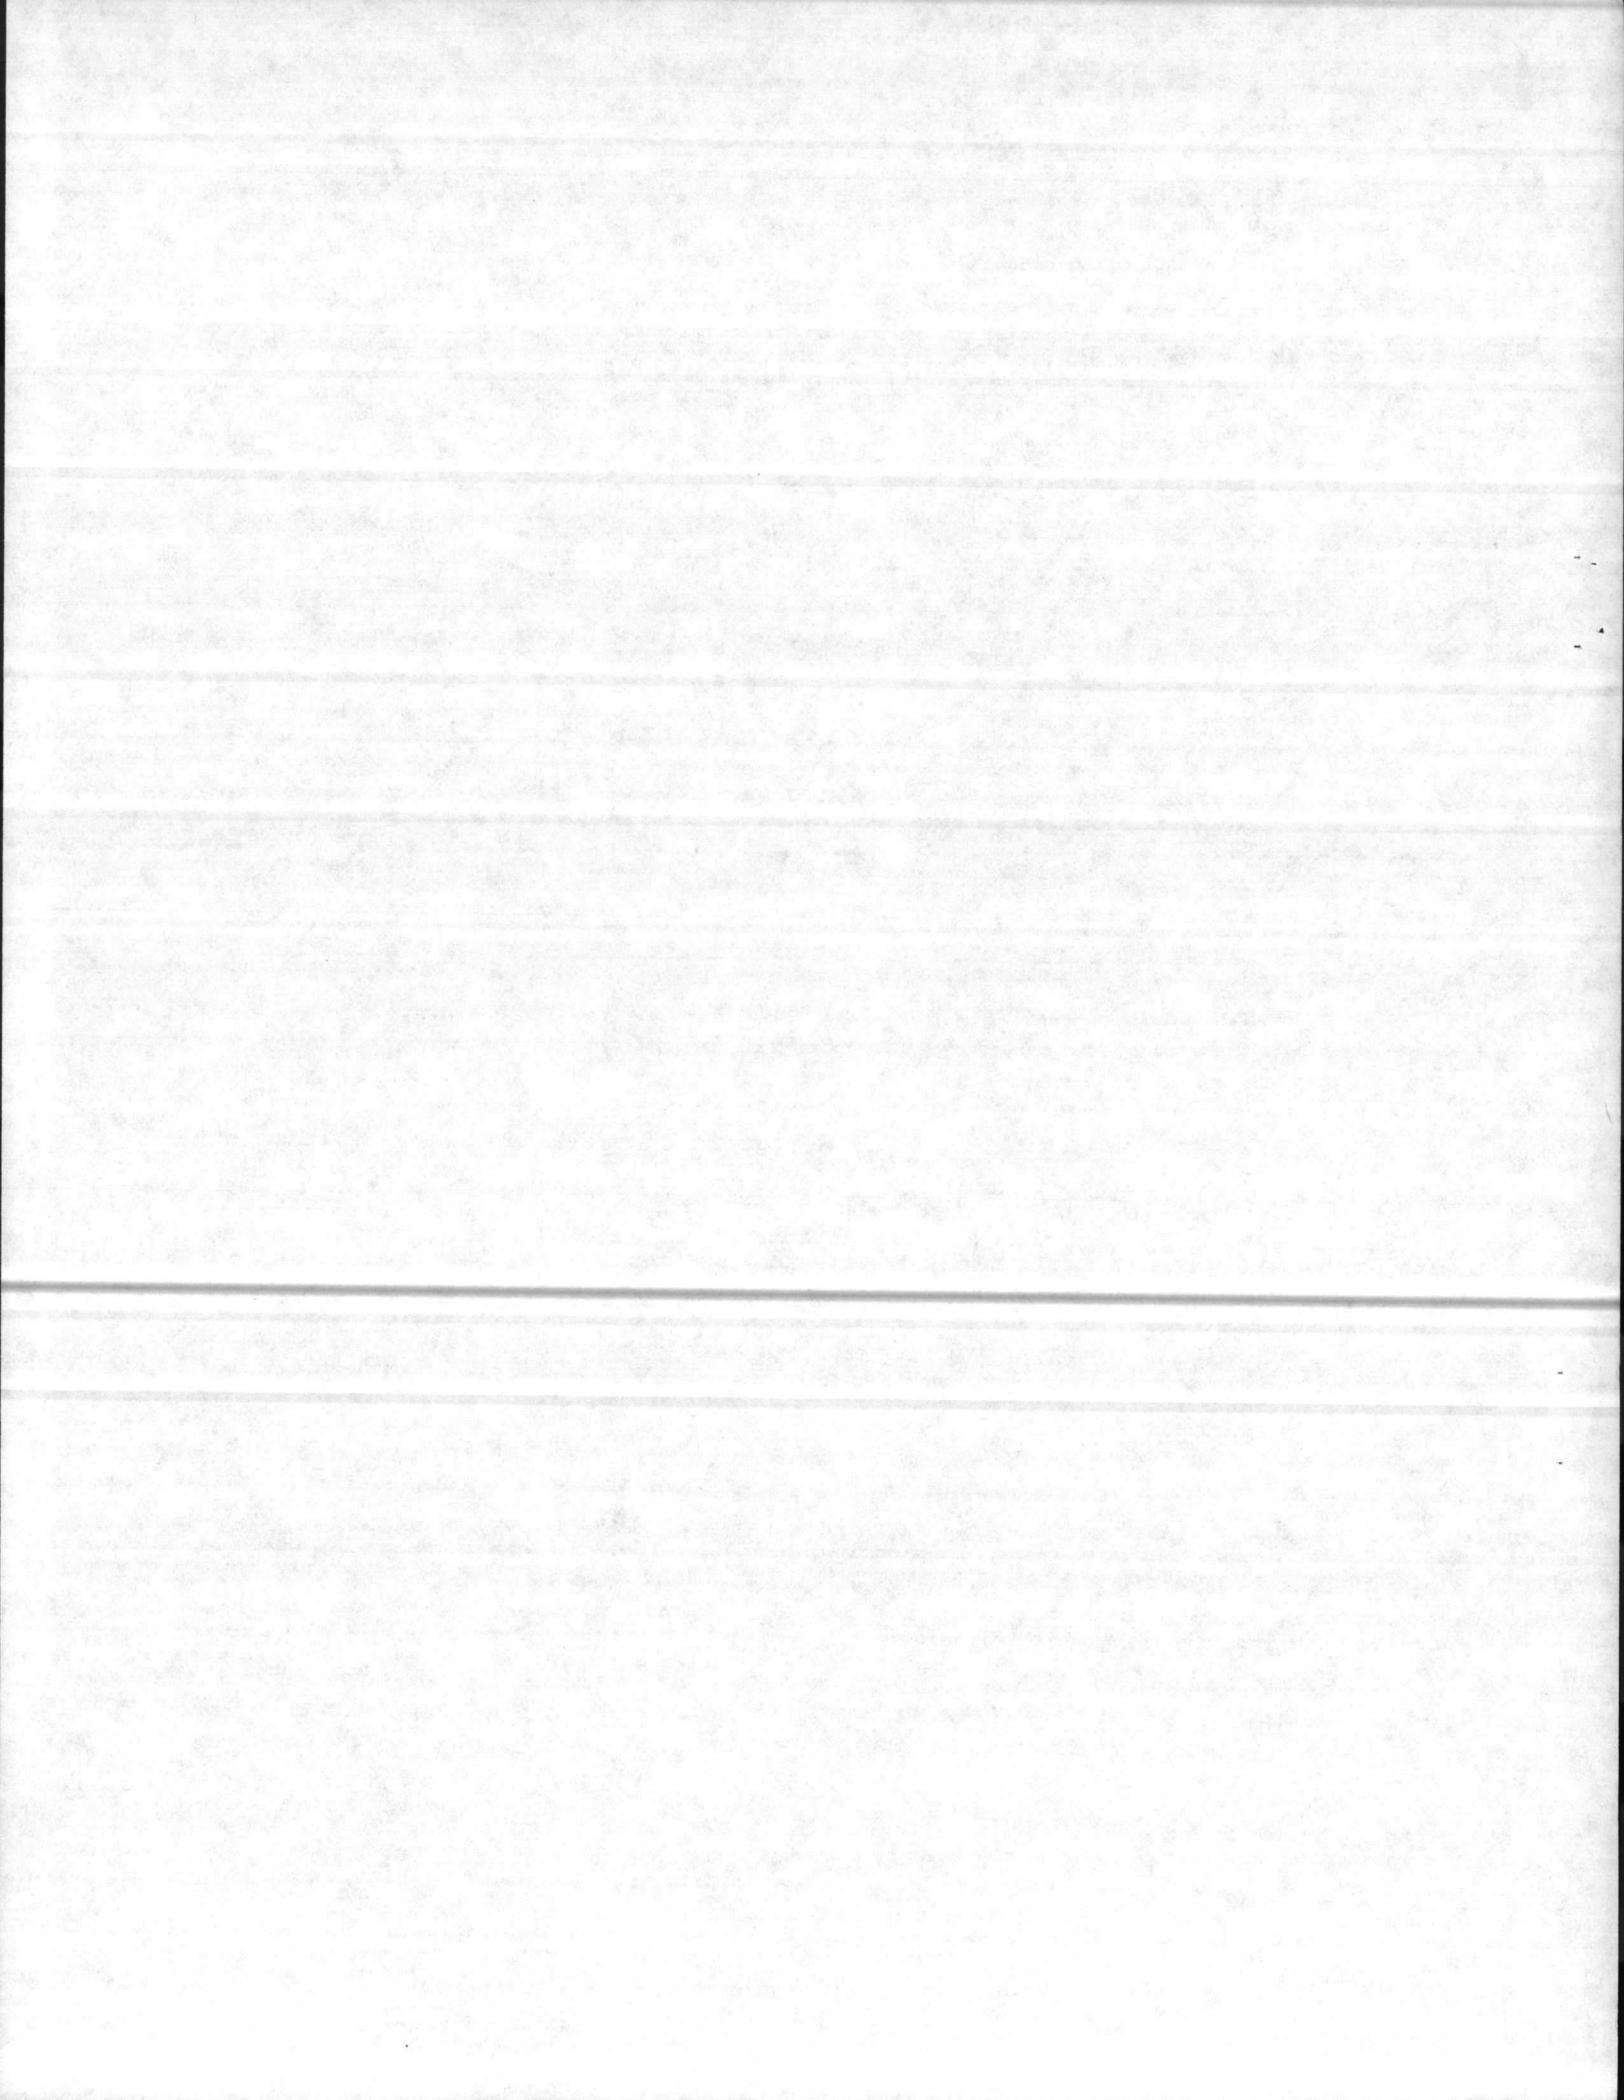

Contractor shall submit proof, if requested by the Contracting Officer, that the materials, appliances, equipment or devices that he provides under this contract, meet the requirements of the Underwriters' Laboratories, Inc., as regards fire and casualty hazards. The label of, or listing by, the Underwriters' Laboratories, Inc., will be accepted as conforming with this requirement. In lieu of the label or listing, the Contractor may submit independent proof satisfactory to the Contracting Officer that the materials, appliances, or devices conform to the published standards, including methods of test, of the Underwriters' Laboratories, Inc.

4.2 Material Handling: Material arriving on job site shall be stored in such a manner as to keep material free of rust and dirt and so as to keep material properly aligned and true to shape. Rusty, dirty, or misaligned material shall be rejected. Electrical conduit shall be stored to provide protection from the weather and accidental damage.

Cables shall be sealed, stored and handled carefully to avoid damage to the outer covering or insulation and damage from moisture and weather. Adequate protection shall be required at all times for electrical equipment and accessories until installed and accepted. Materials damaged during shipment, storage, installation or test shall be replaced or repaired in a manner meeting with the approval of the Contracting Officer.

4.3 All electrical components shall be waterproofed by use of total enclosure, gaskets or seals and by other acceptable means as required.


5. ELECTRICAL SERVICE FOR BUILDINGS: Building service: 120/208-volt, 3-phase, 4-wire, Y-connected alternating current (60 hertz). Final connections to the power distribution system shall be made by the Contractor as directed by the Contracting Officer.

5.1 Service into Buildings: Underground conduit for service feeders shall be rigid steel as indicated. The underground portion of the conduit shall be encased in a concrete envelope having a wall thickness of not less than three inches and shall be buried not less than 24 inches. Where a conduit enters through a concrete floor, the curved portion shall not be visible above the finished floor, and the entire conduit below the floor slab shall be encased in a concrete envelope having a wall thickness of not less than three inches. Where underground service connections enter a building above the ground floor, a suitable pull box shall be installed.

5.2 Service entrance equipment shall conform to UL 869 and W-S-865, as applicable.

6. MATERIALS AND EQUIPMENT:

6.1 Conduit and Fittings:

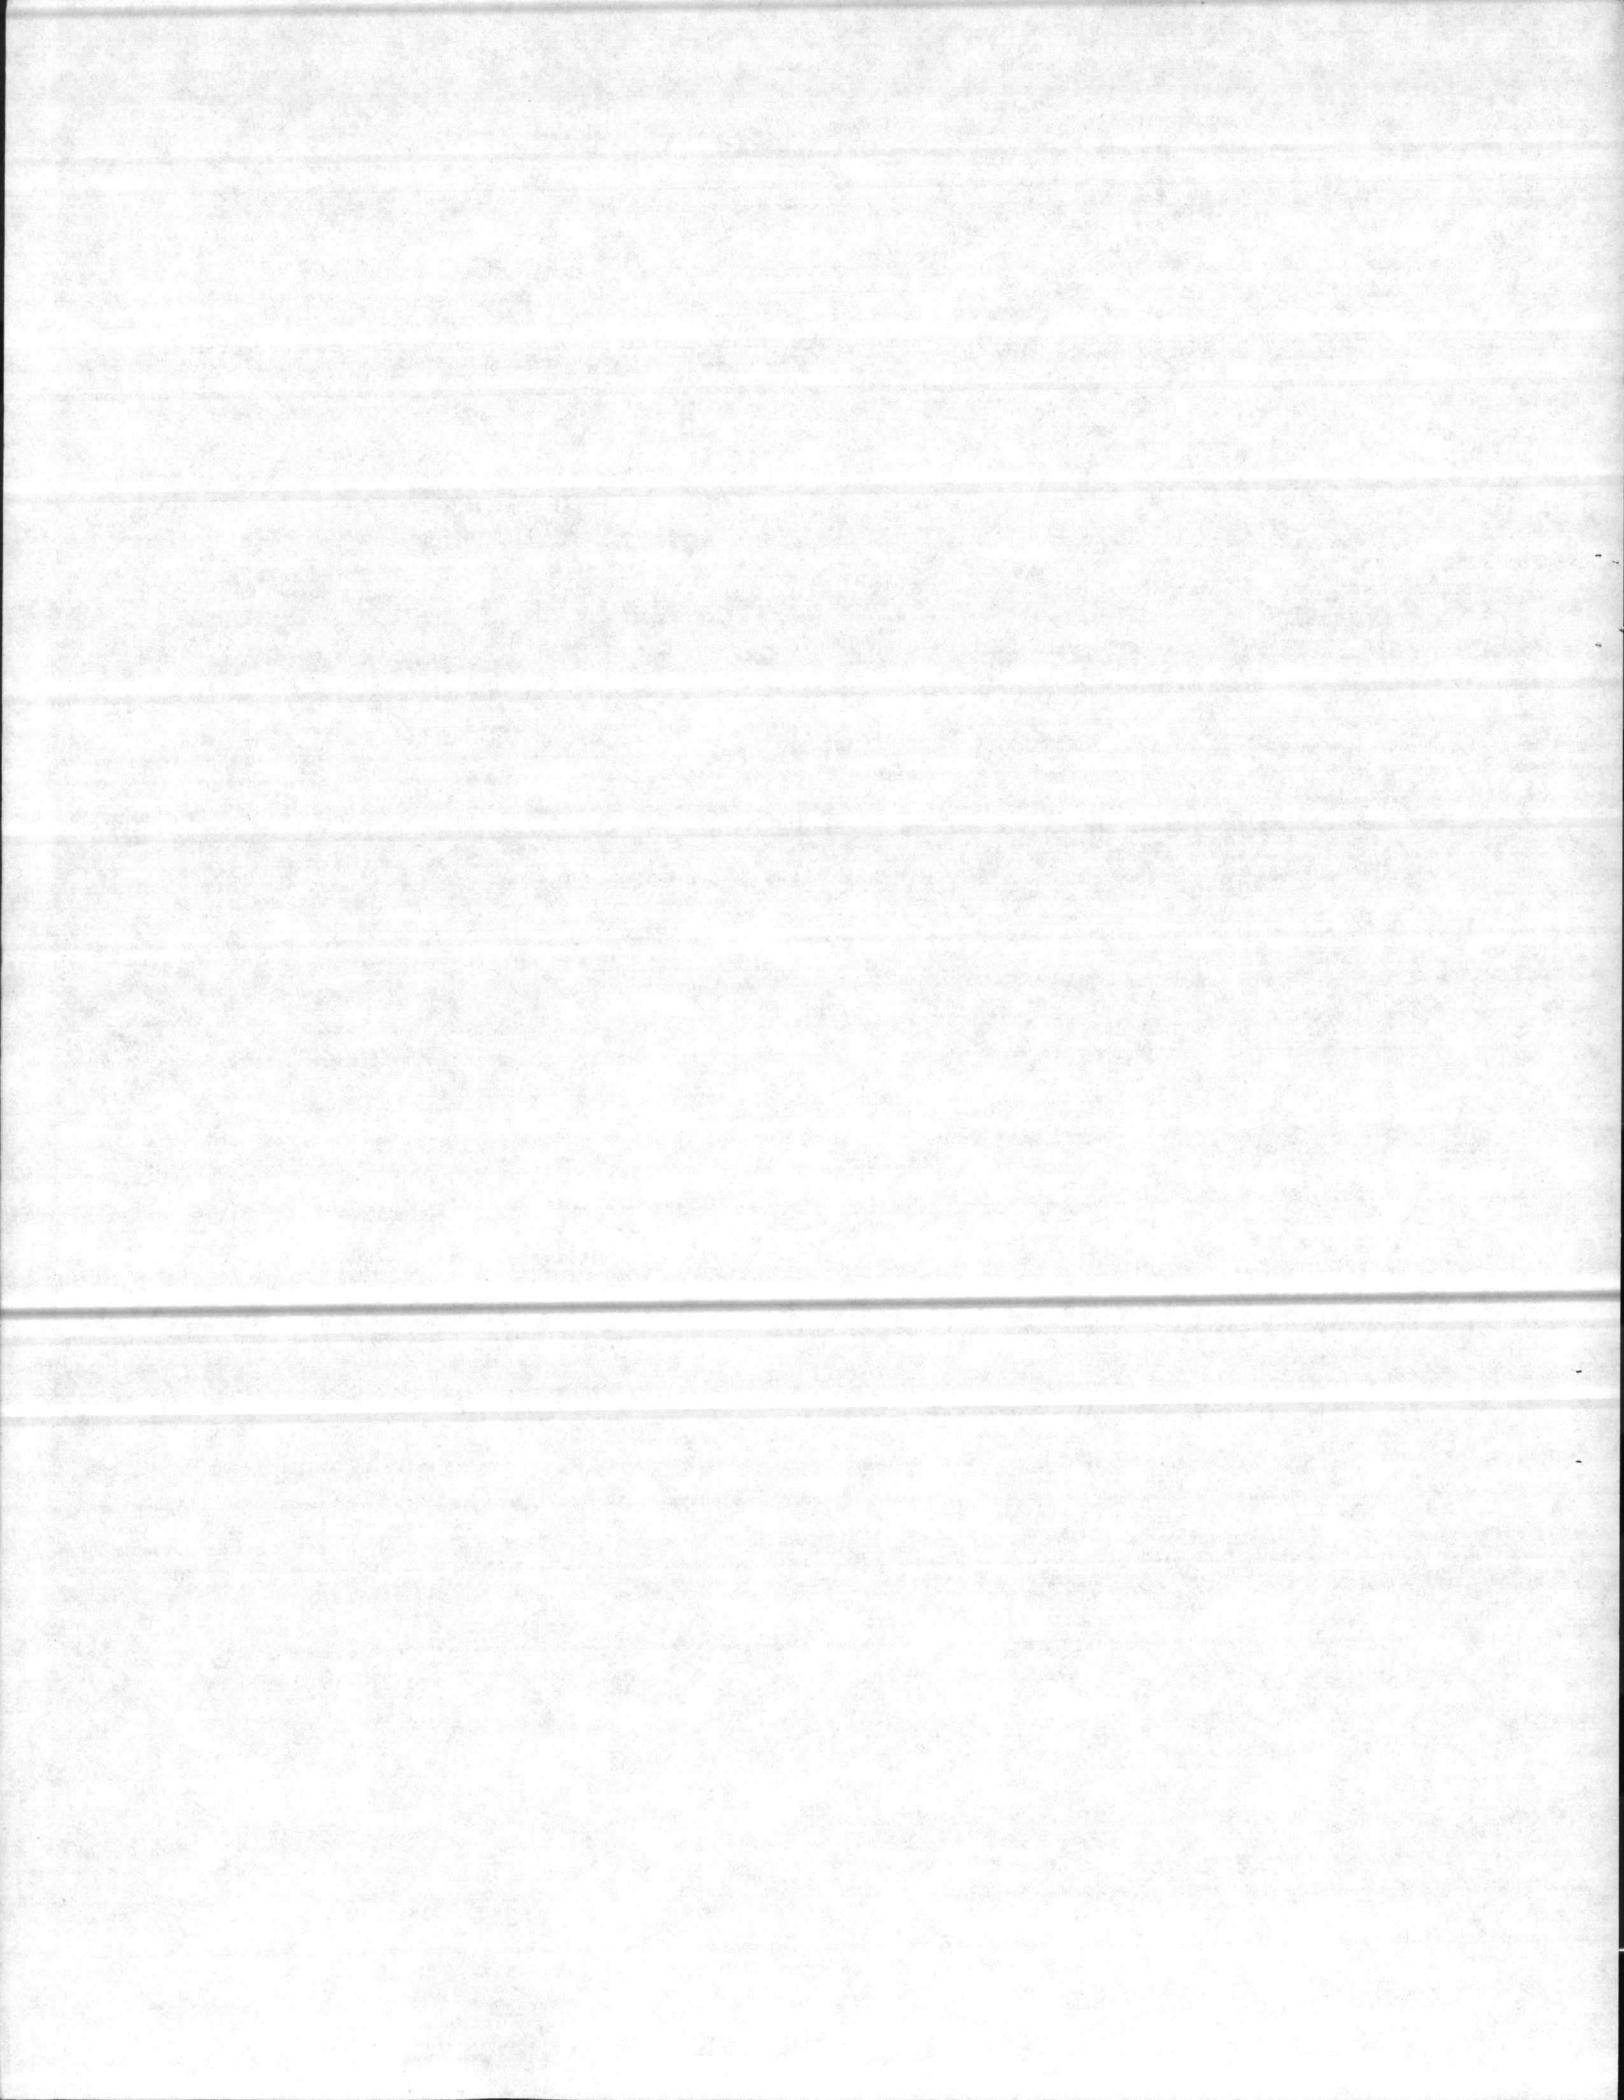

6.1.1 Metal Conduit: Metal conduit shall be zinc coated rigid steel conforming to ANSI C80.1.

6.1.2 Flexible galvanized steel conduit shall have an extruded moisture and oil-proof PVC jacket for installation where indicated and in areas subject to abnormal moisture. Watertight connectors shall be used with PVC covered conduit.

6.1.3 Conduit Fittings: Fittings for rigid metal conduit, nonmetallic conduit, and flexible metal conduit shall conform to UL 467 and UL 514, as applicable. Fittings shall be of the same manufacture as the conduit. Fittings for all conduit installed in this contract shall provide a watertight joint.

6.1.4 Wireway: Rigid steel wiring troughs shall be square in shape, constructed of steel, totally enclosed with hinged cover or cover fastened with screws, and sized as required by NFPA 70. The wireway shall be provided complete with all necessary accessories and fittings and shall be watertight.


6.2 Boxes and Outlets: Boxes shall conform to UL 514. Boxes shall be provided in the wiring or raceway systems wherever required for pulling of wires, making connections, and mounting of devices or fixtures. Boxes for metallic raceways shall be of the cast metal hub type suitable for use in normally wet locations. Boxes shall be sized and installed according to the National Electrical Code.

6.2.1 Boxes for use with raceway systems shall not be less than 1-1/2 inches deep except where shallower boxes, required by structural conditions, are approved. Boxes for other than lighting-fixture outlets shall be not less than 4 inches square except that 4 inch by 2 inch boxes may be used where only one raceway enters the outlet. Boxes less than 4 inches for mounting lighting fixtures may be installed as required by fixture configuration, as approved.

6.3 Receptacles:

6.3.1 Weatherproof receptacles shall be as specified herein and shall be provided with a cast metal box with a gasketed, weatherproof, cast metal cover plate and a cap over each receptacle opening. The cap(s) shall be provided with a spring-hinged flap. Receptacles shall be duplex, grounding type conforming to W-C-596 and rated 20 amperes, 125 volts. Bodies shall be brown thermosetting plastic composition, supported on a metal mounting strap. Receptacles shall be side-wired with binding type terminals. The grounded pole shall be connected to the mounting strap.

6.4 Toggle Switches: Toggle switches shall conform to UL 20 and shall be totally enclosed with bodies and handles of brown thermosetting plastic and a mounting strap. Wiring terminals shall be of the screw type, side wired. Backwired clamp-type terminals are not acceptable. Switches shall be rated quiet type, AC only, 20 ampere, 120-277 volt, as indicated.

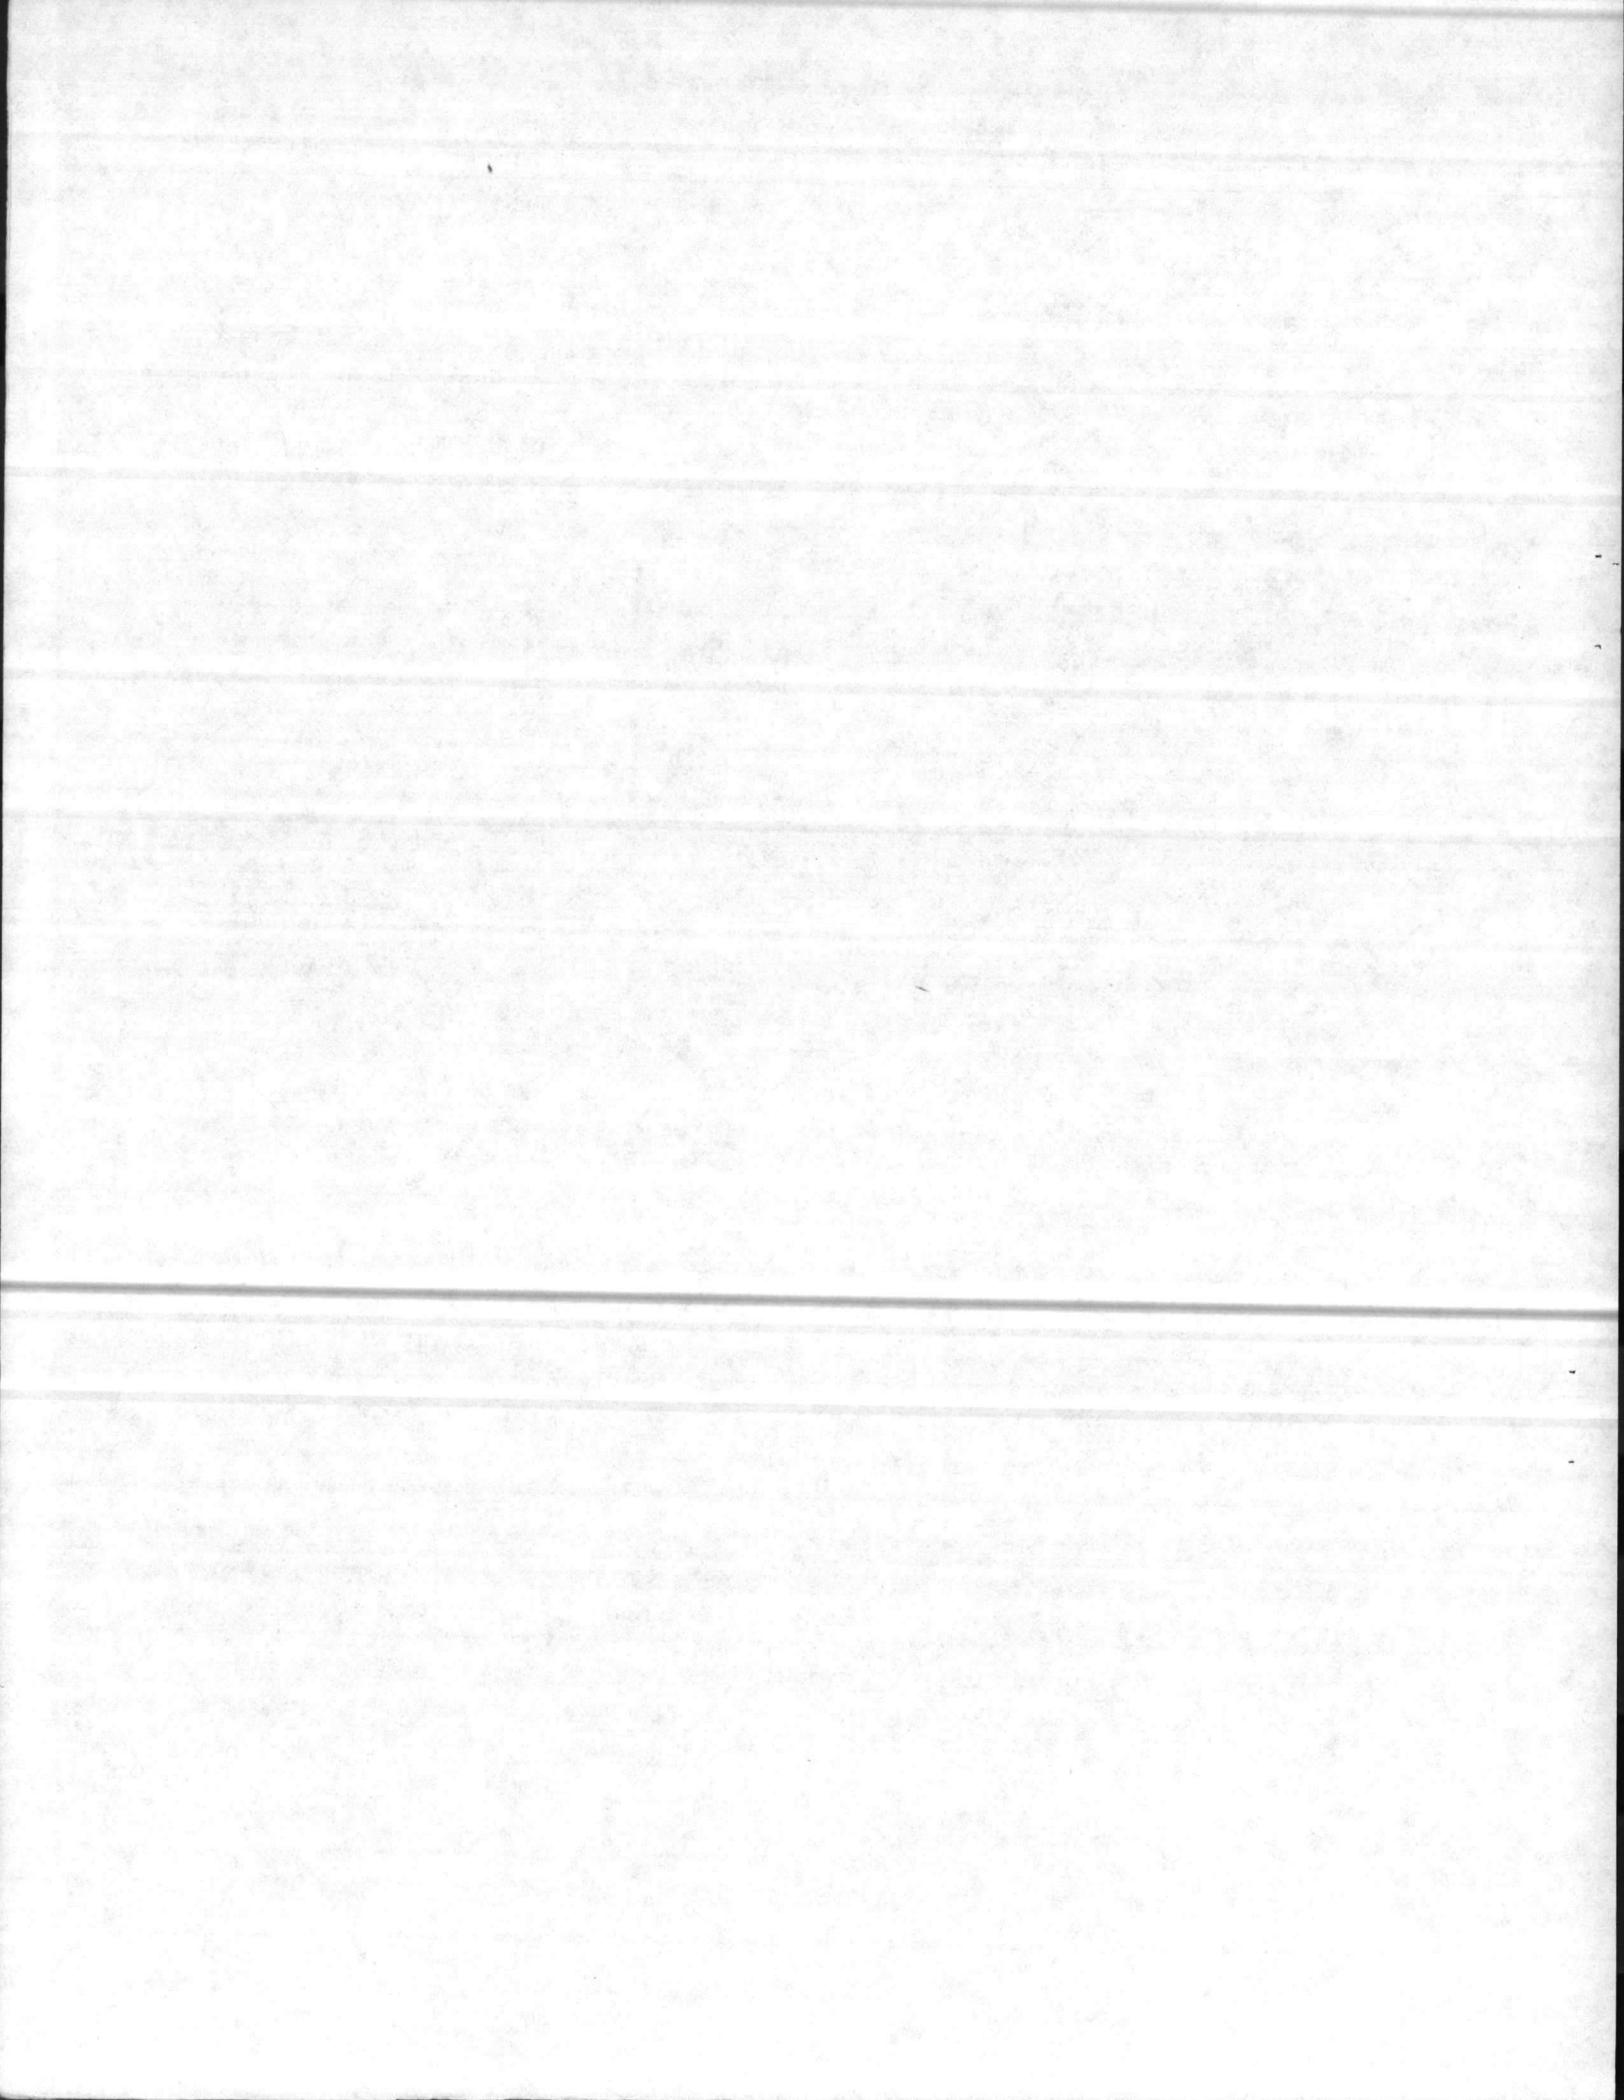

6.4.1 Weatherproof switches shall be the same as those specified hereinbefore, provided in weatherproof enclosures with external operating handles.

6.5 Wires and Cables: Conductor sizes are expressed in American Wire Gage (AWG) or in circular mils. Minimum conductor size shall be No. 12 AWG except control wires and cables shall be minimum No. 19 AWG. Wires No. 8 and larger shall be stranded. Conductors shall be copper.

6.5.1 Grounding Conductors: Conductors for grounding, bonding and other uses requiring bare copper wire shall be solid bare copper wire conforming to ASTM B1 for sizes No. 8 AWG and smaller, and shall be stranded bare copper wire conforming to ASTM B8, class B, for sizes No. 6 AWG and larger.

6.5.2 Power and lighting wires and cables shall be type THW or THWN conforming to UL 83.

6.5.3 Underground Secondary Circuits: The underground secondary conductors shall be single conductor, type USE conforming to UL 854, rated not less than 600 volts. Cable shall be suitable for direct burial or conduit installation and shall be free from splices from one junction box to another.

6.5.4 Color Coding: All secondary service, feeder, branch and control circuit conductors shall be color-coded. Conductor identification shall be provided within each enclosure where a tap, splice or termination is made. Conductor identification shall be by color coded insulated conductors, plastic coated self sticking printed markers, colored nylon cable ties and plates, or heat-shrink type sleeves. Control circuit terminations shall be properly identified.

Colors to be used in coding shall be:


208 VOLT SYSTEM

Neutral - White
Phase A - Black
Phase B - Red
Phase C - Blue
Grounding Conductor - Green

6.5.5 Controls including relays and wiring shall be as specified in section: "Electrical Distribution, Exterior".

6.6 Splices and Terminations shall conform to UL 486. Tapes for splices and terminations shall conform to UL 510. Connections in wires No. 10 AWG and smaller shall be made with insulated pressure type connectors or wirenut type connectors. Splices for wires No. 8 AWG and larger shall be made with a solderless connector.

6.7 Panelboards shall conform to UL 67 and UL 50, as applicable. Panelboards shall be factory assembled automatic circuit breaker type. Wiring gutters on panelboards

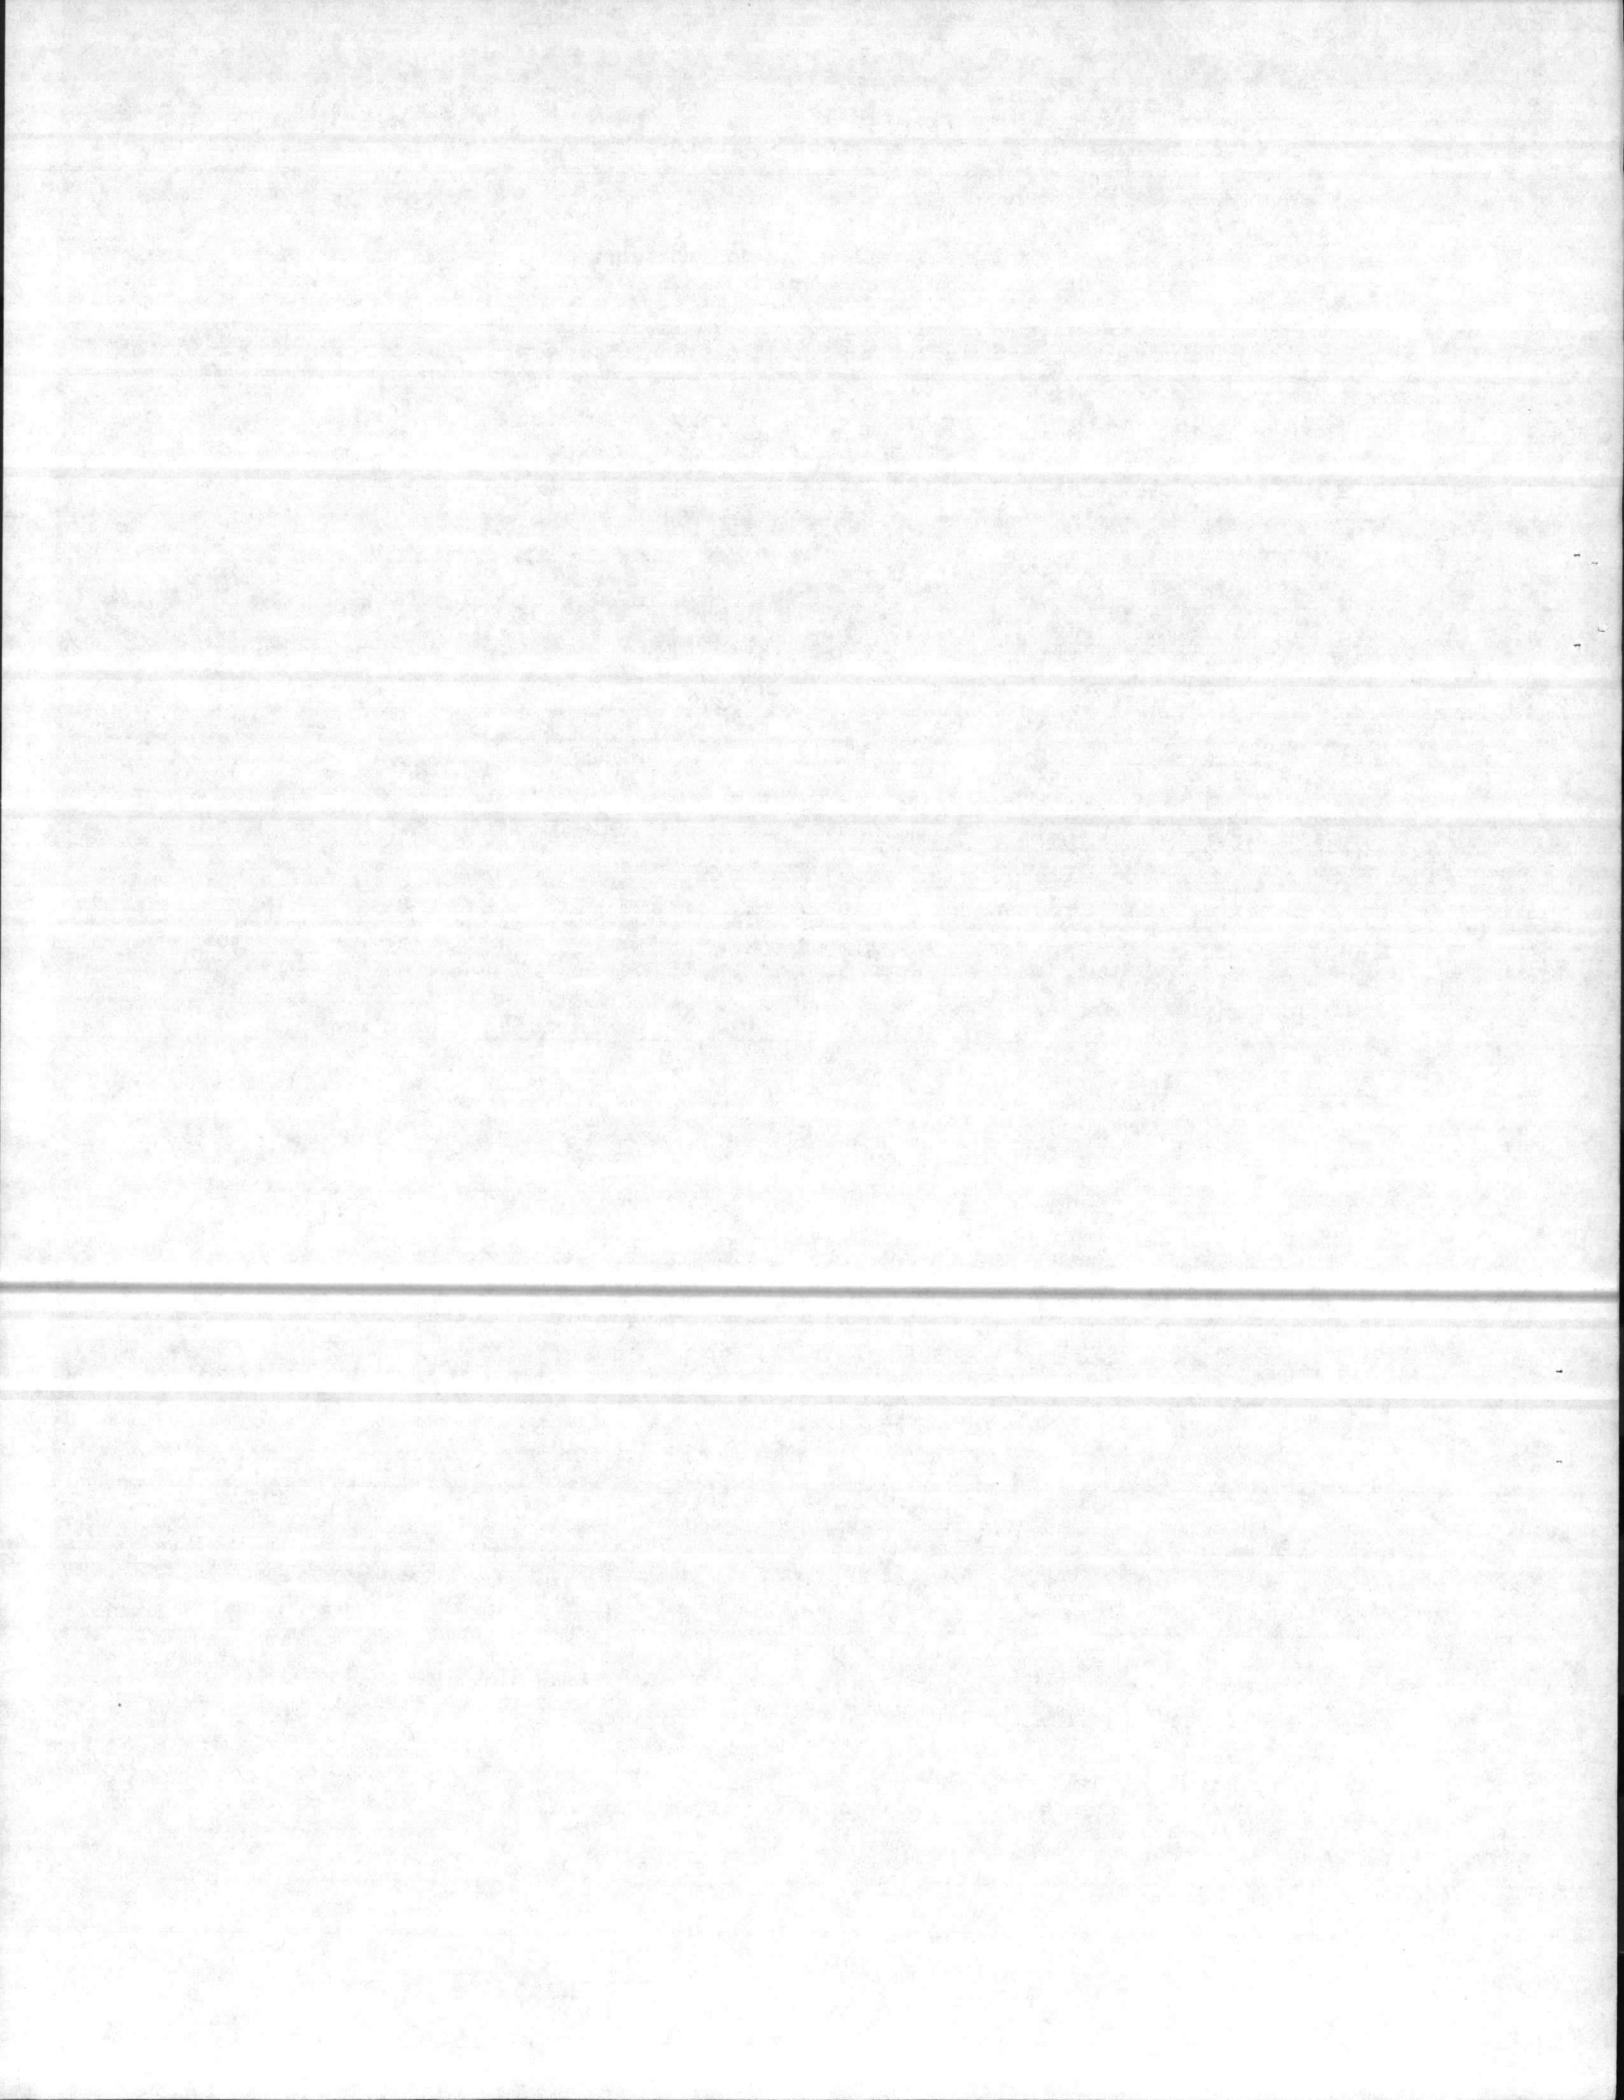


having through feeders shall be 5 inch minimum. Panelboards shall not exceed 78 inches in height. Panelboard shall be made of cold rolled sheet steel in accordance with gauges as required by the Underwriters' Laboratories. All trim shall have door equipped with flush type combination lock and catch, three milled type keys being supplied with each lock. Each lock shall be keyed same as lock on other panelboards. Provide panel with typewritten index card and transparent cover in frame on inside of door, indicating circuit control. Panelboards shall be weatherproof (NEMA - 3R).

6.7.1 Buses for panelboards: An insulated neutral bus for each panel for connection of both feeder and branch circuit neutral wires shall be provided. A separate ground bus, bonded to the steel cabinet, shall be provided for each panel connection of all ground wires and shall be marked with a green stripe along the front of the bus. Bus bars shall be copper and shall be securely fastened to bases and shall not depend upon breakers for support. All main buses and back pans shall be so designed that branch circuits may be changed without additional machining, drilling, or tapping.

6.7.2 Circuit Breakers shall conform to W-C-375, type II and shall have a minimum interrupting capability of 10,000 amperes symmetrical. All breakers shall be designed to accept copper, copper-clad, and aluminum conductors. Multipole circuit breakers shall be of the common-trip type having a single operating handle. Plug-in type circuit breakers are not acceptable. All multipole breakers shall be so designed that an overload in one pole automatically causes all poles to open. Any three adjacent breaker poles shall be connected to Phases A, B, and C respectively and that same relationship of phase sequence shall be maintained. Complete panelboard assembly shall be so designed that any individual breaker can be removed without disturbing adjacent units or without loosening or removing supplemental insulation supplied as a means of obtaining clearances and other requirements of the Underwriters' Laboratories.

6.7.3 Panelboard Submittals: Before manufacturing, drawings shall be submitted showing dimensions of panelboard cabinets, gutter space, gage and trim, main bus and terminal ratings, manufacturer's name and type of breakers, and details of construction of the panelboards to determine compliance with the specification.

6.8 Disconnect switches shall be normal duty fused single throw, quick-make quick-break, 3 pole, 250 volts, NEMA Type 4 enclosed unless otherwise indicated. Switch shall have no cover interlock. Switches serving as motor-disconnect means shall be horsepower rated in conformance with Table III of W-S-865.

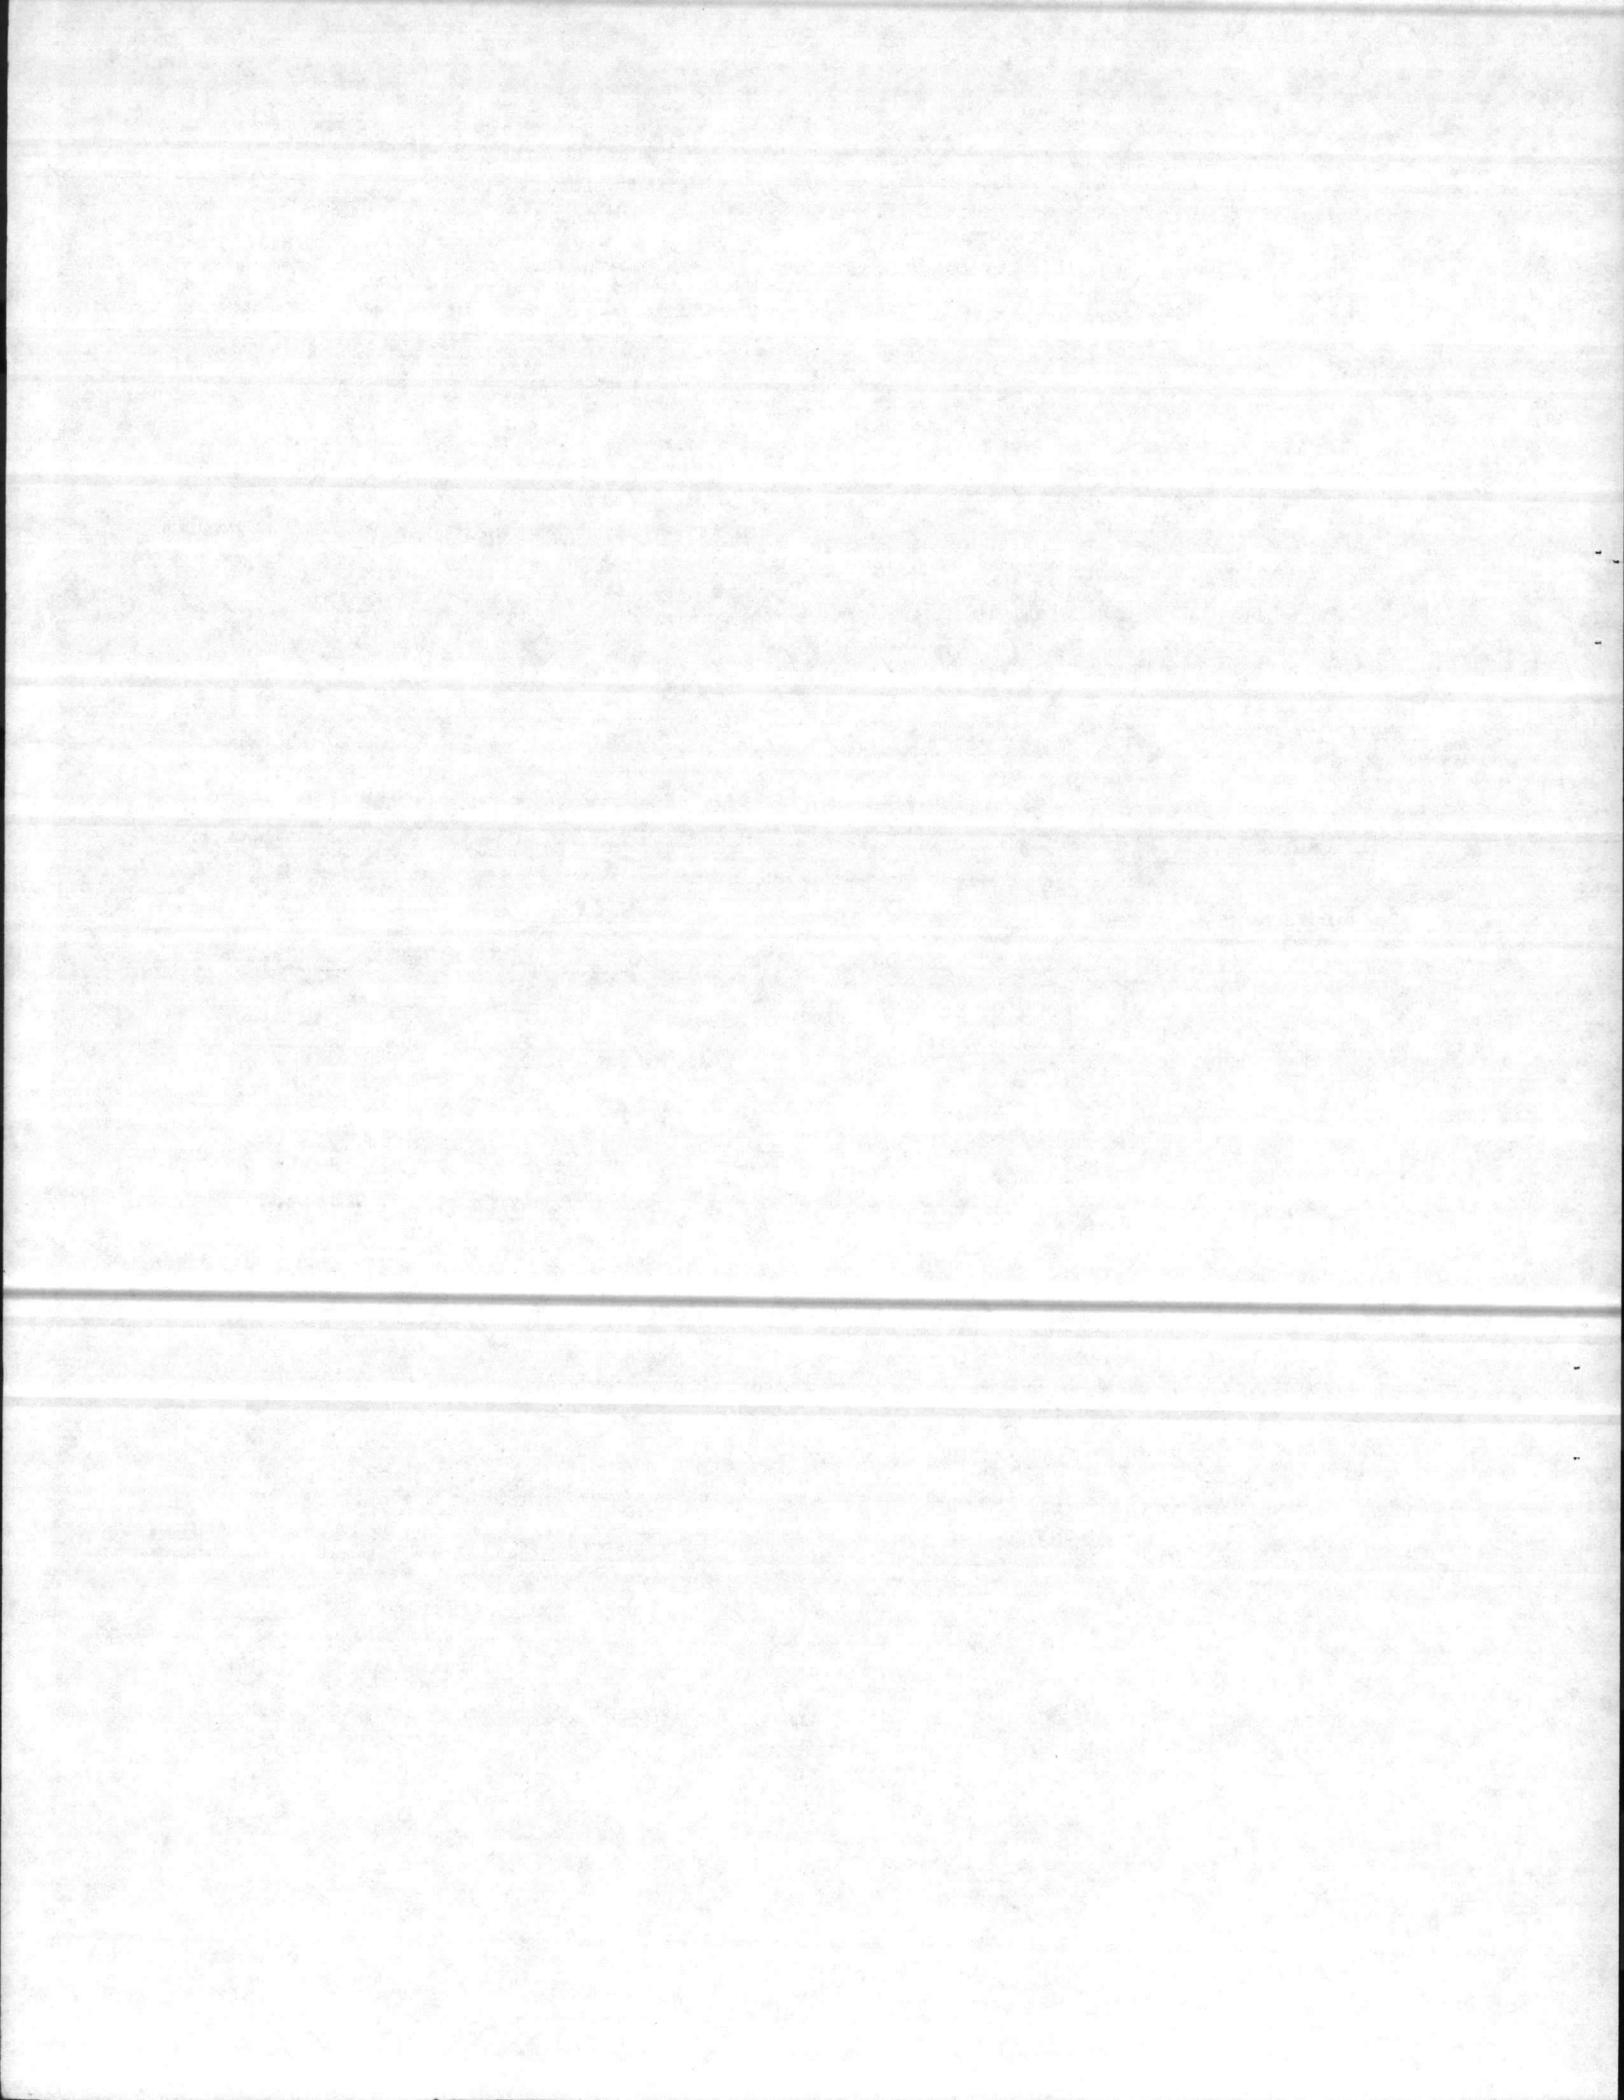

6.9 Fuses shall conform to NEMA FU-1 and UL 198. A complete set of fuses for all switches shall be provided. Time-current characteristic curves of fuses serving motors or connected in series with circuit breakers shall be coordinated for proper operation. Fuses shall have voltage rating not less than the circuit voltage.


6.9.1 Cartridge fuses, dual-element time-lag type, shall be nonrenewable with an interrupting rating not less than 200,000 amperes. At 500 percent current, time lag fuses shall not blow in less than 10 seconds. Dual-element time-lag fuses shall be used for circuits rated in excess of 30 amperes or 125 volts, except where current-limiting fuses are indicated.

6.10 Motors and controllers shall conform to the latest applicable standards of the NEMA for type, class and size as specifically applied, Where control voltages differ from motor voltage, a control voltage transformer shall be provided in and as part of the starter. The approximate size of each motor is shown on drawings. Check size and characteristics of all motors to insure that correctly sized starters and overload heaters are provided for the motors installed.

6.10.1 Motors shall conform to NEMA MG-1 and shall be of sufficient size for the duty to be performed and shall not exceed their full load nameplate current rating when driven equipment is operated at specified capacity under the most severe conditions likely to be encountered. Motors provided for operation on 208 volt 3 phase circuits shall have a voltage rating of 200 volts. All motors shall be designed to operate at full capacity with a voltage variation of plus or minus 10 percent of the motor voltage rating and shall be capable of starting with a transient voltage dip of at least 25 percent below normal operating voltage with normal starting load for the required application. Motors shall be suitable for across-the-line starting.

6.10.2 Motor controllers shall conform to NEMA ICS. Motor controllers or starters and controls shall be furnished as part of the equipment on which they are used. Each type of controller shall contain thermal running overload protection and manual reset means. All starters and controls shall be NEMA 4 enclosed. Manual starters shall be three pole type designed for surface mounting.

6.10.3 Selector Switch: The controller shall have a hand-off-automatic selector switch. Connections to the selector switch shall be such that only the normal automatic regulatory control devices will be bypassed when the switch is in the "hand" position. All safety control devices, such as high temperature cutouts and motor overload protection devices shall be connected in the motor control circuit in both "hand" and "automatic" positions.

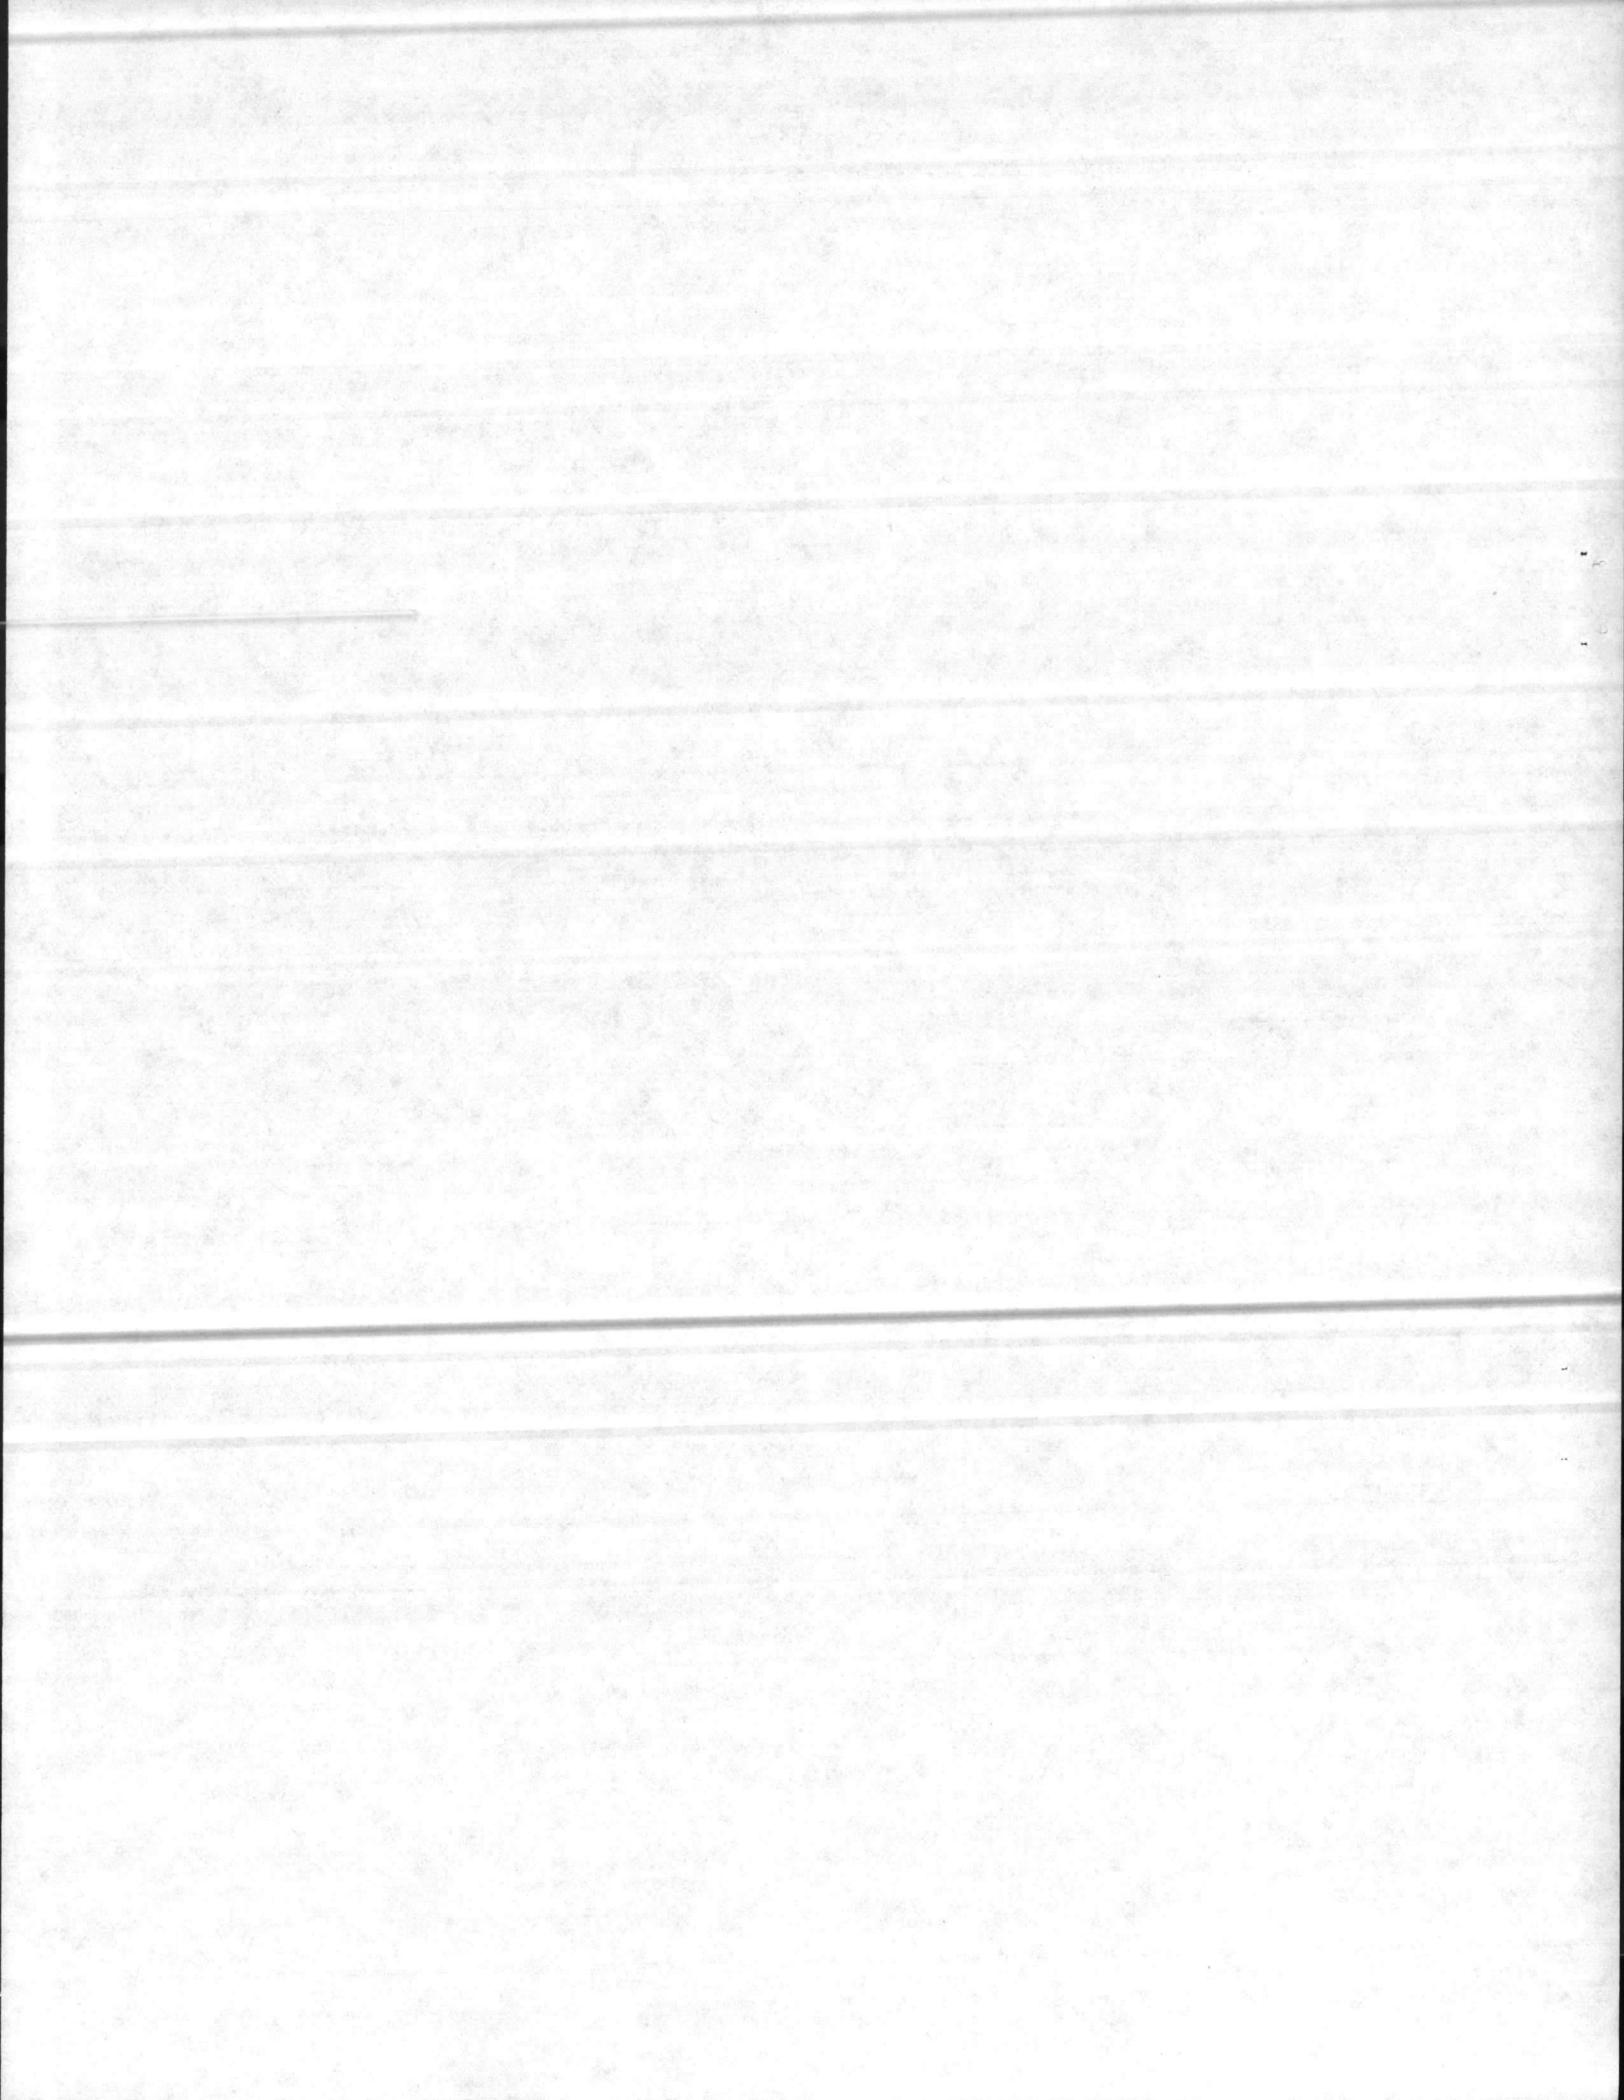

6.10.4 Combination starters with fusible disconnect switch in the same enclosure shall be furnished where indicated. Starters for motors without automatic control shall have built-in "start-stop" pushbuttons. Starters for motors under automatic control shall have built-in "hand-off-auto" selector switch. Pushbutton stations shall have "start-stop" momentary contacts, having one normally-open and one normally-closed set of contacts, with ruby indicating lights to indicate when motors are running. Stations shall be heavy-duty type designed for flush or surface mounting, as required. Pilot and indicating lights shall be neon type.

6.11 Grounding and Bonding: Grounding and bonding equipment shall be in accordance with UL 467.


6.11.1 Equipment grounds: A green-colored equipment grounding conductor which shall be separate from the electrical system neutral conductor shall be provided. Equipment ground conductors shall be provided in all branch circuits serving convenience outlets, receptacles, portable and permanently installed electrical appliances, equipment, apparatus and other miscellaneous metal-enclosing bodies including light switch boxes normally within contact of personnel.

6.11.2 Ground rods shall be rolled to a commercially round shape from a welded copper-clad steel manufactured by the molten-welding process or by the electro-formed process (molecularly bonded). They shall have an ultimate tensile strength of 75,000 pounds per square inch (psi) and an elastic limit of 49,000 psi. The rods shall be not less than 3/4 inch in diameter by 10 feet in length and shall have a hard, clean, smooth, continuous copper surface and the proportion of copper shall be uniform throughout the length of the rod. The copper shall have a minimum wall thickness of 0.013 inch at any point on the rod.

6.12 Lighting Fixtures: Lighting fixtures shall conform to UL 57, shall be as indicated, shall be as shown on LANTDIV Plates Nos. 16-I-1 and shall be provided complete with lamps of the number, type and wattages shown. The details, shapes and dimensions are indicative of the general type desired, but are not intended to restrict selection to fixtures of any particular manufacturer. Fixtures of similar designs and equipment, light-distribution and brightness characteristics, and of equal finish and quality will be acceptable as approved by the Contracting Officer.

7. INSTALLATION: Electrical installation shall conform to the National Electrical Safety Code, the National Electrical Code and to the requirements specified herein.


7.1 Conduit, Fittings and Support:

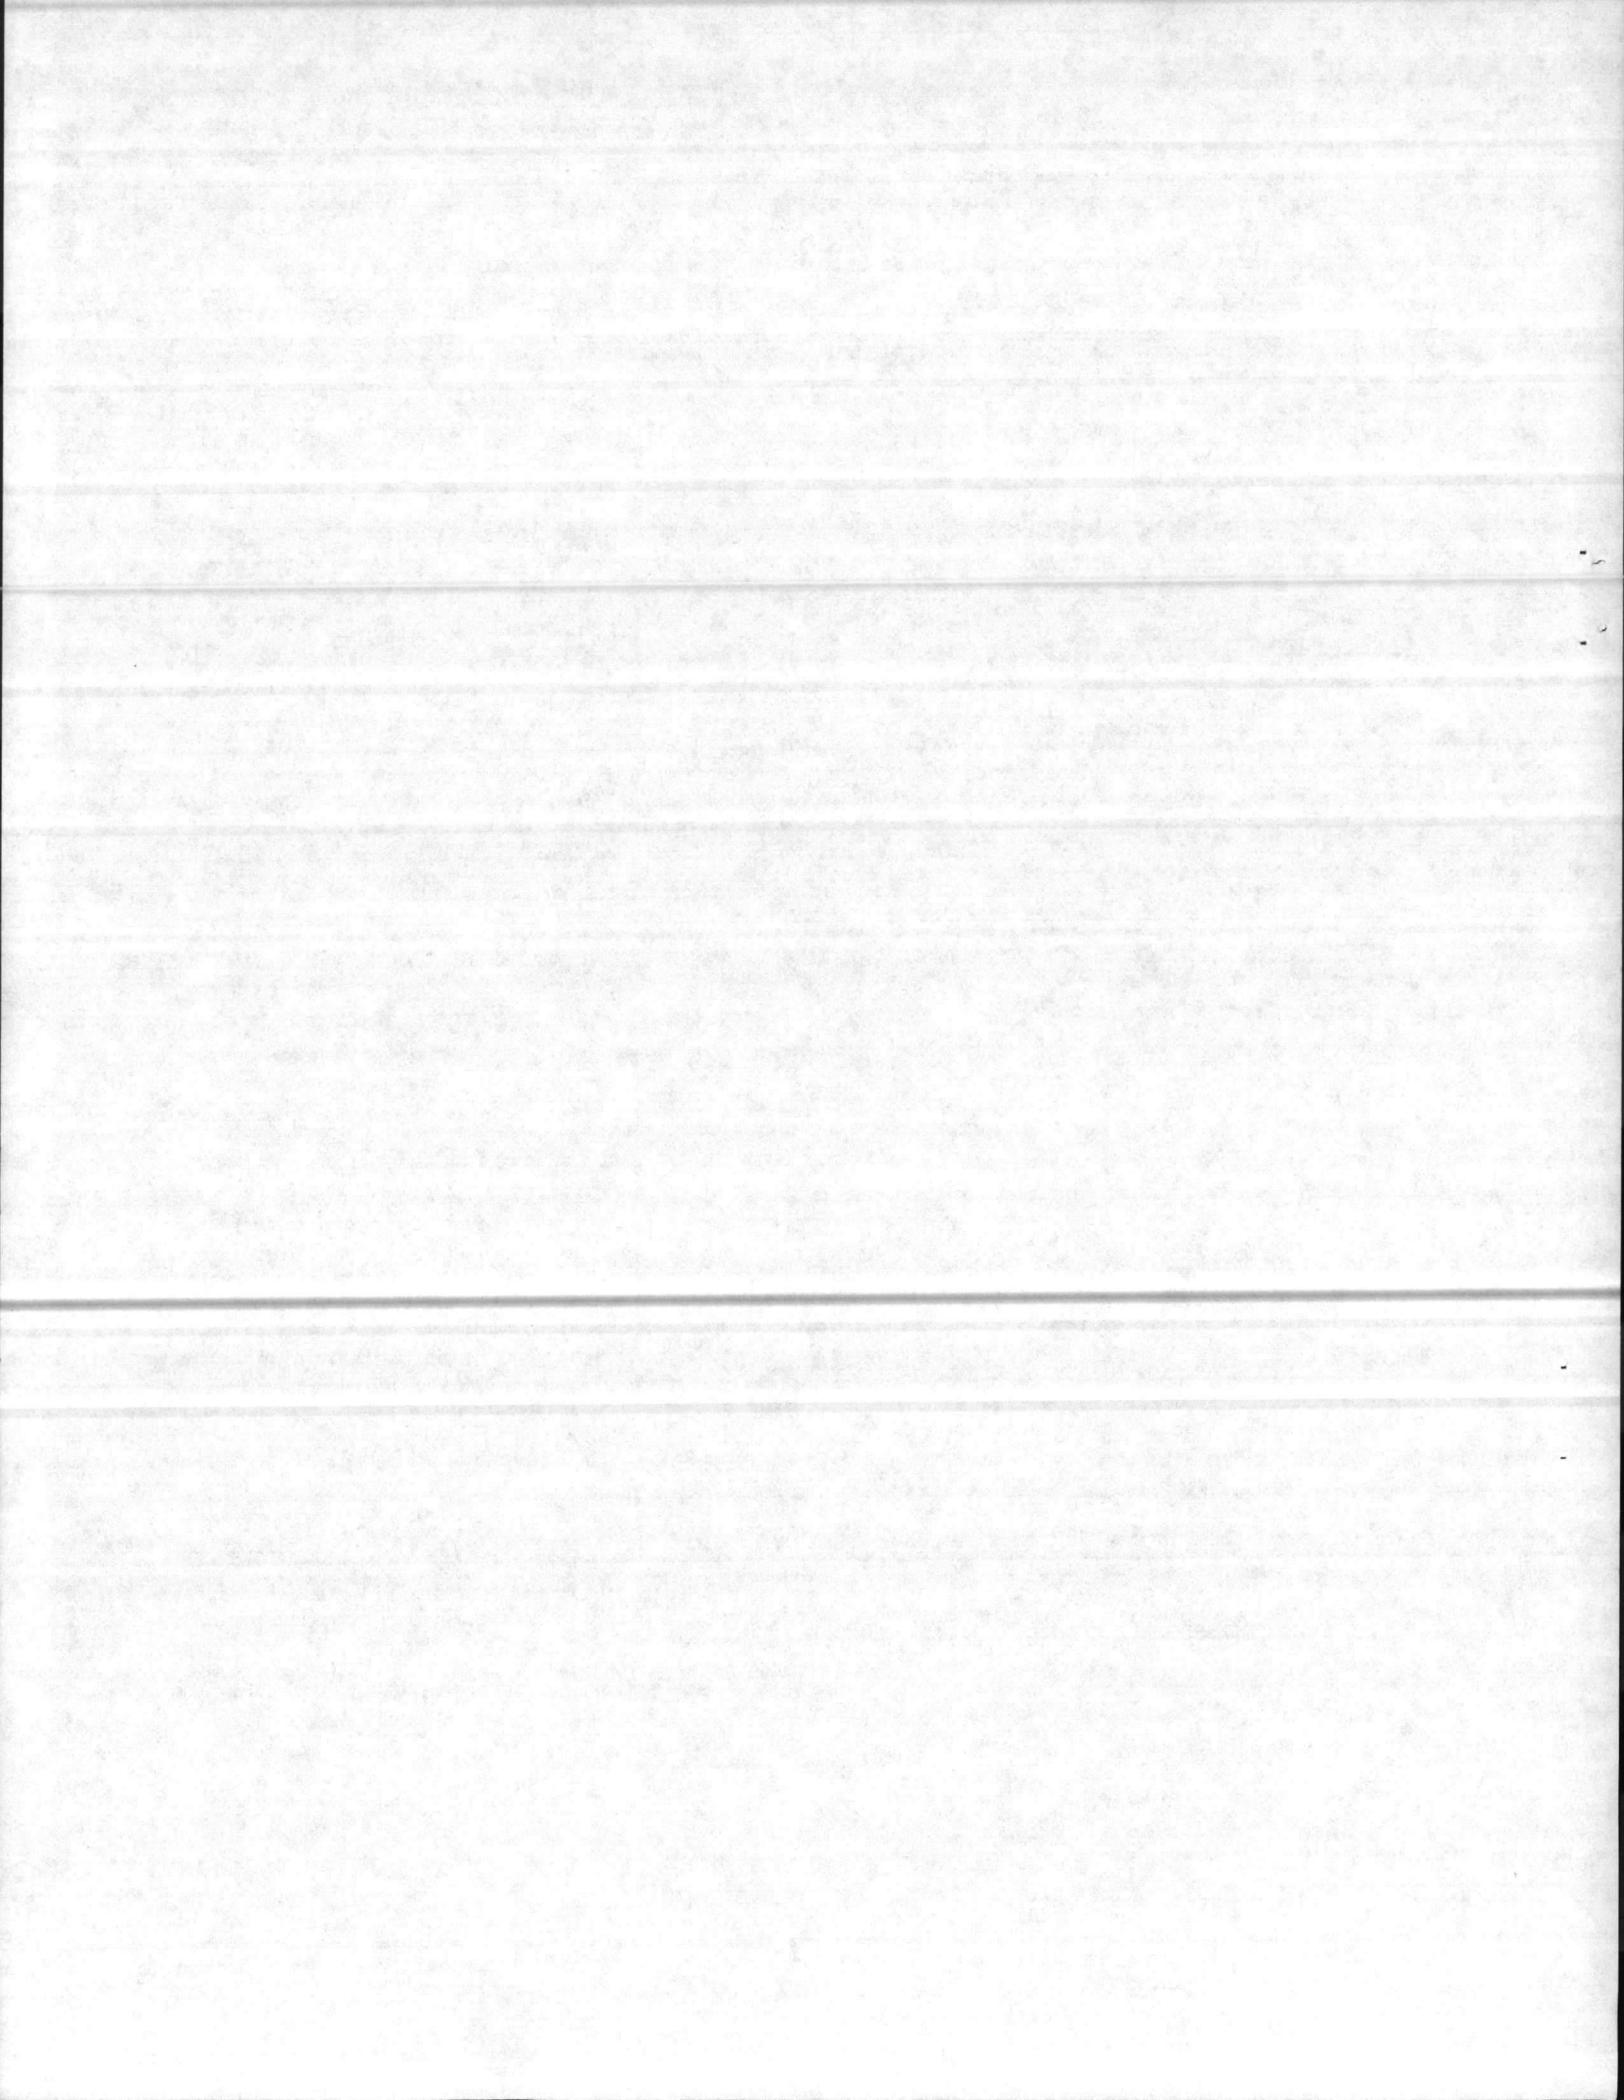

7.1.1 Use of Specific Types: Aluminum conduit shall not be installed. Electrical metallic tubing shall not be used. Flexible conduit shall be used for connections to motors and other equipment subject to vibration and shall be waterproof.

7.1.2 Conduit Installation, General Requirements: Conduit shall be installed exposed in walls and ceilings. Maintain a minimum distance of 6 inches from parallel runs of water pipes. For floor mounted equipment, conduit may be run overhead and dropped down, where underfloor installation is not practicable. Groups of conduit shall be uniformly spaced, where straight and at turns. Bends and offsets, where unavoidable, shall be made with hickey or bending machine. Conduit shall be cut with a hacksaw or an approved conduit-cutting machine and reamed after threading to remove all burrs. Securely fasten conduit to outlets, junction and pull boxes to effect firm electrical contact. Join conduit with approved couplings. Expansion fittings shall be installed in conduit where it passes through structural expansion joints. Trapped conduits shall be avoided. Plaster, dirt or trash shall be prevented from lodging in conduits, boxes, fittings and equipment during construction. Clogged conduits shall be freed of all obstructions.

7.1.3 Conduit Support: Conduit shall be supported every 8 feet and shall be installed parallel with or perpendicular to walls, structural members or intersections of vertical planes and ceilings with right angle turns consisting of fittings or symmetrical bends. Conduits shall be supported within 1 foot of all changes in direction. Supports shall be approved pipe straps, wall brackets, hangers or ceiling trapeze. Fastenings shall be by wood screws to wood; by toggle bolts on hollow masonry units; by expansion bolts on concrete or brick; by machine screws, welded threaded studs, or spring-tension clamps on steel work. Explosive-drive equipment may be used to make connections where the use of this equipment complies with safety regulations. Wooden plugs inserted in masonry and the use of nails as fastening media are prohibited. Threaded C-clamps may be used on rigid steel conduit only. Conduits or pipe straps shall not be welded to steel structures. The load applied to fasteners shall not exceed 1/4 of the proof test load. Fasteners attached to concrete ceiling shall be vibration and shock resistant. Holes cut to a depth of more than 1-1/2 inches in reinforced concrete beams or to a depth of more than 3/4 inch in concrete joints shall not cut the main reinforcing bars. Holes not used shall be filled. In partitions of light steel construction, sheet-metal screws shall be used. Spring steel fasteners may only be used to support lighting branch circuit conduits to structural steel members. Conduits shall be fastened to all sheet-metal boxes and cabinets with two locknuts where required by the National Electrical Code, where insulated bushings are used and where bushings cannot be brought into firm contact with the box. Locknuts shall be the type with sharp edges for digging into the wall of metal enclosures. Bushings shall be installed on the ends of all conduits and shall be of the insulating type where required by the National Electrical Code.

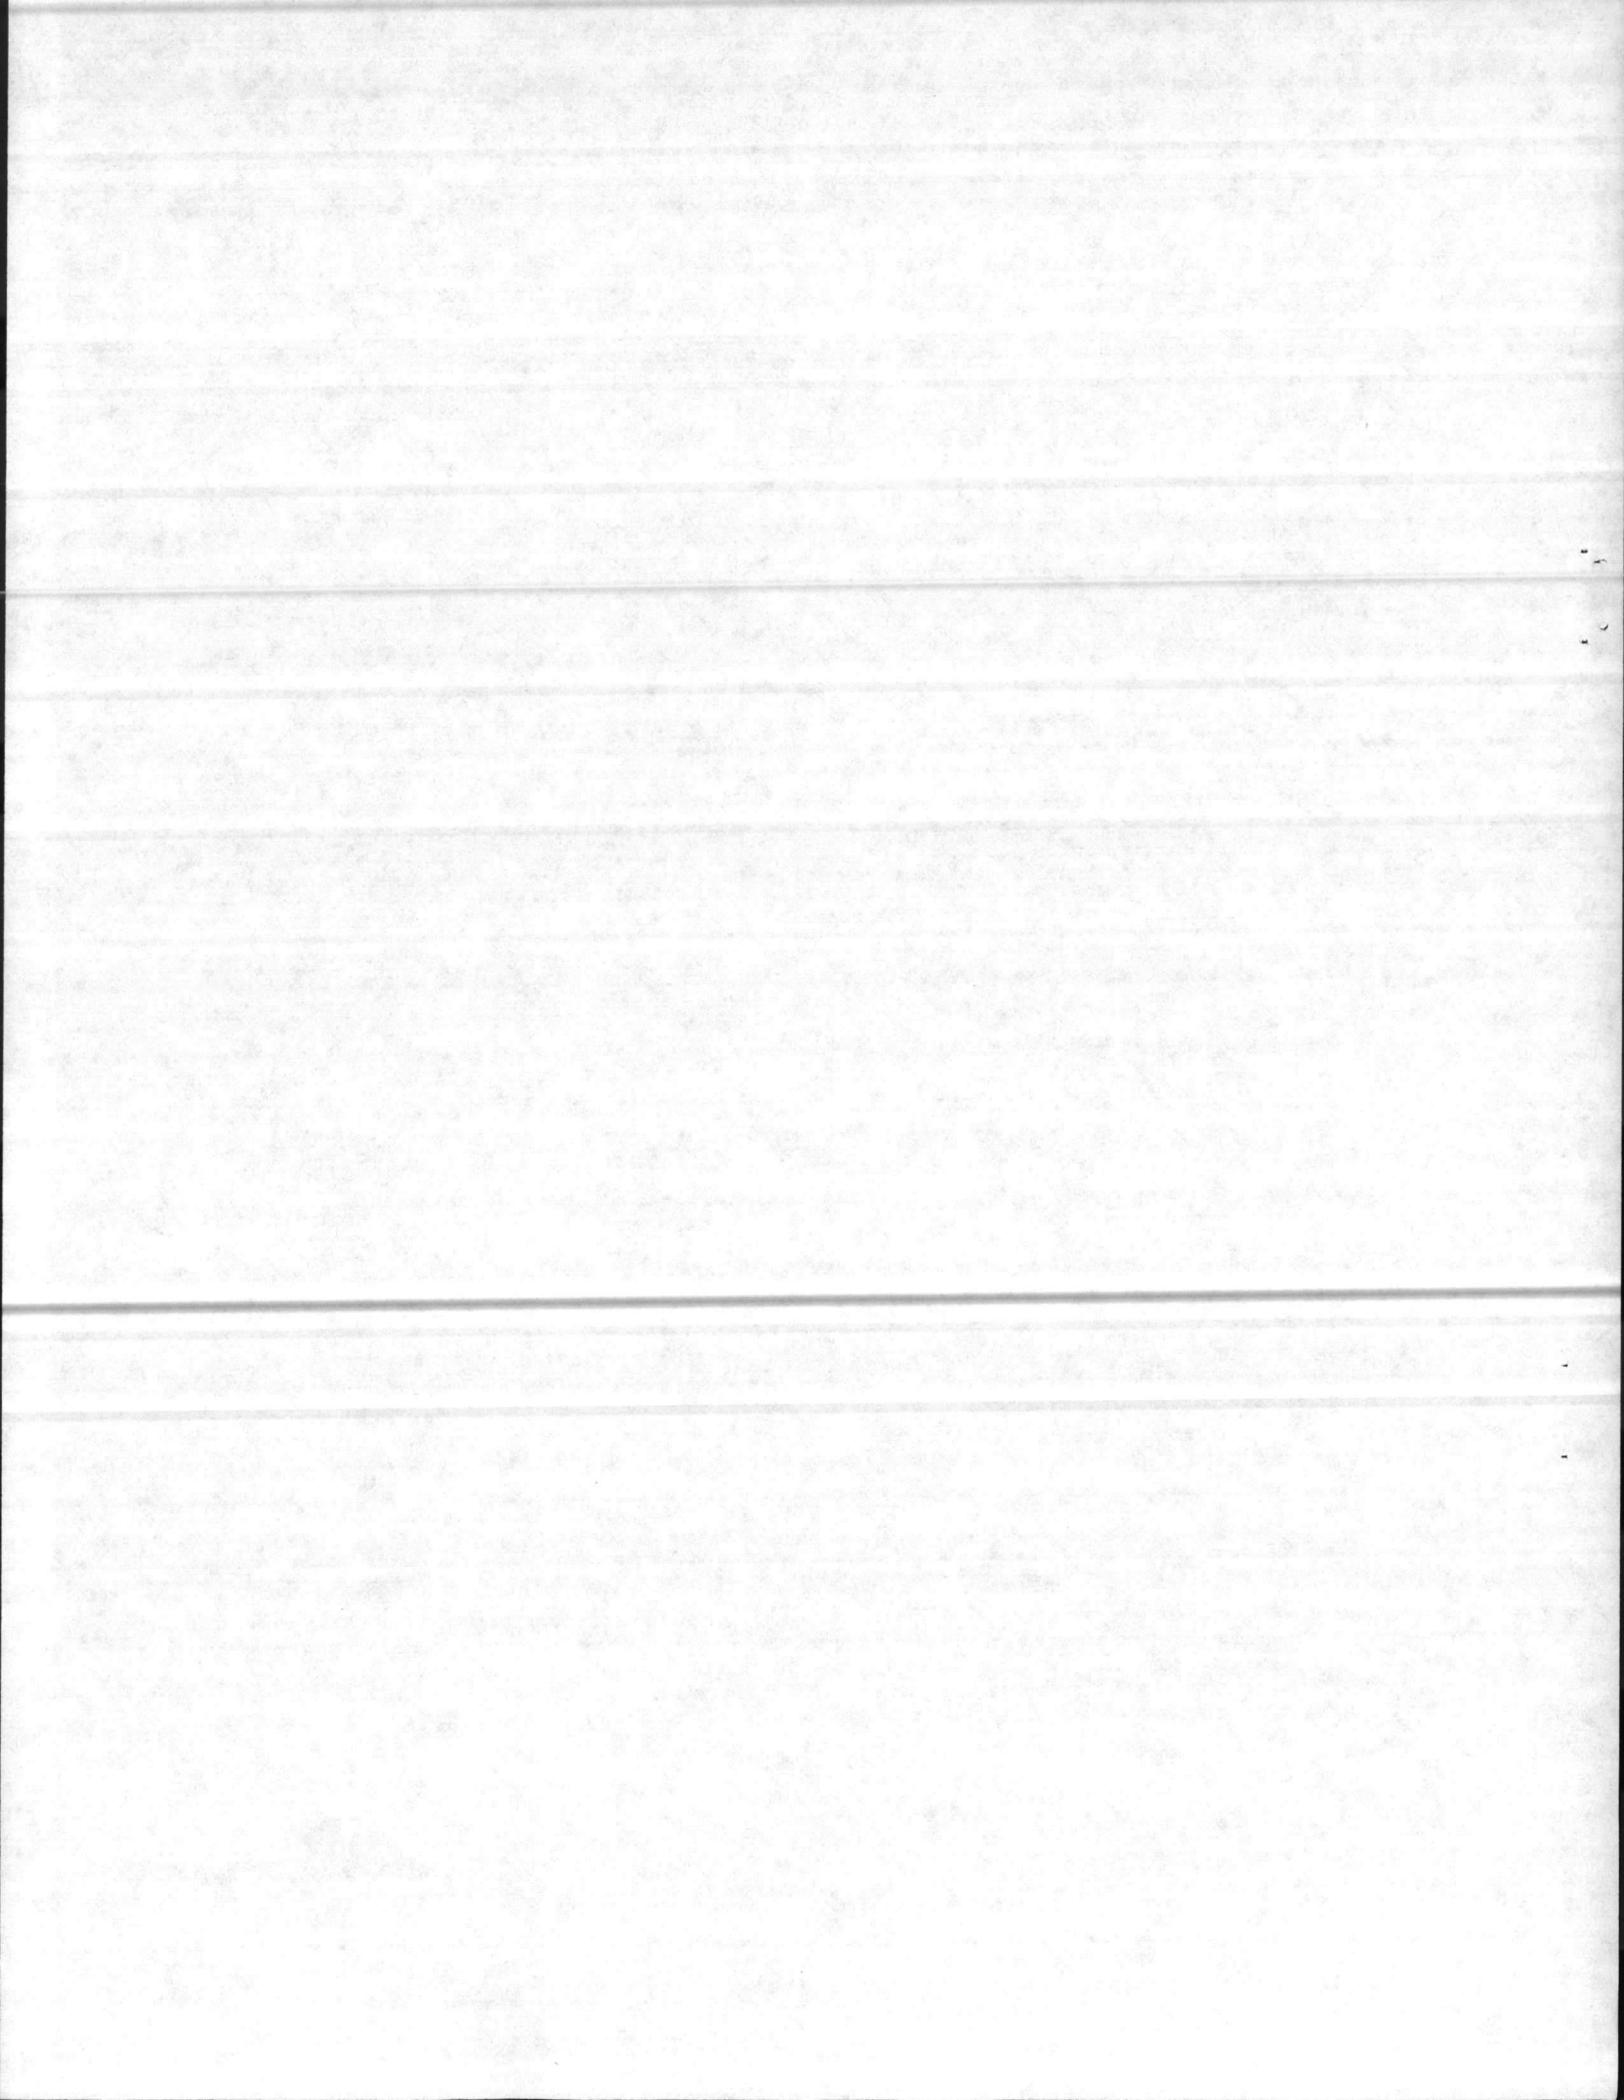

7.1.4 Conduit installed in concrete floor slabs shall be located so as not to affect the structural strength of the slabs. Conduit shall be installed within the middle one-third of the concrete slab except where necessary to not disturb the reinforcement.

Outside diameter of conduit shall not exceed one-third of the slab thickness and conduits shall be spaced not closer than three diameters except at cabinet locations. Curved portions of bends shall not be visible above the finish slab. Slab thickness shall be increased as necessary to provide a minimum one inch cover over conduit. Where embedded conduits cross expansion joints, suitable watertight expansion fittings and bonding jumpers shall be provided. Conduit larger than one inch trade size shall be parallel with or at right angles to the main reinforcement; when at right angles to the reinforcement, the conduit shall be close to one of the supports of the slab. Conduits shall not be stacked more than 2 diameters high in floor slabs.


7.1.5 Wireway: Wireway shall be installed where required by NEC and as indicated.

7.2 Boxes and Outlets: Boxes shall be provided in the wiring or raceway systems wherever required for pulling of wires, making connections, and mounting of devices or fixtures. Boxes shall be furnished with screw-fastened covers. Where several feeders pass through a common pull box, the feeders shall be tagged to indicate clearly the electrical characteristics, circuit number, and panel designation. Gaskets shall be provided on boxes and outlets where required to insure watertight installation.

7.2.1 - Stub-Ups: Conduits stubbed up through concrete floors for connections to free-standing equipment shall be provided as indicated. Wiring shall be extended in rigid threaded conduit to equipment, except that where required, flexible conduit may be used 6 inches above the floor. Screwdriver-operated threaded flush plugs shall be installed in conduits from which no equipment connections are made.

7.3 Receptacle Mounting: Receptacles shall be mounted 18 inches above finished floor unless indicated otherwise.

7.4 Toggle Switches: Switches shall be installed as indicated and shall be located 4 feet 6 inches above finished floor levels and be connected so as to afford control over the indicated outlets and shall be waterproof.

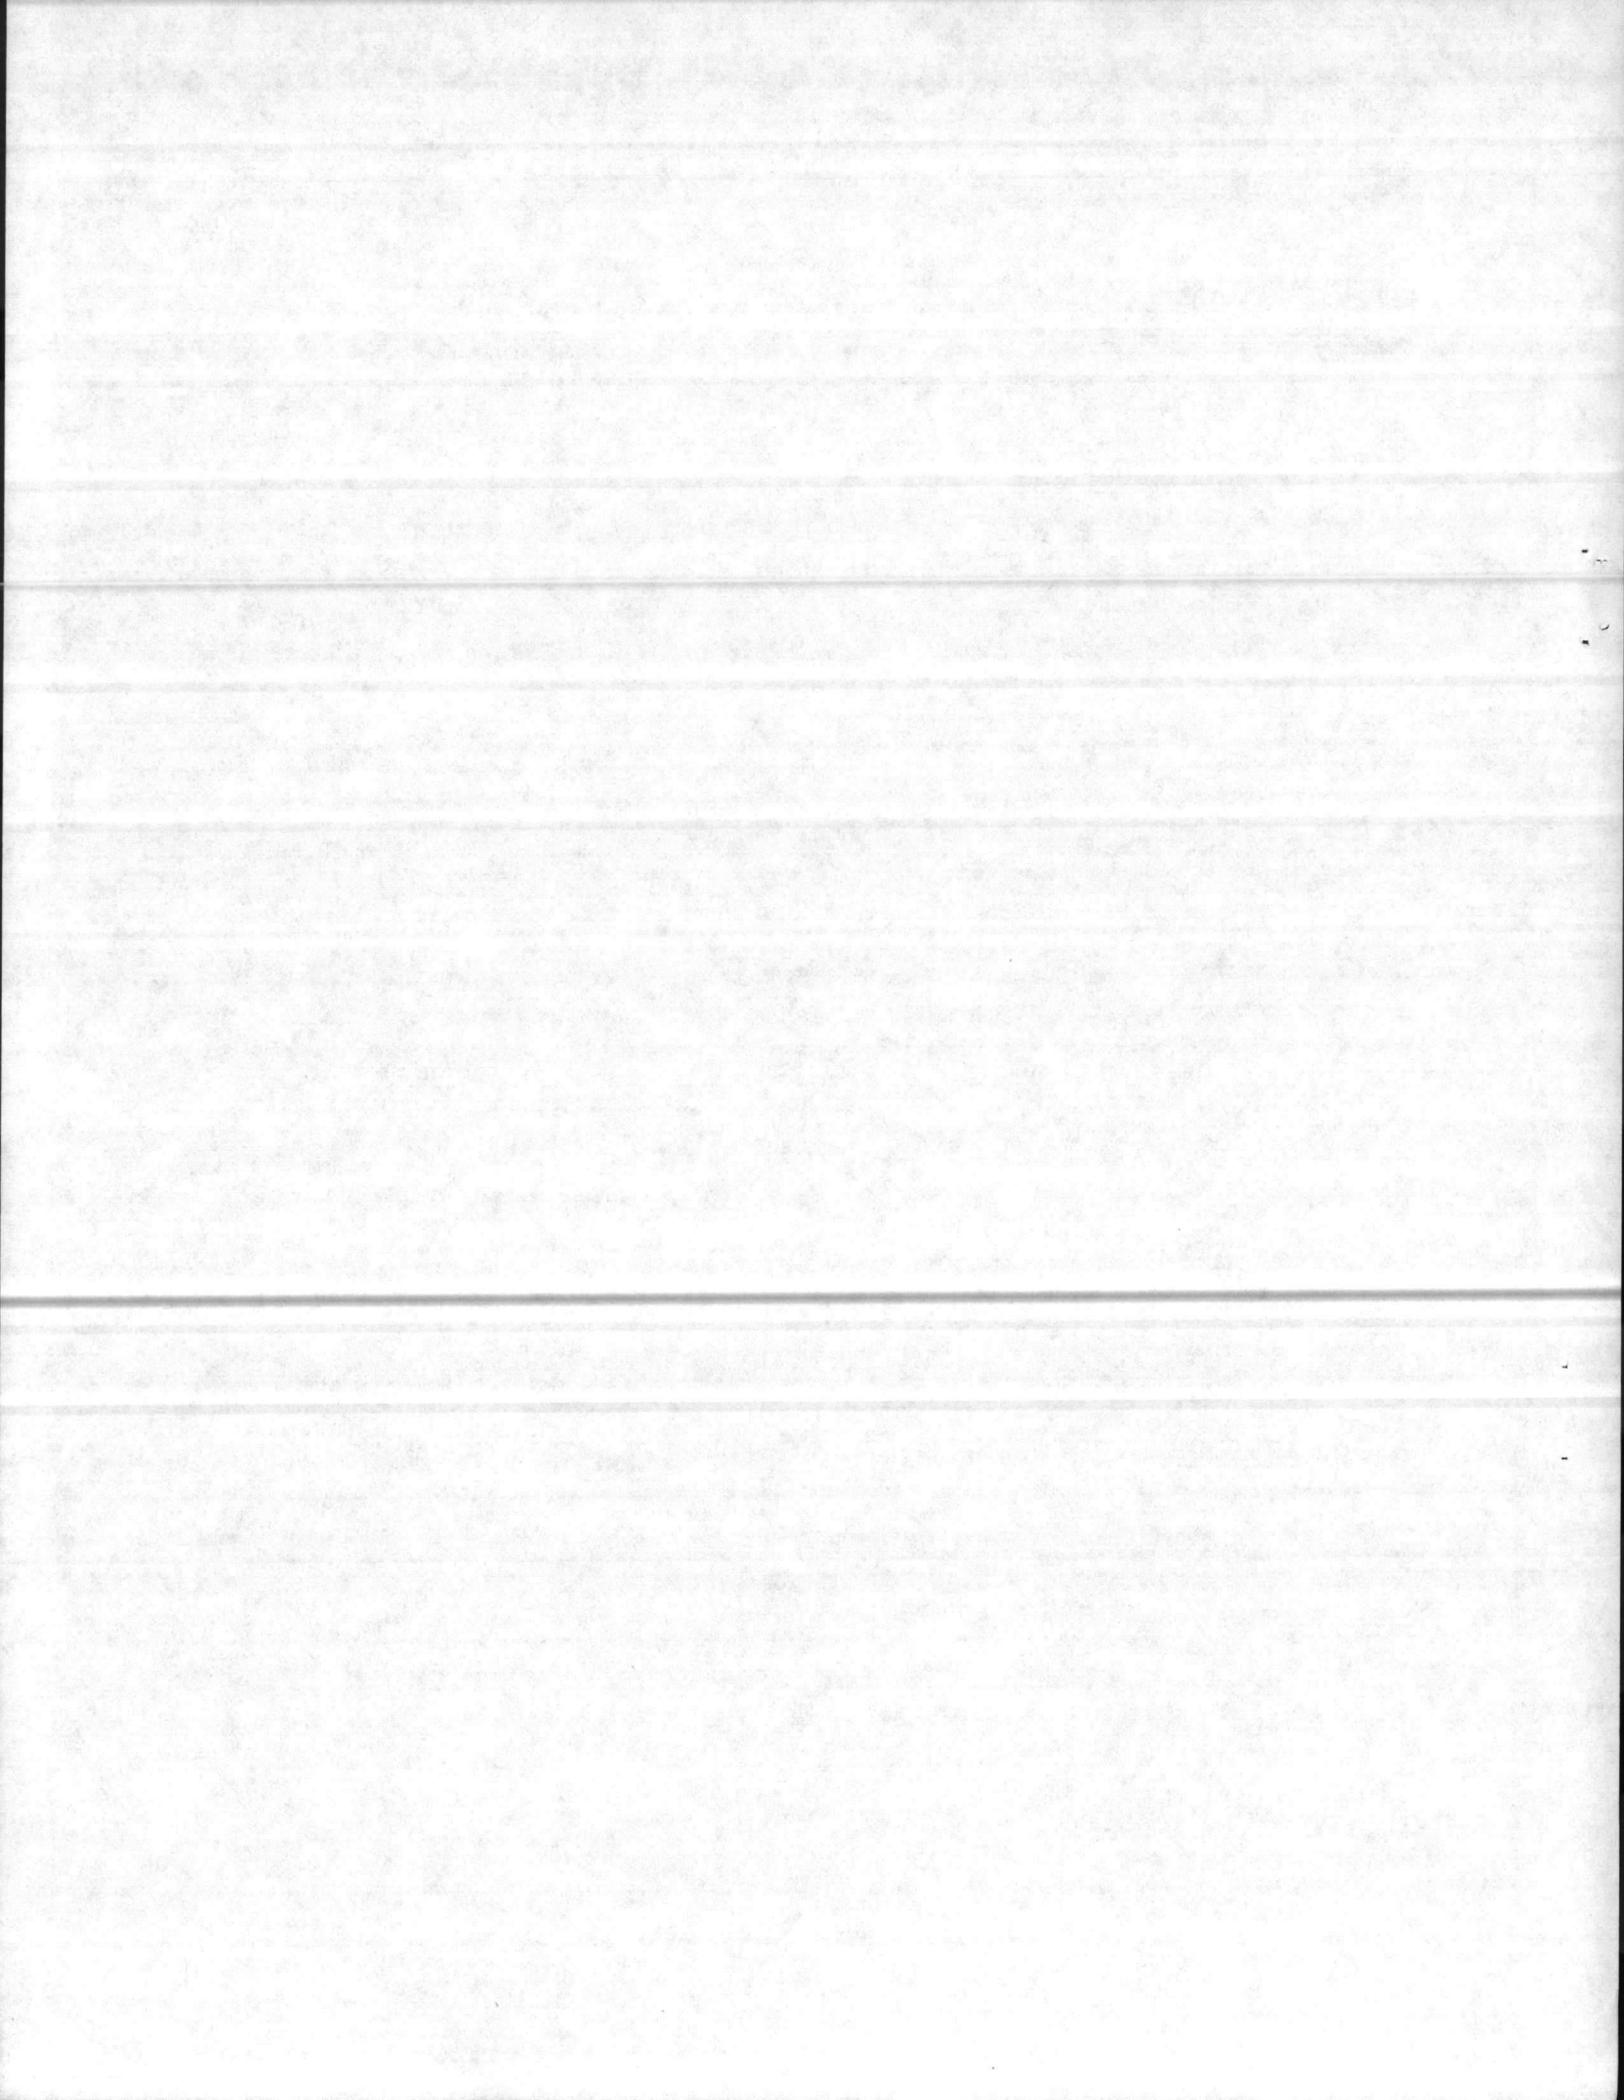

7.5 Wiring - General: Suitable equipment shall be used to pull conductors through conduit, exercising due care to avoid damage to insulation. Wires shall not be pulled through conduits before the conduit system is complete and has been carefully freed from obstruction of any kind. Soapstone or an approved compound may be employed to facilitate pulling wires. Where two or more circuits are housed in one conduit, a common neutral may be used if sized in compliance with NEC. Wires and cables shall be installed in conduit.

7.7 Splices and Terminations: Splices and terminations shall be made in outlet or junction boxes and shall be mechanically and electrically secure, using proper thickness of tape. Mechanical connectors of every kind shall be taped. Splices and terminations shall be covered with an insulation material equivalent to the conductor insulation. Connections involving aluminum conductors shall utilize approved type fittings and joint compound. Flashover or insulation value of joints shall be at least 100% in excess of wire insulation. Terminal strips shall be used for interconnecting or splicing control cables, communication cables and other conductors. These terminal strips shall be of the proper voltage, properly labeled and mounted in a cabinet.


7.8 Panelboards: Panelboards shall be located as indicated and shall be so mounted that the height of the top operating handle will not exceed 6 feet 6 inches from the floor.

7.9 Disconnect Switches: Disconnect switches shall be provided where indicated.

7.10 Fuses: Fuses shall be provided in ratings indicated.

7.11 Motors and Controllers: Motors and controllers furnished under the division entitled "Mechanical" shall be installed under this section. Motors and controllers shall be mounted and wired to operate as indicated.

7.12 Grounding and Bonding: Except where specifically indicated otherwise, all exposed non-current-carrying metallic parts of electrical equipment, metallic raceway systems, and neutral conductor of wiring systems shall be grounded. The ground connection shall be made at the main service equipment and shall be extended to the point of entrance of

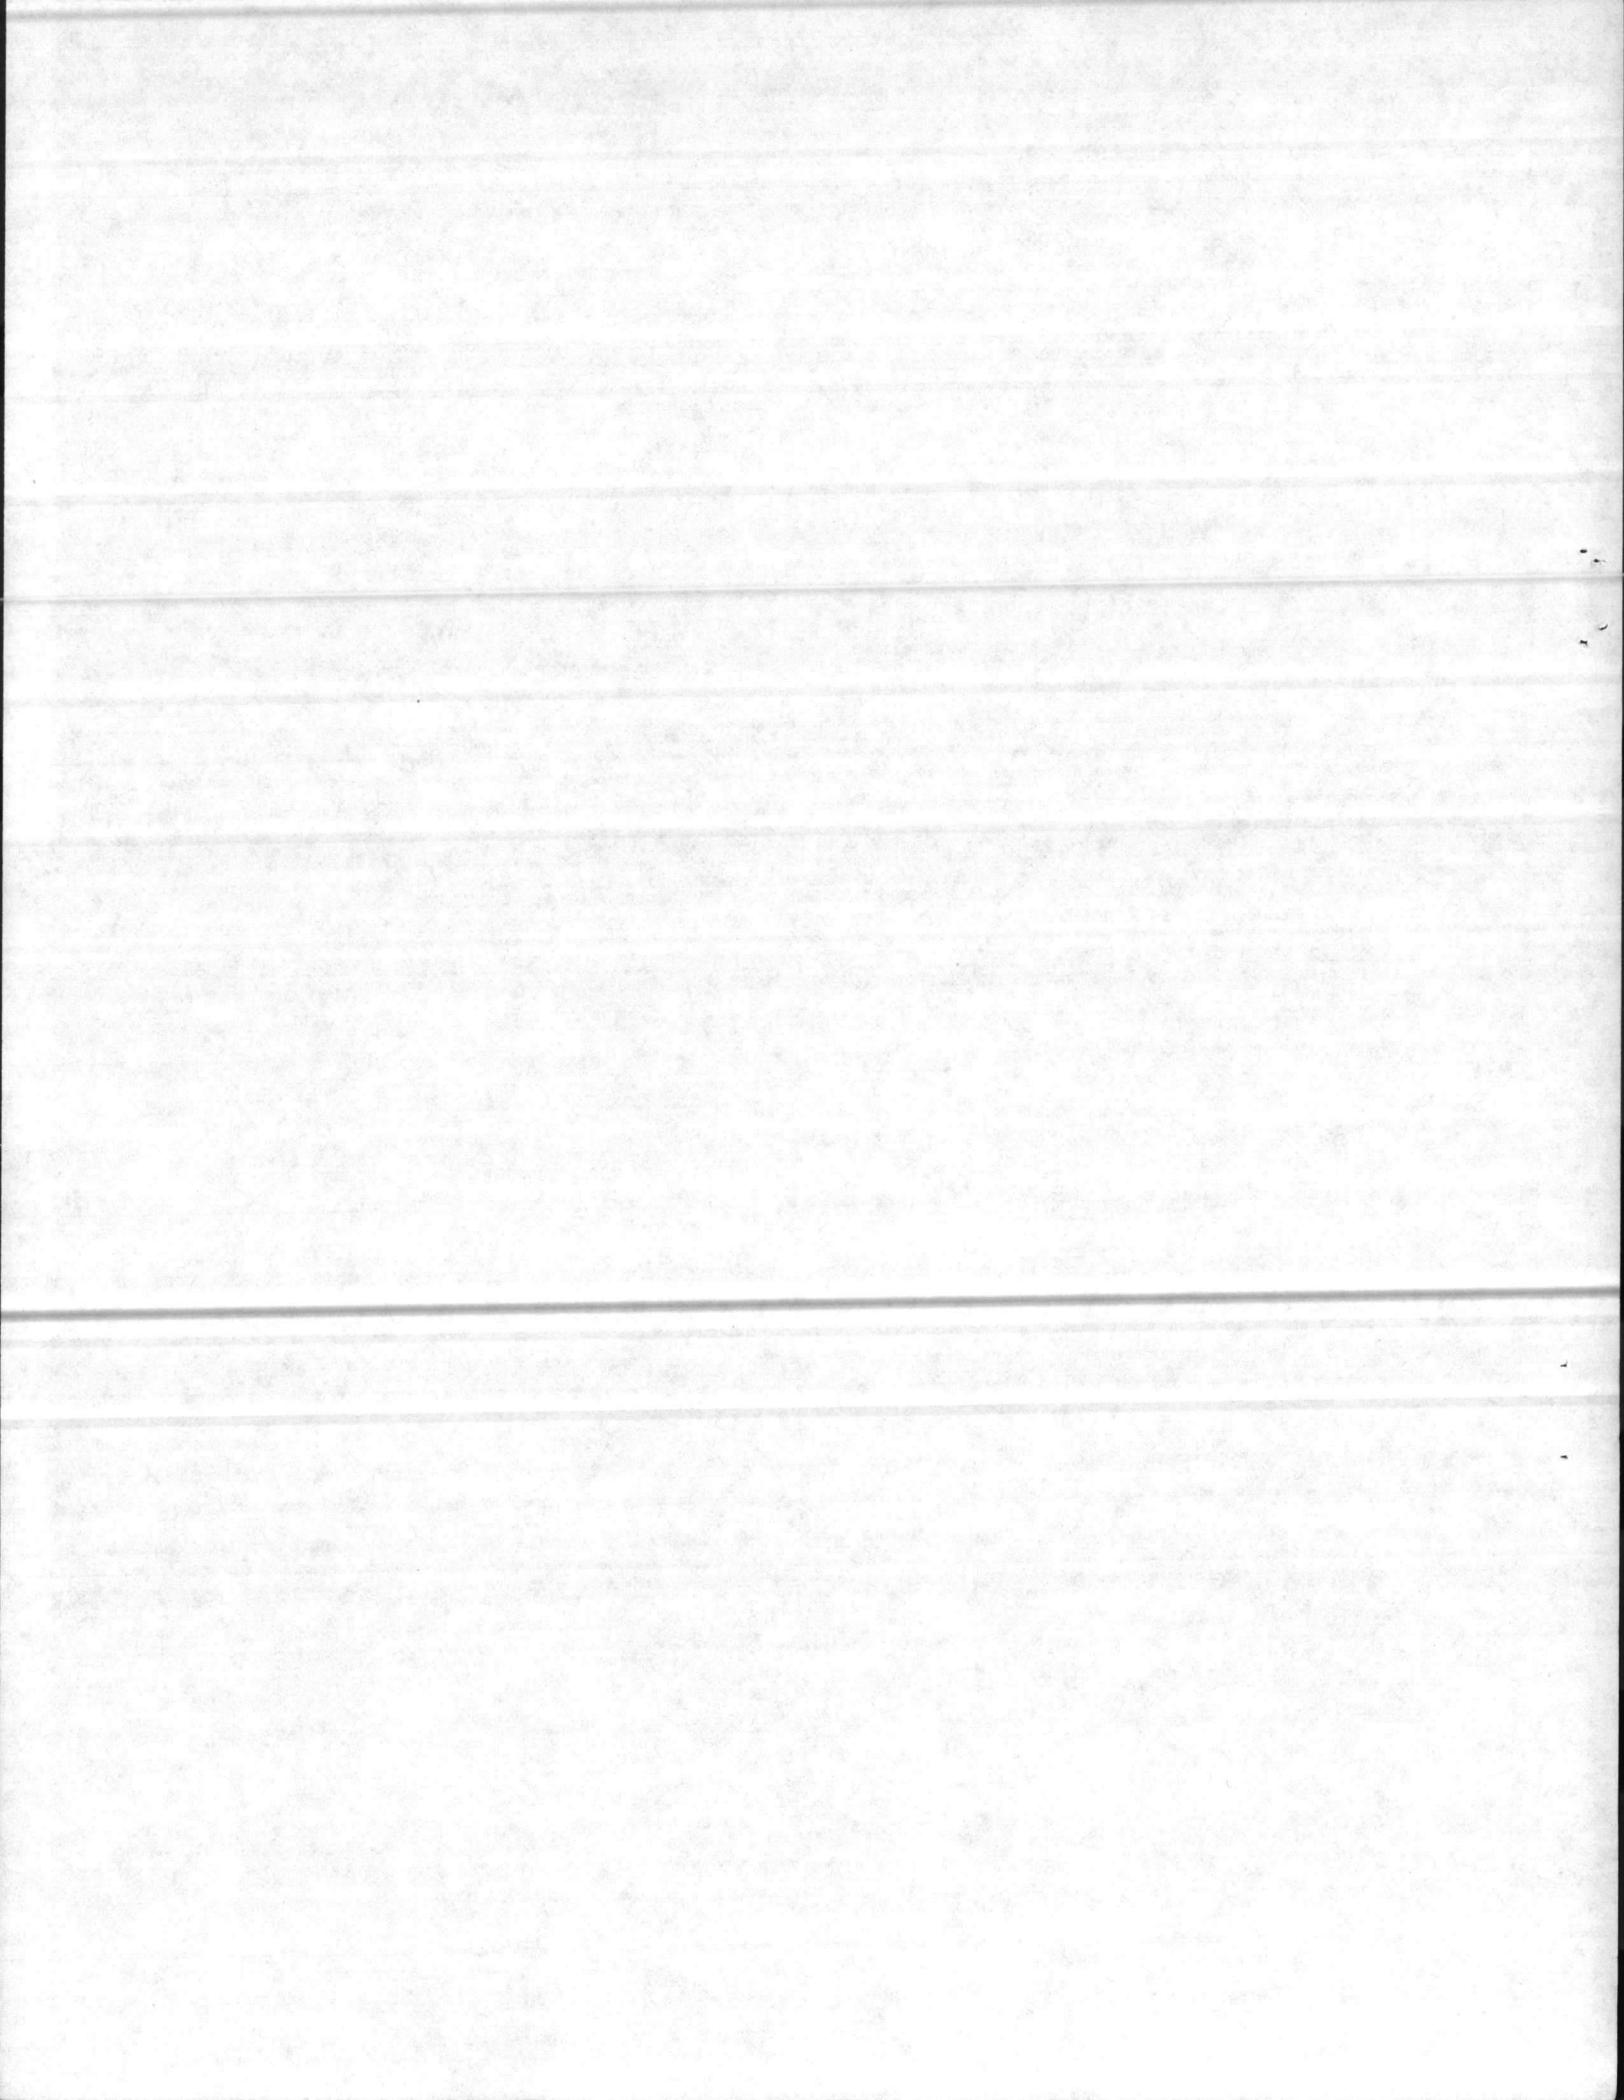

the metallic water service. Connection to the water pipe shall be made by a suitable ground clamp or lug connection to a plugged tee. If flanged pipes are encountered, connection shall be made with the lug bolted to the street side of the flanged connection. If there is no metallic water service to the building, ground connection shall be made to driven ground rods on the exterior of the building. Where ground fault protection is employed, care shall be taken so that the connection of ground and neutral does not interfere with the correct operation of the fault protection.


7.12.1 Equipment Grounds: Equipment grounds shall be solid and continuous from a connection at earth to all distribution panelboards. Ground connections at panelboards, outlets, equipment and apparatus shall be made in an approved and permanent manner.

7.12.2 Resistance: The maximum resistance to ground of a driven ground rod shall not exceed 25 ohms under normally dry conditions. Where the resistance obtained exceeds 25 ohms, additional ground rods shall be installed not less than 6 feet on centers.

7.13 Equipment Connections: All power wiring for the connection of motors and control equipment as indicated on the electrical drawings shall be provided under this section of the specification.

7.14 Concrete: All concrete work shall be in accordance with the applicable requirements of Section entitled "Cast-In-Place Concrete".

7.15 Field Painting: Metal surfaces, excluding aluminum and zinc-coated or factory prefinished surfaces, shall receive one coat of pretreatment coating conforming to specification MIL-P-15328 applied to a dry film thickness of 0.3 to 0.5 mil and one coat of zinc-chromate primer conforming to specification TT-P-645 applied to a minimum dry film thickness of 1.0 mil. After receiving the coatings specified hereinbefore, metal surfaces shall receive two coats of paint conforming to specification TT-E-489 applied to a minimum dry film thickness of 1.0 mil each coat.

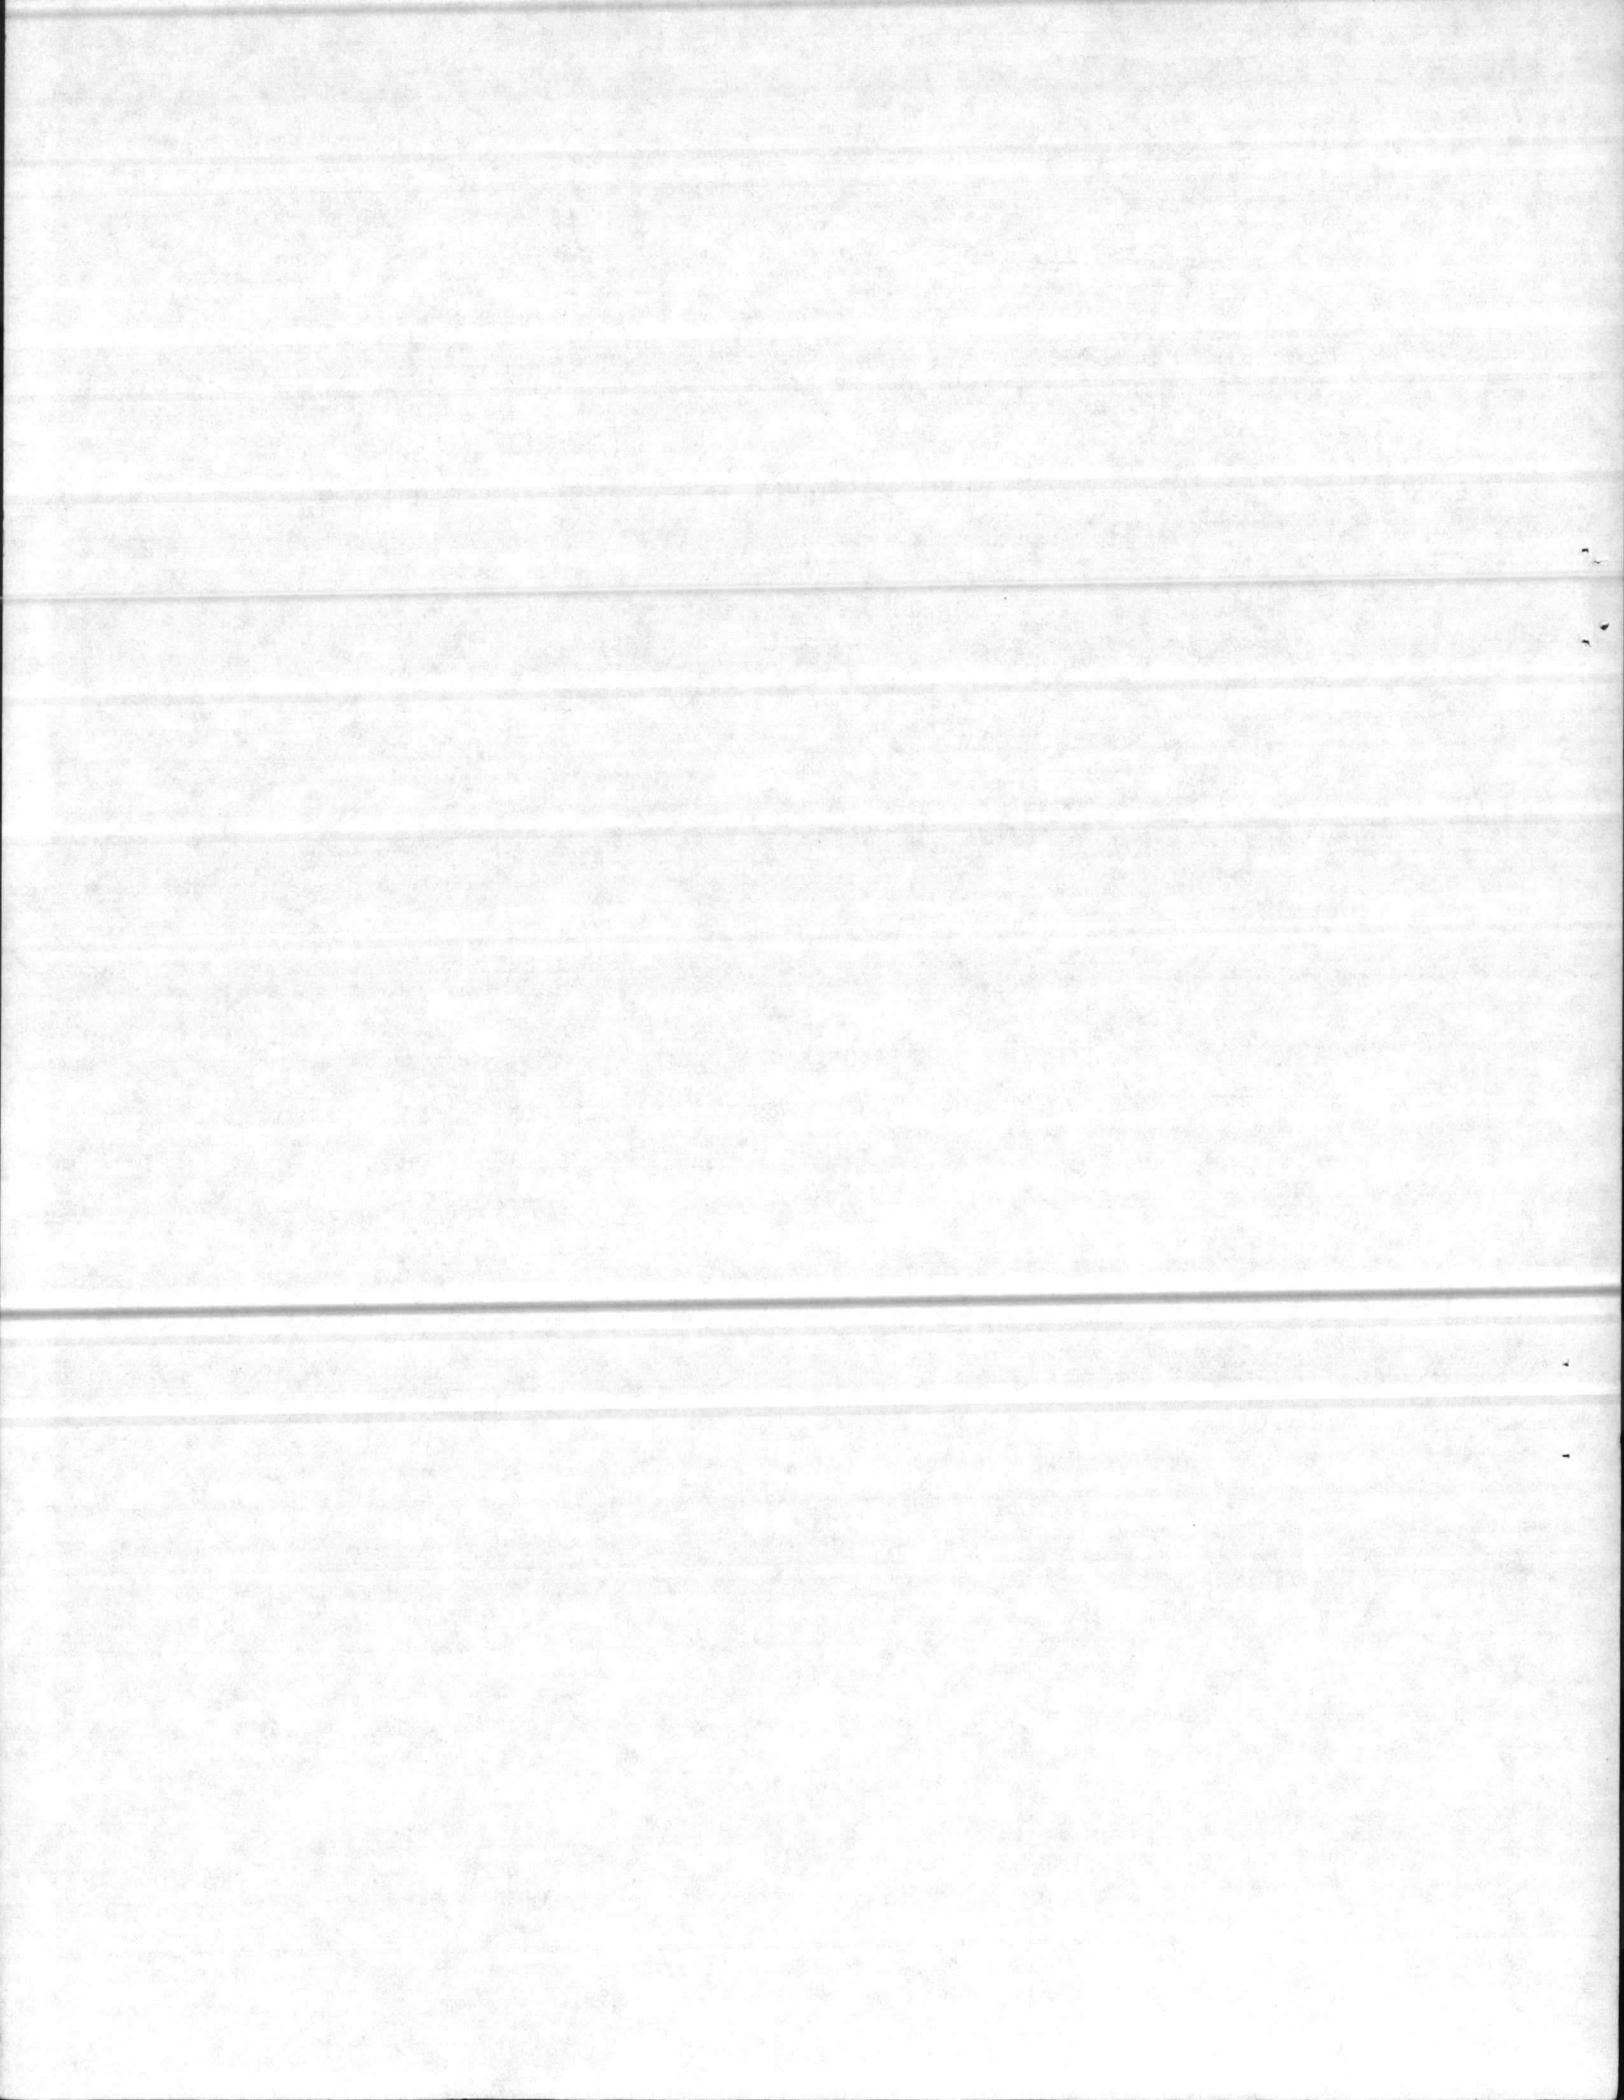


8. FIELD TESTS: The Contractor shall perform all field tests and shall provide all labor, equipment and incidentals required for testing, except that the Government will provide electric power required for the tests. All defective material and workmanship disclosed shall be corrected by the Contractor at no cost to the Government. The Contractor shall show by demonstration in service that all circuits and devices are in good operating condition. Tests shall be such that each item of control equipment will function not less than five times.

8.1 Insulation resistance test for systems 600 volts and less. After all wiring is completed and connected ready for operation, but prior to placing systems in service and before any branch circuit breakers are closed, insulation resistance tests shall be made in all feeder and subfeeder circuits. The insulation resistance between conductors and between such conductor and ground shall be measured. Measurements shall be made with an instrument capable of making measurements at an applied potential of 500 volts. Readings shall be taken after the voltage has been applied for a minimum of one minute. The minimum insulation resistance for circuits of No. 12 AWG conductors shall be 1,000,000 ohms. For circuits of No. 10 AWG or larger conductors, a resistance based on the allowable ampacity of the conductor shall be as follows:

25 through 50 amperes	250,000 ohms
51 through 100 amperes	100,000 ohms

8.2 Grounding system shall be tested to assure continuity and compliance with the requirement that ground resistances not exceed 25 ohms. Ground resistance measurements of each ground rod shall be taken and certified by the Contractor. Upon completion of the project, the Contractor shall submit to the Contracting Officer, the measured ground resistance of each ground rod and grounding system, indicating the location of the rod and grounding system, as well as the resistance and soil conditions at the time the measurements were made. Ground resistance measurements shall be made in normally dry weather, not less than 48 hours after rainfall, and with the ground under test isolated from other grounds. Ground resistance shall also be measured from each piece of equipment to the ground electrode and shall not exceed three (3) ohms.

---000---

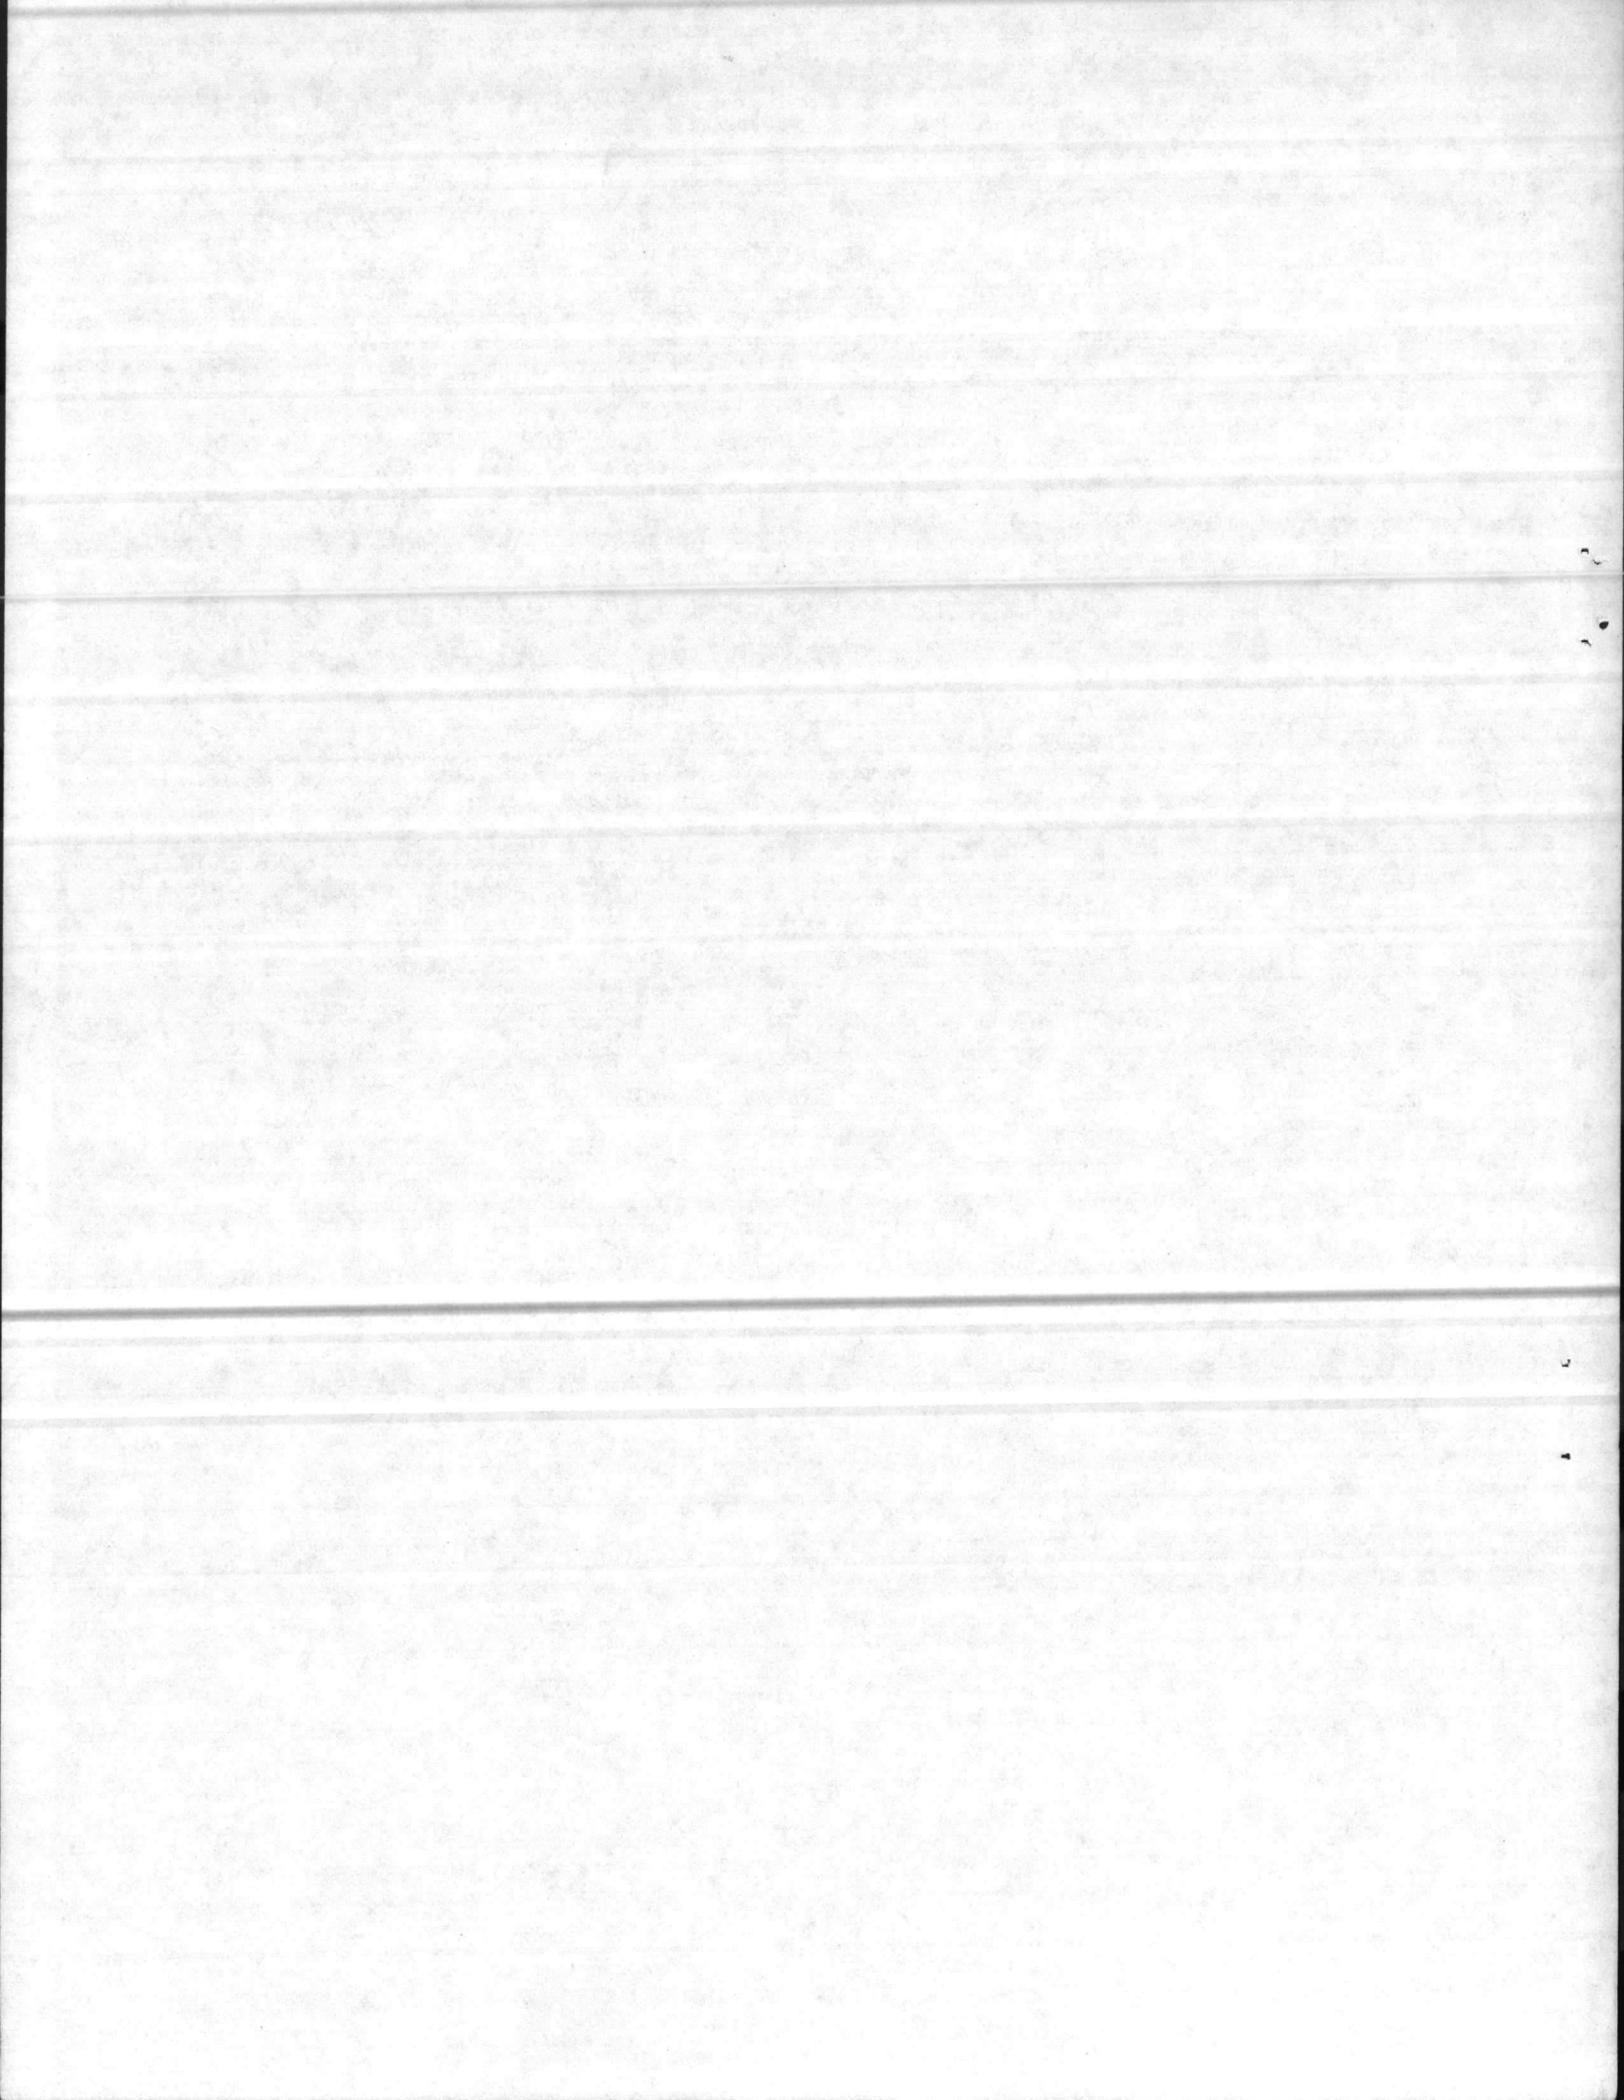


NOTE:

FIXTURE SCHEDULE INDICATES
TYPE OF MOUNTING.

3/4" RIGID STEEL CONDUIT
FIXTURE STEM

VENTILATED NECK

DETACHABLE PORCELAIN ENAMELED
STEEL REFLECTOR

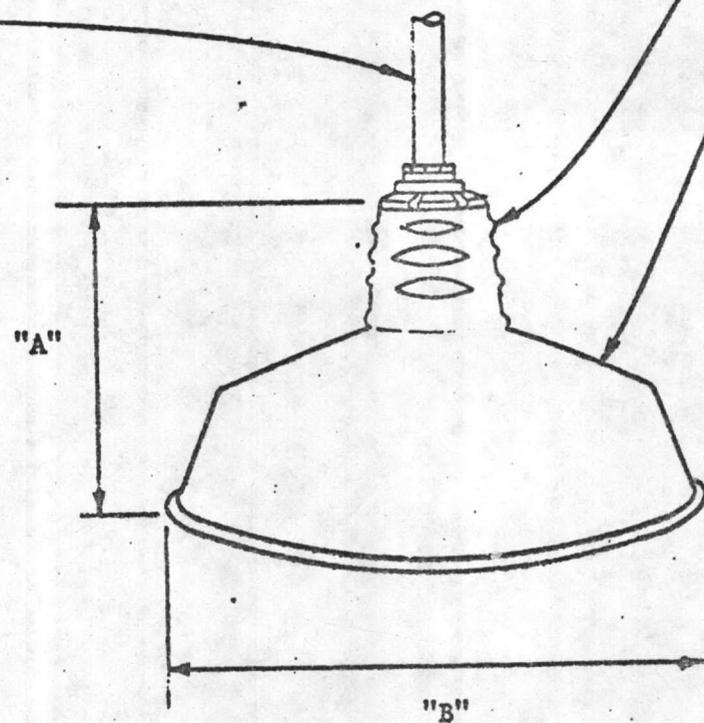

FIXTURE TYPE	LAMPS	DIMENSIONS	
		"A"	"B"
16-I-1	1-150W	9"	14"
16-I-2	1-200W	10"	16"
16-I-3	1-300W	12"	18"

TYPE 1 THRU 3

LANTDIV PLATE 16-I

6-76

05-79-4476
16402 - 15

