

File ESP File

1. FROM (Activity and location)

Commanding General, Marine Corps Base, Camp Lejeune, NC 28542

2. TO

Commander, Atlantic Division, Naval Facilities Engineering Command, Norfolk, VA 23511

3. REFERENCE(S)

4. ESR IDENTIFICATION NUMBER (if applicable)

19E82

5. ENCLOSURE(S) (check)

- NAVCOMPT 140
- NAVCOMPT 2038
- NAVCOMPT 372

(1) Jones-Onslow Elec Mbrship Corp Dwg #208-43G & Sketch "A" for Bldg 45
 (2) NAVFAC Dwg 4049532=4049535 & Sketch "B" for Bldg AS-202

6. TYPE OF FUNDING (check)

- O&MN OTHER (specify)
- NIF O&MMC
- NAF

7. TYPE OF SERVICES REQUESTED

Slate and select A&E firm and negotiate A&E contract for work described herein.

8. DESIRED COMPLETION DATE

July 1982

SECTION A FOR USE BY REQUESTER

9. DESCRIPTION OF WORK

I. GENERAL. Plans and specifications are required for the design of a new lighting system for the shop area of Bldg 45 and the design of a new lighting system for the Gym of Bldg AS-202. The design shall provide for all new light fixtures, wire, conduit and electrical panels. Type of lighting shall be the most cost efficient type available and suitable for the application.

II. BACKGROUND. The existing lights are deteriorated incandescent. In Bldg 45 the lights are not equally spaced and are located approximately 30 feet from the

10. FOR INFORMATION CONSULT (Name and phone)

L. G. NORRIS, JR., Mgr, Elec Br AV: 484-3658

11. OFFICIAL REPRESENTATIVE (Signature)

R. E. CARLSON By direction

12. DATE

FEB 12 1982

SECTION B FOR USE BY EFD

1. SCOPE OF SERVICES

2. DATE RECEIVED

3. ESR NUMBER

SECTION C INTERIM ENDORSEMENT

1. REMARKS

SECTION D FINAL ENDORSEMENT

2. EST. COMPLETION DATE

3. AUTHORIZED REPRESENTATIVE (Signature)

4. DATE

1. ENCLOSURE(S)

- DRAWINGS AND MAPS SPECIFICATIONS REPORT
- OTHER (specify) _____


2. EST. COST (if applicable)

3. AUTHORIZED REPRESENTATIVE (Signature)

4. DATE OF COMPLETION

COPY TO (w/o encl) AC/S, Fac; AC/S, Comp; BMaintO; SSO; CO MCAS(H), NR(S-4); OICC (02)



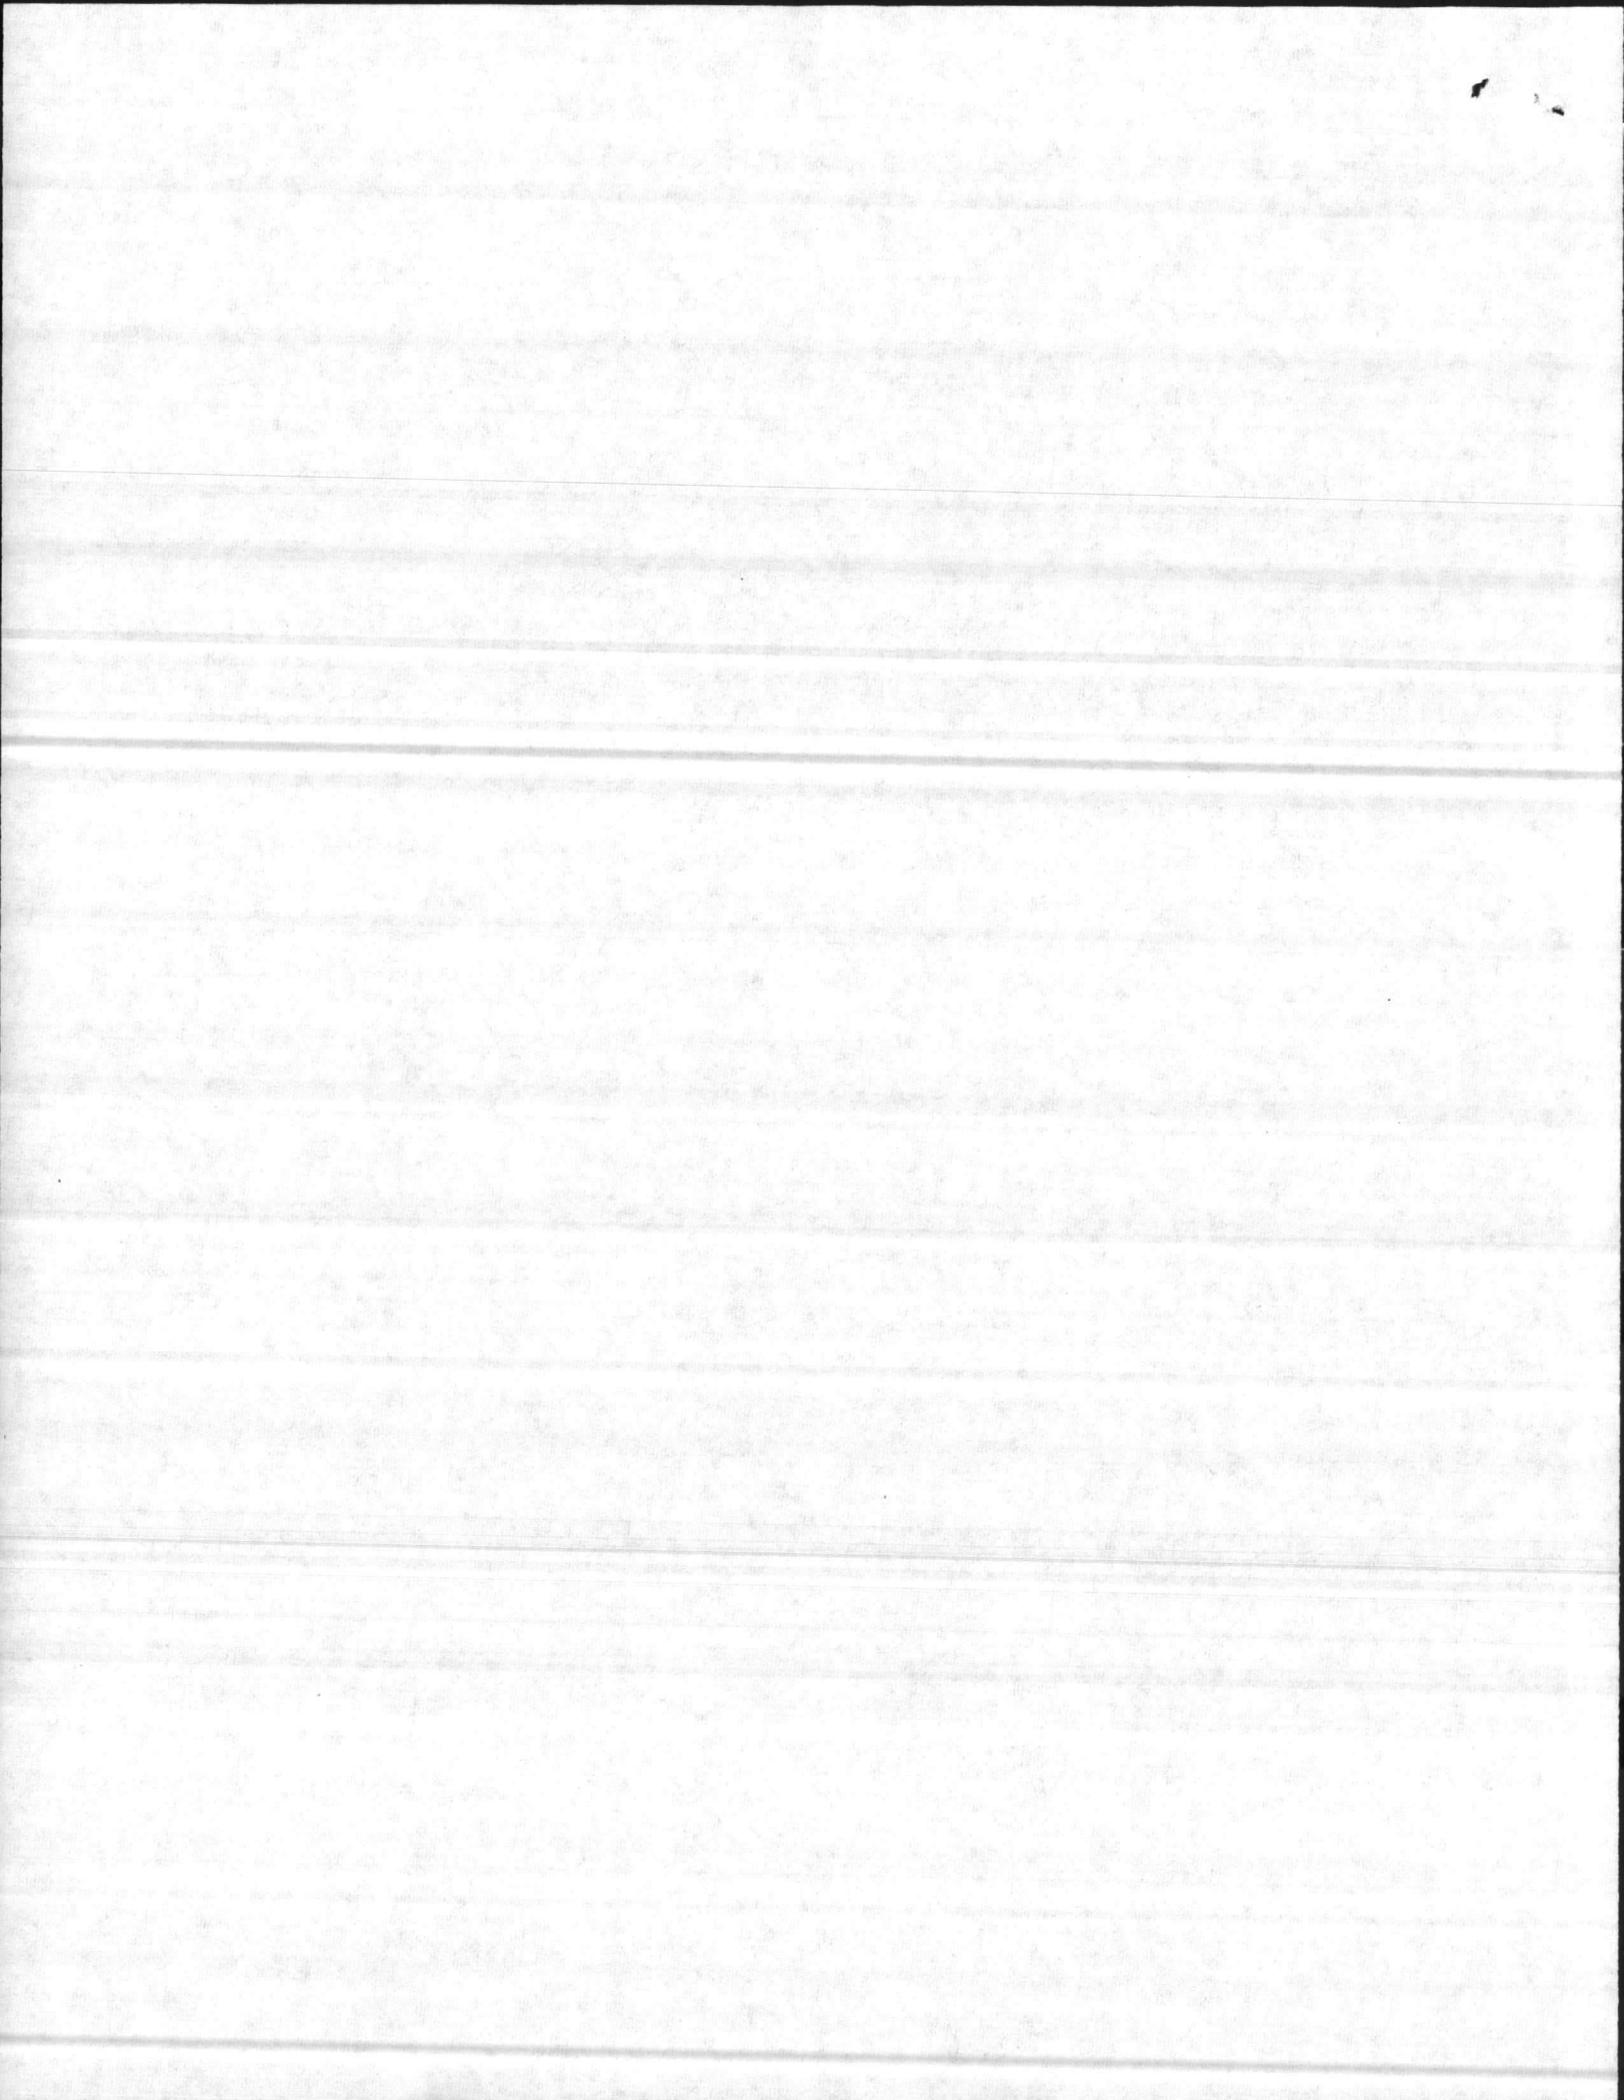

floor due to the overhead crane location. The lighting circuits and lighting panels were installed in the 1940's and are in an advanced state of deterioration.

I.II. DETAILS OF WORK.

A. In the shop area of Bldg 45 and the Gym area of Bldg AS-202, remove all lighting and associated wire and conduit. Remove all lighting panels. Provide new lighting, new wire and conduit and new lighting panels.

B. Deliverables. Plans, specifications and cost estimates for local award of construction contract.

C. Special Requirements. Slate and select A&E firm for enclosed work. Forward design contract to OICC, Jacksonville, NC Area, for award. Design will be reviewed by this activity at the 35% and at the 90% stages. Cost estimates are required for all reviews as well as the 100% design. A pre-design conference should be scheduled at this activity prior to beginning the design.

D. Time Requirements. Award of the A&E contract should be made by March 1982. Design for the work should be completed by July 1982 to permit FY82 contract award.

E. Drawings. See enclosure (1) for drawing and sketch pertaining to Bldg 45. This is the only electrical drawing we have for this building. Enclosure (2) provides drawings and sketch for Bldg AS-202. There were no reproducible electrical drawings.

IV. FUNDS AVAILABLE.

A. For Design. Funds have been reserved for the A&E contract.

B. For Construction. O&MMC funds for construction are available upon request.

V. POINT OF CONTACT. Mr. Luther G. Norris, Jr., Manager, Electrical Branch, AV: 484-3658/FTS: 676-3658.

